TARINA BUILD INSTRUCTIONS

Step by step build instructions for the 3D printable Raspberry Pi video camera - Tarina. Now, this is still a work in progress and documentation is on its way, if your in a hurry feel free to drop a message in telegram

Get the parts

3d printing

Post processing

Soldering stuff

Putting it together

Installing software

Tested lenses

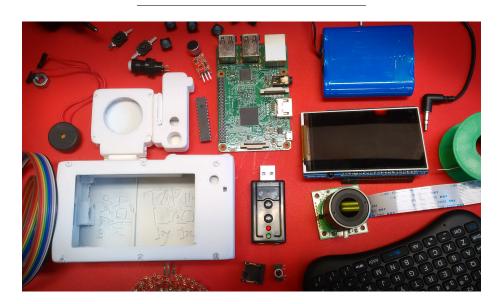


Figure 1: Tarina parts layed out

Get the parts

Here is a list of parts that will work, there are other parts that probably will work but this is what I recommend.

Raspberry pi 3 B

Price ~ 30 eur

The heart of Tarina. Why Raspberry pi you ask? There are several reasons:

- Huge support.
- The great Debian based os Raspbian (beeing a debian nerd myself).
- Low price.
- Picamera.

The 3B+ is too power hungry for the Powerbooster 1000C thats why I went with 3B

Links Raspberry pi site Buy Aliexpress

Arducam 8 MP Sony IMX219 camera module with CS lens 2718

Price ~ 60 eur

This module and lens gives good hd video quality with the ability to manually focus and replace lenses. See tested lenses down below.

Links Arducam Buy uctronics

Ugeek 3.5 inch 800x480 TFT Screen

Price ~ 35 eur

Best 3.5 inch screen that I could find. Features worth mentioning:

- 800x480 pixels
- Very responsible 11 ms.
- High contrast.
- Sunlight readable.
- I2C Master.

This is not a touchscreen but I don't think touchscreens are good for cameras anyway.

Links Raspberrypiwiki Buy Aliexpress

USB via vt1620a Sound card
Price ~1 eur
Really cheap usb soundcard. It has been working suprisingly well. Have not tested other cards yet.
Buy Aliexpress
3.7v 7800mAh li-ion Battery
Price ~17 eur
I have tried several batteries, the adafruit 6800mAh is also fine.
Buy Aliexpress
Adafruit Powerboost 1000C
Price ~23 eur
This is the only power board that I could find with the feature to run the camera and charge it at the same time.
Links Adafruit Buy Ebay
8x8x5MM DIP-4 Silicone Switch Mute Silent button
Price $\sim 2 \text{ eur}/20 \text{ pcs}$
You can only buy a pack of 20 pcs but these buttons are good and silent! Not necessary if you want to control with keyboard like Rii mini $8+$
Buy Ebay

MCP23017-E/SP DIP-28 16 Bit I / O Expander I2C

Price ~1 eur This will be connected to the screen I2C port. This is not necessary if you intend to control the camera with a keyboard like the Rii mini i8+ Buy Aliexpress 2x8cm double Side Copper prototype pcb Price ~0.20 eur/pcs PCB board to solder all connections on the MCP23017-E/SP **Buy** Aliexpress Piezo Electronic Buzzer Price ~ 1 eur Very useful for timing shots! Buy Aliexpress 1A 30V DC 250V Black Latching On Off Mini Torch Push **Button Switch** Price ~1 eur/10 pcs This serves as the microphone and screen on/off button **Buy** Aliexpress

Latching push button switch 10mm fixed

Price $\sim 5 \text{ eur}/24 \text{ pcs}$

I use this as the powerbutton. I have tried different versions of safe shutdown buttons for the Raspberry pi but they have not worked as I wanted (they draw

with a menu button	is powered off, this is not good). I have solved the problem to safely shut down the camera.
Buy Aliexpress	
Stainless Steel	Hex Full Nut 1/4 inch -20 UNC 304 A2
Price ~2 eur/10 pcs	
This is the standard need this.	camera stand nuts. If you never use a stand then you don
Buy Ebay	
MAX9812 Mic	rophone Amplifier
Price ~2 eur	
This makes suprising	gly good sounding sound!
	Si, Sood boarding board.
Buy Aliexpress	5.7 good bounding bound.
	5-17 good bounding bound.
Buy Aliexpress	
Buy Aliexpress 3.5mm Female	
Buy Aliexpress 3.5mm Female Audio	
3.5mm Female Audio Price ~1 eur/10 pcs	
3.5mm Female Audio Price ~1 eur/10 pcs Microphone input.	
3.5mm Female Audio Price ~1 eur/10 pcs Microphone input.	5 Pins Stereo Headset Interior PCB Moun
3.5mm Female Audio Price ~1 eur/10 pcs Microphone input. Buy Ebay	5 Pins Stereo Headset Interior PCB Moun
3.5mm Female Audio Price ~1 eur/10 pcs Microphone input. Buy Ebay LR44 Batteries	5 Pins Stereo Headset Interior PCB Moun

Screws	M3x1	2
--------	------	----------

Price $\sim 2 \text{ eur}/25 \text{ pcs}$

These hold the camera together.

Buy Your local harware store Motonet (store in Finland)

Screws 2.2x9.5mm

Price $\sim 1 \text{ eur}/20 \text{ pcs}$

These hold the camera/mic together.

Buy Your local hardware store Hobbycenter (store in Finland)

LR44 Button Cell Battery Socket Holder

Price $\sim 1 \text{ eur/pcs}$

We only need the metal parts from these, if you have som thin metal you could cut these yourself.

Buy Aliexpress

3.5mm Jack to Jack Aux Cable

Price ~ 1 eur

From microphone to mic-in.

Buy Aliexpress

Rii mini i8+ mini keyboard

Price ~ 17 eur

Wireless control over camera. You will also need this for wifi settings etc. (Recommended) This is one of the best mini keyboards I've tried.

Buy Aliexpress



3d printing

While waiting for ordered parts lets 3d print the rest of the parts. I recommend printing with a solid 90% infill. Now it is pretty crucial that you have a good calibrated printer so that you don't over/under print. Some parts need to be very precise to work.

You'll find all the 3d parts in the 3d folder.

- body
- button-plate-bottom
- \bullet button-plate-upper
- hdmi-cap
- left-side
- mic-body
- mic-lid
- picamera-body
- picamera-body-lid
- picamera-bridge
- right-side
- screen-lid

Post processing

This is still a work in progress...

So far I've come to this conclusion:

- Put 3d printed parts together with screws.
- Sand with sandpaper from rough to finest (from 120 to 400). I like to sand down all corners making them round.
- Dust off.
- Paint.
- Wait til dry.
- Paint again.
- Wait til dry. I like to wait for atleast a day to make it really dry.
- Sand again.
- Paint and wait again.

• Continue like this til you are satisfied with the feel, now I like to have a good grip so I finnish with sanding with 400 grit paper and leave it like that.
Soldering stuff
Documentation on its way, if your in a hurry feel free to drop a message in telegram
Putting it together Documentation is on its way, if your in a hurry feel free to drop a message in telegram
Installing software
Download latest Raspbian and follow install instructions. Ssh into Raspberry Pi and run:
sudo raspi-config
Expand file system, enable camera and then reboot. Run this to install git:
sudo apt-get install git
Git clone tarina and then run install script with sudo:
<pre>git clone https://rbckman@bitbucket.org/rbckman/tarina.git cd tarina sudo ./install.sh</pre>
You'r ready to rumble:
python tarina.py
Happy filming!



Figure 2: Should be looking like this once finnished

Tested lenses

Here is what I'm testing right now.

Yumiki 6-60mm 1/3" CS Lens CCTV Lens IR F1.6 Manual Zoom Manual Iris

Aliexpress

Camera Lens 2.8-12mm Varifocal

This lens is good. Will write a longer review once I have more filming hours. Aliexpress