TARINA BUILD INSTRUCTIONS

Step by step build instructions for a 3D printable Raspberry Pi video camera. Now, this is still a work in progress and documentation is on its way, if you're in a hurry feel free to drop a message in telegram

Get the parts

3d printing

Post processing

Soldering stuff

Putting it together

Installing software

Tested lenses

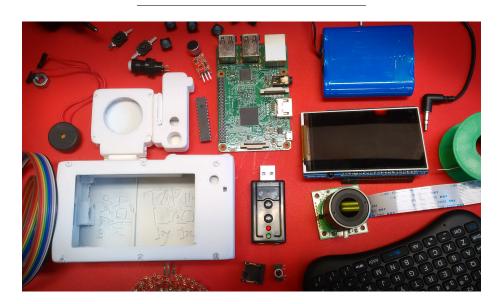


Figure 1: Tarina parts layed out

Get the parts

Here is a list of parts that will work, there are other parts that probably will work but this is what I recommend.

Raspberry pi 3 B

Price ~ 30 eur

The heart of Tarina. Why Raspberry pi you ask? There are several reasons:

- Huge support.
- The great Debian based os Raspbian (beeing a debian nerd myself).
- Low price.
- Picamera.

The 3B+ is too power hungry for the Powerbooster 1000C thats why I went with 3B

Links Raspberry pi site Buy Aliexpress

Arducam 5 MP OV5647 camera module with CS lens

Price ~30 eur

This module and lens gives good hd video quality with the ability to manually focus and replace lenses. See tested lenses down below.

Links Arducam Buy ebay

Ugeek 3.5 inch 800x480 TFT Screen

Price ~35 eur

Best 3.5 inch screen that I could find. Features worth mentioning:

- 800x480 pixels
- Very responsible 11 ms.
- High contrast.
- Sunlight readable.
- I2C Master.

This is not a touch screen but I dont think touch screens are good for cameras anyway.

Links Raspberrypiwiki Buy Aliexpress

USB via vt1620a sound card

Price ~ 1 eur

Really cheap usb soundcard. It has been working suprisingly well. Have not tested other cards yet.

Buy Aliexpress

3.7v 7800mAh li-ion Battery

Price ~17 eur

I have tried several batteries, the adafruit 6800mAh is also fine.

Buy Aliexpress

Adafruit Powerboost 1000C

Price ~23 eur

This is the only power board that I could find with the feature to run the camera and charge it at the same time.

Links Adafruit Buy Ebay

8x8x5MM DIP-4 Silicone Switch Mute Silent button

Price $\sim 2 \text{ eur}/20 \text{ pcs}$

You can only buy a pack of 20 pcs but these buttons are good and silent! Not necessary if you want to control with keyboard like Rii mini 8+

Buy Ebay

MCP23017-E/SP DIP-28 16 bit I / O expander I2C

Price ~ 1 eur

This will be connected to the screen I2C port. This is not necessary if you intend to control the camera with a keyboard like the Rii mini i8+

| Buy Aliexpress |
|---|
| |
| 2x8cm double side copper prototype pcb |
| Price ~0.20 eur/pcs |
| PCB board to solder all connections on the MCP23017-E/SP |
| Buy Aliexpress |
| |
| Piezo electronic buzzer |
| Price ~1 eur |
| Very useful for timing shots! |
| Buy Aliexpress |
| |
| Latching push button switch mini |
| Price ~1 eur/10 pcs |
| This serves as the microphone and screen on/off button |
| Buy Aliexpress |
| |
| Latching push button switch 10mm |
| Price $\sim 5 \text{ eur}/24 \text{ pcs}$ |
| I use this as the power button. I have tried different versions of safe shutdown buttons for the Raspberry pi but they have not worked as I wanted (they draw power even when Pi is powered off, this is not good). I have solved the problem with a menu button to safely shut down the camera. |
| Buy Aliexpress |

Nut 1/4 -20 UNC 304 A2

| 1440 1/1 20 0140 901 112 | |
|--|--------------------|
| Price $\sim 2 \text{ eur}/10 \text{ pcs}$ | |
| This is the standard camera stand nuts. If you never use a smeed this. | tand then you dont |
| Buy Ebay | |
| | |
| MAX9812 Microphone amplifier | |
| Price ~2 eur | |
| This makes suprisingly good sounding sound! | |
| Buy Aliexpress | |
| | |
| 3.5mm Female stereo headset interior PCB i | \mathbf{mount} |
| Price ~1 eur/10 pcs | |
| Microphone input. | |
| Buy Ebay | |
| | |
| LR44 Batteries | |
| Price ~2 eur/10 pcs | |
| Microphone batteries | |
| Buy Aliexpress | |
| | |
| Screws M3x12mm | |
| Price ~2 eur/25 pcs | |
| These hold the camera together. | |
| | |
| Buy Your local harware store Motonet (store in Finland) | |

| Screws 2.2x9.5mm |
|---|
| Price $\sim 1 \text{ eur}/20 \text{ pcs}$ |
| These hold the camera/mic together. |
| Buy Your local hardware store Hobbycenter (store in Finland) |
| |
| LR44 Button cell socket holder |
| Price ~1 eur/pcs |
| We only need the metal parts from these, if you have som thin metal you could cut these yourself. |
| Buy Aliexpress |
| |
| |
| 3.5mm Jack to jack aux cable |
| Price ~1 eur |
| From microphone to mic-in. |
| Buy Aliexpress |
| |
| |
| Rii mini i8+ mini keyboard |
| Price ~17 eur |
| Wireless control over camera. You will also need this for wifi settings etc. |

(Recommended) This is one of the best mini keyboards I've tried.

 ${f Buy}$ Aliexpress

Parts grand total ${\sim}200~{\rm eur}$

3d printing

While waiting for ordered parts lets 3d print the rest of the parts. I recommend printing with a solid 90% infill. Now it is pretty crucial that you have a good calibrated printer so that you don't over/under print. Some parts need to be very precise to work.

You'll find all the 3d parts in the 3d folder.

- body
- button-plate-bottom
- button-plate-upper
- hdmi-cap
- left-side
- mic-body
- mic-lid
- picamera-body
- picamera-body-lid
- picamera-bridge
- right-side
- screen-lid

Post processing

This is still a work in progress...

So far I've come to this conclusion:

- Put 3d printed parts together with screws.
- Sand with sandpaper from rough to finest (from 120 to 400). I like to sand down all corners making them round.
- Dust off.
- Paint.
- Wait til dry.
- Paint again.
- Wait til dry. I like to wait for atleast a day to make it really dry.
- Sand again.
- Paint and wait again.
- Continue like this til you are satisfied with the feel, now I like to have a good grip so I finnish with sanding with 400 grit paper and leave it like that.

Soldering stuff

| Documentation on its way, if you're in a hurry feel free to drop a message in telegram |
|--|
| Putting it together |
| Documentation on its way, if you're in a hurry feel free to drop a message in telegram |
| Installing software |
| Download latest Raspbian and follow install instructions. Ssh into Raspberry Pi and run: |
| sudo raspi-config |
| Expand file system, enable camera and then reboot. Run this to install git: |
| sudo apt-get install git |
| Git clone tarina and then run install script with sudo: |
| <pre>git clone https://github.com/rbckman/tarina.git cd tarina sudo ./install.sh</pre> |
| You'r ready to rumble: |
| python tarina.py |
| Happy filming! |
| |
| |
| Tested lenses |
| Here is what I'm testing right now. |



Figure 2: Should be looking like this once finnished

Yumiki 6-60mm 1/3" CS Lens CCTV Lens IR F1.6 Manual Zoom Manual Iris

| Aliexpress | | |
|------------|--|--|
| | | |

Camera Lens 2.8-12mm Varifocal

This lens is good. Will write a longer review once I have more filming hours. Aliexpress