


Universal Einsy Box

Assembly Instructions Manual

Step 1:


Mount your Raspberry in first place:

- Place 4 hex nuts (on the other side use 4 M3x8 screws to attach the Raspberry)
- Place 2 square nuts.
- Pass the cables using this hole (to connect Raspberry to Einsy board)

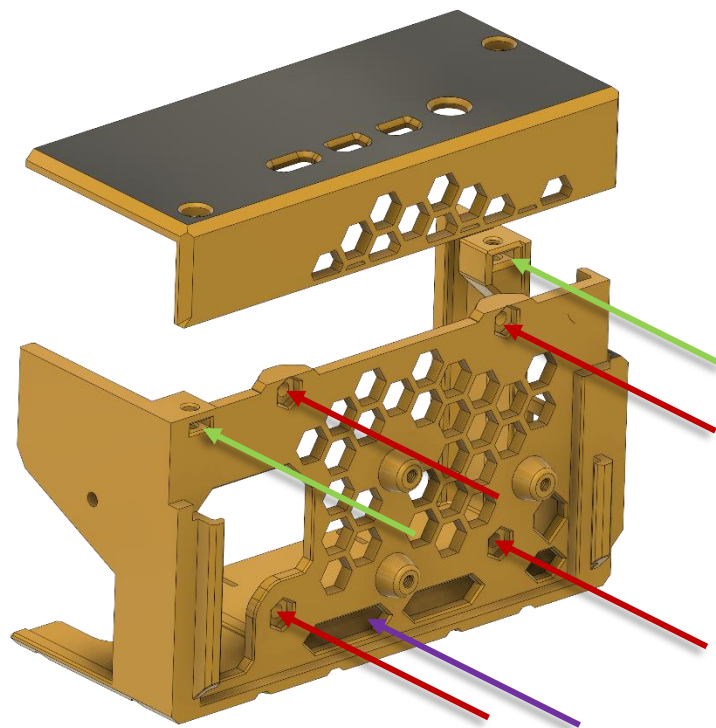

Step 2: Optional


- Add a Stepdown using three M3x6 screws (threaded holes)
- Connect the power cables from Stepdown to Raspberry (pass the cables using this hole)

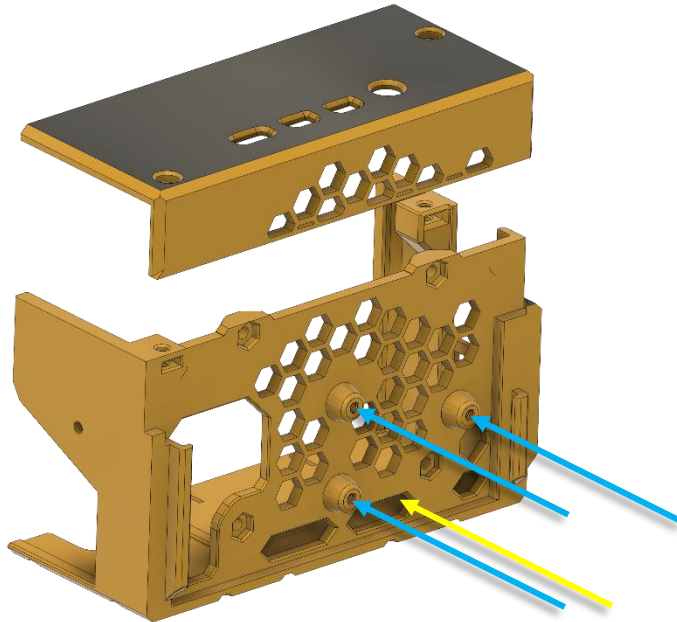

Step 3:

Prepare the required Anchor, long when using a Raspberry module, short in other case (Original Prusa Frame MK3 doesn't need one so jump to next step, the provided Prusa Anchor is for MK2/2.5 only)

- Place 5 hex nuts (4 for the short one)

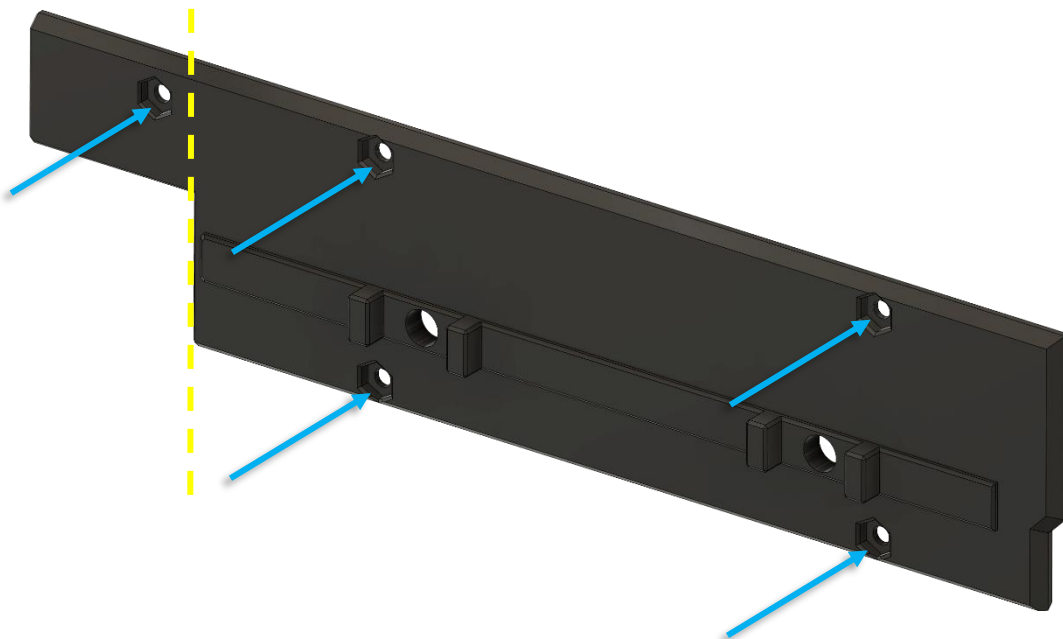


Step 4:

Prepare Main Body.

— Place 4 hex nuts.

— Place 5 square nuts.

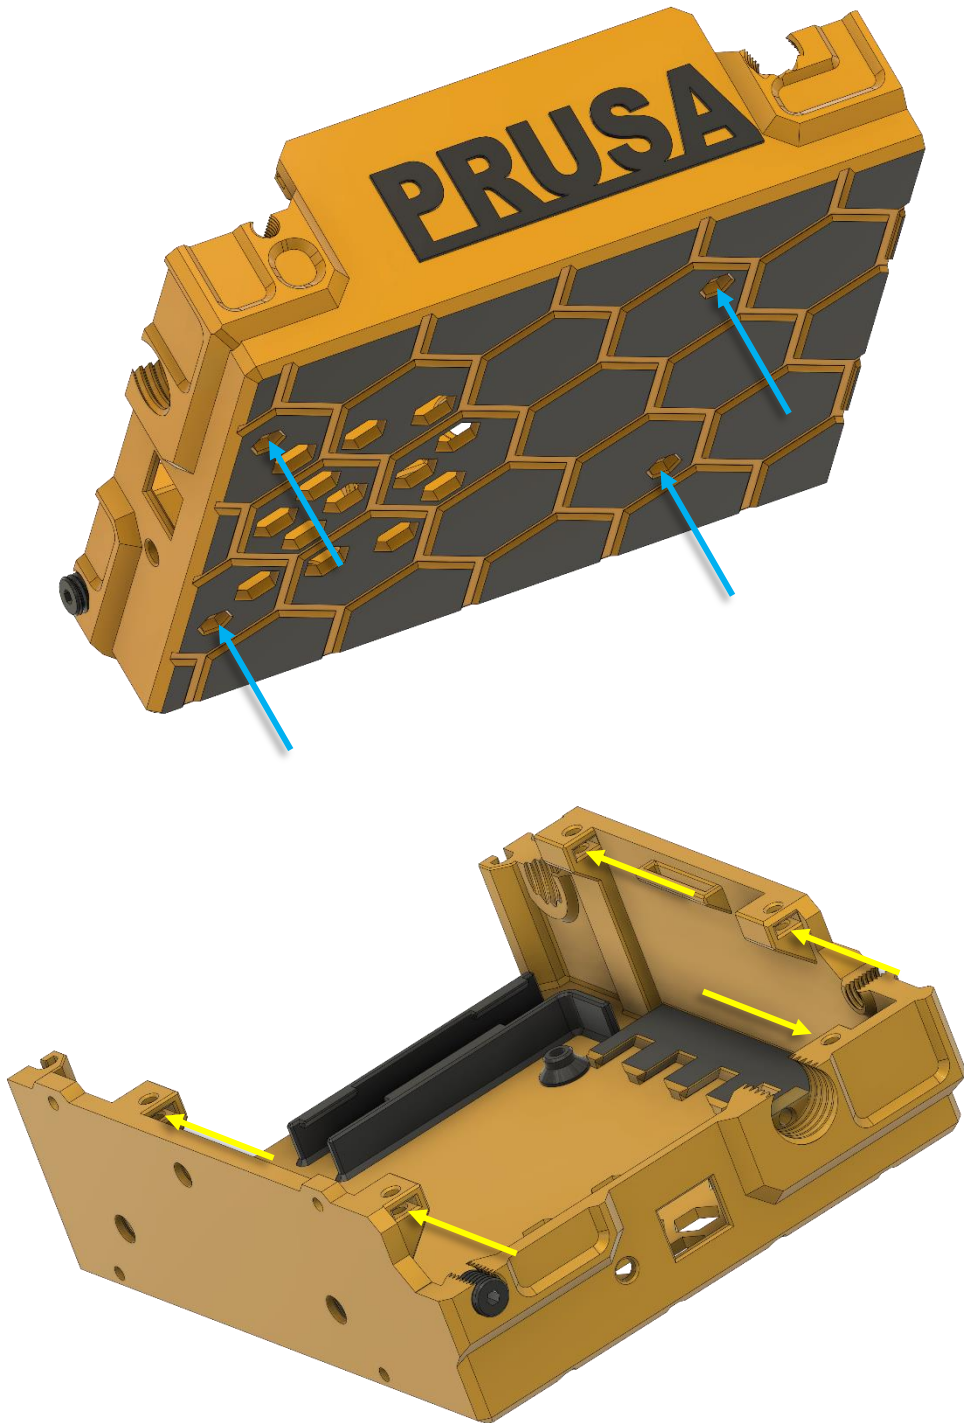



Step 5:

Join the Main body with the Anchor.

— Use four M3x5 screws (in case of Original Prusa MK3 frame use four M3x10 screws to attach the box directly to frame, no Anchor is required)

— Assembly the Raspberry Module using these guides.

— Use one M3x8 screw.

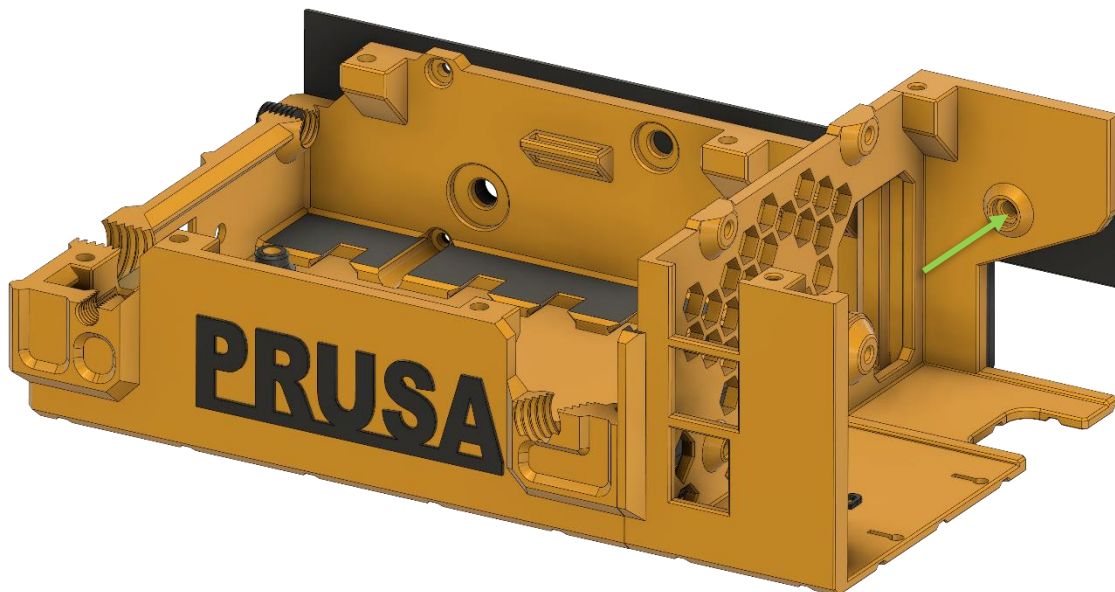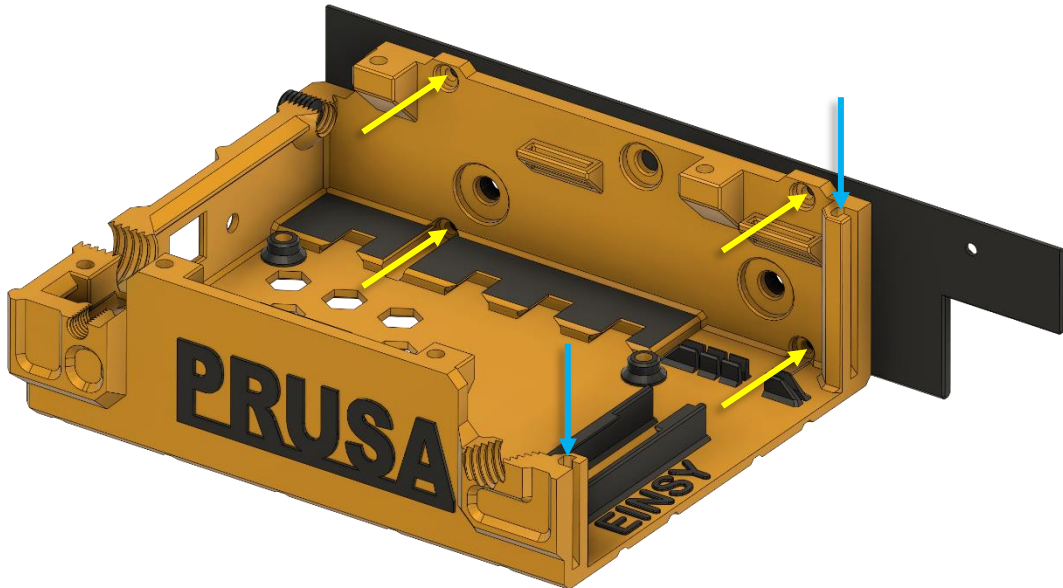

Step 6:


Place the Box on the frame (Original Prusa MK3 users jump to next step)

— Place screws and nuts for your frame (Caribou or Zaribo and Bear frames)

— Additional screw (Only Bear frame)

— Place as many Cable Holders as you need (organizers, up to ten)


— You can use Pins to secure cables (optional).

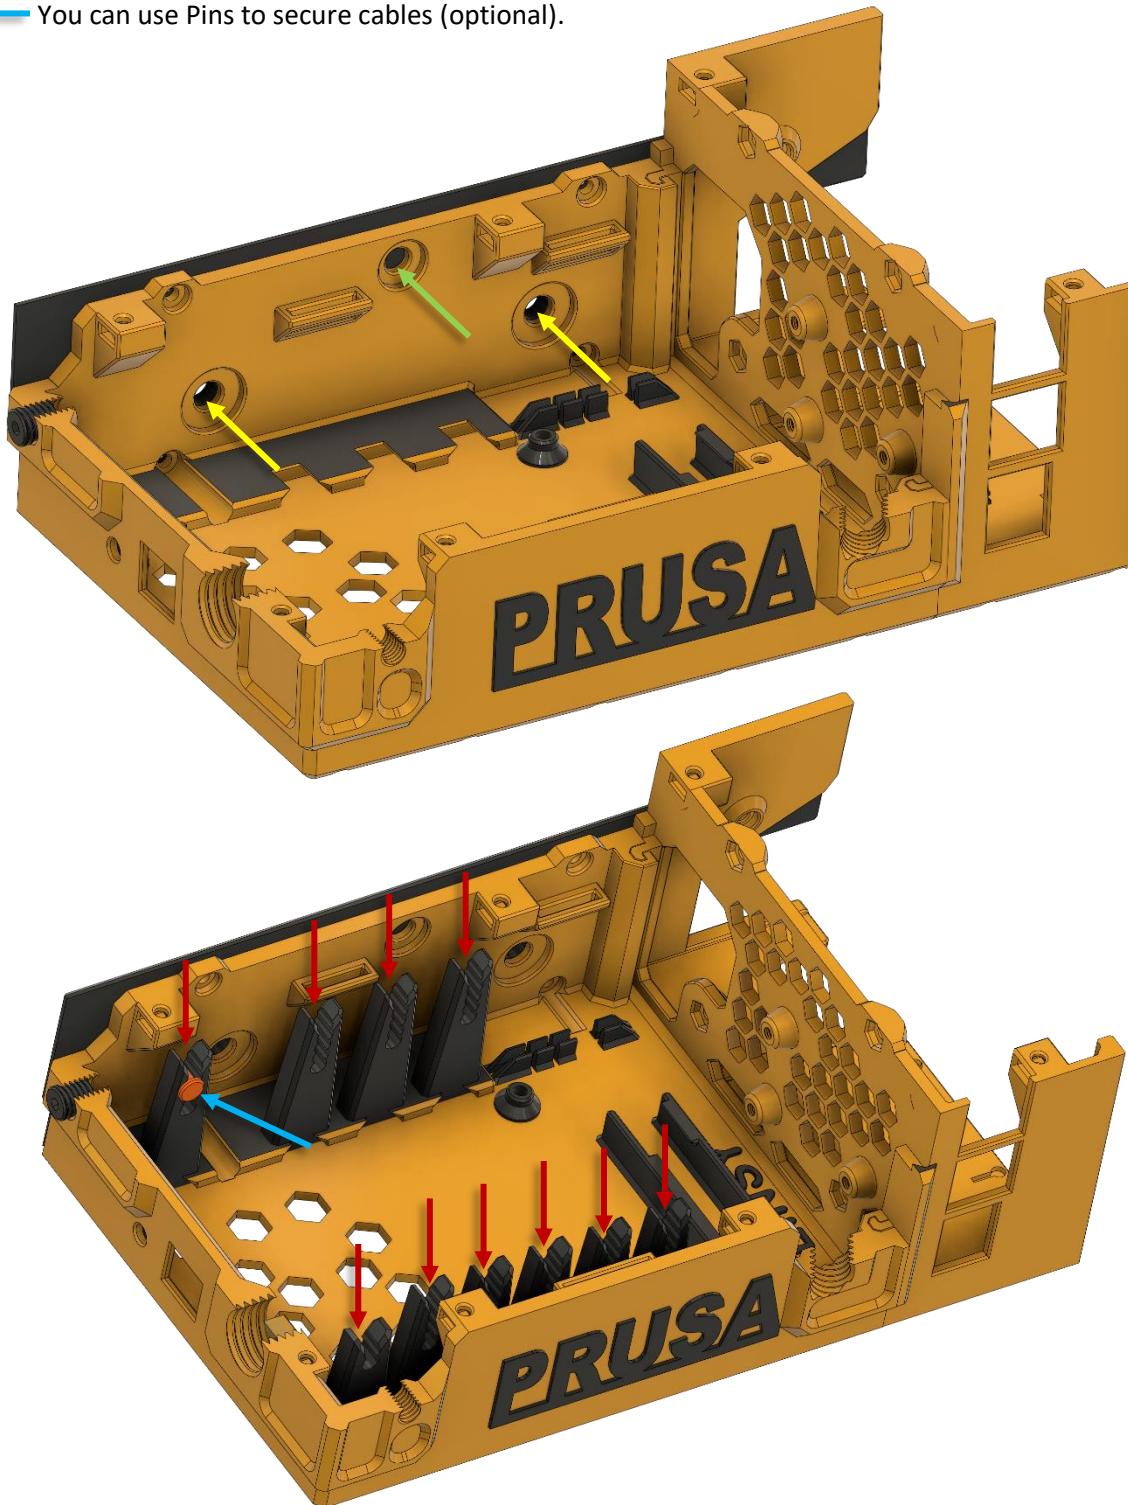

Step 7:


Place the Einsy board on the box.

— Use four M3x8 screws.

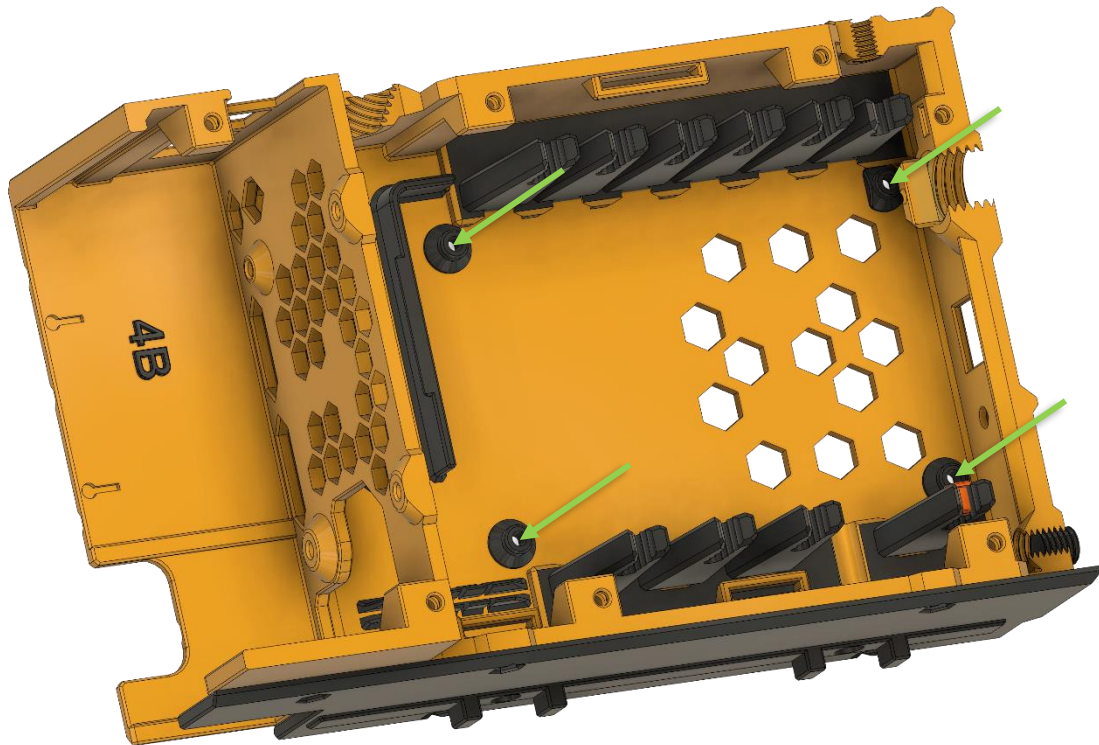

Step 8:

Connect your cables (please follow the original Prusa electronics assembly manual)

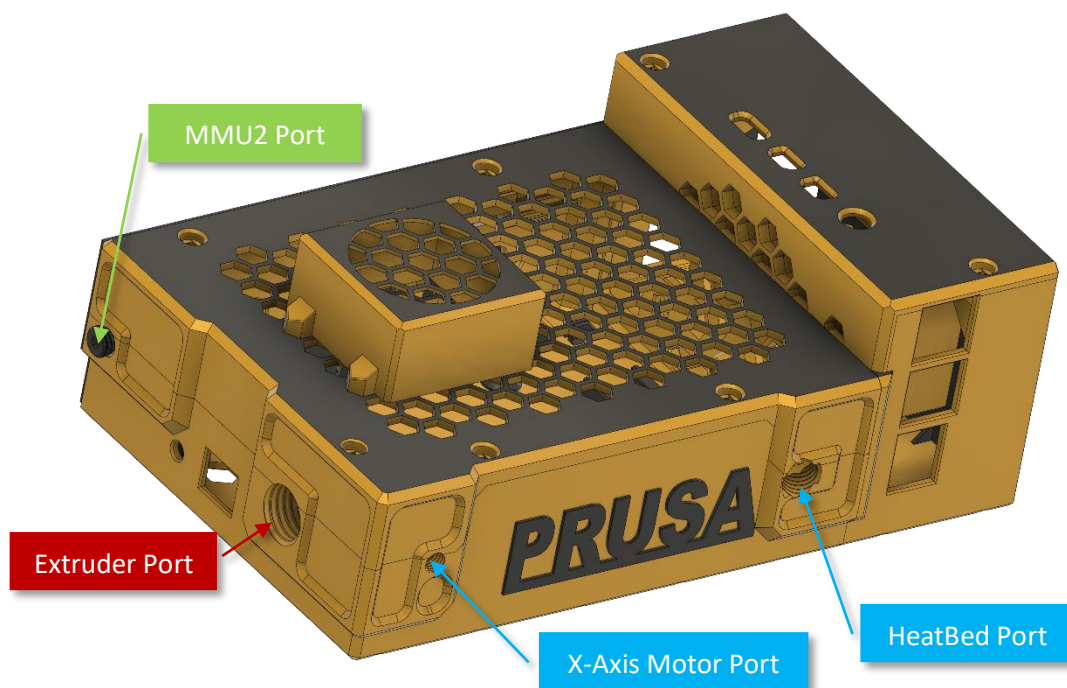


Step 9:

Screw the two covers (Main and Raspberry)

— Use four M3x8 screws

— Use one M3x25 screw

— Use two M3x8 screws

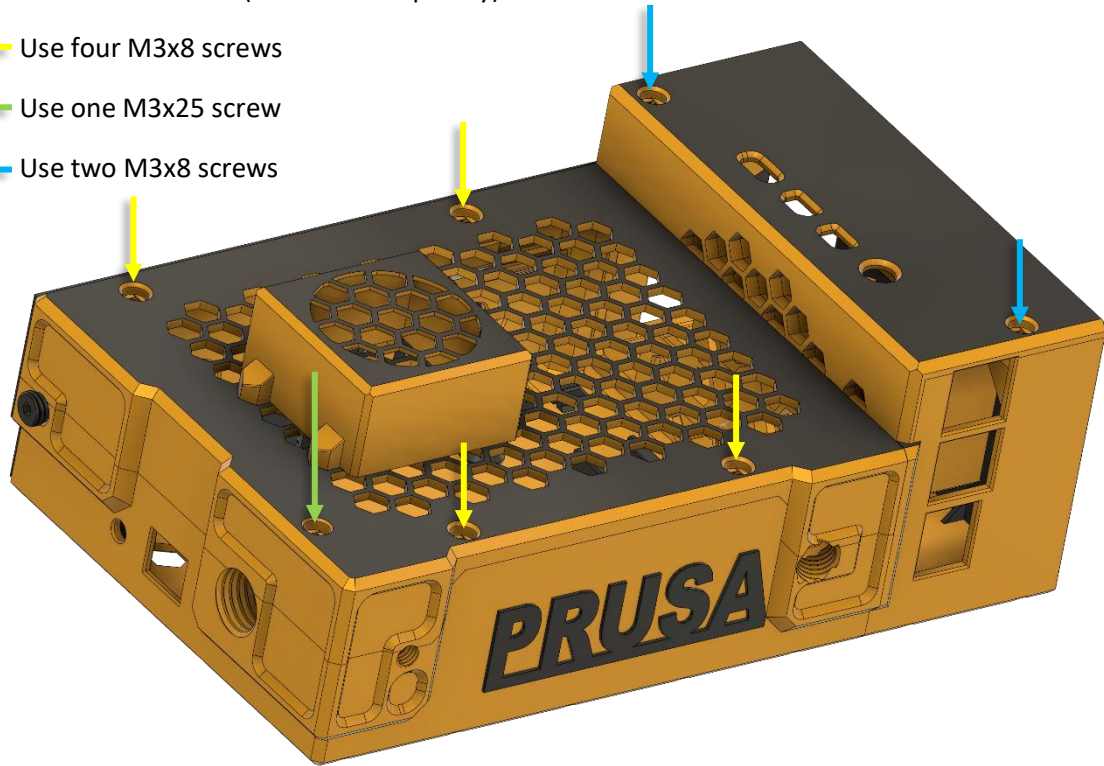

Additional Information

Raspberry to Einsy Connections


Raspberry	EINSY Board		
04	02	Red	5V
06	04	Black	Ground
08	06	Orange	GPIO14 Tx (Transmit)
10	08	Yellow	GPIO15 Rx (Receive)
15	13	Blue	GPIO22 (SD0 CLK)
16	14	Green	GPIO23 (SD0 CMD)

You can use any combination of cable colors; this is only an example showed on the next picture. Here also you have the 5v (upper black and red wires) connector to be used with your **optional fan**.



Emsy board connections

Connection of a Stepdown

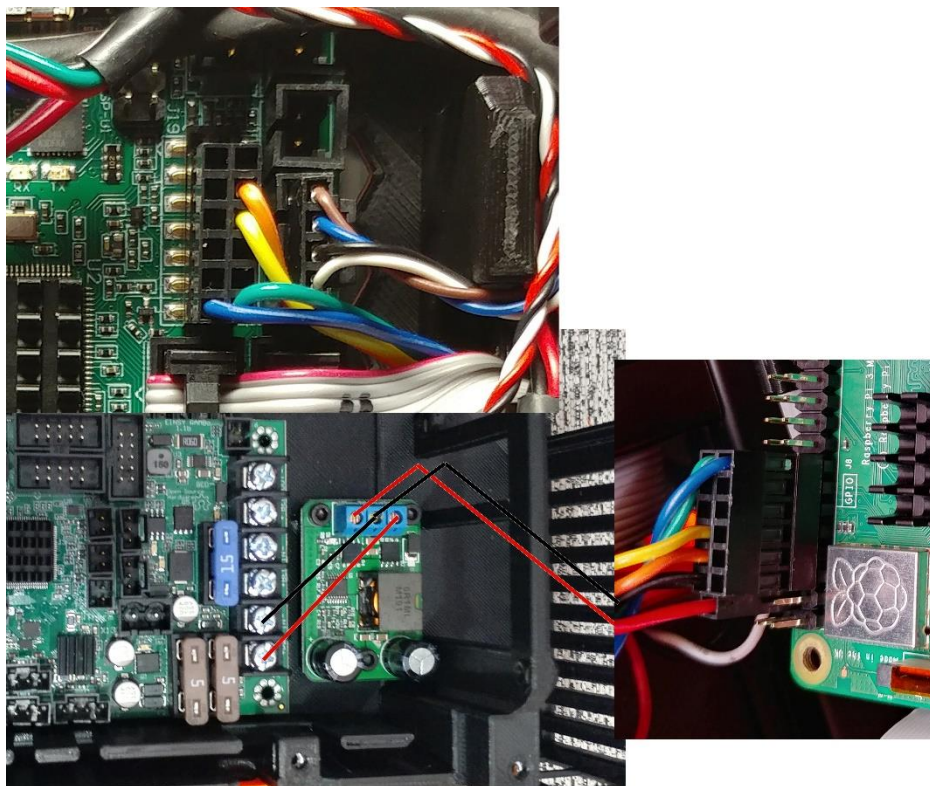

If you use a 5V fan for your Raspberry it can be connected here:

