

PCB Tact Switch

PCB 12 VDC 50 mA SMT



FEATURES:

Contact Resistance: 100m-ohms max. @ 1A 2 - 4 VDC

Insulation Resistance: 100M-ohms max. @ 500VDC

Withstand Voltage: 100VAC RMS for 1 min

Endurance: 10.000 cycles @ 10 cpm

Total Travel: 0.25 mm


SPECIFICATION:

Switching type	Momentary function
Switching type, () momentary	(on)-off
Rated current	50 mA
Rated voltage	12 VDC
Actuation force	2.45 N
Poles	1
Mounting	SMT
Termination type	PCB
Colour	black/grey
Temperature range	-20...+70 °C
Construction form	Tact switch
Height	5 mm
Length	6 mm
Width	6 mm



Art. Nr.

RND 210-00209

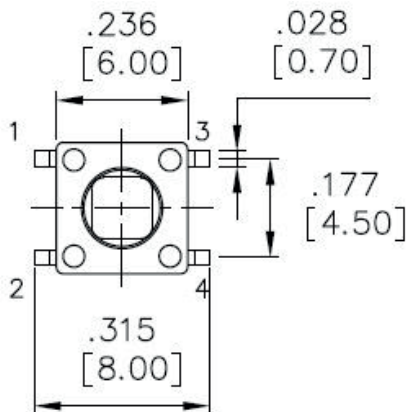

CIRCUIT

