


Hole	Count
Round 12 mil	648
Round 39.4 mil	13
Round 43.3 mil	152
Round 49.2 mil	3
Round 51.2 mil	4

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
Rev B: New switcher topology				
Rev C: Analog section improvements				
Rev D: New power section				
Rev E: Unconnect SS pins				
Rev F: J402 pinout				
Rev G: Added J204, simplified laser driver				

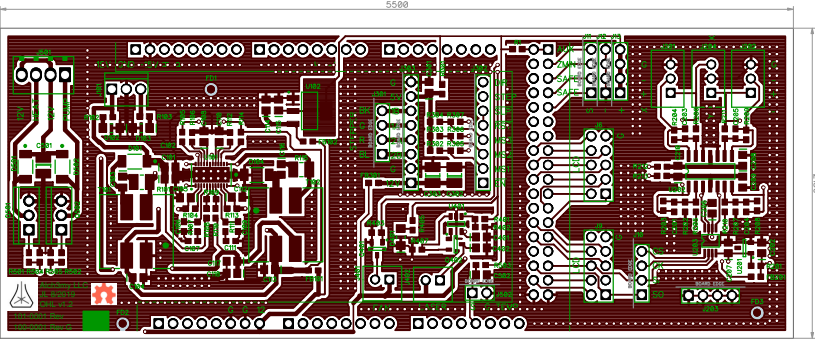

Fab Notes:

- 1) 2 LAYER PCB 0.062 THICK (+/-10%)
- 2) FR4
- 3) 10Z TO 20Z FINISHED
- 4) ENIG OR LF-HASL
- 5) SOLDERMASK - GREEN; SILK - WHITE
- 6) PART SUBSTITUTION - ENGINEERING APPROVAL ONLY

Resin Shield		
Alch3my LLC, CERN OHL v1.2		
Size	PCB 100-0001	Rev G
	PCA 101-0001	
9/20/2018		Drawn by JL
resinshield.dip		Sheet 1