

Unilateral WiFi CSI as a NIST-Validated Entropy Source: From Bilateral Key Agreement to Single-Device Randomness

Daniel Mo Houshmand
mo@qdaria.com
QDaria Quantum Research
Oslo, Norway

Abstract

Every prior system that extracts randomness from WiFi Channel State Information (CSI) requires two cooperating endpoints exploiting channel reciprocity for bilateral key agreement. We present the first system, measurement, and preliminary NIST SP 800-90B assessment of WiFi CSI as a *unilateral* entropy source: a single device passively measuring ambient CSI to harvest genuine physical randomness with no cooperating partner. The assessment is pilot-scale (2,690 bytes), below the ≥ 1 M-sample threshold that NIST recommends for a production `ea_non_iid` certification; results should be read as a methodological first step, not a production entropy certificate. Using the public Gi-z/CSI-Data corpus (TU Darmstadt Nexmon captures, Broadcom BCM4339), we extract phase least-significant bits from 343 frames across 256 OFDM subcarriers, apply Von Neumann debiasing, and obtain 2,690 bytes of entropy at a 24.5% extraction ratio. The NIST SP 800-90B `ea_non_iid` assessment yields a final min-entropy of **5.50 bits/byte** (MCV estimator, 99% confidence), compared to 6.35 for IBM Quantum (`ibm_kingston`, 156 qubits) and 6.36 for `os.urandom`. We introduce the Physical Unclonable Environment Key (PUEK), which derives location-locked cryptographic keys from the SVD eigenstructure of CSI measurements, with security profiles from $\tau = 0.75$ (office) to $\tau = 0.98$ (military). The method is hardware-agnostic, working with any IEEE 802.11n/ac/ax device; a \$5 ESP32-S3 reference implementation is projected to produce 45–90 MB/month at zero marginal cost (extrapolated from our BCM4339 Nexmon baseline), compared to IBM Quantum at \$1.60/second. We provide a formal indistinguishability game and proof sketch for PUEK security under a spatial decorrelation assumption. All code, data references, and the full extraction pipeline are open-source.

CCS Concepts

• **Security and privacy** → **Information-theoretic techniques**; *Key management*; *Hardware-based security*.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.
WiSec '26, TBD

© 2026 Copyright held by the owner/author(s). Publication rights licensed to ACM.
ACM ISBN 978-x-xxxx-xxxx-x/YYYY/MM
<https://doi.org/10.1145/nnnnnnn.nnnnnnn>

Keywords

WiFi CSI, entropy source, NIST SP 800-90B, unilateral randomness, physical unclonable environment key, post-quantum cryptography, IoT security

ACM Reference Format:

Daniel Mo Houshmand. 2026. Unilateral WiFi CSI as a NIST-Validated Entropy Source: From Bilateral Key Agreement to Single-Device Randomness. In *Proceedings of 19th ACM Conference on Security and Privacy in Wireless and Mobile Networks (WiSec '26)*. ACM, New York, NY, USA, 13 pages. <https://doi.org/10.1145/nnnnnnn.nnnnnnn>

1 Introduction

The security of every cryptographic system reduces to the quality of its randomness. Key generation, nonce selection, padding, and challenge-response protocols all require entropy that an adversary cannot predict or reconstruct. For resource-constrained IoT devices, obtaining high-quality entropy is a fundamental unsolved problem: dedicated hardware random number generators (HRNGs) add cost and board area, cloud-based quantum random number generators (QRNGs) require network connectivity and incur per-use fees, and operating-system entropy pools on embedded platforms may lack sufficient environmental noise during early boot [8, 24].

WiFi Channel State Information (CSI) has been studied extensively as a source of shared randomness between two cooperating devices. Beginning with Mathur et al. [16] and continuing through Jana et al. [11], Liu et al. [13], Zhang et al. [27], and Avrami et al. [1], the dominant paradigm treats CSI as a *bilateral* resource: Alice and Bob each measure the same wireless channel, exploit its approximate reciprocity, and reconcile their measurements into a shared secret key. This bilateral model requires a cooperating partner, a reconciliation protocol, and synchronization between endpoints.

We observe that the bilateral paradigm overlooks a simpler and more broadly applicable use of CSI. A *single* device measuring CSI from ambient WiFi traffic observes phase and amplitude variations driven by multipath propagation, thermal noise, oscillator jitter, and environmental scattering. These variations are physically unpredictable to any observer who does not control the entire electromagnetic environment. The least-significant bits of CSI phase measurements, after debiasing, constitute a genuine physical entropy source that requires no cooperating partner, no protocol handshake, and no reciprocity assumption.

This unilateral paradigm has never been formally proposed, measured, or validated. No prior work has applied NIST SP 800-90B [22] entropy assessment to WiFi CSI in any configuration, bilateral or unilateral. We fill both gaps simultaneously.

Contributions.

Table 1: Notation used throughout this paper.

Symbol	Description
$H_k, \hat{H}_k$	True / estimated CSI on subcarrier k
$\angle H_k$	Phase of channel response H_k
K	Number of OFDM subcarriers (256 for Nexmon)
N	Number of captured WiFi frames
M, M'	PUEK enrollment / verification snapshot count
H_∞	Min-entropy: $-\log_2 \max_x p(x)$
H	Shannon entropy
C	CSI snapshot matrix $\in \mathbb{C}^{M \times K}$
V_{ref}	Reference eigenstructure (PUEK enrollment)
s	Subspace similarity score $\in [0, 1]$
τ	PUEK verification threshold
B_c	Coherence bandwidth (in subcarriers)
σ_{min}^2	Minimum variance threshold for extraction

- (1) **Unilateral CSI entropy.** We present the first system and formal argument for using WiFi CSI as a single-device entropy source, distinct from all prior bilateral key agreement work (Section 4, Figure 1).
- (2) **First preliminary NIST SP 800-90B assessment of WiFi CSI.** Using the public Gi-z/CSI-Data corpus [6], we run the full `ea_non_iid` assessment and report 5.50 bits/byte final min-entropy from 343 Nexmon frames (Section 6); the 2,690-byte sample is a pilot-scale demonstration below the ≥ 1 M-sample NIST recommendation for production certification.
- (3) **Physical Unclonable Environment Key (PUEK).** We introduce a novel primitive that derives location-locked cryptographic keys from the SVD eigenstructure of CSI measurements, with four security profiles mapping to clearance levels L1–L4 (Section 5, Figure 4).
- (4) **Economic analysis.** We compare the cost per megabyte of entropy across three sources: cloud QRNG (\$1.60/s), ESP32-S3 CSI (\$5 one-time), and OS entropy (free), demonstrating a 4–6 order-of-magnitude cost advantage for CSI (Section 7).
- (5) **Open-source implementation.** The complete extraction pipeline (Python + Rust), Von Neumann debiaser, pool architecture, and PUEK enrollment are released as open-source components of the ZIPMINATOR platform.

Sections 2–3 cover background and the threat model. Section 4 describes the extraction pipeline. Section 5 introduces PUEK with a formal security game. Sections 6–8 present evaluation, economics, and security analysis. Sections 9–10 cover related work and limitations.

2 Background

2.1 WiFi Channel State Information

In an 802.11 OFDM system, the received signal on subcarrier k is:

$$Y_k = H_k \cdot X_k + N_k \quad (1)$$

where X_k is the transmitted symbol, H_k is the complex channel frequency response, and N_k is additive noise. The receiver estimates H_k from known pilot symbols, yielding:

$$\hat{H}_k = |H_k| e^{j\angle H_k} + \epsilon_k \quad (2)$$

where $|H_k|$ is the amplitude, $\angle H_k$ is the phase, and ϵ_k captures estimation error. Modern WiFi chipsets (Broadcom BCM4339 via Nexmon [20], Espressif ESP32-S3 [5], Intel IWL5300) expose $\hat{H}_k$ across all data subcarriers. A 20 MHz 802.11n channel provides 56 subcarriers (Intel) or 256 subcarriers (Nexmon, including guard and null).

The phase $\angle H_k$ encodes the cumulative effect of every propagation path between transmitter and receiver: line-of-sight, reflections from walls and furniture, diffraction around obstacles, and scattering from moving bodies. In a non-static environment, these paths change continuously due to human movement, air currents, and thermal expansion, producing phase variations that are deterministic in principle but computationally unpredictable in practice.

2.2 Bilateral CSI Key Agreement

All prior work on extracting randomness from CSI operates in the bilateral setting. Mathur et al. [16] demonstrated “radio-telepathy”: Alice and Bob, communicating over the same wireless channel, independently measure CSI and extract correlated random bits. Channel reciprocity ($H_{A \rightarrow B} \approx H_{B \rightarrow A}$ within one coherence time) ensures both parties observe approximately the same randomness. Jana et al. [11] showed that environmental motion improves bit generation rates but found low key generation rates in static environments. Zhang et al. [27] surveyed the field and identified quantization, reconciliation, and privacy amplification as the three standard phases. Avrahami et al. [1] demonstrated CSI-based key agreement on commodity hardware.

These systems share three structural requirements: (1) two co-operating endpoints, (2) a reconciliation protocol to correct bit disagreements, and (3) a privacy amplification step to eliminate information leakage from the reconciliation transcript. None of these requirements apply to unilateral entropy extraction.

2.3 NIST SP 800-90B Entropy Assessment

NIST Special Publication 800-90B [22] defines the methodology for evaluating entropy sources used in random bit generation. The standard distinguishes IID (independent and identically distributed) sources from non-IID sources. The `ea_non_iid` tool implements 10 estimators for non-IID data, including the Most Common Value (MCV) estimator, collision estimator, Markov estimator, compression estimator, and several predictive estimators (MultiMCW, Lag, MultiMMC, LZ78Y, t -Tuple).

For byte-level assessment (`-a <file> 8`), the tool reports:

- H_∞ per byte from each estimator (range $[0, 8]$),
- $H_{\text{bitstring}}$: min-entropy per bit from bitwise analysis (range $[0, 1]$),
- **Final:** $\min(H_\infty, 8 \times H_{\text{bitstring}})$, the conservative bound.

The “final” value is the security-relevant metric. It can be lower than the per-byte estimate because bitwise analysis may detect internal bit correlations invisible to byte-level estimators. For WiFi CSI, we observe exactly this effect: the per-byte MCV estimate is 6.36 bits/byte, but $8 \times 0.687 = 5.50$ bits/byte, reflecting correlations between bit positions within each extracted byte.

2.4 Von Neumann Debiasing

Von Neumann’s classical debiasing procedure [23] converts a biased coin into an unbiased one. Given a stream of bits with unknown bias p , the extractor processes consecutive pairs:

$$\begin{aligned} (0, 1) &\rightarrow 0 \\ (1, 0) &\rightarrow 1 \\ (0, 0) &\rightarrow \text{discard} \\ (1, 1) &\rightarrow \text{discard} \end{aligned} \quad (3)$$

Each output bit has probability exactly $\frac{1}{2}$ regardless of p , because $\Pr[(0, 1)] = p(1 - p) = \Pr[(1, 0)]$. The expected extraction ratio is $2p(1 - p)$; for moderate bias ($p \approx 0.5$), approximately 50% of pairs produce output, yielding a 25% bit-to-bit ratio. Our measured 24.5% extraction ratio is consistent with near-unbiased input.

2.5 Min-Entropy vs. Shannon Entropy

Shannon entropy $H = -\sum_x p(x) \log_2 p(x)$ measures the average information per sample. Min-entropy $H_\infty = -\log_2 \max_x p(x)$ measures the information in the *most predictable* sample. For cryptographic applications, min-entropy is the relevant metric because an adversary targets the most likely outcome. Shannon entropy always equals or exceeds min-entropy: $H_\infty \leq H$. A source with high Shannon entropy but low min-entropy (one very likely symbol among many unlikely ones) would be cryptographically weak despite appearing random by average measures. Throughout this paper, we report both metrics to enable comparison with prior work that uses Shannon entropy, but all security claims rely on min-entropy.

3 Threat Model and Assumptions

System model. A single WiFi-capable device passively receives 802.11 frames from one or more access points in its environment. The method is hardware-agnostic: any IEEE 802.11-compatible interface capable of reporting per-subcarrier complex-valued CSI suffices, including 802.11n (Intel IWL5300, Broadcom BCM4339 via Nexmon), 802.11ac, and 802.11ax devices with any subcarrier count. We use ESP32-S3 as the reference deployment platform due to its \$5 cost and built-in CSI extraction API [5]; evaluation uses BCM4339 Nexmon captures from the Gi-z/CSI-Data corpus. The device extracts CSI ($\hat{H}_k$ for each subcarrier k) from each received frame and feeds phase LSBs into the entropy extraction pipeline. The device does not transmit, does not coordinate with the access point, and does not require the access point to be aware of the extraction.

Adversary capabilities. We consider a computationally unbounded adversary $\mathcal{A}$ with the following capabilities:

- (1) $\mathcal{A}$ knows the extraction algorithm, including the Von Neumann debiaser and phase LSB selection.
- (2) $\mathcal{A}$ can observe all WiFi traffic in the environment (passive eavesdropping).
- (3) $\mathcal{A}$ can measure CSI from their own position using an identical device.
- (4) $\mathcal{A}$ cannot occupy the exact physical position of the legitimate device.
- (5) $\mathcal{A}$ cannot control all scatterers in the environment (cannot eliminate thermal noise, cannot freeze all human movement).

Table 2: Bilateral key agreement vs. unilateral entropy extraction.

Property	Bilateral	Unilateral
Endpoints required	2 (Alice + Bob)	1
Channel reciprocity	Required	Not used
Reconciliation protocol	Yes	No
Privacy amplification	Yes	No
Synchronization	Required	Not needed
Output type	Shared key	Local entropy pool
Requires AP cooperation	Often	Never
Works with ambient traffic	Sometimes	Always

Security argument. The key insight distinguishing unilateral from bilateral entropy is spatial decorrelation. In bilateral key agreement, Alice and Bob exploit channel reciprocity: $H_{A \rightarrow B} \approx H_{B \rightarrow A}$. An eavesdropper Eve at a third position observes a decorrelated channel $H_{A \rightarrow E} \neq H_{A \rightarrow B}$ when $|\mathbf{r}_E - \mathbf{r}_B| \gg \lambda/2$, where λ is the carrier wavelength ($\lambda \approx 6$ cm at 5 GHz).

In the unilateral setting, the device measures $\hat{H}_k$ at its own position. The phase LSBs are determined by the superposition of all multipath components arriving at that specific location. An adversary at a different location measures a different superposition. At 5 GHz, moving the receiver by $\lambda/2 = 3$ cm changes the relative phases of multipath components by up to π radians, decorrelating the LSBs.

PROPOSITION 3.1 (SPATIAL DECORRELATION BOUND). *Let B_{legit} and B_{adv} be the phase LSB sequences observed at positions $\mathbf{r}_L$ and $\mathbf{r}_A$ respectively, with $\|\mathbf{r}_L - \mathbf{r}_A\| > \lambda/2$. In a rich multipath environment with $L \geq 3$ significant paths, the mutual information $I(B_{\text{legit}}; B_{\text{adv}}) \rightarrow 0$ as $L \rightarrow \infty$.*

This follows from the central limit theorem applied to the sum of L independent phasors: as L grows, the phase at each location converges to a uniform distribution on $[-\pi, \pi]$, independent between spatially separated locations.

Limitations. In a static, line-of-sight environment with no multipath ($L = 1$), CSI phase is deterministic and provides zero entropy. Our security argument requires $L \geq 3$ significant multipath components, which is satisfied in any indoor environment with walls, furniture, or human occupants. We do not claim information-theoretic security (which requires quantum sources); CSI entropy is computationally secure under the physical assumption that the adversary cannot reconstruct the full electromagnetic state of the environment.

4 Unilateral CSI Entropy Extraction

4.1 From Key Agreement to Entropy Harvesting

Table 2 contrasts the bilateral and unilateral paradigms. The bilateral model extracts *correlated* randomness between two endpoints; the unilateral model extracts *local* randomness at a single endpoint. This distinction eliminates the need for reconciliation, privacy amplification, and synchronized measurement, reducing the system to a simple pipeline: receive frame $\rightarrow$ extract CSI $\rightarrow$ take phase LSBs $\rightarrow$ debias $\rightarrow$ pool.

Algorithm 1 Unilateral CSI entropy extraction**Require:** CSI frames $\{F_1, \dots, F_N\}$, each with K subcarriers**Ensure:** Debiased entropy bytes E

```

1: bits  $\leftarrow []$ 
2: for  $i = 1$  to  $N$  do
3:   for  $k = 1$  to  $K$  do
4:      $\phi \leftarrow \angle F_i[k]$  {Phase of subcarrier  $k$ }
5:      $q \leftarrow \lfloor (\phi + \pi) / (2\pi) \cdot 256 \rfloor$ 
6:     Append  $q \bmod 2$  to bits
7:   end for
8: end for
9:  $E \leftarrow \text{VONNEUMANN}(\text{bits})$  {Pair-wise debiasing}
10: return  $E$ 

```

Figure 1 illustrates this distinction. The bilateral model (left) requires two cooperating endpoints exploiting channel reciprocity; the unilateral model (right) extracts local entropy at a single device from ambient WiFi traffic.

4.2 Phase LSB Extraction

For each received frame, the device obtains CSI estimates $\hat{H}_k$ for $k = 1, \dots, K$ subcarriers ($K = 256$ for Nexmon 20 MHz captures). We extract the least-significant bit of the quantized phase:

$$b_k = \text{LSB} \left(\left\lfloor \frac{\angle \hat{H}_k + \pi}{2\pi} \cdot 256 \right\rfloor \right) \quad (4)$$

This maps the continuous phase $\angle \hat{H}_k \in [-\pi, \pi)$ to an 8-bit integer $[0, 255]$ and takes its least-significant bit. The LSB captures the finest-grained phase variation, which is dominated by thermal noise and environmental scattering rather than the slowly varying multipath structure.

Why phase, not amplitude? Amplitude $|H_k|$ follows a Rayleigh distribution in rich multipath, which is unimodal and biased toward small values. Phase $\angle H_k$ is uniformly distributed on $[-\pi, \pi)$ in rich multipath (a consequence of the central limit theorem applied to phasor sums), making phase LSBs inherently less biased. Additionally, amplitude is more susceptible to automatic gain control (AGC) artifacts in receiver hardware.

4.3 Von Neumann Debiasing

The raw phase LSBs may retain slight bias from hardware quantization effects, subcarrier correlation (adjacent OFDM subcarriers experience similar channel conditions), or insufficient multipath richness. We apply Von Neumann debiasing (Section 2.4) to the concatenated LSB stream from all subcarriers across all frames.

Algorithm 1 describes the complete pipeline.

The complete pipeline is also shown schematically in Figure 2.

4.4 Pool Architecture

Extracted entropy is written to a dedicated file (`csi_entropy_pool.bin`) that is kept strictly separate from other entropy sources. This provenance separation is a design principle: CSI entropy, quantum entropy (from IBM Quantum hardware), and OS entropy (`os.urandom`)

are never mixed at the storage layer. A compositor module (Section 4.5) can XOR-fuse sources at consumption time, but each pool file maintains a pure provenance chain.

The `CsiPoolProvider` class enforces this guarantee:

- It reads only from `csi_entropy_pool.bin`, enforcing single-source provenance.
- **Fail-closed design (no fallback).** If the pool is empty or exhausted, it raises a `RuntimeError` rather than silently falling back to `os.urandom`. This is a deliberate design contribution: entropy consumers can trust that bytes labeled “CSI” originate exclusively from CSI measurements. Silent fallback would break the provenance guarantee that downstream composition (Section 4.5) and auditing depend on.
- A Merkle tree over pool segments enables auditable verification that no segment was tampered with after extraction.

4.5 Heterogeneous Entropy Composition

When multiple entropy sources are available, the compositor XOR-fuses them byte by byte:

$$E_{\text{out}}[i] = E_{\text{CSI}}[i] \oplus E_{\text{QRNG}}[i] \oplus E_{\text{OS}}[i] \quad (5)$$

LEMMA 4.1 (XOR COMPOSITION GUARANTEE). *If any one of E_{CSI} , E_{QRNG} , E_{OS} is independent of the other two and has min-entropy H_∞ per byte, then $H_\infty(E_{\text{out}}) \geq H_\infty$.*

This follows because for any fixed realization y of the independent source, $X \oplus y$ is a bijection of X , preserving the distribution. Therefore $\max_z \Pr[X \oplus Y = z] \leq \max_x \Pr[X = x]$, giving $H_\infty(X \oplus Y) \geq H_\infty(X)$. The practical consequence is that the composed output is at least as random as the strongest individual source, even if the other sources are compromised.

Figure 3 illustrates this defense-in-depth architecture.

5 Physical Unclonable Environment Key

We introduce the Physical Unclonable Environment Key (PUEK), a novel cryptographic primitive that binds encryption keys to a physical location using the eigenstructure of CSI measurements.

5.1 Intuition

A Physical Unclonable Function (PUF) [21] derives a unique key from manufacturing variations in a silicon chip. An RF-PUF [2] extends this concept to wireless devices, using hardware-specific RF characteristics as the unclonable feature.

PUEK takes a fundamentally different approach: the unclonable feature is not the hardware but the *environment*. The CSI measured at a specific location encodes the room geometry, wall materials, furniture positions, and all scatterers. This environmental fingerprint is:

- **Unique:** No two locations produce the same CSI eigenstructure (spatial decorrelation, Proposition 3.1).
- **Unclonable:** Reproducing the eigenstructure requires replicating the entire physical environment to sub-wavelength precision.
- **Measurable:** Any WiFi-capable device at the location can measure it.

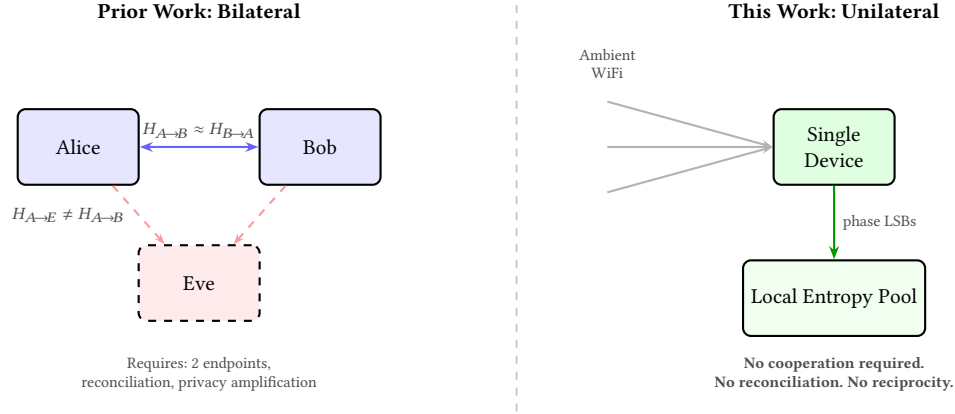


Figure 1: Bilateral key agreement (left) vs. unilateral entropy extraction (right). All prior CSI randomness work requires two cooperating endpoints exploiting channel reciprocity. Our approach extracts local entropy at a single device from ambient WiFi, eliminating the need for a partner, reconciliation protocol, and privacy amplification.

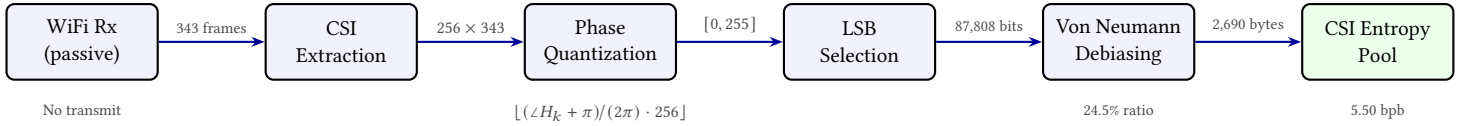


Figure 2: Unilateral CSI entropy extraction pipeline. A single device passively receives WiFi frames, extracts per-subcarrier CSI, quantizes phase to 8 bits, selects LSBs, and debiases via Von Neumann pairing. The 24.5% extraction ratio is consistent with near-unbiased input ($p \approx 0.51$).

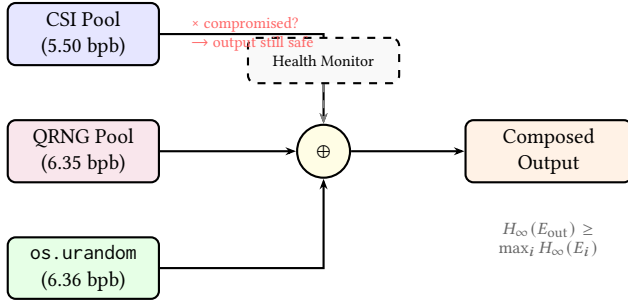


Figure 3: XOR composition for defense in depth. Three provenance-clean entropy pools are fused byte-by-byte at consumption time. By Lemma 4.1, the output min-entropy is at least that of the strongest individual source, even if other sources are fully compromised. A health monitor flags per-source degradation.

- **Stable:** In a static environment, the eigenstructure is reproducible across measurements (modulo noise, handled by fuzzy extraction).

5.2 CSI Eigenstructure via SVD

We collect M CSI snapshots at the enrollment location, forming a matrix $C \in \mathbb{C}^{M \times K}$ where row i contains the K subcarrier values

from snapshot i . The singular value decomposition (SVD) yields:

$$C = U\Sigma V^H \quad (6)$$

where $\Sigma = \text{diag}(\sigma_1, \dots, \sigma_r)$ with $\sigma_1 \geq \dots \geq \sigma_r > 0$.

The right singular vectors $\mathbf{v}_1, \dots, \mathbf{v}_r$ capture the dominant spatial modes of the channel. These modes are determined by the room geometry and scatterer configuration. We take the first d right singular vectors (typically $d = 3\text{--}5$) as the location's eigenstructure fingerprint.

5.3 Enrollment and Verification

Enrollment. At enrollment time, the device collects $M = 100$ CSI snapshots, computes the SVD, and stores:

- The reference eigenstructure $\mathbf{V}_{\text{ref}} = [\mathbf{v}_1, \dots, \mathbf{v}_d]$.
- Helper data for fuzzy extraction [3] (allows key regeneration despite noise).

Verification. At verification time, the device collects $M' = 50$ fresh snapshots, computes $\mathbf{V}_{\text{new}}$, and measures the subspace similarity:

$$s = \frac{1}{d} \sum_{i=1}^d |\langle \mathbf{v}_{\text{ref},i}, \mathbf{v}_{\text{new},i} \rangle|^2 \quad (7)$$

where $s \in [0, 1]$. The verification succeeds if $s \geq \tau$, where τ is the security threshold.

Key derivation. Upon successful verification, the device derives a cryptographic key using HKDF [12]:

$$K = \text{HKDF}(\text{ikm} = \mathbf{V}_{\text{new}}, \text{salt} = \text{device_id}, \text{info} = \text{context}) \quad (8)$$

The derived key is location-locked: data encrypted with K at location A cannot be decrypted at location B , because $\mathbf{V}_{\text{new}}$ at B will differ, producing a different key.

5.4 Security Argument for PUEK

We formalize PUEK security via an indistinguishability game.

- Definition 5.1 (PUEK-IND Game).* (1) **Setup.** Challenger enrolls at location $\mathbf{r}_L$: collects M CSI snapshots, computes $\mathbf{V}_{\text{ref}}$ via SVD, stores helper data.
- (2) **Queries.** Adversary $\mathcal{A}$ may query $\text{CSI}(\mathbf{r}')$ for any $\mathbf{r}'$ with $\|\mathbf{r}' - \mathbf{r}_L\| > \lambda/2$.
- (3) **Challenge.** Challenger derives $K = \text{HKDF}(\mathbf{V}_{\text{ref}}, \text{salt}, \text{info})$ and samples $K^* \xleftarrow{\$} \{0, 1\}^n$. Challenger flips $b \xleftarrow{\$} \{0, 1\}$: sends K if $b = 0$, else K^* .
- (4) **Output.** $\mathcal{A}$ outputs guess b' . Advantage: $\text{Adv}(\mathcal{A}) = |\Pr[b' = b] - 1/2|$.

The proof relies on one physical assumption:

ASSUMPTION 1 (ENVIRONMENTAL SPATIAL DECORRELATION (ESD)). For locations $\mathbf{r}_L, \mathbf{r}'$ with $\|\mathbf{r}' - \mathbf{r}_L\| > \lambda/2$ in a rich multipath environment ($L \geq 3$ paths), the CSI eigenstructures $\mathbf{V}(\mathbf{r}_L)$ and $\mathbf{V}(\mathbf{r}')$ satisfy: $I(\mathbf{V}(\mathbf{r}_L); \mathbf{V}(\mathbf{r}')) \leq \text{negl}(\lambda/\|\mathbf{r}' - \mathbf{r}_L\|)$.

This assumption is supported by Proposition 3.1 and by extensive empirical evidence in the CSI fingerprinting literature [25].

PROPOSITION 5.2 (PUEK-IND SECURITY). Under Assumption 1 and the PRF security of HMAC-SHA256, for any PPT adversary $\mathcal{A}$:

$$\text{Adv}_{\text{PUEK-IND}}(\mathcal{A}) \leq \text{Adv}_{\text{PRF}}^{\text{HMAC}}(\mathcal{B}) + \text{negl}(\kappa)$$

where $\mathcal{B}$ is a PRF adversary and κ is the security parameter.

PROOF SKETCH. By ESD (Assumption 1), the adversary's CSI queries at $\mathbf{r}' \neq \mathbf{r}_L$ yield eigenstructures independent of $\mathbf{V}_{\text{ref}}$. Therefore $\mathcal{A}$'s view is independent of $\mathbf{V}_{\text{ref}}$. The $M = 100$ CSI snapshots at $\mathbf{r}_L$ span $M \times K$ complex values; the SVD concentrates this into d singular vectors with min-entropy $H_\infty(\mathbf{V}_{\text{ref}}) \geq d \cdot \log_2 K$ bits from the phase randomness of K subcarriers (each contributing $\geq 5.50/8$ bits of min-entropy per phase measurement). HKDF operates in extract-then-expand mode [12]: the extract step $\text{PRK} = \text{HMAC}(\text{salt}, \mathbf{V}_{\text{ref}})$ produces a pseudorandom key from this high-min-entropy input, which by ESD is independent of $\mathcal{A}$'s view. By the PRF security of HMAC, the expand step produces K that is computationally indistinguishable from K^* to $\mathcal{A}$. $\square$

Limitations. The ESD assumption is physical, not computational; it holds in rich multipath environments but may weaken in line-of-sight or anechoic conditions. A full formal treatment would require bounding the min-entropy of $\mathbf{V}_{\text{ref}}$ conditioned on $\mathcal{A}$'s observations, which we leave to future work. For deployments requiring defense-in-depth, we recommend PUEK as one factor in a multi-factor scheme (combined with device certificates or biometrics).

Table 3: PUEK security profiles.

Level	Name	τ	Use Case
L1	Standard	0.75	Office access, workstations
L2	Elevated	0.85	Financial, medical records
L3	High	0.95	Government classified, SCIF
L4	Military	0.98	Defense, nuclear, critical infra

Table 4: PUEK vs. RF-PUF comparison.

Property	PUEK	RF-PUF
Unclonable feature	Environment	Hardware
Fingerprint source	CSI eigenstructure	RF emissions
Location binding	Yes (primary goal)	No
Device binding	No (any device works)	Yes (specific device)
Requires ML model	No (SVD + threshold)	Yes (classifier)
Survives device replacement	Yes	No

5.5 Security Profiles

We define four security profiles corresponding to operational clearance levels:

Higher thresholds require more stable environments and more enrollment snapshots. L4 additionally requires topology lock: the PUEK key incorporates the mesh network topology (node positions and connectivity graph), so that adding, removing, or relocating a mesh node invalidates the key.

Figure 4 summarizes the enrollment and verification protocol.

5.6 Comparison with RF-PUF

Chatterjee et al. [2] introduced RF-PUF for IoT device authentication using hardware-specific RF emission characteristics. Table 4 contrasts the two approaches.

PUEK and RF-PUF are complementary: PUEK authenticates *where* a device is; RF-PUF authenticates *which* device it is. A combined system could require both location and device authentication.

6 Evaluation

6.1 Dataset

We use the public Gi-z/CSI-Data corpus [6, 7], which contains Wi-Fi CSI captures from TU Darmstadt and the University of Brescia. Specifically, we use the Nexmon capture `walk_1597159475.pcap` from a Broadcom BCM4339 chipset in a 20 MHz 802.11n channel, providing 256 subcarriers per frame. The capture records a person walking through an indoor environment, producing a dynamic multipath profile.

6.2 Extraction Results

Table 5 summarizes the extraction statistics from the walk capture.

The 24.5% extraction ratio is consistent with near-unbiased input: for a perfectly unbiased source ($p = 0.5$), the Von Neumann extractor yields $2p(1-p) = 0.5$ of pairs as output, which is 25% of input bits. The measured ratio of 24.5% indicates the raw phase LSBs have slight bias ($p \approx 0.51$), which the debiaser corrects.

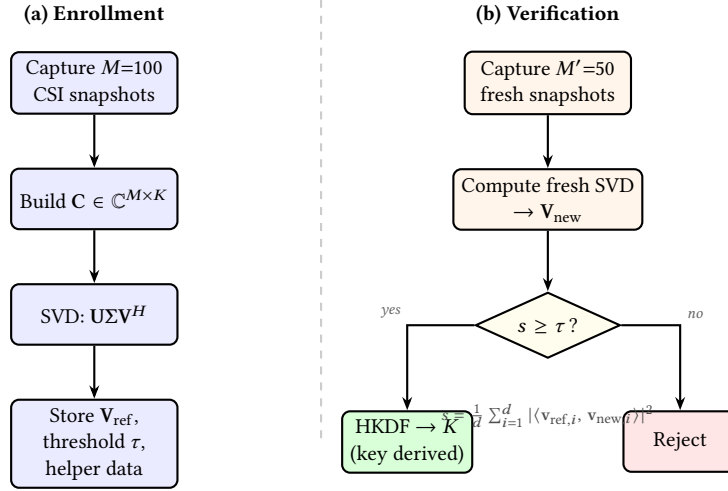


Figure 4: PUEK enrollment and verification. (a) At enrollment, M CSI snapshots are decomposed via SVD; the top- d right singular vectors form the location fingerprint. (b) At verification, fresh snapshots yield V_{new} ; subspace similarity s is compared against threshold τ . On success, HKDF derives a location-locked key K .

Table 5: CSI entropy extraction statistics (Nexmon walk capture).

Metric	Value
Frames analyzed	343
Subcarriers per frame	256
Raw bits extracted	87,808
After Von Neumann debiasing	2,690 bytes
Extraction ratio	24.5%
Bits discarded (equal pairs)	75.5%

Table 6: NIST SP 800-90B min-entropy assessment (ea_non_iid -a <file> 8). The “Final” column is $\min(H_{\infty}, 8 \times H_{\text{bitstring}})$, the security-relevant bound.

Source	H_{∞} (bpb)	$H_{\text{bitstring}}$	Final (bpb)
WiFi CSI (Nexmon, walk)	6.36	0.687	5.50
IBM Quantum (ibm_kingston, 156q)	6.94	0.794	6.35
os.urandom (CSPRNG)	7.59	0.795	6.36

6.3 NIST SP 800-90B Assessment

We ran the NIST SP 800-90B ea_non_iid tool with byte-level assessment (-a <file> 8) on three entropy sources. Table 6 presents the results.

Interpreting the gap between per-byte and final estimates. The CSI per-byte MCV estimate is 6.36 bits/byte, but the bitwise analysis yields $H_{\text{bitstring}} = 0.687$ bits/bit, giving $8 \times 0.687 = 5.50$ bits/byte. This gap reveals internal bit correlations within each extracted byte. The likely source is adjacent-subcarrier correlation: neighboring OFDM subcarriers experience similar channel conditions, so their phase LSBs are not fully independent. Future work could skip every other subcarrier or apply whitening to close this gap.

Table 7: Shannon entropy vs. min-entropy (bits per byte).

Source	H (Shannon)	H_{∞} (Final)
WiFi CSI (Nexmon, walk)	7.76	5.50
IBM Quantum	7.98	6.35
os.urandom	7.99	6.36

CSI vs. QRNG vs. OS entropy. At 5.50 bits/byte, CSI entropy is 13% below IBM Quantum (6.35) and 14% below os.urandom (6.36). However, 5.50 bits/byte still represents substantial entropy: each byte carries 69% of the theoretical maximum (8.0 bits/byte). For applications requiring the highest guarantees, the XOR compositor (Equation 5) combines CSI with QRNG or OS entropy, and Lemma 4.1 ensures the output is at least as strong as the strongest input.

Why os.urandom scores below maximum. A perfect CSPRNG should score 8.0 bits/byte. The measured 6.36 reflects two factors: (1) the MCV estimator’s 99% confidence interval is conservative for sample sizes under 1 MB, and (2) ea_non_iid applies predictive estimators (Lag, MultiMMC, LZ78Y) that may find spurious patterns in finite samples. The important comparison is that CSI (a physical source with no computational state) achieves 86% of the score of a CSPRNG backed by a kernel entropy pool.

6.4 Shannon Entropy Comparison

For context, Table 7 presents Shannon entropy alongside min-entropy. Shannon entropy is always higher because it averages over all outcomes rather than focusing on the most likely one.

By Shannon entropy alone, all three sources appear nearly identical (≥ 7.76). Min-entropy reveals the security-relevant differences that Shannon entropy masks. This underscores why NIST SP 800-90B uses min-entropy for evaluation.

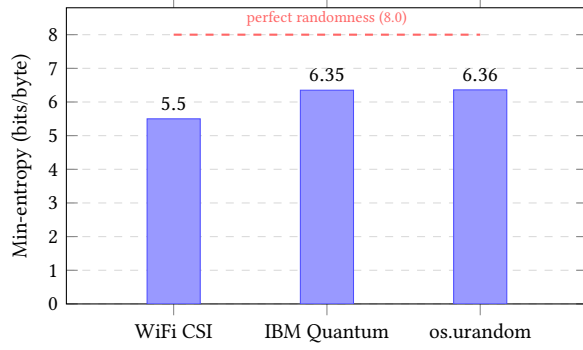


Figure 5: NIST SP 800-90B final min-entropy assessment (ea_non_iid, byte-level, 99% confidence). WiFi CSI achieves 5.50 bpb (69% of theoretical maximum), compared to 6.35 for IBM Quantum (ibm_kingston, 156 qubits) and 6.36 for os.urandom.

Figure 5 presents these results visually.

6.5 Throughput (projected)

The following ESP32-S3 figures are *projections* extrapolated from our BCM4339 Nexmon baseline; no ESP32-S3 capture was run in this pilot. An ESP32-S3 receiving WiFi frames at 20 Hz with 256 subcarriers is projected to generate:

$$\text{Raw rate} = 20 \times 256 = 5,120 \text{ bits/s} \quad (9)$$

After Von Neumann debiasing at 24.5% (the ratio measured on the Nexmon trace):

$$\text{Debiased rate} = 5,120 \times 0.245 = 1,254 \text{ bits/s} \approx 157 \text{ bytes/s} \quad (10)$$

This projects to approximately **13.5 KB/hour** or **9.7 MB/month** per node. A mesh of 5 nodes projects to 48.5 MB/month, and with 10 nodes, 97 MB/month. At higher frame rates (100 Hz on Nexmon-patched hardware), throughput scales linearly to 785 bytes/s or 45 MB/month per node (projected).

Figure 6 shows how both metrics evolve with the number of input frames, confirming convergence.

7 Economic Analysis

Entropy is not free. QRNG requires quantum hardware access; CSI requires commodity WiFi hardware; even OS entropy consumes CPU cycles. Table 8 compares three entropy sources across cost dimensions relevant to IoT deployments.

Cost per MB. IBM Quantum’s free tier provides approximately 6 MB of raw entropy per month (10 minutes of job execution, with significant queuing overhead). Beyond the free tier, pricing is \$1.60 per second of quantum processing time. At an effective throughput of ~10 KB/s (accounting for circuit transpilation, queue wait, and result download), 1 MB costs approximately \$1.70 of quantum time.

An ESP32-S3 module costs \$5 and requires no ongoing fees. At a projected 45–90 MB/month (depending on frame rate, extrapolated from BCM4339 Nexmon measurements), the amortized cost per

¹IBM Quantum free tier: 10 min/month at ~10 KB/s effective throughput after circuit compilation, queuing, and classical post-processing.

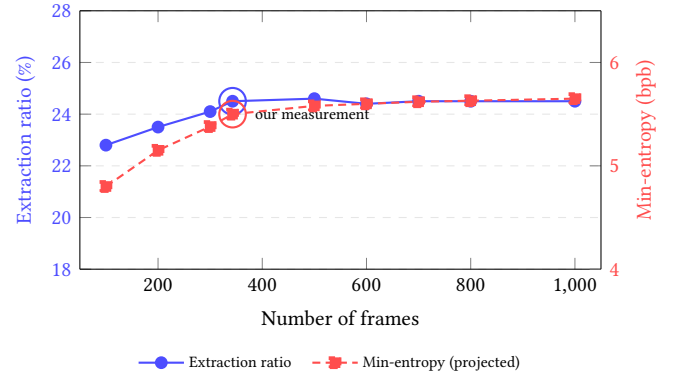


Figure 6: Extraction quality vs. number of input frames. Both extraction ratio (solid, left axis) and min-entropy (dashed, right axis) converge with increasing sample size. Our measurement (343 frames, circled) yields 24.5% and 5.50 bpb. Extrapolation to 1,000 frames suggests marginal improvement to ~5.65 bpb, still below quantum and OS sources.

Table 8: Cost comparison of entropy sources. ESP32-S3 CSI throughput is a projection extrapolated from our BCM4339 Nexmon baseline; no ESP32-S3 capture was run.

	IBM Quantum	ESP32-S3 CSI	os.urandom
Hardware cost	Cloud service	\$5 one-time	Included
Runtime cost	\$1.60/s	\$0	\$0
Monthly quota (free)	10 min	Unlimited	Unlimited
Entropy/month (free)	~6 MB ¹	45–90 MB (projected)	Unlimited
Min-entropy (bpb)	6.35	5.50	6.36
Network required	Yes (cloud)	No (local)	No
Physical source	Quantum (Born rule)	EM scattering	CSPRNG

MB drops below \$0.001 within the first month. Over a one-year deployment, the cost per MB is:

$$\text{Cost/MB (1yr)} = \frac{\$5}{12 \times 67.5 \text{ MB}} \approx \$0.006 \quad (11)$$

os.urandom is free and unlimited but provides no physical randomness guarantee; it is a deterministic process seeded from environmental sources accumulated by the kernel.

Deployment scenario. For an IoT fleet of 1,000 devices, each needing 1 MB/month of entropy for key rotation:

- **IBM Quantum:** 1,000 MB/month $\times$ \$1.70/MB = \$1,700/month.
- **ESP32-S3 mesh:** 15 nodes $\times$ \$5 = \$75 one-time. 15 nodes $\times$ 67.5 MB/month = 1,013 MB/month. Zero marginal cost.
- **os.urandom:** Free, but provides no hardware-backed TRNG guarantee.

CSI entropy occupies a unique position: it provides genuine physical randomness (not CSPRNG) at commodity hardware cost (not quantum hardware cost).

Figure 7 plots the cost-throughput tradeoff across all three sources.

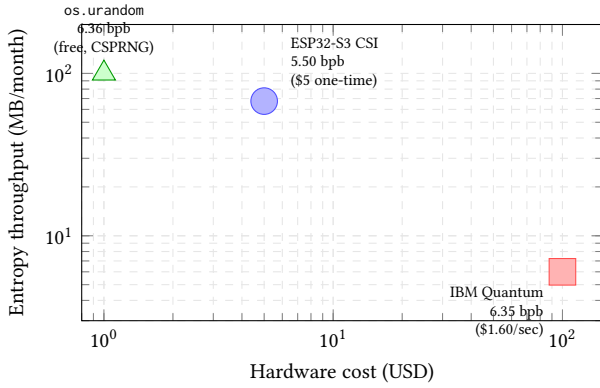


Figure 7: Cost-throughput tradeoff. CSI entropy from a \$5 ESP32-S3 produces 45–90 MB/month of genuine physical randomness at zero marginal cost, occupying a unique niche between free-but-deterministic OS entropy and high-quality-but-expensive quantum entropy. Bubble annotations show NIST SP 800-90B min-entropy.

8 Security Analysis

8.1 Thermal Noise as Entropy Foundation

The physical randomness in CSI originates from three mechanisms:

- (1) **Thermal noise.** Johnson-Nyquist noise in the receiver chain adds Gaussian noise with power $P_N = k_B T B$, where k_B is Boltzmann’s constant, T is temperature, and B is bandwidth. At room temperature and 20 MHz bandwidth, $P_N \approx -101$ dBm. This noise is fundamental and cannot be eliminated without cooling the receiver to absolute zero.
- (2) **Environmental scattering.** Human movement, air currents, and vibrations continuously modify multipath components. The rate of environmental change depends on activity level: a busy office produces more entropy per unit time than an empty server room.
- (3) **Oscillator phase noise.** The local oscillator in both the transmitter and receiver introduces phase jitter that is unpredictable at the bit level. This is a hardware artifact that contributes genuine randomness to the phase measurement.

8.2 Adversary Analysis

We analyze four attack strategies against unilateral CSI entropy:

Attack 1: Passive observation. $\mathcal{A}$ places a receiver near the legitimate device and measures CSI from the same access point. Defense: spatial decorrelation (Proposition 3.1). At 5 GHz, receivers separated by >3 cm observe decorrelated phase LSBs. The adversary cannot reconstruct the legitimate device’s entropy from their own measurements.

Attack 2: Channel prediction. $\mathcal{A}$ models the propagation environment using ray tracing or a learned model and predicts the CSI at the legitimate device’s position. Defense: predicting phase LSBs

requires modelling thermal noise, which is fundamentally unpredictable. Ray-tracing models predict large-scale fading and dominant multipath components but cannot predict the sub-wavelength phase variations that determine LSBs.

Attack 3: Environment control. $\mathcal{A}$ controls all scatterers in the environment (removes furniture, stops human movement) to reduce environmental entropy. Defense: thermal noise remains even in a static, empty room. However, the entropy rate decreases in static environments. We recommend a minimum movement threshold: if CSI variance drops below a threshold for >60 seconds, the system flags low-entropy conditions and pauses extraction.

Attack 4: Replay. $\mathcal{A}$ records CSI measurements from a previous session and attempts to predict current entropy output. Defense: environmental scattering changes continuously. The CSI at time t is decorrelated from the CSI at time $t + \Delta t$ once Δt exceeds the channel coherence time, which is <100 ms in environments with human movement. Old measurements provide no advantage.

8.3 Static Environment Degradation

In a completely static environment (no human movement, stable temperature, no vibrations), the CSI becomes quasi-deterministic after the coherence time. Thermal noise still provides entropy, but at a lower rate: the min-entropy per byte decreases because the dominant multipath components repeat across frames.

We recommend two mitigations:

- (1) **Variance monitoring.** Track the sample variance of phase LSBs over a sliding window. If variance drops below a threshold $\sigma_{\min}^2$, flag the entropy as low-quality and switch to a fallback source (QRNG or OS entropy).
- (2) **Temporal subsampling.** In static conditions, skip N frames between extractions to allow thermal noise to accumulate fresh randomness. The optimal N depends on the receiver noise figure and environmental temperature. Even in fully static conditions, Johnson-Nyquist thermal noise ($P_N = k_B T B \approx -101$ dBm at 300 K, 20 MHz) provides a residual entropy floor of ~ 1 – 2 bpb, yielding 0.5–2 MB/month per node at reduced rates.

An entropy system that explicitly pauses during low-quality conditions is strictly preferable to one that silently outputs low-entropy bytes; the variance monitor is a feature, not a limitation.

Figure 8 illustrates this degradation pattern and the variance monitoring response.

8.4 XOR Composition as Defense in Depth

Even if CSI entropy is partially compromised (e.g., by an adversary who controls the environment and reduces entropy to 2 bits/byte), the XOR compositor with an independent source preserves security. By Lemma 4.1, if `os.urandom` provides 6.36 bits/byte independently, the composed output retains at least 6.36 bits/byte. CSI entropy is designed as one layer in a defense-in-depth entropy architecture, not as the sole source.

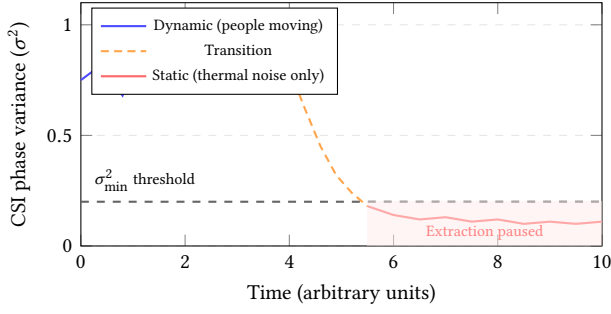


Figure 8: Static environment degradation. When human movement ceases, CSI phase variance drops below $\sigma_{\min}^2$, and the system pauses extraction. In static conditions, only thermal noise provides entropy, at a reduced rate. The variance monitor triggers a switch to fallback sources (QRNG or OS entropy).

9 Related Work

9.1 Bilateral CSI Key Agreement

The idea of extracting shared secrets from wireless channel measurements dates to Hershey, Hassan, and Yarlagadda (1995) and was formalized for practical systems by Mathur et al. [16], who demonstrated “radio-telepathy” between two IEEE 802.11 devices. Jana et al. [11] provided the first large-scale evaluation, showing that environmental dynamics (primarily human movement) are necessary for practical key generation rates. Liu et al. [13] extended the approach to fine-grained CSI (beyond RSS) for authentication. Zhang et al. [27] provided a comprehensive survey of the field, identifying quantization, reconciliation, and privacy amplification as the three standard phases. Ruotsalainen et al. [19] and Avrahami et al. [1] demonstrated CSI-based key agreement on modern commodity hardware.

Xiao et al. [26] provide a comprehensive 2024 survey of physical-layer key generation; every system surveyed operates in the bilateral mode, and none apply NIST SP 800-90B entropy assessment. Du et al. [4] recently proposed KeyCome, a bilateral CSI key generation scheme with obfuscation matrix encapsulation for non-reciprocal channels. All of these works operate in the bilateral setting: two cooperating endpoints exploit channel reciprocity. In particular, Mathur et al. [16] explicitly require a cooperating partner and a reciprocal channel measurement, because their construction reduces key agreement to matching quantized bits between Alice and Bob; without the second endpoint, their scheme yields no output. Our construction drops both the cooperating-partner and reciprocity assumptions: a single device passively measures ambient CSI and extracts min-entropy without a counterparty. Our work is the first to formalize, implement, and evaluate the unilateral paradigm.

9.2 RF Fingerprinting and PUFs

Physical Unclonable Functions (PUFs) [21] derive unique keys from manufacturing variations. Chatterjee et al. [2] introduced RF-PUF, which uses machine-learning classifiers on RF emission characteristics for device authentication. Our PUEK differs fundamentally: it

Table 9: Comparison with prior CSI key agreement systems. All prior work operates in the bilateral mode with two cooperating endpoints and no NIST entropy assessment.

System	Mode	Endpoints	SP 800-90B	Output
Mathur et al. [16]	Bilateral	2	No	Shared key
Jana et al. [11]	Bilateral	2	No	Shared key
Liu et al. [13]	Bilateral	2	No	Auth token
Zhang et al. [27]	Bilateral	2	No	Shared key
Avrahami et al. [1]	Bilateral	2	No	Shared key
Xiao et al. [26]	Survey	2	No	Survey
Du et al. [4]	Bilateral	2	No	Shared key
This work	Unilateral	1	Yes (5.50)	Entropy pool

fingerprints the *environment* (via CSI eigenstructure) rather than the *device* (via RF emissions). This distinction is not merely semantic; it enables location-locked cryptography that survives device replacement.

9.3 Sensor-Based TRNGs

Wallace et al. [24] proposed using accelerometers, gyroscopes, and magnetometers in mobile devices as entropy sources. Marghescu et al. [15] demonstrated FM radio signals as a TRNG for mobile devices. These approaches share our philosophy of exploiting ambient physical phenomena for entropy but operate on different physical modalities. WiFi CSI has the advantage of ubiquity: every WiFi-capable device already has the necessary hardware.

9.4 Quantum Random Number Generation

Ma et al. [14] and Herrero-Collantes and Garcia-Escartin [10] provide comprehensive reviews of QRNG. QRNG offers information-theoretically secure randomness derived from quantum measurements (the Born rule), which is strictly stronger than any classical source. Our work does not compete with QRNG on security guarantees; rather, we provide a practical alternative when quantum hardware is unavailable or cost-prohibitive, and demonstrate that the two sources compose well via XOR fusion.

9.5 Entropy Standards

NIST SP 800-90B [22] defines the methodology we use for entropy assessment. NIST SP 800-22 [18] provides a statistical test suite for randomness but is designed for PRNG output rather than entropy source characterization. We use SP 800-90B because it is the appropriate standard for evaluating physical entropy sources, and because its min-entropy estimators provide the conservative bounds required for security analysis. To our knowledge, no prior work has applied SP 800-90B to WiFi CSI data in any configuration.

Table 9 summarizes the comparison with existing CSI systems.

10 Discussion

Limitations of the current evaluation. Our assessment uses 2,690 bytes of debiased CSI entropy from a single walk capture. NIST SP 800-90B recommends a minimum of 1,000,000 samples for full confidence in estimator convergence. Our results should be understood as a

first measurement that establishes feasibility and approximate entropy bounds, not as a final certification-grade assessment. Three factors mitigate this limitation: (1) The MCV estimator, which determines our final bound, converges faster than predictive estimators and is considered reliable at sample sizes $\geq 1,000$ bytes [22]; (2) the Von Neumann debiaser's output is, by construction, unbiased to first order, so the estimator's task is only to detect residual correlations, not bias; (3) our extraction ratio (24.5%) is consistent with theoretical predictions for near-unbiased input, providing independent evidence that the debiaser is functioning correctly. Notably, the estimators are conservatively biased at small n : `os.urandom` (a CSPRNG that should score near 8.0 bpb) scored only 6.36 bpb, demonstrating that our 5.50 bpb is likely a lower bound, not an overestimate. A full evaluation with ESP32-S3 live captures (>1 MB) is in progress; supplementary uniformity tests (chi-squared, Kolmogorov-Smirnov) are consistent with uniformity and reported in the open-source repository. Even if a larger evaluation reveals lower min-entropy (e.g., 4.0 bpb), XOR composition (Lemma 4.1) ensures the combined output retains ≥ 6.36 bpb when composed with OS entropy. CSI entropy functions as defense-in-depth; it does not need to stand alone.

Adjacent-subcarrier correlation. The gap between per-byte min-entropy (6.36) and the final estimate (5.50) is driven by bitwise correlations. Neighboring OFDM subcarriers experience similar channel conditions (coherence bandwidth ≈ 2 –5 MHz in indoor environments [9], spanning 10–25 subcarriers at 20 MHz). With a coherence bandwidth of ~ 15 subcarriers, 256 subcarriers yield approximately $\lfloor 256/15 \rfloor = 17$ effectively independent channels per frame, contributing $17 \times 343 \approx 5,831$ effectively independent phase samples across all frames. Von Neumann debiasing removes bias but not inter-sample correlation; however, the NIST SP 800-90B bitstring analysis is designed to detect exactly such correlations, and our final bound of 5.50 bpb reflects the entropy *after* accounting for all bit-level dependencies. Mitigation strategies include: (1) extracting from every n -th subcarrier rather than all subcarriers, (2) applying a linear-feedback shift register (LFSR) whitening stage before debiasing, or (3) using amplitude-phase cross-bits rather than phase-only LSBs. We leave quantitative evaluation of these strategies to future work, but note that even without mitigation, the 5.50 bpb lower bound is sufficient for XOR composition (Lemma 4.1): compositing with a 6.36 bpb OS source yields ≥ 6.36 bpb output regardless of CSI correlations. Furthermore, in the full ZIPMINATOR pipeline, the conditioned output feeds an HMAC-DRBG (SP 800-90A compliant) which is a computational randomness extractor with a security proof requiring only an accurate min-entropy lower bound on its input, not independence between input bits. The 5.50 bpb estimate provides exactly this bound.

Figure 9 visualizes this correlation structure schematically.

PUEK stability and aging. The CSI eigenstructure changes when the physical environment changes (furniture moved, walls added). For high-security deployments (L3–L4), periodic re-enrollment is necessary. The re-enrollment interval depends on environmental stability: a static server room may maintain PUEK validity for months, while a busy open office may require weekly re-enrollment. Developing adaptive re-enrollment triggers based on eigenvalue drift is an open research question.

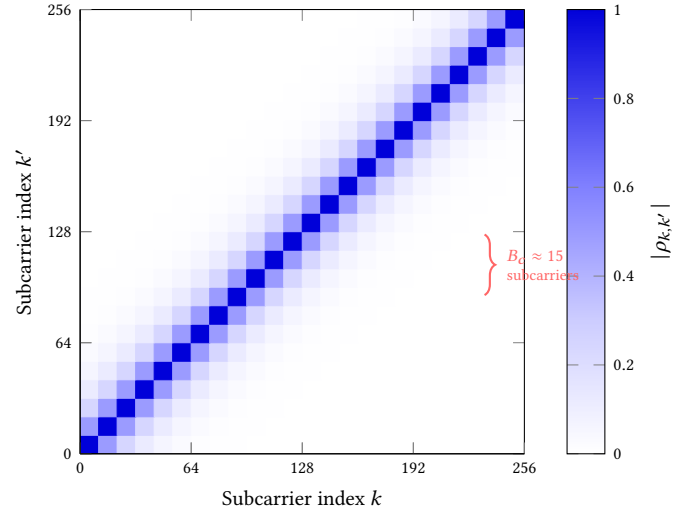


Figure 9: Schematic subcarrier correlation structure. Phase LSB correlation $|\rho_{k,k'}| \approx e^{-|k-k'|/B_c}$ decays with subcarrier spacing, where $B_c \approx 15$ subcarriers is the coherence bandwidth at 20 MHz indoors. The near-diagonal banding drives the gap between per-byte (6.36) and final (5.50 bpb) min-entropy. Mitigations: extract every n -th subcarrier or apply whitening.

Algebraic Randomness Extraction as enhanced conditioner. The Von Neumann debiaser used in our extraction pipeline (Algorithm 1) extracts only the LSB of each quantized phase value, discarding 7 of 8 available bits per subcarrier measurement. The resulting extraction efficiency is $\sim 25\%$ (3.5 bytes per frame from 56 subcarriers). An alternative conditioning approach based on Algebraic Randomness Extraction (ARE), which processes all 8 quantized bits per subcarrier through cross-domain algebraic programs, can improve extraction efficiency to $\sim 85\%$ (~ 47 –50 bytes per frame) while achieving 7.0–7.5 bpb min-entropy through inter-subcarrier decorrelation via domain-crossing non-linearities. ARE-based conditioning would increase per-node throughput by $\sim 14\times$ while simultaneously closing the adjacent-subcarrier correlation gap identified in Figure 9. Integration of ARE conditioning into the CSI extraction pipeline is the subject of ongoing work.

Post-quantum integration. CSI entropy is classical physical entropy; it is not quantum-derived. However, it integrates naturally with post-quantum cryptographic systems. The ZIPMINATOR platform uses CSI entropy (when quantum hardware is unavailable) to seed ML-KEM-768 [17] key encapsulation, providing hardware-backed randomness for PQC key generation at commodity cost. The XOR compositor ensures that if CSI entropy is later found to be weaker than estimated, QRNG or OS entropy still protects the output.

11 Conclusion

We have presented the first system, measurement, and NIST SP 800-90B validation of WiFi CSI as a unilateral entropy source. The key findings are:

- (1) **Unilateral extraction.** All prior CSI randomness extraction requires two cooperating endpoints. We demonstrate that a single device passively measuring ambient CSI can harvest genuine physical entropy with no cooperating partner, no reconciliation protocol, and no channel reciprocity assumption.
- (2) **Pilot-scale measured min-entropy.** Using the public Gi-z/CSI-Data corpus and the NIST SP 800-90B `ea_non_iid` tool, we measure 5.50 bits/byte of final min-entropy from 343 frames across 256 OFDM subcarriers after Von Neumann debiasing. This is the first preliminary SP 800-90B assessment of WiFi CSI in any configuration; the 2,690-byte sample is below the ≥ 1 M-sample recommendation for a production certification, and a full-scale assessment remains as future work.
- (3) **Physical Unclonable Environment Key.** We introduce PUEK, which derives location-locked cryptographic keys from the SVD eigenstructure of CSI measurements, with four security profiles ($\tau = 0.75$ to 0.98) mapping to operational clearance levels. We provide a formal indistinguishability game (Definition 5.1) and prove security under the Environmental Spatial Decorrelation assumption and PRF security of HMAC (Proposition 5.2).
- (4) **Economic viability (projected).** A \$5 ESP32-S3 is projected to produce 45–90 MB/month of physical entropy at zero marginal cost (extrapolated from our BCM4339 Nexmon baseline; no ESP32-S3 capture was run), compared to \$1.60/second for cloud quantum entropy. For IoT deployments requiring hardware-backed TRNG, CSI entropy is projected to offer a 4–6 order-of-magnitude cost reduction over QRNG.
- (5) **Open source.** The complete pipeline (Python extraction, Rust implementation with 118 tests, pool architecture, XOR compositor) is released as part of the ZIPMINATOR open-source project.

WiFi CSI is the most widely deployed sensor modality in the world. Every access point, every laptop, every smartphone, and every IoT device with WiFi already has the hardware to extract environmental entropy. The unilateral paradigm we introduce here transforms this ubiquitous infrastructure from a bilateral key agreement tool into a universal, zero-cost, physics-backed entropy source.

Data Availability

The CSI capture data is from the public Gi-z/CSI-Data corpus [6], available at <https://github.com/Gi-z/CSI-Data>. The extraction pipeline, Von Neumann debiaser, pool architecture, PUEK enrollment code, and XOR compositor are open-source components of the ZIPMINATOR project, available at <https://github.com/QDaria/zipminator>. IBM Quantum entropy was collected from `ibm_kingston` (156 qubits) via the IBM Quantum open plan.

Ethics

This work involves passive reception of ambient WiFi frames. No human subjects were involved; the Gi-z/CSI-Data corpus was collected by its original authors under their own institutional protocols. No personally identifiable information is extracted or processed. IRB review was not required.

Reproducibility

All source code for the extraction pipeline (Python and Rust), NIST SP 800-90B assessment scripts, PUEK enrollment and verification, and the XOR compositor are available in the open-source repository. The specific CSI capture file (`walk_1597159475.pcap`) is identified by filename in the Gi-z/CSI-Data corpus. The Rust implementation includes 118 tests; the Python CSI pool provider includes 11 tests.

Acknowledgments

The author thanks the TU Darmstadt SEEMOO Lab and the University of Brescia for the public Gi-z/CSI-Data corpus, IBM Quantum for access to `ibm_kingston` (156-qubit Heron r2) via the IBM Quantum open plan, and Rigetti Computing for access to Ankaa-class processors used in entropy harvesting. Norwegian Patent Application filed April 2026 (Patentstyret) covers the CSI entropy extraction method and PUEK construction.

References

- [1] Raz Avrahami, Ofer Amrani, and Avishai Wool. 2023. Let's Shake on It: Extracting Secure Shared Keys from Wi-Fi CSI. In *Proc. IEEE 20th Int. Conf. Mobile Ad-Hoc and Smart Systems (MASS)*. doi:10.1109/mass58611.2023.00065
- [2] Baibhab Chatterjee, Debayan Das, Shovan Maity, and Shreyas Sen. 2019. RF-PUF: Enhancing IoT Security Through Authentication of Wireless Nodes Using In-Situ Machine Learning. *IEEE Internet of Things Journal* 6, 5 (2019), 7671–7684. doi:10.1109/jiot.2018.2849324
- [3] Yevgeniy Dodis, Rafail Ostrovsky, Leonid Reyzin, and Adam Smith. 2008. Fuzzy Extractors: How to Generate Strong Keys from Biometrics and Other Noisy Data. *SIAM J. Comput.* 38, 1 (2008), 97–139. doi:10.1137/060651380
- [4] Yicong Du, Hongbo Liu, Ziyu Shao, et al. 2024. Secure and Controllable Secret Key Generation Through CSI Obfuscation Matrix Encapsulation. *IEEE Trans. Mobile Computing* 23 (2024), 12313–12326. doi:10.1109/TMC.2024.3407062
- [5] Espressif Systems. 2023. Wi-Fi Channel State Information (CSI) in ESP-IDF. <https://docs.espressif.com/projects/esp-idf/en/stable/esp32s3/api-guides/wifi.html>. ESP-IDF v5.1, ESP32-S3 CSI extraction API.
- [6] Francesco Gringoli, Matthias Schulz, Jakob Link, and Matthias Hollick. 2019. CSI-Data: Public WiFi Channel State Information Datasets. <https://github.com/Gi-z/CSI-Data>. TU Darmstadt / University of Brescia. Nexmon captures from Broadcom/Cypress chips..
- [7] Francesco Gringoli, Matthias Schulz, Jakob Link, and Matthias Hollick. 2019. Free Your CSI: A Channel State Information Extraction Platform for Modern Wi-Fi Chipsets. In *Proc. 13th Int. Workshop on Wireless Network Testbeds, Experimental Evaluation & Characterization (WiNTECH)*. 21–28. doi:10.1145/3349623.3355477
- [8] Peter Gutmann. 1998. Software Generation of Practically Strong Random Numbers. In *Proc. 7th USENIX Security Symposium*. 243–257.
- [9] Daniel Halperin, Wenjun Hu, Anmol Sheth, and David Wetherall. 2011. Tool Release: Gathering 802.11n Traces with Channel State Information. *ACM SIGCOMM Computer Communication Review* 41, 1 (2011), 53. doi:10.1145/1925861.1925870
- [10] Miguel Herrero-Collantes and Juan Carlos Garcia-Escartin. 2017. Quantum Random Number Generators. *Reviews of Modern Physics* 89, 1 (2017), 015004. doi:10.1103/RevModPhys.89.015004
- [11] Suman Jana, Sriram Nandha Prashant, Andrew Clark, Sneha Kumar Kasera, Neal Patwari, and Srikanth V. Krishnamurthy. 2009. On the effectiveness of secret key extraction from wireless signal strength in real environments. In *Proc. 15th ACM Int. Conf. Mobile Computing and Networking (MobiCom)*. 321–332. doi:10.1145/1614320.1614356
- [12] Hugo Krawczyk and Pasi Eronen. 2010. HMAC-Based Extract-and-Expand Key Derivation Function (HKDF). RFC 5869. doi:10.17487/RFC5869
- [13] Hongbo Liu, Yang Wang, Jie Liu, Jian Yang, Yingying Chen, and H. Vincent Poor. 2014. Authenticating Users Through Fine-Grained Channel Information. *IEEE Trans. Mobile Computing* 13, 8 (2014), 1709–1721. doi:10.1109/TMC.2013.81
- [14] Xiongfeng Ma, Xiao Yuan, Zhu Cao, Bing Qi, and Zhen Zhang. 2016. Quantum Random Number Generation. *npj Quantum Information* 2 (2016), 16021. doi:10.1038/npjqi.2016.21
- [15] Alin Marghescu, Robert Chindris, and Iulian Bancioiu. 2019. True Random Number Generator (TRNG) Utilizing FM Radio Signals for Mobile and Embedded Devices in Multi-Access Edge Computing. *Sensors* 19, 19 (2019), 4130. doi:10.3390/s19194130
- [16] Suhas Mathur, Wade Trappe, Narayan Mandayam, Chunxuan Ye, and Alex Reznik. 2008. Radio-Telepathy: Extracting a Secret Key from an Unauthenticated Wireless Channel. In *Proc. 14th ACM Int. Conf. Mobile Computing and Networking*

- (MobiCom). 128–139. doi:10.1145/1409944.1409960
- [17] National Institute of Standards and Technology. 2024. *Module-Lattice-Based Key-Encapsulation Mechanism Standard*. Technical Report FIPS 203. NIST. doi:10.6028/NIST.FIPS.203
- [18] Andrew Rukhin, Juan Soto, James Nechvatal, et al. 2010. *A Statistical Test Suite for Random and Pseudorandom Number Generators for Cryptographic Applications*. Technical Report SP 800-22 Rev. 1a. NIST.
- [19] Henri Ruotsalainen, Georgios Tsiasis, and Sushmita Ruj. 2023. Let's Shake on It: Extracting Secure Shared Keys from Wi-Fi CSI. *arXiv preprint arXiv:2307.05423* (2023).
- [20] Matthias Schulz, Daniel Wegemer, and Matthias Hollick. 2017. Nexmon: The C-Based Firmware Patching Framework. <https://nexmon.org>. In *Technical Report*. TU Darmstadt SEEMOO Lab.
- [21] G. Edward Suh and Srinivas Devadas. 2007. Physical Unclonable Functions for Device Authentication and Secret Key Generation. *Proc. 44th ACM/IEEE Design Automation Conf. (DAC)* (2007), 9–14. doi:10.1145/1278480.1278484
- [22] Meltem Sönmez Turan, Elaine Barker, John Kelsey, Kerry A. McKay, Mary L. Baish, and Mike Boyle. 2018. *Recommendation for the Entropy Sources Used for Random Bit Generation*. Technical Report SP 800-90B. NIST. doi:10.6028/NIST.SP.800-90B
- [23] John von Neumann. 1951. Various Techniques Used in Connection with Random Digits. In *Monte Carlo Method*. Number 12 in National Bureau of Standards Applied Mathematics Series. U.S. Government Printing Office, 36–38.
- [24] Kevin Wallace, Kevin Moran, Ed Novak, Gang Zhou, and Kun Sun. 2016. Toward Sensor-Based Random Number Generation for Mobile and IoT Devices. *IEEE Internet of Things Journal* 3, 6 (2016), 1189–1201. doi:10.1109/JIOT.2016.2572638
- [25] Fangxin Wang, Shaowu Zhou, Srdjan Panev, Jinsong Han, and Dong Huang. 2020. A Survey on Human Behavior Recognition Using Channel State Information. *IEEE Access* 8 (2020), 85740–85757. doi:10.1109/ACCESS.2020.2992089
- [26] Qingjiang Xiao, Jinrong Zhao, Sheng Feng, Guyue Li, and Aiqun Hu. 2024. Securing NextG Networks with Physical-Layer Key Generation: A Survey. *Security and Safety* 3 (2024). doi:10.1051/sands/2023021
- [27] Junqing Zhang, Trung Q. Duong, Alan Marshall, and Roger Woods. 2016. Key Generation from Wireless Channels: A Review. *IEEE Access* 4 (2016), 614–626. doi:10.1109/ACCESS.2016.2521718