

1. Description


1.1. Project

Project Name	RoboMaster05-1
Board Name	custom
Generated with:	STM32CubeMX 5.6.0
Date	03/22/2020

1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F427/437
MCU name	STM32F427IIHx
MCU Package	UFBGA176
MCU Pin number	201

2. Pinout Configuration

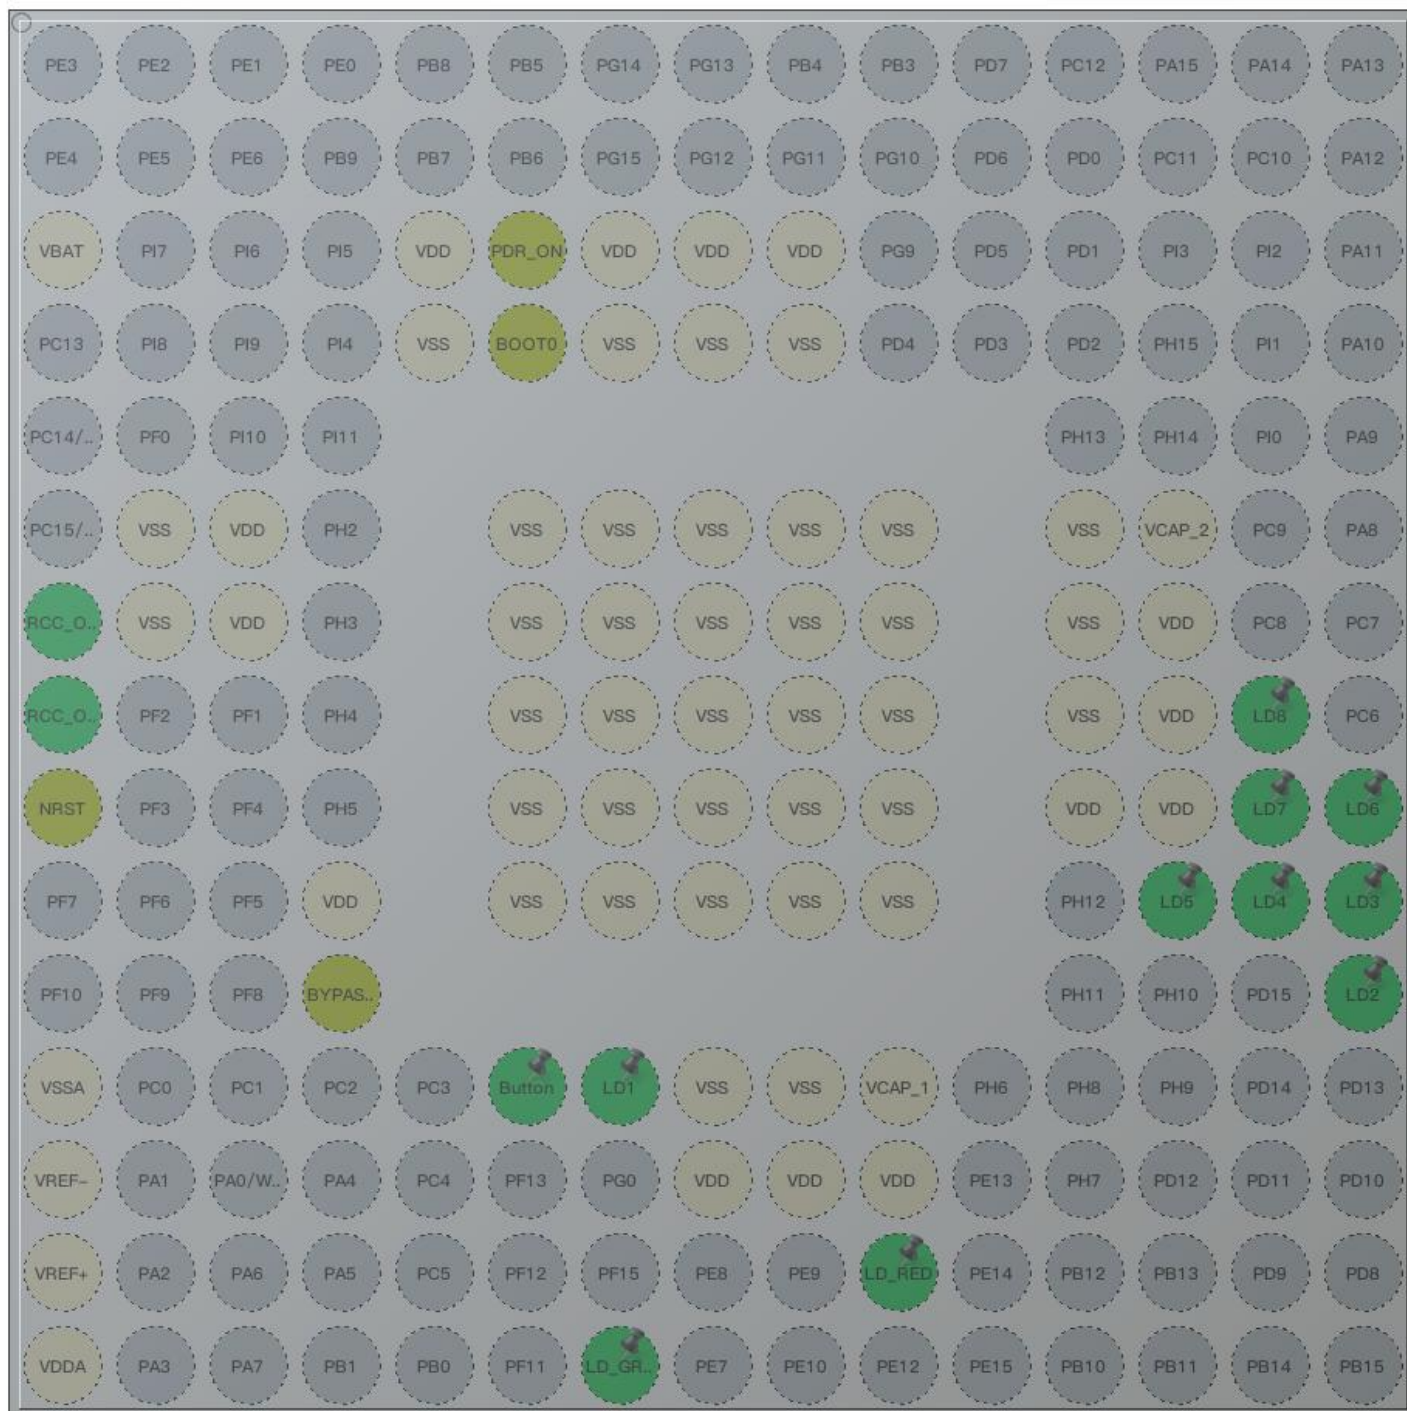

UFBGA176 +25 (Top view)


3. Pins Configuration

Pin Number UFBGA176	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
C1	VBAT	Power		
C5	VDD	Power		
C6	PDR_ON	Reset		
C7	VDD	Power		
C8	VDD	Power		
C9	VDD	Power		
D5	VSS	Power		
D6	BOOT0	Boot		
D7	VSS	Power		
D8	VSS	Power		
D9	VSS	Power		
F2	VSS	Power		
F3	VDD	Power		
F6	VSS	Power		
F7	VSS	Power		
F8	VSS	Power		
F9	VSS	Power		
F10	VSS	Power		
F12	VSS	Power		
F13	VCAP_2	Power		
G1	PH0/OSC_IN	I/O	RCC_OSC_IN	
G2	VSS	Power		
G3	VDD	Power		
G6	VSS	Power		
G7	VSS	Power		
G8	VSS	Power		
G9	VSS	Power		
G10	VSS	Power		
G12	VSS	Power		
G13	VDD	Power		
H1	PH1/OSC_OUT	I/O	RCC_OSC_OUT	
H6	VSS	Power		
H7	VSS	Power		
H8	VSS	Power		
H9	VSS	Power		
H10	VSS	Power		

Pin Number UFBGA176	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
H12	VSS	Power		
H13	VDD	Power		
H14	PG8 *	I/O	GPIO_Output	LD8
J1	NRST	Reset		
J6	VSS	Power		
J7	VSS	Power		
J8	VSS	Power		
J9	VSS	Power		
J10	VSS	Power		
J12	VDD	Power		
J13	VDD	Power		
J14	PG7 *	I/O	GPIO_Output	LD7
J15	PG6 *	I/O	GPIO_Output	LD6
K4	VDD	Power		
K6	VSS	Power		
K7	VSS	Power		
K8	VSS	Power		
K9	VSS	Power		
K10	VSS	Power		
K13	PG5 *	I/O	GPIO_Output	LD5
K14	PG4 *	I/O	GPIO_Output	LD4
K15	PG3 *	I/O	GPIO_Output	LD3
L4	BYPASS_REG	Reset		
L15	PG2 *	I/O	GPIO_Output	LD2
M1	VSSA	Power		
M6	PB2/BOOT1	I/O	GPIO_EXTI2	Button
M7	PG1 *	I/O	GPIO_Output	LD1
M8	VSS	Power		
M9	VSS	Power		
M10	VCAP_1	Power		
N1	VREF-	Power		
N8	VDD	Power		
N9	VDD	Power		
N10	VDD	Power		
P1	VREF+	Power		
P10	PE11 *	I/O	GPIO_Output	LD_RED
R1	VDDA	Power		
R7	PF14 *	I/O	GPIO_Output	LD_GREEN

* The pin is affected with an I/O function

4. Clock Tree Configuration

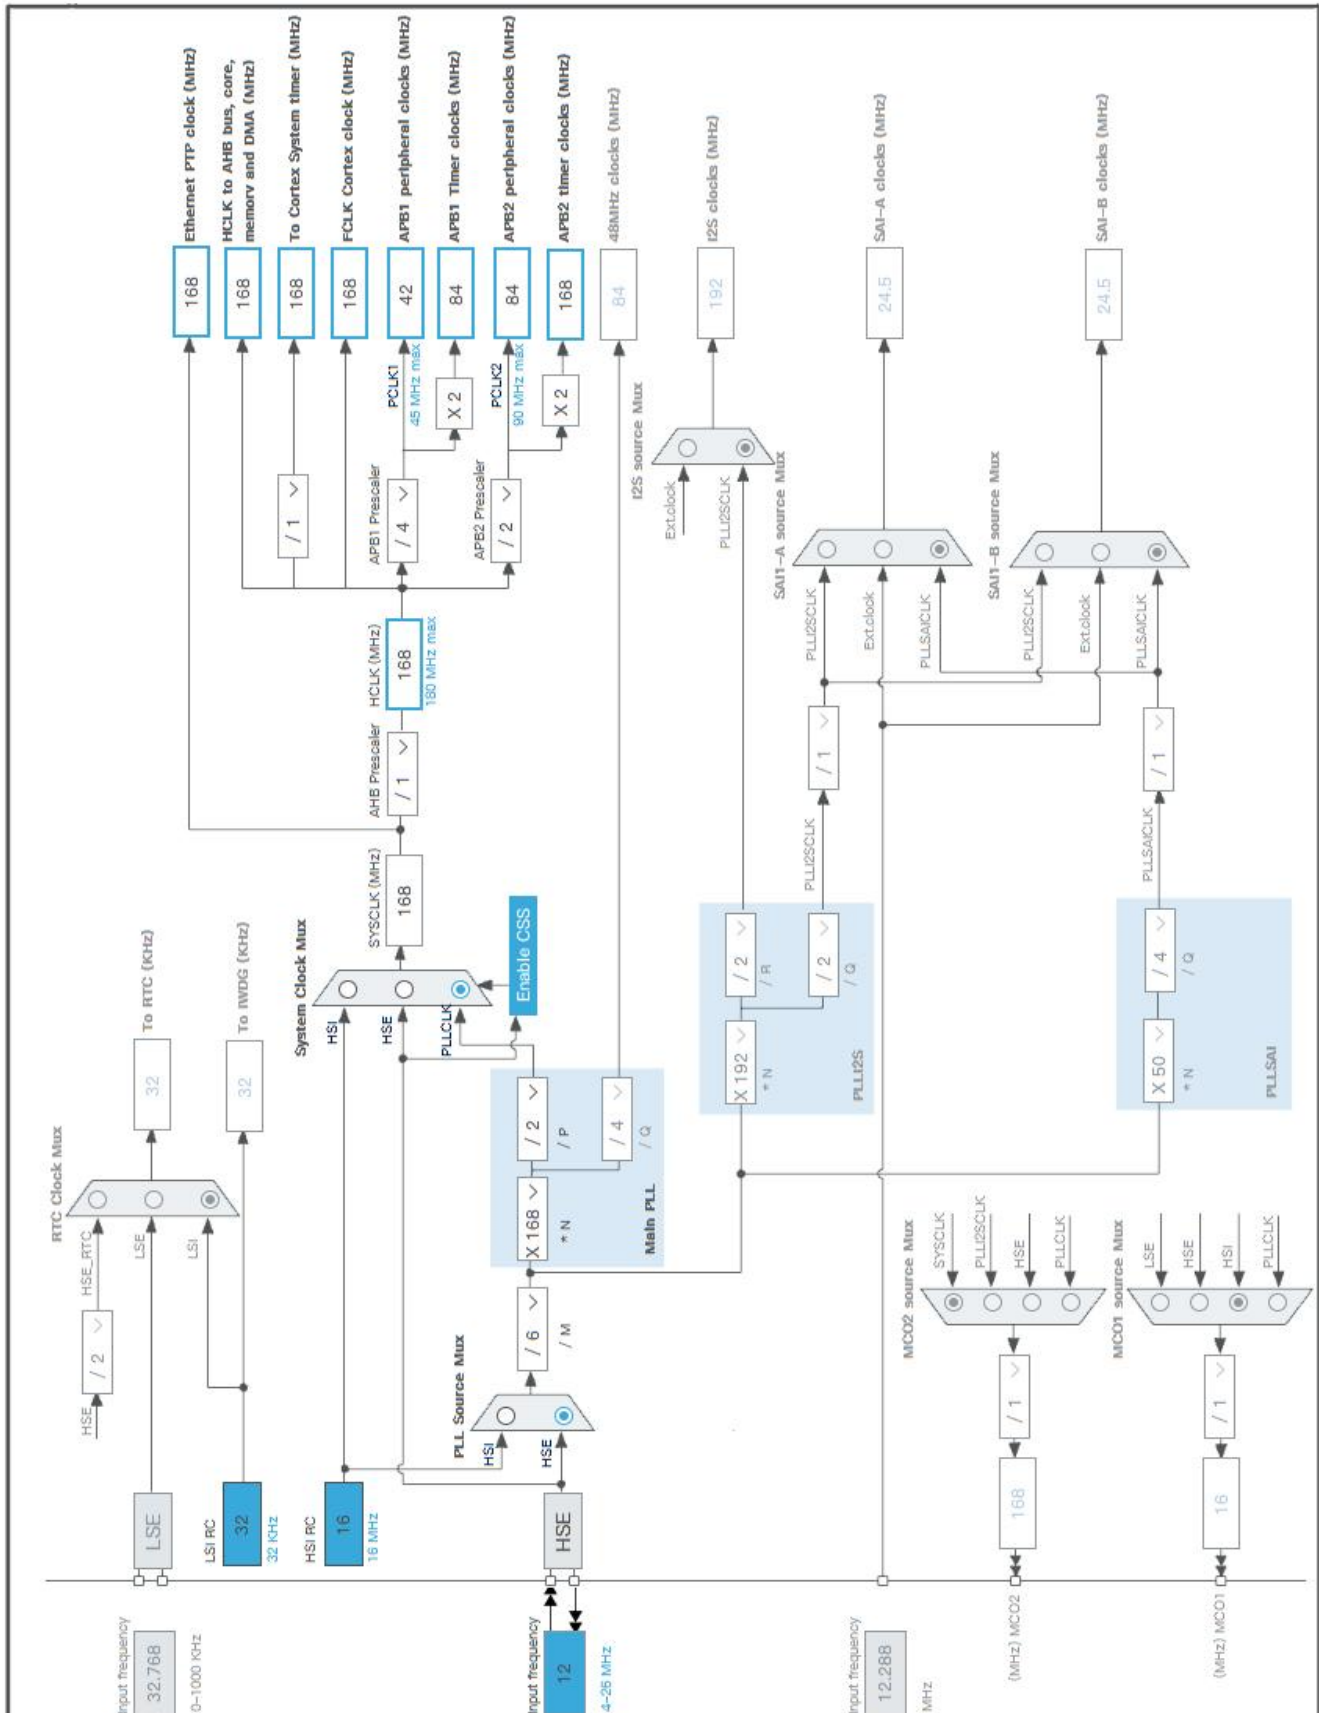

5. Software Project

5.1. Project Settings

Name	Value
Project Name	RoboMaster05-1
Project Folder	/home/alchemic_ronin/Documents/-STM32-RoboMaster-/RoboMaster05-1
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_F4 V1.25.0

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F4
Line	STM32F427/437
MCU	STM32F427IIHx
Datasheet	024030_Rev9

6.2. Parameter Selection

Temperature	25
Vdd	3.3

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP UDM (Under Drive)
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	Scale1-High	No Scale
Fetch Type	FLASH	n/a
CPU Frequency	180 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator LP Flash-PwrDwn
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	57 mA	100 μ A
Duration	0.1 ms	0.9 ms
DMIPS	225.0	0.0
Ta Max	97.66	104.99
Category	In DS Table	In DS Table

6.5. RESULTS

Sequence Time	1 ms	Average Current	5.79 mA
Battery Life	24 days, 10 hours	Average DMIPS	225.0 DMIPS

6.6. Chart

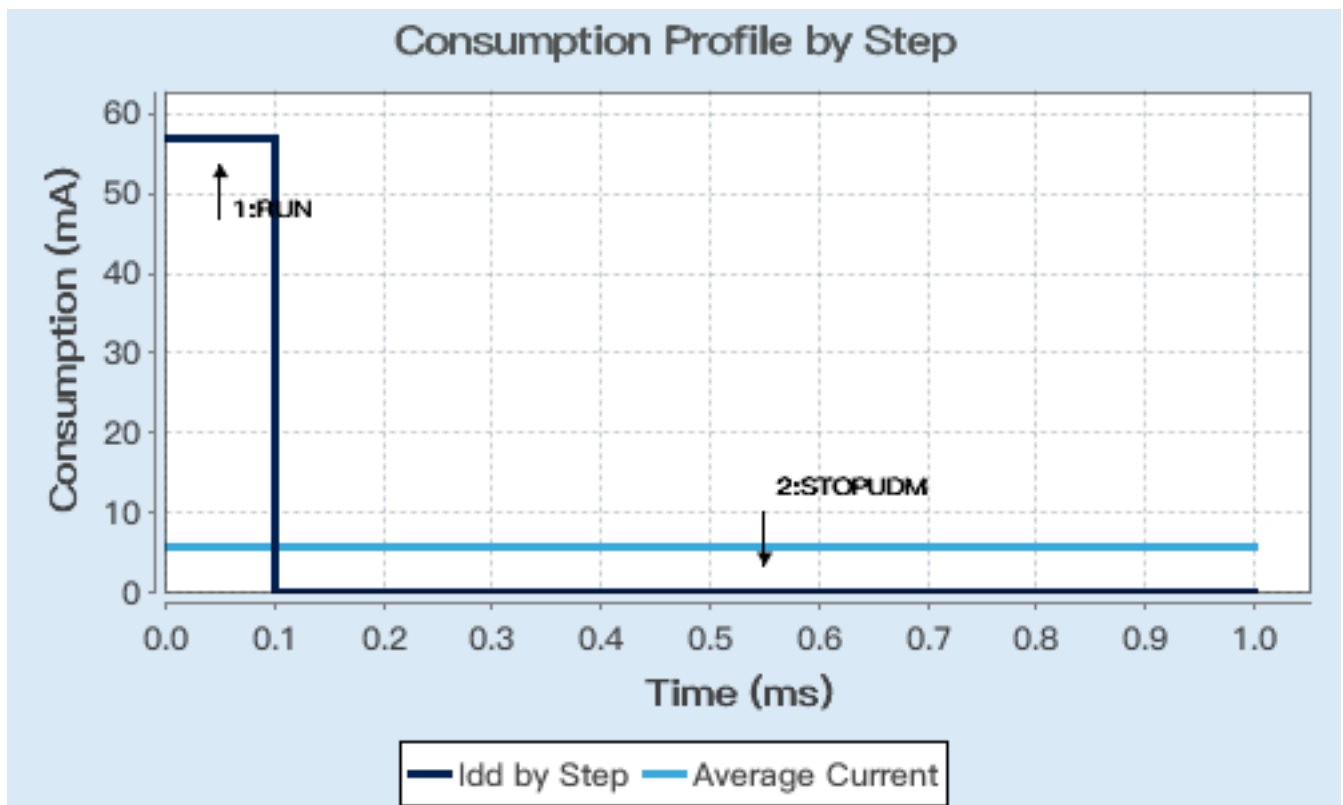

7. IPs and Middleware Configuration

7.1. GPIO

7.2. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

7.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	5 WS (6 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
Power Over Drive	Disabled

7.3. SYS

Timebase Source: SysTick

7.4. TIM6

mode: Activated

7.4.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	41999 *
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	999 *
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Trigger Event Selection	Reset (UG bit from TIMx_EGR)
-------------------------	------------------------------

*** User modified value**

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PH0/OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1/OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
GPIO	PG8	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD8
	PG7	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD7
	PG6	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD6
	PG5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD5
	PG4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD4
	PG3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD3
	PG2	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD2
	PB2/BOOT1	GPIO_EXTI2	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	Button
	PG1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD1
	PE11	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD_RED
	PF14	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD_GREEN

8.2. DMA configuration

nothing configured in DMA service

8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
EXTI line2 interrupt	true	1	0
TIM6 global interrupt, DAC1 and DAC2 underrun error interrupts	true	1	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
FPU global interrupt	unused		

* User modified value

9. *Predefined Views - Category view : Current*

Middleware

System Core

Analog

Timers

Connectivity

Multimedia

Security

Computing

DMA

GPIO ✓

NVIC ✓

RCC ✓

SYS ✓

TIM6 ✓

10. Software Pack Report