








# 12N5-BS Sealed Maintenance Free Battery




## Terminal Dimensions: (in./mm)

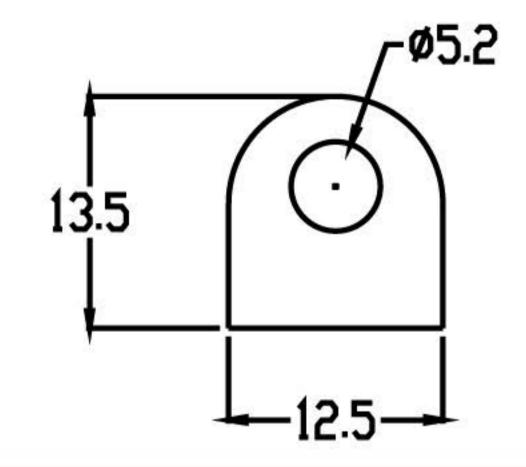


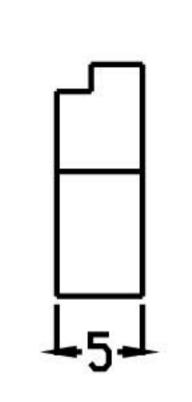


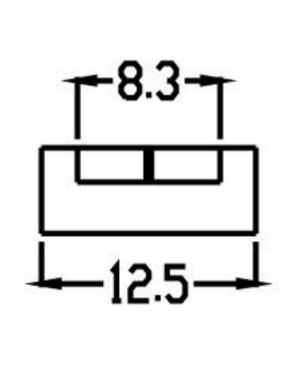

### Physical Dimensions: (in./mm)

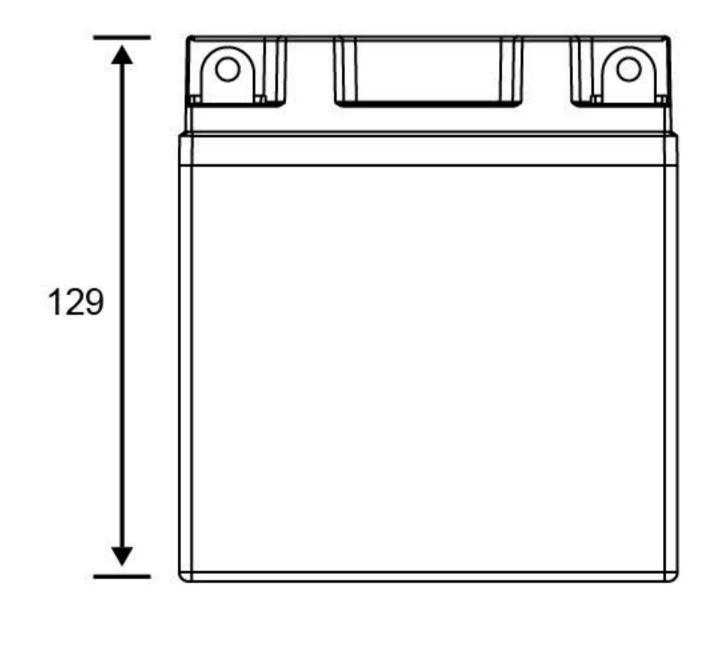

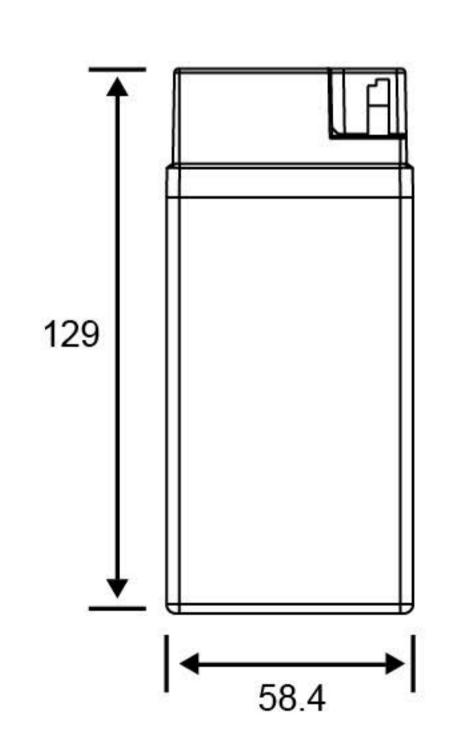

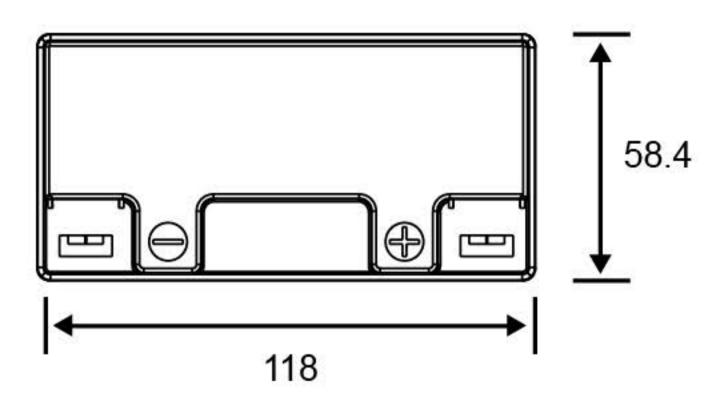

Length:4.65in(118mm) Width:2.30in(58.4mm) Height:5.08in(129mm)

Tolerances are ±0.04 inches (±1mm) and ±0.08 inches (±2mm) for height.

#### **Features**

- Advanced sulfate-resistant technology.
- Advanced calcium lead alloy technology.
- Maintenance-free design.
- Factory activated, Ready to install and go!
- Absorbed Glass Mat (AGM) technology.


# Performance Specifications


Nominal	Voltage	12 volts			
Nominal Capacity 25℃ (77°F)					
20-hr.	(0.25A to 10.5 volts)	5.4AH			
10-hr.	(0.5A to 10.5 volts)	5AH			
5-hr.	(1A to 10.2 volts)	4.1 AH			
1C.	(5A to 9.6 volts)	2.3AH			
3C.	(15A to 9.6 volts)	1.8 AH			
Approximate Weight		- 4.27 lbs. (1.92kg)			
Cranking (by Tester) 155Amperes					
Cold Cranking (-18°C) 75Amperes					
Internal Resistance(at 1KHz) Approx.18.2mΩ					
Operating Temperature Range					
Discha	arge	22°F(-30°C) to 122°F(50°C)			
Charg	e 32°F(0	32°F(0°C) to 104°F(40°C)			
Life Expectancy (Cycle Use)					
60% c	lepth of discharge	250 cycles			
30% c	lepth of discharge	400 cycles			
Shelf Lif	)SOC% ocv)				
1 mon	ıths	91% 12.78V			
3 mon	iths	89% 12.70V			
6 mon	iths	80% 12.5V			
Case		ABS			









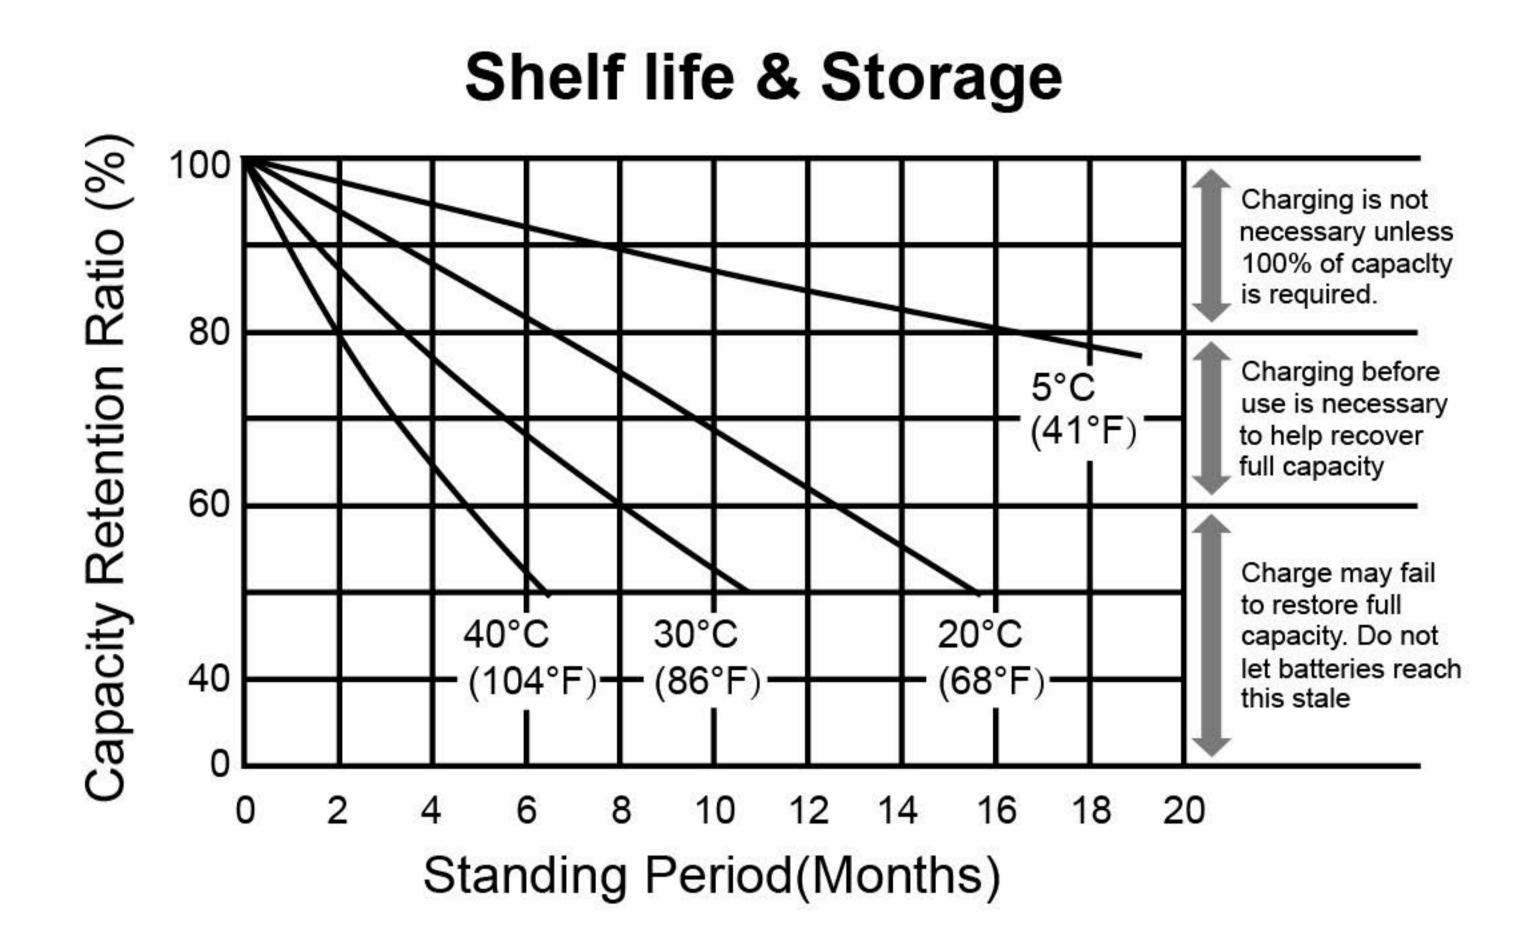

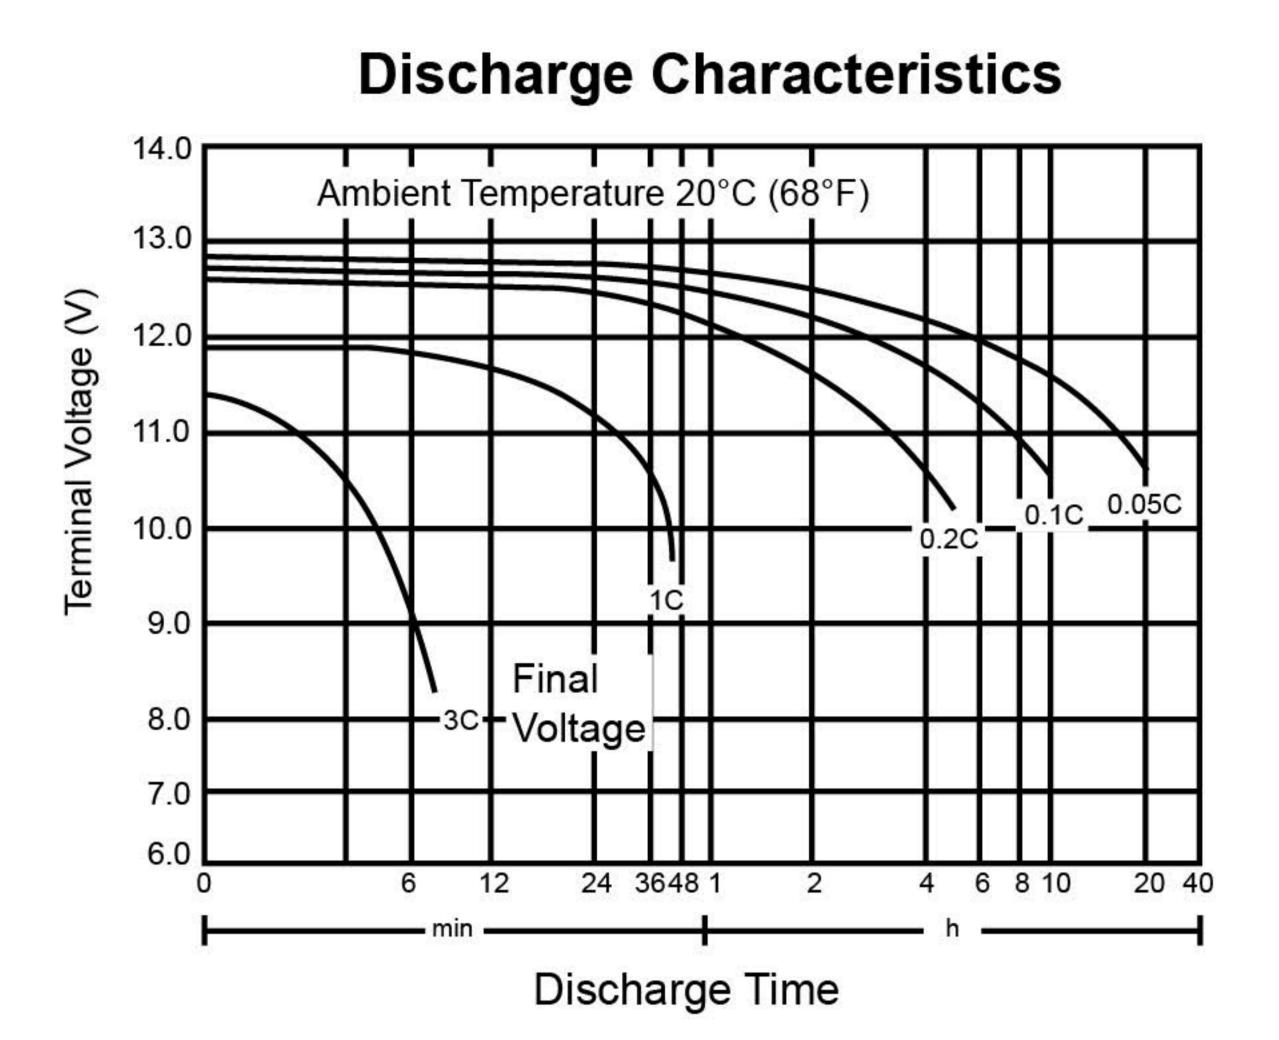

# Discharge Time vs. Discharge Current

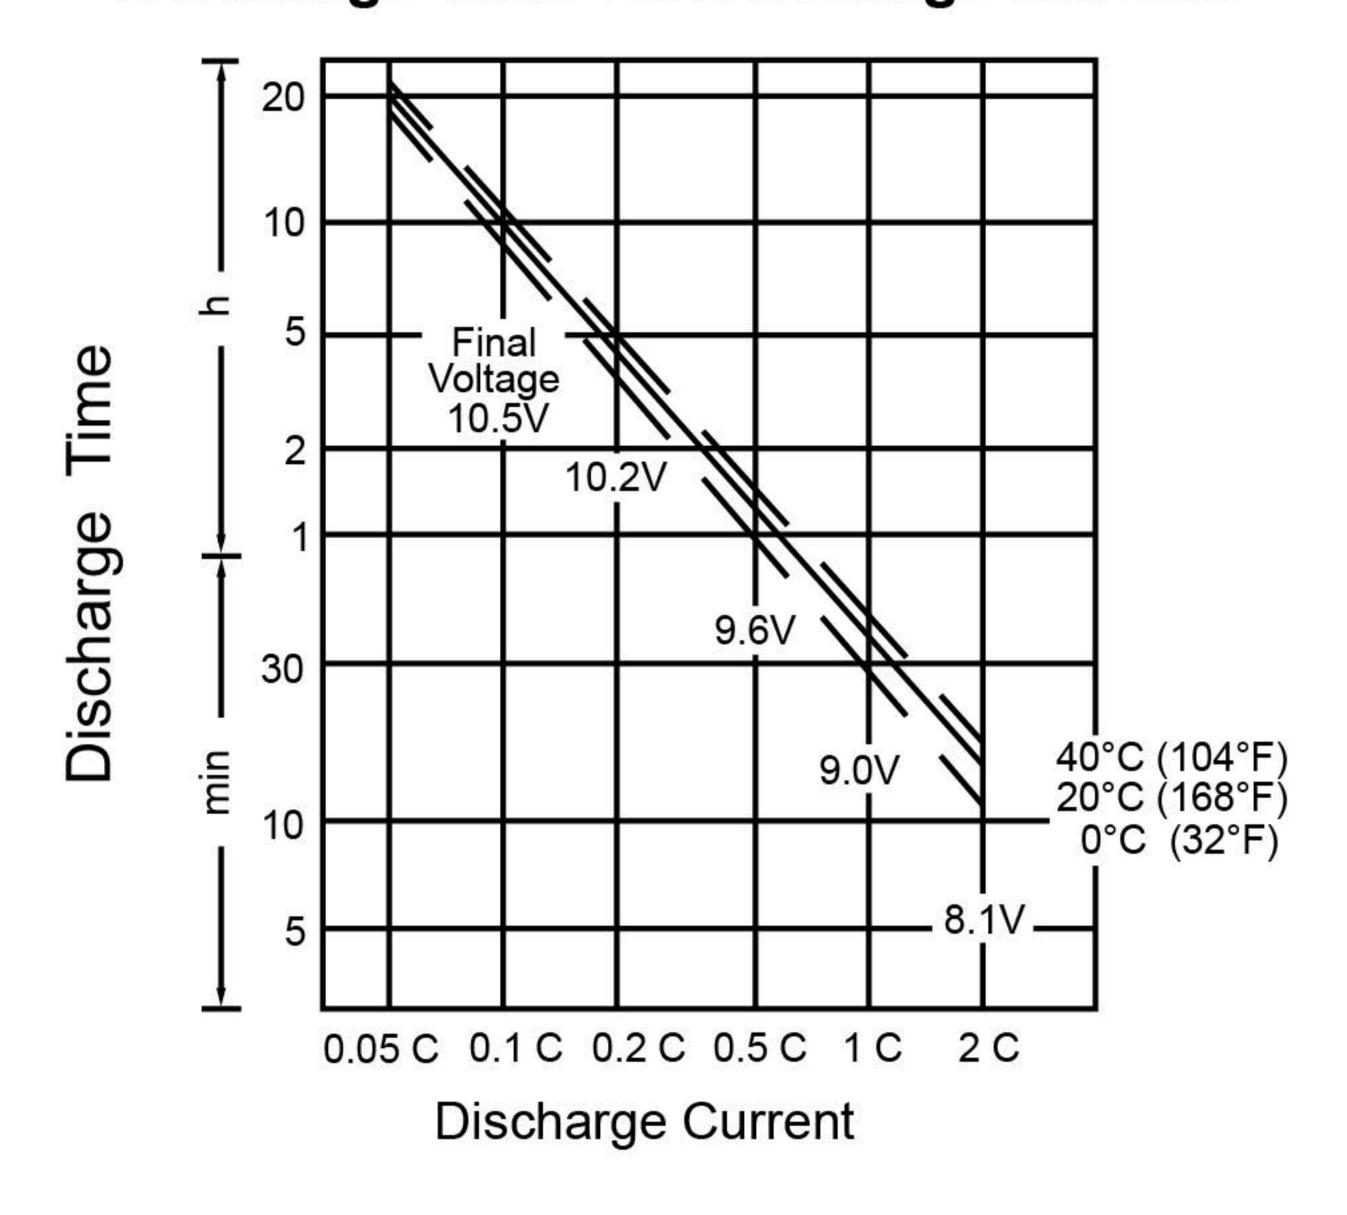

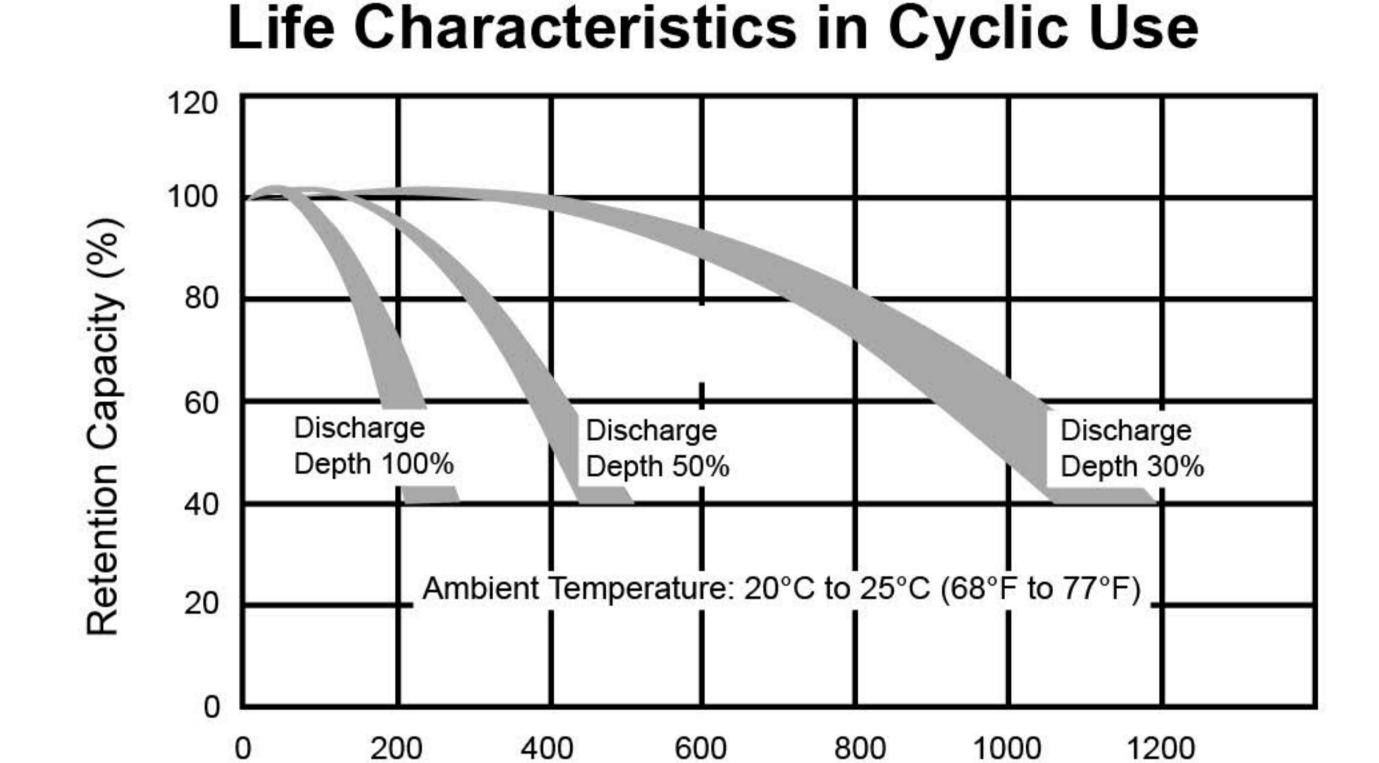

## Charging

**Cycle Applications:** Limit initial current to 0.2C. Charge until battery voltage (under charge) reaches 14.8 to 15.0 volts at 68  $\mathbb{F}$  (20 $^{\circ}$ C). Hold at 14.8 to 15.0 volts until current drops to under 50 mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

**Note:** Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

#### **Further information:**

Please contact our technical department for advice if you have difficulty or contact us at info@agsbattery.ae

#### Can be used to replace:

12N5-3B	YB5L-B	

Number of Cycles