

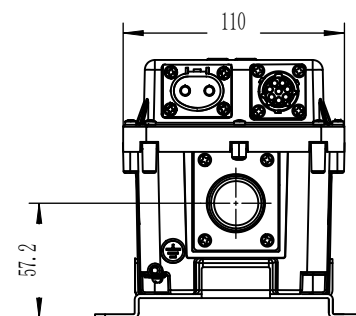


BT58000501

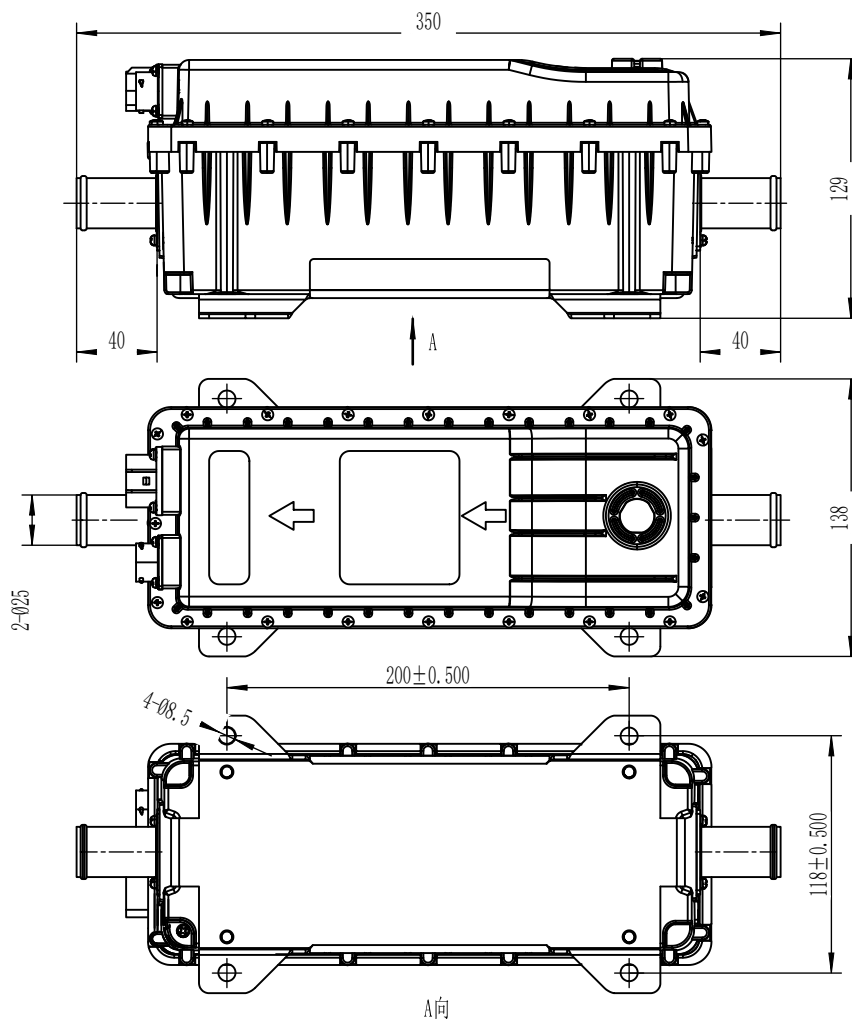


Technical requirement

1. Rated voltage: DC 320V, normal operating voltage range: DC220-450V
2. Low voltage control voltage DC24V, normal operating voltage range: DC16-32V
3. Working temperature: -40~85 °C
4. Rated power: 5KW $\pm$ 10% (flow rate of 20L/min, inlet temperature of 40 $\pm$ 3 °C)
5. Insulation resistance: $\geq$ 100M Ω (DC1000V) (high-voltage part)
6. Electrical strength: No flashover or breakdown, leakage $\leq$ 5mA (DC3500V) (high-voltage part)
7. Starting current $\leq$ 35A
8. Water resistance $\leq$ 15KPa (flow rate 20L/min)
9. Unmarked dimensional tolerances shall be in accordance with GB/T 1804-2000-V level
10. Protection level: IP67
11. Communication protocol: EV-RD-PT000-032; Baud rate: 250Kbps; ID: 18FFC53D



Connector model: PL082X-60-6
Opposite Connector: PL182X-60-6
(Customer self provided)

High voltage	1	DC 600V +	Orange 6.0
	2	DC 600V -	Orange 6.0
Low voltage connector	A	DC 24V +	Red 0.75
	B	DC 24V -	Black 0.75
	C	Reserve	
	D	Reserve	
	E	Reserve	
	F	Reserve	
	G	CAN L	Grey 0.75
	H	CAN H	Orange 0.75



Connector model: RT00128PN03
Opposite Connector: RT06128SNHEC03
(Customer self provided)

					PTC water heater		TKT		
							BT58000501		
标记	处数	更改文件名	签字	日期	86-1201-0025		图样标记	重量	比例
设计			日期						1:2.5
审核			日期						
批准			日期				共 张	第 张	