


L000007361B	
首用 车型	TKT-BCS3-R

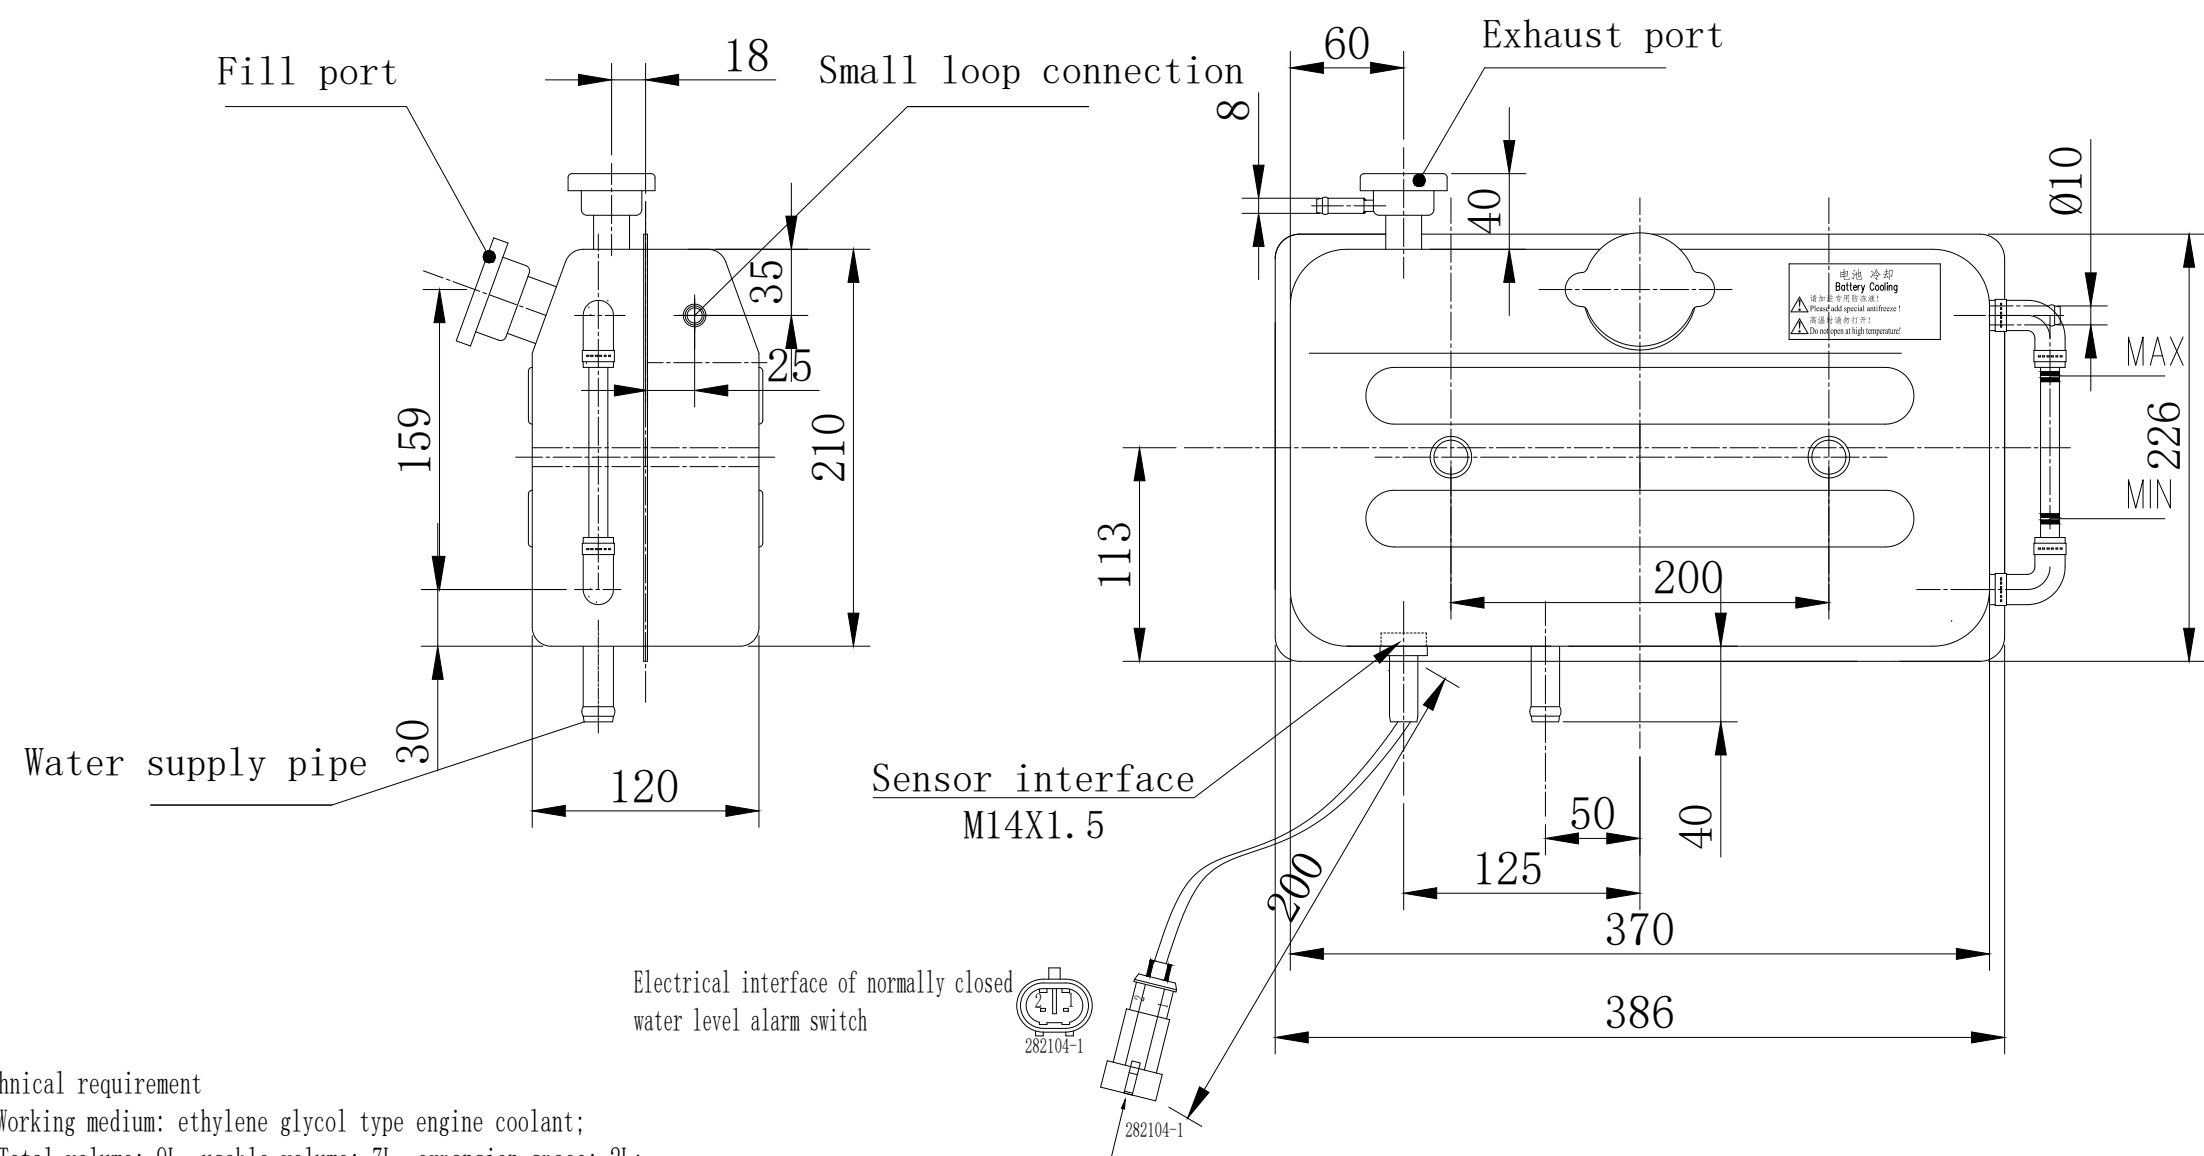

Technical requirement

- Working medium: ethylene glycol type engine coolant;
- Total volume: 9L, usable volume: 7L, expansion space: 2L;
The opening pressure of the pressure seal cover for the exhaust small cup is 50Kpa, and the vacuum degree of the intake valve is 0.98Kpa to 11.8Kpa;
The opening pressure of the pressure seal cover of the 4 water inlet cup is 70Kpa, and the vacuum degree of the intake valve is 0.98Kpa to 11.8Kpa;
- The overall sealing performance is good, and the airtightness test: the test pressure is 0.3Mpa, and the pressure is maintained for 1 minute without any abnormal deformation or air leakage;
The main body, pressure cover, sealing cover, and chain of the 6 assemblies are all made of stainless steel, and the outer surface is sprayed with plastic (black) treatment;
- The dimensions not specified shall be determined by the manufacturer to ensure the reliability of the structure of each connecting pipe;
As shown in the top view, a label with the words "oil proof and waterproof" should be pasted on the water tank; White background with black characters;
- Anti corrosion performance: tested according to GB/T10125, NSS>144h, no metal substrate corrosion;
Make permanent markings according to Q/FTB102;
- Two M12 * 170 bolts (with nuts) are included with the supply;
- The expansion water tank assembly is equipped with an overflow water pipe, with a length of 2000mm;
The 13 water level switch is installed from bottom to top. When the water is full, the switch closes, and when there is a shortage of water, the switch opens.

					Expansion water tank (with normally closed water level switch)	BT93200007			
标记	处数	通知书号	签字	日期		图样标记	图幅	质量	比例
设计	Eric		标准		1U11681101044	S	A3		1:4
校对			审定			共	1	页	第
审核			批准			TKT			
工艺			日期						