P-control

November 24, 2025

0.1 Import

[2]:
```
import numpy as np
import matplotlib.pyplot as plt
import tclab
import time
from IPython.display import display, clear_output
```

[ ]:
```

```

0.2 Parametri simulazione

[3]:
```
# ----------------------------
# Adjust controller gain (Kc)
# ----------------------------
Kc = 5 # Proportional Gain

n = 180  # Number of second time points
tm = np.linspace(0,n-1,n) # Time values
T1 = np.zeros(n) # vector of measured temperatures
Q1 = np.zeros(n) # vector of actuated controls



# step setpoint from 23.0 to 40.0 degC
set_point= 40.0
SP1 = np.ones(n)*23.0 # 23 is assumed as air temperature and reference value␣
 ↪for the first 10 seconds
SP1[10:] = set_point
Q1_bias = 0.0
```

0.3 Avvio simulazione

[5]:
```
lab = tclab.TCLab()
channel= 1   #select which heater and sensor to use, use 2 to speed up the␣
 ↪lecture and avoid cooling
```

```
TCLab version 1.0.0
Arduino Leonardo connected on port COM5 at 115200 baud.
TCLab Firmware 2.0.1 Arduino Leonardo/Micro.
```

[13]:
```
print('T1=', lab.T1, ' T2=',lab.T2) # check initial conditions
```

```
T1= 23.734  T2= 22.51
```

0.3.1 Loop simulazione e plot

[14]:
```
# Start live plot
plt.ion()# Turn on matplotlib interactive mode
fig, axs = plt.subplots(2, 1, figsize=(20, 14))



# simulation loop

for i in range(n): # for all time steps


    # record measurement
    if channel==1:
        T1[i] = lab.T1
    else:
        T1[i] = lab.T2


    # P-only controller
    Q1[i] = Q1_bias + Kc * (SP1[i] - T1[i])
    Q1[i] = max(0, min(100, Q1[i]))        # Clip to 0-100% (saturation)

    # Actuate control
    if channel==1:
        lab.Q1(Q1[i])
    else:
        lab.Q2(Q1[i])


    # --- Live updating plot ---
    clear_output(wait=True)
    axs[0].cla()
    axs[1].cla()
    axs[0].grid()
    axs[0].plot(tm[:i+1]/60.0, SP1[:i+1], 'k-', label=r'$T_1$ SP')
    axs[0].plot(tm[:i+1]/60.0, T1[:i+1], 'r.', label=r'$T_1$ PV')
    axs[0].text(4.1, 30, 'Measured Offset: ' + str(np.round(SP1[i]-T1[i],2)))
    offset = set_point - (23 + 0.9*Kc*set_point) / (1 + 0.9*Kc)
    axs[0].text(4.1, 26, 'Calculated Offset: ' + str(np.round(offset,2)))
```

```
    axs[0].text(4.1, 22, r'$K_c$: ' + str(np.round(Kc,2)))
    axs[0].plot([tm[i]/60.0, tm[i]/60.0], [SP1[i], T1[i]], 'b-', lw=3, alpha=0.
 ↪5)
    axs[0].set_ylabel(r'Temp ($^oC$)')
    axs[0].set_xlim([0, n/60])
    axs[0].set_ylim([15, np.max(SP1)*1.25])
    axs[0].legend(loc=2)

    axs[1].grid()
    axs[1].plot(tm[:i+1]/60.0, Q1[:i+1], 'b-', label=r'$Q_1$ actuated')
    axs[1].plot(tm[:i+1]/60.0, Q1_bias + Kc * (SP1[:i+1] - T1[:i+1]), 'g-',␣
 ↪label=r'$Q_1$ computed')

    axs[1].set_ylabel(r'Heater (%)')
    axs[1].set_xlabel('Time (min)')
    axs[1].legend(loc=1)
    axs[1].set_xlim([0, n/60])
    axs[1].set_ylim([-50,200])
#    fig.tight_layout()
    display(fig)
    plt.pause(0.01)
    time.sleep(1)

plt.ioff()  # Turn off interactive mode
```

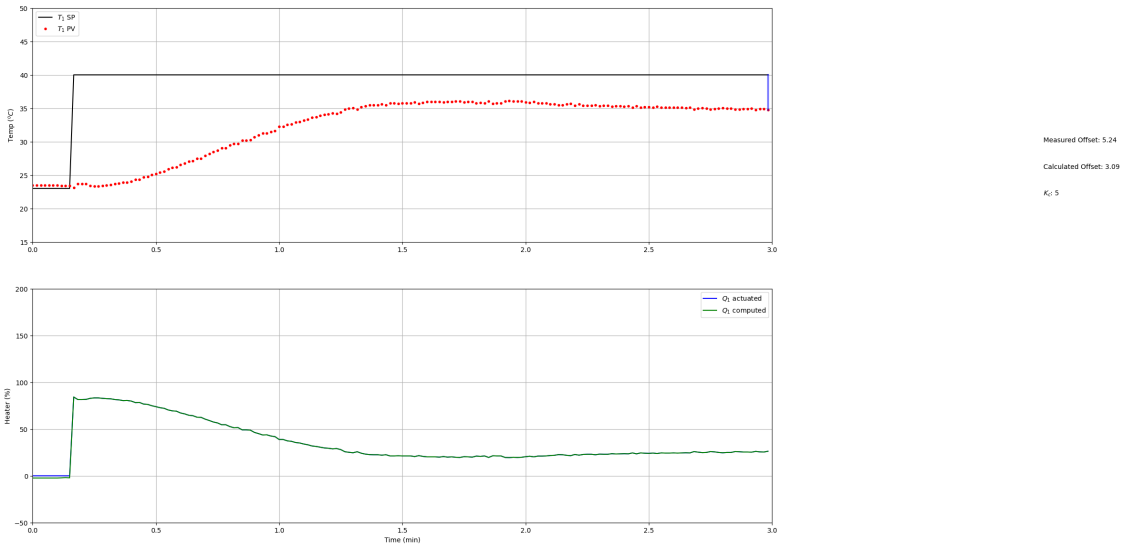


```
<Figure size 640x480 with 0 Axes>
```

0.3.2 Interrompi simulazione

[15]:
```
lab.close()
```

```
TCLab disconnected successfully.
```

0.3.3 vediamo un offset piuttosto marcato (>4°C), proviamo a tirare su il guadagno proporzionale

[16]:
```
Kc=10
```

[ ]:
```

```

[17]:
```
lab = tclab.TCLab()
print('T1=', lab.T1, ' T2=',lab.T2) # check initial conditions
channel= 2   #select which heater and sensor to use, use 2 to speed up the␣
 ↪lecture and avoid cooling
```

```
TCLab version 1.0.0
Arduino Leonardo connected on port COM5 at 115200 baud.
TCLab Firmware 2.0.1 Arduino Leonardo/Micro.
```

[18]:
```
# Start live plot
plt.ion()# Turn on matplotlib interactive mode
fig, axs = plt.subplots(2, 1, figsize=(20, 14))



# simulation loop

for i in range(n): # for all time steps


    # record measurement
    if channel==1:
        T1[i] = lab.T1
    else:
        T1[i] = lab.T2


    # P-only controller
    Q1[i] = Q1_bias + Kc * (SP1[i] - T1[i])
    Q1[i] = max(0, min(100, Q1[i]))        # Clip to 0-100% (saturation)

    # Actuate control
    if channel==1:
        lab.Q1(Q1[i])
    else:
```

```
        lab.Q2(Q1[i])

    # --- Live updating plot ---
    clear_output(wait=True)
    axs[0].cla()
    axs[1].cla()
    axs[0].grid()
    axs[0].plot(tm[:i+1]/60.0, SP1[:i+1], 'k-', label=r'$T_1$ SP')
    axs[0].plot(tm[:i+1]/60.0, T1[:i+1], 'r.', label=r'$T_1$ PV')
    axs[0].text(4.1, 30, 'Measured Offset: ' + str(np.round(SP1[i]-T1[i],2)))
    offset = set_point - (23 + 0.9*Kc*set_point) / (1 + 0.9*Kc)
    axs[0].text(4.1, 26, 'Calculated Offset: ' + str(np.round(offset,2)))
    axs[0].text(4.1, 22, r'$K_c$: ' + str(np.round(Kc,2)))
    axs[0].plot([tm[i]/60.0, tm[i]/60.0], [SP1[i], T1[i]], 'b-', lw=3, alpha=0.
 ↪5)
    axs[0].set_ylabel(r'Temp ($^oC$)')
    axs[0].set_xlim([0, n/60])
    axs[0].set_ylim([15, np.max(SP1)*1.25])
    axs[0].legend(loc=2)


    axs[1].grid()
    axs[1].plot(tm[:i+1]/60.0, Q1[:i+1], 'b-', label=r'$Q_1$ actuated')
    axs[1].plot(tm[:i+1]/60.0, Q1_bias + Kc * (SP1[:i+1] - T1[:i+1]), 'g-',␣
 ↪label=r'$Q_1$ computed')

    axs[1].set_ylabel(r'Heater (%)')
    axs[1].set_xlabel('Time (min)')
    axs[1].legend(loc=1)
    axs[1].set_xlim([0, n/60])
    axs[1].set_ylim([-50,200])
#    fig.tight_layout()
    display(fig)
    plt.pause(0.01)
    time.sleep(1)

plt.ioff()  # Turn off interactive mode




lab.close()
```

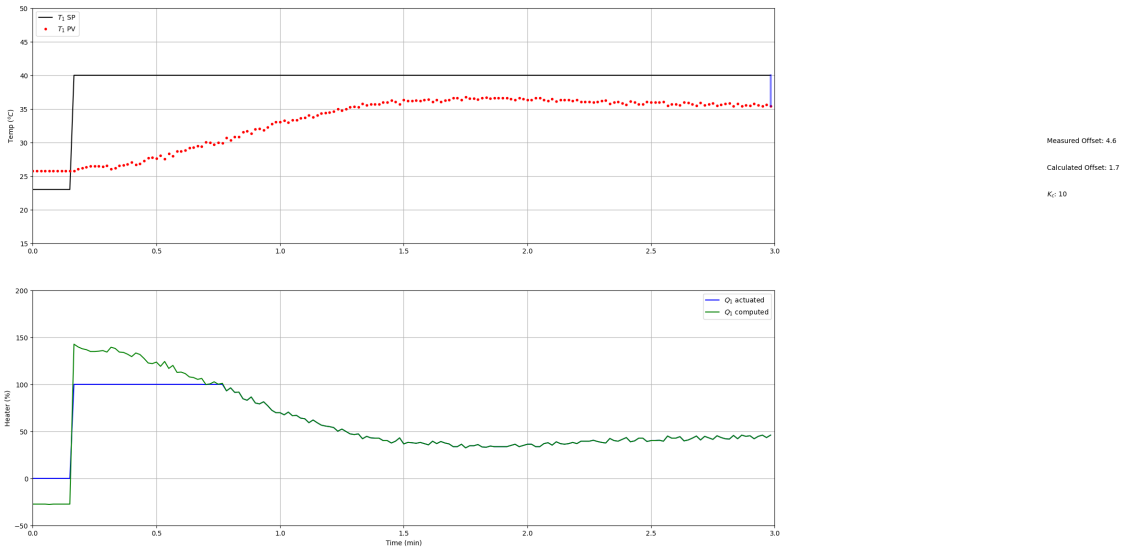


```
<Figure size 640x480 with 0 Axes>
```

```
TCLab disconnected successfully.
```

0.3.4 L'offset si è ridotto, ma non è sparito. Notate inoltre il periodo in cui l'attuatore era in saturazione (il controllo non era attuabile).

0.3.5 cosa succede per valori di Kc molto elevati?

[26]:
```
Kc=10000

n = 300  # Number of second time points, higher to show a longer test
tm = np.linspace(0,n-1,n) # Time values
T1 = np.zeros(n) # vector of measured temperatures
Q1 = np.zeros(n) # vector of actuated controls



# step setpoint from 23.0 to 40.0 degC
set_point= 40.0
SP1 = np.ones(n)*23.0 # 23 is assumed as air temperature and reference value␣
 ↪for the first 10 seconds
SP1[10:] = set_point
Q1_bias = 0.0
```

[ ]:
```

```

[ ]:
```
lab = tclab.TCLab()
print('T1=', lab.T1, ' T2=',lab.T2) # check initial conditions
```

```
channel= 1   #select which heater and sensor to use, use 2 to speed up the␣
 ↪lecture and avoid cooling
```

[28]:
```
# Start live plot
plt.ion()# Turn on matplotlib interactive mode
fig, axs = plt.subplots(2, 1, figsize=(20, 14))



# simulation loop

for i in range(n): # for all time steps


    # record measurement
    if channel==1:
        T1[i] = lab.T1
    else:
        T1[i] = lab.T2


    # P-only controller
    Q1[i] = Q1_bias + Kc * (SP1[i] - T1[i])
    Q1[i] = max(0, min(100, Q1[i]))        # Clip to 0-100% (saturation)

    # Actuate control
    if channel==1:
        lab.Q1(Q1[i])
    else:
        lab.Q2(Q1[i])

    # --- Live updating plot ---
    clear_output(wait=True)
    axs[0].cla()
    axs[1].cla()
    axs[0].grid()
    axs[0].plot(tm[:i+1]/60.0, SP1[:i+1], 'k-', label=r'$T_1$ SP')
    axs[0].plot(tm[:i+1]/60.0, T1[:i+1], 'r.', label=r'$T_1$ PV')
    axs[0].text(4.1, 30, 'Measured Offset: ' + str(np.round(SP1[i]-T1[i],2)))
    offset = set_point - (23 + 0.9*Kc*set_point) / (1 + 0.9*Kc)
    axs[0].text(4.1, 26, 'Calculated Offset: ' + str(np.round(offset,2)))
    axs[0].text(4.1, 22, r'$K_c$: ' + str(np.round(Kc,2)))
    axs[0].plot([tm[i]/60.0, tm[i]/60.0], [SP1[i], T1[i]], 'b-', lw=3, alpha=0.
 ↪5)
    axs[0].set_ylabel(r'Temp ($^oC$)')
    axs[0].set_xlim([0, n/60])
    axs[0].set_ylim([15, np.max(SP1)*1.25])
```


```
    axs[0].legend(loc=2)

    axs[1].grid()
    axs[1].plot(tm[:i+1]/60.0, Q1[:i+1], 'b-', label=r'$Q_1$ actuated')
    axs[1].plot(tm[:i+1]/60.0, Q1_bias + Kc * (SP1[:i+1] - T1[:i+1]), 'g-',␣
 ↪label=r'$Q_1$ computed')

    axs[1].set_ylabel(r'Heater (%)')
    axs[1].set_xlabel('Time (min)')
    axs[1].legend(loc=1)
    axs[1].set_xlim([0, n/60])
    axs[1].set_ylim([-50,200])
#    fig.tight_layout()
    display(fig)
    plt.pause(0.01)
    time.sleep(1)

plt.ioff()  # Turn off interactive mode

lab.close()
```

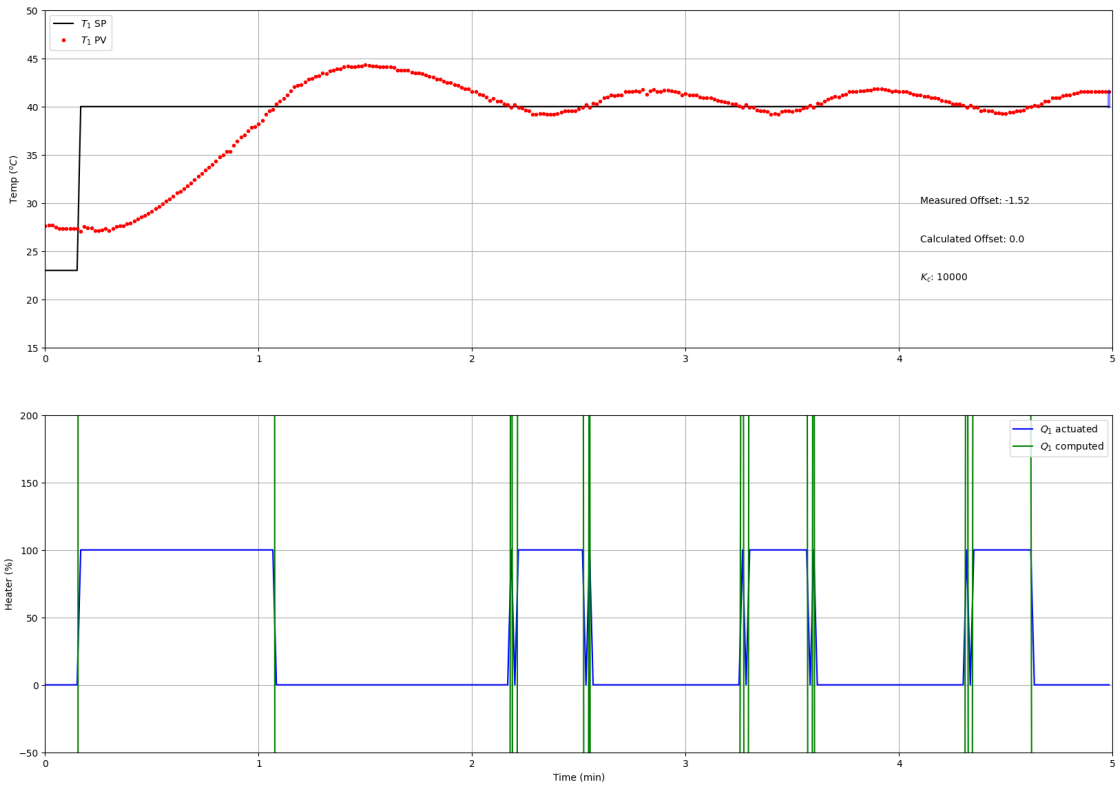


```
<Figure size 640x480 with 0 Axes>
```

```
TCLab disconnected successfully.
```

0.3.6 Come potete vedere compaiono delle oscillazioni. Il controllo P non può rimuovere da solo l'offset nell'errore.

[ ]:

[ ]: