


## Technical data sheet

| Customer  |  |
|-----------|--|
|           |  |
| Reference |  |
|           |  |
| Mail      |  |

| t | Distribuited by |
|---|-----------------|
|   |                 |
|   |                 |

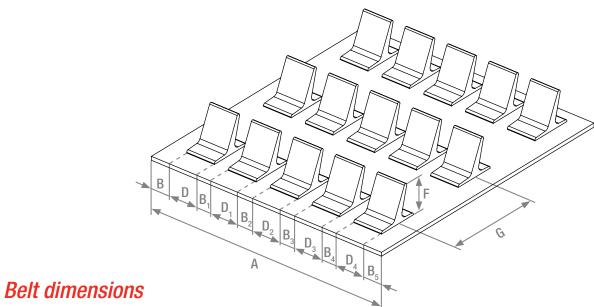


|                | u.m. | value |
|----------------|------|-------|
| А              | mm   |       |
| В              | mm   |       |
| B <sub>1</sub> | mm   |       |
| B <sub>2</sub> | mm   |       |
| B <sub>3</sub> | mm   |       |
| B <sub>4</sub> | mm   |       |
| B <sub>5</sub> | mm   |       |
| D              | mm   |       |
| D <sub>1</sub> | mm   |       |
| D <sub>2</sub> | mm   |       |

|                | u.m. | value  |
|----------------|------|--------|
| $D_3$          | mm   |        |
| D <sub>4</sub> | mm   |        |
| F              | mm   |        |
| G              | mm   |        |
| Belt legth     | mm   |        |
| Endless closed |      | yes no |
| Base belt      |      |        |
| Rubber quality |      |        |

## **Technical Remarks**

|                        | u.m. | value  |  |
|------------------------|------|--------|--|
| Min diam. Pulley ( P ) | mm   |        |  |
| Min. diam. Wheel ( W ) | mm   |        |  |
| Oil presence           |      | yes no |  |
| Operation temperature  | C°   |        |  |
| Quantity               | n.   |        |  |

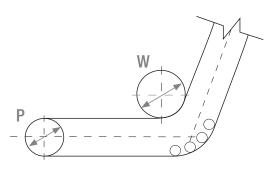

| Note  |  |  |
|-------|--|--|
| 11010 |  |  |
|       |  |  |
|       |  |  |