



Functional Description

Gas engine-generator sets

GG12V0400A1

with E3042Z6/ZH6 and B3042Z7 engines

MS13072/00E

Name	SLU Name Model	Engine model	Application group
MTU 12V400 GS	GG12V0400A1	E3042Z6	3A, continuous operation, unrestricted
MTU 12V400 GS	GG12V0400A1	E3042ZH6	3A, continuous operation, unrestricted
MTU 12V400 GS	GG12V0400A1	B3042Z7	3A, continuous operation, unrestricted

© 2017 MTU Onsite Energy GmbH, Augsburg

The original document was created in the German language.

This publication including all of its parts is protected by copyright. Each instance of use requires the prior written consent of MTU Onsite Energy GmbH. This applies in particular to duplication, dissemination, editing, translation, microfilming, and storage and/or processing in electronic systems, including databases and online services.

All of the information presented in this publication was current and up-to-date at the time of publishing. MTU Onsite Energy GmbH reserves the right to make changes to, delete, or supplement the provided information and data as needed.

Table of Contents

1 Engine-Generator Set		5.2 Gas train	38
1.1 Application group	4	6 Exhaust System	
1.2 Nameplate and designation	5	6.1 Module - Exhaust system	40
1.3 Module - With heat supply from cogeneration and integrated exhaust gas heat exchanger	8	6.2 Genset - Exhaust system	43
1.4 Genset - With heat supply from cogeneration	14	7 Lube Oil System	
1.5 Genset - Without heat supply from cogeneration	20	7.1 Lube oil system	46
		7.2 Crankcase breather	50
2 Engine		8 Cooling System and Heating Water System	
2.1 Engine - General description	24	8.1 Module - Cooling system with heat supply from cogeneration and integrated exhaust gas heat exchanger	52
2.2 Engine - Overview	25	8.2 Genset - Cooling system with heat supply from cogeneration	54
2.3 Engine side and cylinder designations	27	8.3 Genset - Cooling system without heat supply from cogeneration	56
2.4 Starting system	28	8.4 Module - Heating water system	58
2.5 Ignition system	29	8.5 Genset - Heating water system	60
2.6 Speed control	30	8.6 Mixture coolant system	62
3 Generator		8.7 Anti-condensation heating	64
3.1 Generator and coupling	31	9 Technical Data	
4 Monitoring and Control		9.1 Technical data	65
4.1 MMC and MIP control system	32	10 Appendix A	
5 Charge-air System and Gas System		10.1 Index	66
5.1 Mixture formation and supercharging	34		

1 Engine-Generator Set

1.1 Application group

The genset consists of a gas engine and a generator mounted on a common baseframe. Upon demand, the engine will start and drives the generator to generate heat energy and to produce electrical power. On the version without a heat module, no heat energy is generated.

The object of delivery from MTU Onsite Energy complies with the EC Machinery Directive and German specifications and standards.

When the object of delivery is used abroad or in other special regions, MTU Onsite Energy is not responsible for observance of the statutory and other specifications / standards applicable at the place of use.

Application group 3A – Continuous operation, unrestricted (Continuous Power)

Gensets for unrestricted continuous power and heat energy supply are used for:

- Base load generation
- Part of a power supply or the public grid

Continuous operation	Application group 3A
Operating mode	Continuous operation, unrestricted
Rating definition	10% overload capacity (ICXN)
Load factor	< 100 %
Operating hours	Unrestricted

Benefits

- Wide range of standardized gensets to meet customer requirements with regard to power, emission and other characteristics.
- Option of selecting different components:
 - Only current supply
 - Heat supply from cogeneration from engine coolant
 - Heat supply from cogeneration from engine coolant and exhaust gas
- Most recent gas engine technology
- Main components with state-of-the-art technology for high electrical and thermal efficiency and long service life.

1.2 Nameplate and designation

Nameplates

The product has the following nameplates:

- Nameplate of module or genset
- Engine nameplate
- Nameplate of generator

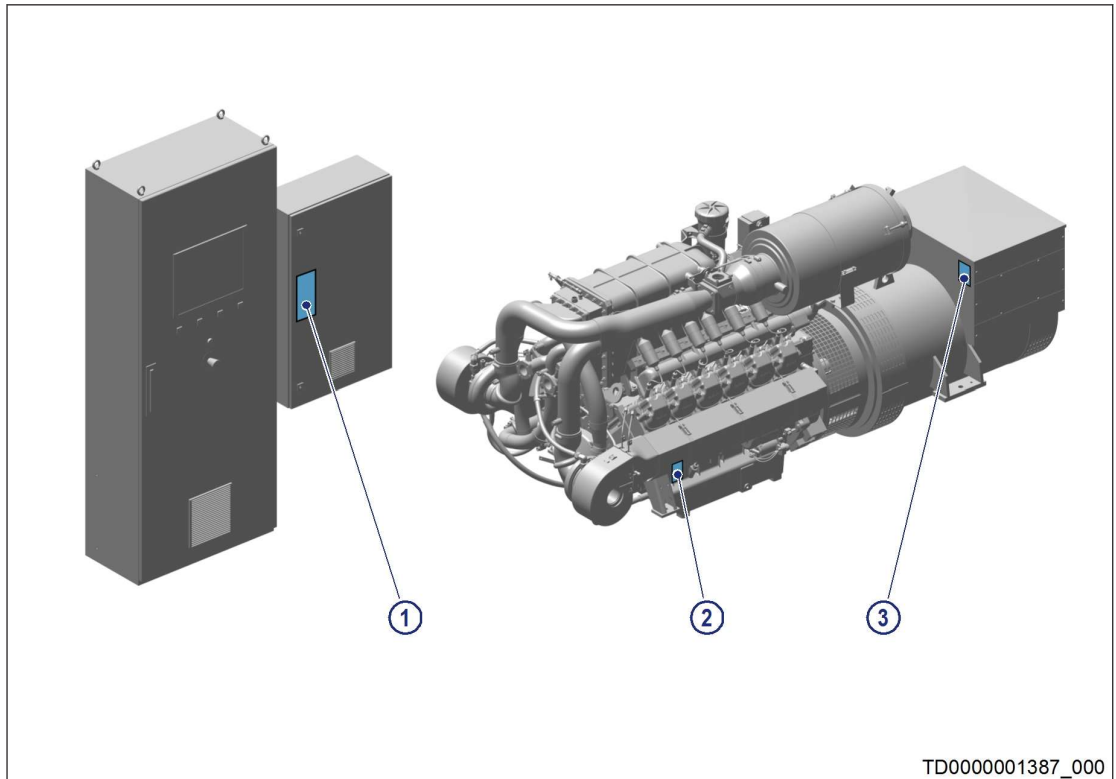


Figure 1: Fitting position of nameplates

1 Nameplate of module or genset

2 Engine nameplate

3 Nameplate of generator

Module or genset – nameplate and designation

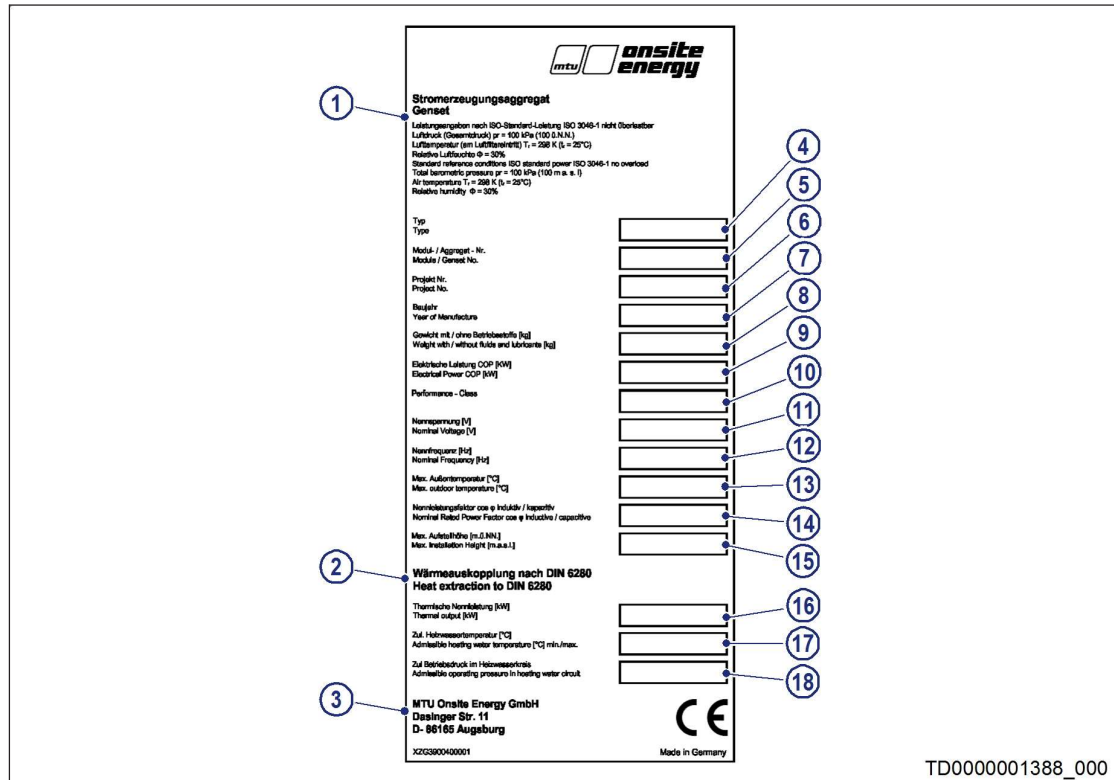


Figure 2: Nameplate of module or genset

Item	Designation
1	Power ratings as per ISO standard power ISO 3046-1 no overload capability Air pressure (total pressure) $p_r = 100 \text{ kPa}$ (100 above sea level) Air temperature (at air filter inlet) $T_r = 298 \text{ K}$ ($t_r = 25 \text{ °C}$) Relative air humidity $\phi = 30\%$
2	Heat supply from cogeneration as per DIN 6280
3	MTU Onsite Energy Dasinger Str. 11 D-86165 Augsburg
4	Type
5	Module / genset no.
6	Project no.
7	Year of construction
8	Weight with / without fluids and lubricants [kg]
9	Electrical output COP [KW]
10	Performance-Class (performance class of generator)
11	Rated voltage [V]
12	Rated frequency [Hz]
13	Max. outside temperature [°C]
14	Rated power factor $\cos \phi$ inductive / capacitive
15	Max. site altitude [m above sea level]
16	Thermal rated power [kW]

Item	Designation
17	Perm. heating water temperature [°C]
18	Perm. operating pressure in heating water circuit

Explanation of type

Example: MTU 12V400 GS	
MTU	Manufacturer: MTU Onsite Energy
12	Number of cylinders of the engine
V	Cylinder arrangement
400	400 series
GS	Gas system

Explanation of model name (SLU name)

Example: GG12V0400C1	
GG	Product type: Gasgenset
12	Number of cylinders of the engine
V	Cylinder arrangement
0400	400 series
C1	Design/version

1.3 Module – With heat supply from cogeneration and integrated exhaust gas heat exchanger

Description

The module comprises the following main components:

- Engine
- Gas train (not visible on the illustrations)
- Generator and coupling
- Heat supply from cogeneration with exhaust gas heat exchanger
- MMC (MTU Module Control) for plant control, closed-loop control, diagnostics
- MIP (MTU Interface Panel) for engine control, closed-loop control, diagnostics

The energy contained in the fuel is converted into mechanical work and heat in the combustion engine.

The generator, which converts the mechanical work into electrical energy, is flange-mounted on the engine via a resilient coupling. The connecting bell is provided with a service port that permits the replacement of the flexible coupling element without displacing the engine or generator. The engine and generator are joined via resilient, vibration-damped elements to the baseframe.

The heat is transferred via the coolant to several points:

- Mixture heat via the 1st stage of the mixture cooler
- Lube oil heat
- Engine heat
- Exhaust gas heat

The plate-core heat exchanger represents the interface between the coolant system of the module and the customer-provided heating system. In this connection, it is also referred to as a coolant or heating water heat exchanger.

The mixture heat of the 2nd stage is dissipated via a customer-provided cooler.

All closed-loop controls, control systems and monitoring systems, including communication options to and from the system, are implemented in the hardware and software in the switch cabinets.

The following components have complete pipework and are installed in the baseframe:

- Plate-core heat exchanger
- Exhaust gas heat exchanger
- Silencer
- Catalytic converter (optional)

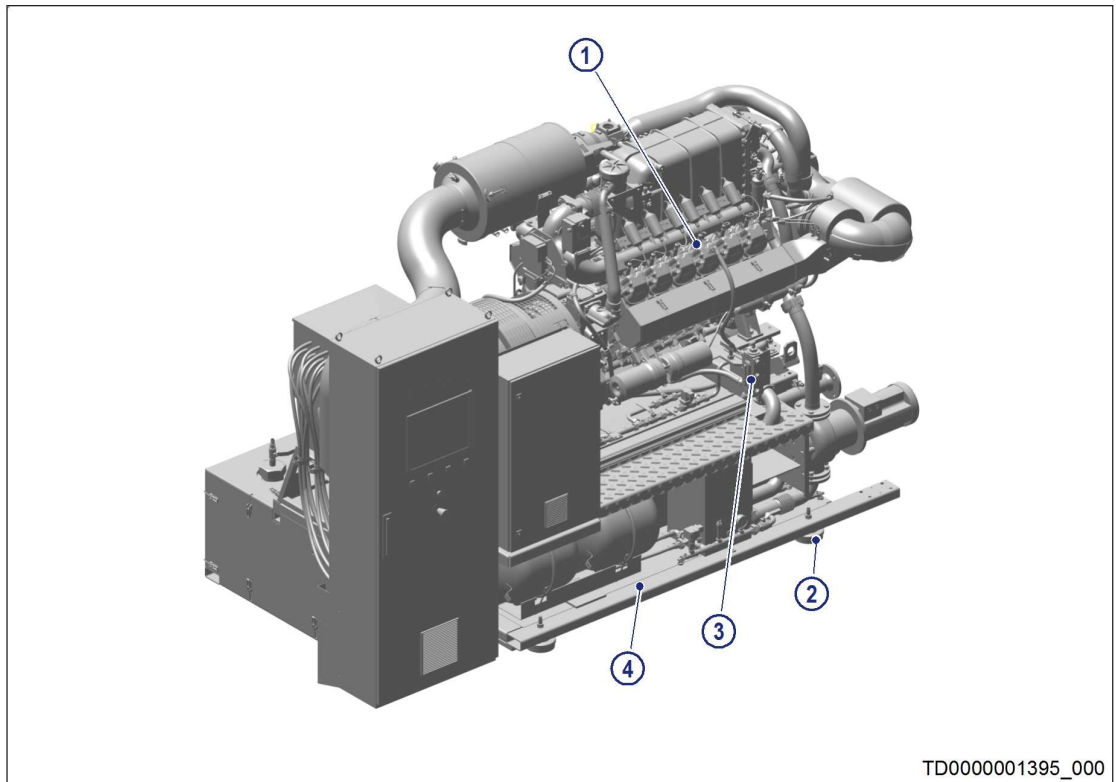


Figure 3: Module – generator side

- | | |
|---------------------------|-------------------|
| 1 Engine | 3 Oil sight glass |
| 2 Machine shoe (optional) | 4 Baseframe |

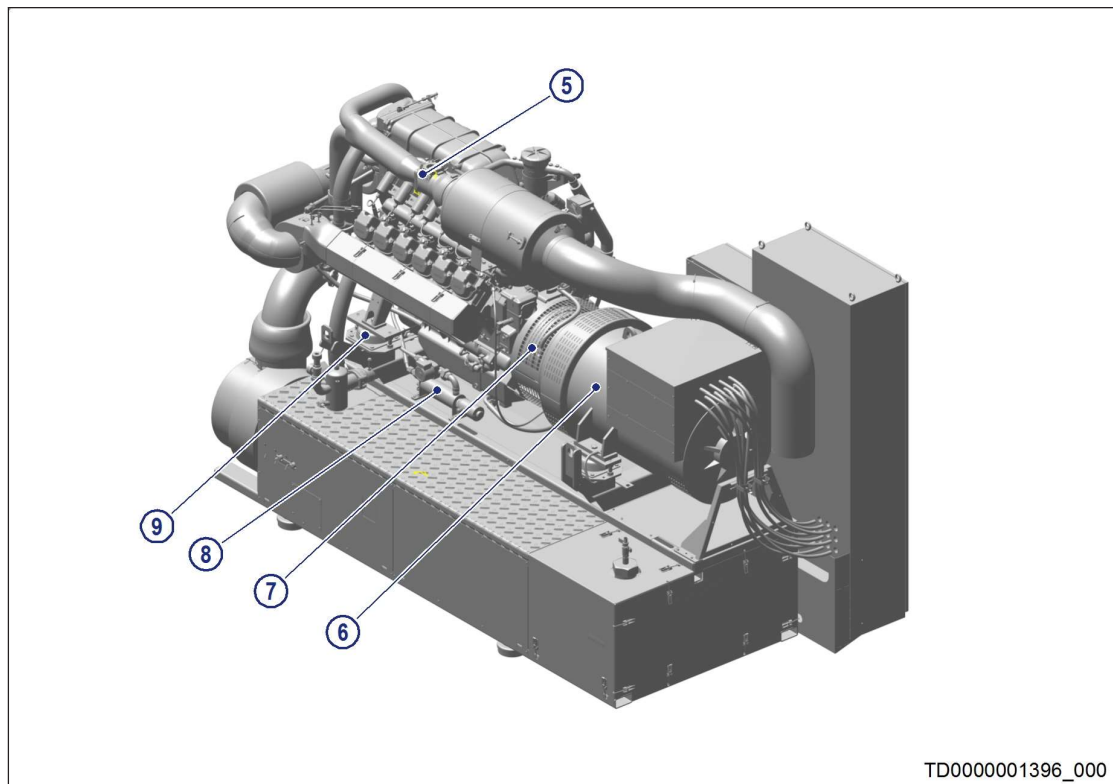


Figure 4: Module – generator side

- | | | |
|------------------------------------|--|-----------------------|
| 5 Gas mixer (gas train connection) | 7 Flange coupling | 9 Bowl-shaped element |
| 6 Generator | 8 Anti-condensation heating (optional) | |