

Functional Description

Series 4000 GS L32 / L33

MTU 8V4000 GS - 8V4000L32 / L33

MTU 12V4000 GS - 12V4000L32 / L33

MTU 16V4000 GS - 16V4000L32 / L33

MTU 20V4000 GS - 20V4000L32 / L33

MS13078/00E

Sales name	Engine model	Application group
MTU 8V4000 GS	8V4000L32	3A, continuous operation, unrestricted
MTU 12V4000 GS	12V4000L32	3A, continuous operation, unrestricted
MTU 16V4000 GS	16V4000L32	3A, continuous operation, unrestricted
MTU 20V4000 GS	20V4000L32	3A, continuous operation, unrestricted
MTU 8V4000 GS	8V4000L33	3A, continuous operation, unrestricted
MTU 12V4000 GS	12V4000L33	3A, continuous operation, unrestricted
MTU 16V4000 GS	16V4000L33	3A, continuous operation, unrestricted
MTU 20V4000 GS	20V4000L33	3A, continuous operation, unrestricted

Table 1: Valid for

© 2016 MTU Onsite Energy GmbH, Augsburg

The original document was created in the German language.

This publication including all of its parts is protected by copyright. Each instance of use requires the prior written consent of MTU Onsite Energy GmbH. This applies in particular to duplication, dissemination, editing, translation, microfilming, and storage and/or processing in electronic systems, including databases and online services.

All of the information presented in this publication was current and up-to-date at the time of publishing. MTU Onsite Energy GmbH reserves the right to make changes to, delete, or supplement the provided information and data as needed.

Table of Contents

1 Engine-Generator Set		6.2 Air filter	31
1.1 General description	4	7 Lube Oil System	
1.2 Engine-generator set - Application group	5	7.1 Lube oil system	33
1.3 Engine-generator set - Nameplate and designation	6	7.2 Lube oil pump	35
1.4 Engine-generator set - Standard scope of delivery	9	8 Cooling System	
1.5 Engine-generator set - Optional scope of delivery	15	8.1 Cooling system	36
2 Engine		8.2 Heat recovery module (with GR and GC version)	41
2.1 Engine side and cylinder designations	16	9 Base Frame	
2.2 Product summary	17	9.1 Mounting	44
2.3 Coupling	24	10 Optional Components	
3 Generator		10.1 Gas detector	45
3.1 Generator - General information	25	10.2 Fire detection system	46
4 Monitoring and Control		11 Appendix A	
4.1 MIP and MMC control system	26	11.1 Abbreviations	47
5 Gas system		12 Appendix B	
5.1 Gas train	27	12.1 Index	49
6 Exhaust System			
6.1 Mixture formation, turbocharging and exhaust system	28		

1 Engine-Generator Set

1.1 General description

The engine-generator set comprises the following main assemblies:

- Engine
- Gas train
- Generator and coupling
- Baseframe
- Heat extraction (with versions GR and GC)
- MMC (MTU Module Control) for plant control, closed-loop control, diagnostics (optional)
- MIP (MTU Interface Panel) for engine control, closed-loop control, diagnostics

In the combustion engine, the energy contained in the fuel is converted into mechanical work and heat.

The generator, which converts the mechanical work into electrical energy, is flanged-mounted on the engine via a resilient coupling. The generator is installed on two slide rails, which allow the generator to be shifted when the coupling element is being replaced. The engine and generator are connected to the baseframe via resilient, vibration-damped elements.

All closed-loop controls, control systems and monitoring systems, including communication options to and from the system, are implemented in the hardware and software in the control cabinet.

1.2 Engine-generator set – Application group

The engine-generator set consists of a gas engine and a generator mounted on a common baseframe. Upon demand, the engine will start and drives the generator to produce electrical power.

Application group 3A – Continuous operation, unrestricted (Continuous Power)

Engine-generator sets for unlimited continuous power supply are used for:

- Base load generation
- Part of a power supply or the public grid

Continuous operation	Application group 3A
Operating mode	Continuous operation, unrestricted
Rating definition	10% overload capacity (ICXN)
Load factor	< 100 %
Operating hours	Unrestricted

Benefits

- Wide range of standardized engine-generator sets to meet customer requirements with regard to power, emission and other characteristics.
- Possibility to choose from different component designs (e.g. generator) and to select options (e.g. heat module)
- Most recent gas engine technology.
- Main components with state-of-the-art technology for high electrical and thermal efficiency and long service life.

1.3 Engine-generator set - Nameplate and designation

Nameplates on engine-generator set

The engine-generator set has the following nameplates:

- Nameplate of engine-generator set
- Engine nameplate
- Nameplate of generator

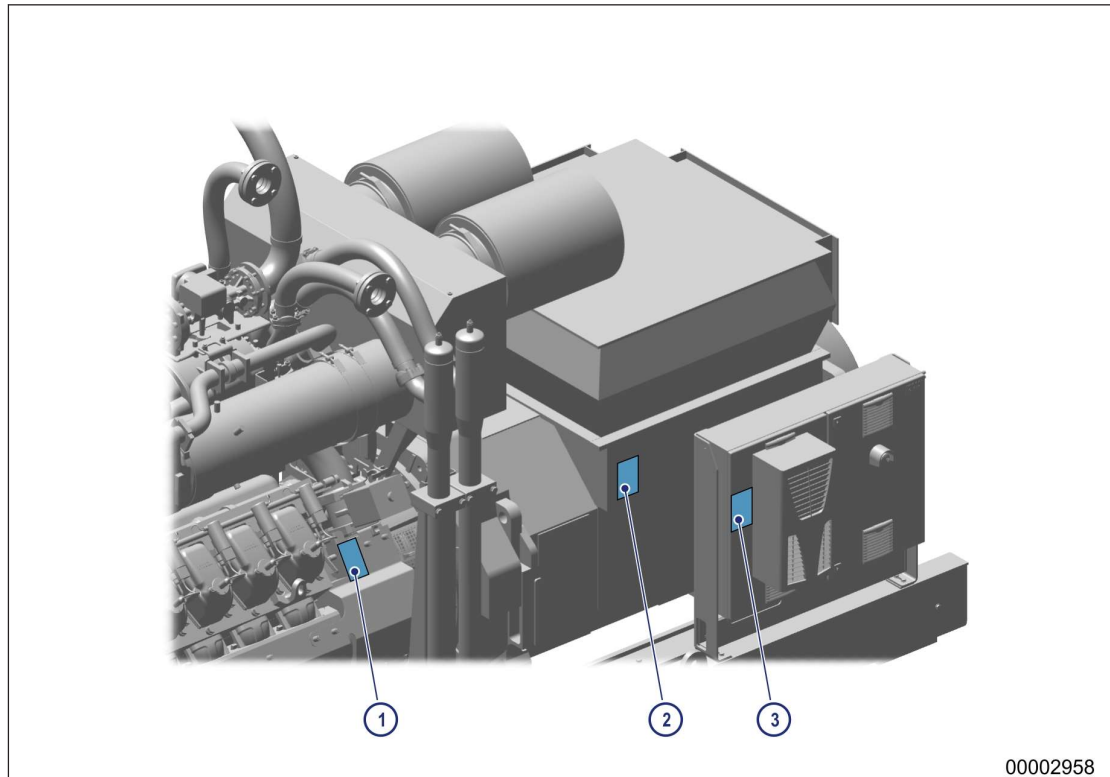


Figure 1: Fitting position of nameplates (generator and engine-generator set)

1 Engine nameplate

2 Nameplate of generator

3 Nameplate of engine-generator set

Explanation of product name

Example: MTU 12V4000 GS

MTU	Manufacturer: MTU Onsite Energy
12	Number of cylinders of the engine
V	Cylinder arrangement of the engine Vee arrangement
4000	MTU Series 4000
GS	Gas System

Overview of application groups on nameplate

Specification on the nameplate	Application group
CONTINUOUS POWER	3A – Continuous operation, unrestricted
PRIME POWER	3B – Continuous operation, variable load, ICXN
LTP GRID STABILITY	3G – Continuous operation, time limited, ICXN

TM-ID: 0000070260 - 001

Specification on the nameplate	Application group
DATA CENTER CONTINUOUS	3F – Standby operation mode, unlimited, ICXN
MISSION CRITICAL STANDBY	3H – Standby operation mode, special qualifications

Engine-generator set – nameplate and designation

1 **Stromerzeugungsaggregat
Genset**
Leistungsangaben nach ISO-Standard-Leistung (ISO 3046-1 nicht überlastbar)
Luftdruck (Gesamtdruck) $p_r = 100 \text{ kPa}$ (100 ü.N.N.)
Lufttemperatur (am Luftfiltereintritt) $T_r = 298 \text{ K}$ ($t_r = 25^\circ\text{C}$)
Relative Luftfeuchte $\phi = 30\%$
Standard reference conditions (ISO standard power (ISO 3046-1 no overload)
Total barometric pressure $p_r = 100 \text{ kPa}$ (100 m a. s. l.)
Air temperature $T_r = 298 \text{ K}$ ($t_r = 25^\circ\text{C}$)
Relative humidity $\phi = 30\%$

2 **Wärmeauskopplung nach DIN 6280
Heat extraction to DIN 6280**
Thermische Nennleistung [kW]
Thermal output [kW]
Zul. Heizwassertemperatur [°C]
Admissible heating water temperature [°C] min./max.
Zul. Betriebsdruck im Heizwasserkreis
Admissible operating pressure in heating water circuit

3 **MTU Onsite Energy GmbH**
Dasinger Str. 11
D-86165 Augsburg
XZG390400001
Made in Germany

4 Type

5 Modul- / Aggregat - Nr.
Module / Genset No.

6 Projekt Nr.
Project No.

7 Baugjahr
Year of Manufacture

8 Gewicht mit / ohne Betriebsstoffe [kg]
Weight with / without fluids and lubricants [kg]

9 Elektrische Leistung COP [kW]
Electrical Power COP [kW]

10 Performance - Class

11 Nennspannung [V]
Nominal Voltage [V]

12 Nennfrequenz [Hz]
Nominal Frequency [Hz]

13 Max. Außentemperatur [°C]
Max. outdoor temperature [°C]

14 Nennleistungsfaktor cos ϕ induktiv / kapazitiv
Nominal Rated Power Factor cos ϕ inductive / capacitive

15 Max. Aufstellhöhe [m ü.N.N.]
Max. installation height [m a.s.l.]

16

17

18

CE

00002761

Figure 2: Nameplate of engine-generator set

Item	Designation
1	Power ratings as per ISO standard power ISO 3046-1 no overload capability Air pressure (total pressure) $p_r = 100 \text{ kPa}$ (100 above sea level) Air temperature (at air filter inlet) $T_r = 298 \text{ K}$ ($t_r = 25^\circ\text{C}$) Relative air humidity $\phi = 30\%$
2	Heat supply from cogeneration as per DIN 6280
3	MTU Onsite Energy Dasinger Str. 11 D-86165 Augsburg
4	Type
5	Module / engine-generator set no.
6	Project no.
7	Year of construction
8	Weight with / without fluids and lubricants [kg]
9	Electrical output COP [kW]
10	Performance class
11	Rated voltage [V]
12	Rated frequency [Hz]
13	Max. outside temperature [°C]

Item	Designation
14	Rated power factor $\cos \phi$ inductive / capacitive
15	Max. site altitude [m above sea level]
16	Thermal rated power [kW]
17	Perm. heating water temperature [°C]
18	Perm. operating pressure in heating water circuit

1.4 Engine-generator set - Standard scope of delivery

The illustrations show an engine-generator set featuring a Series 20V 4000 L32 and 12V4000 L32 engine. The illustrations also apply to engine-generator sets with 8, 16 and 20-cylinder engines.


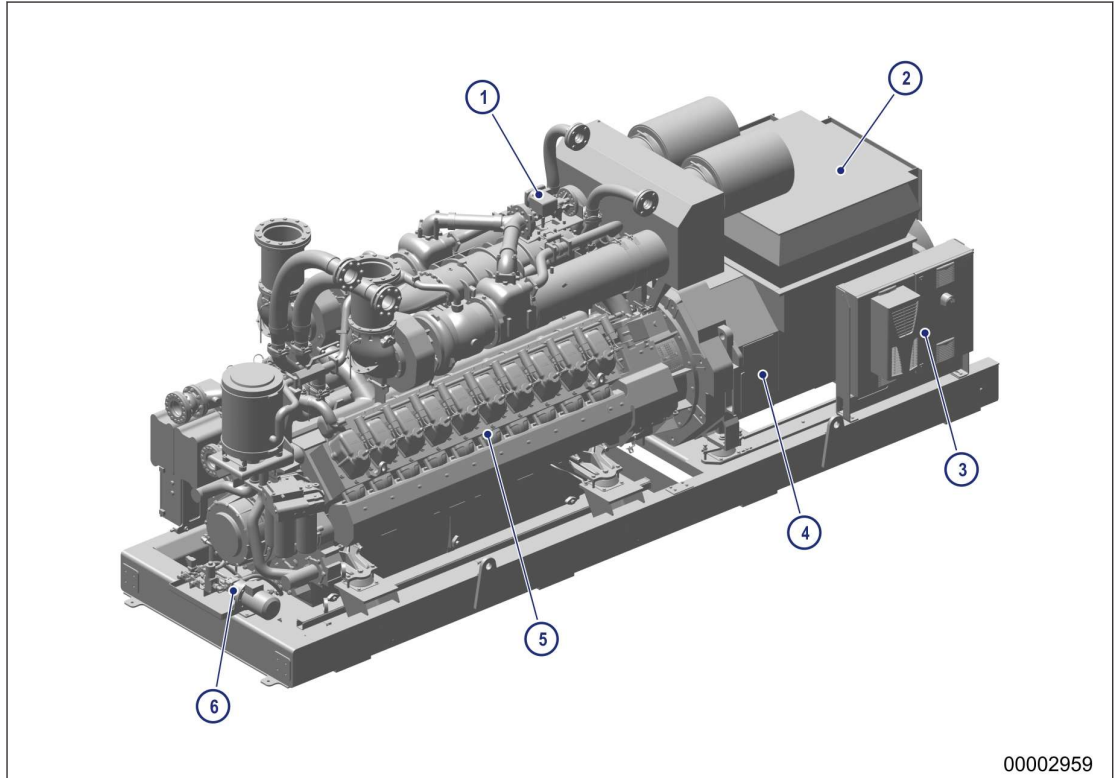


Figure 3: Engine-generator set - 20V engine, engine side


- | | | |
|------------------------|-------------------|-----------------|
| 1 Gas train | 3 Control cabinet | 5 Engine |
| 2 Generator connection | 4 Generator | 6 Lube oil pump |

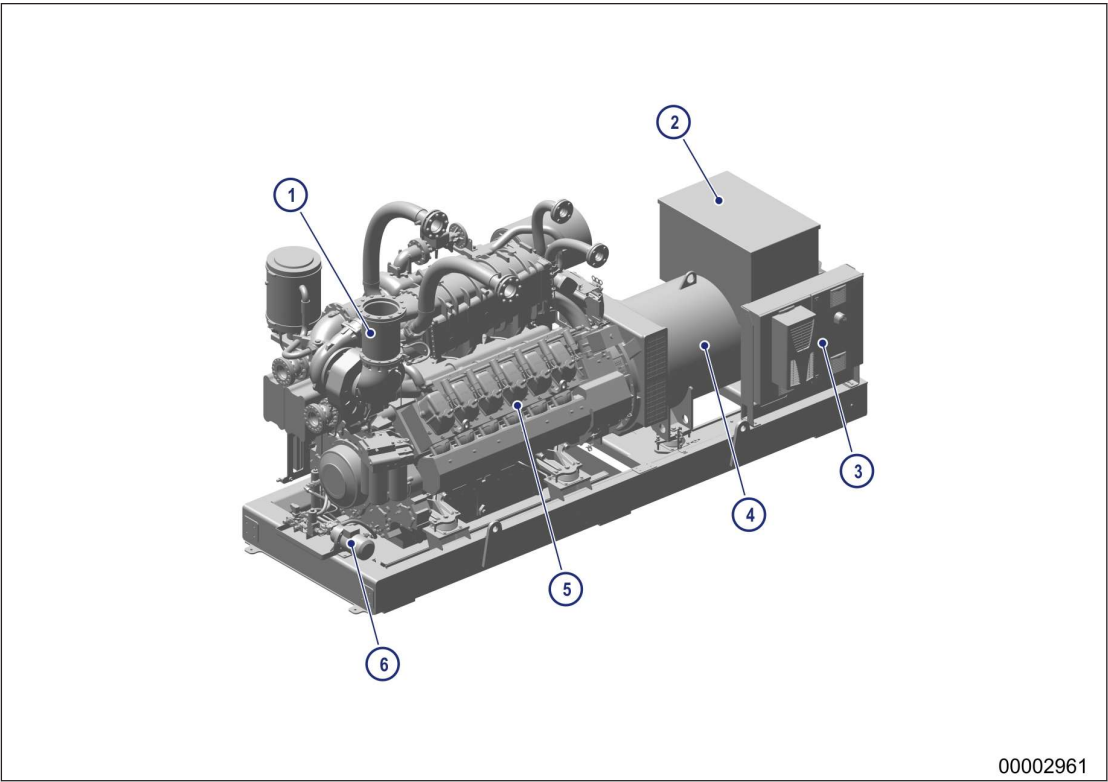

00002961

Figure 4: Engine-generator set – 12V engine, engine side

- | | | |
|------------------------|-------------------|-----------------|
| 1 Exhaust outlet | 3 Control cabinet | 5 Engine |
| 2 Generator connection | 4 Generator | 6 Lube oil pump |

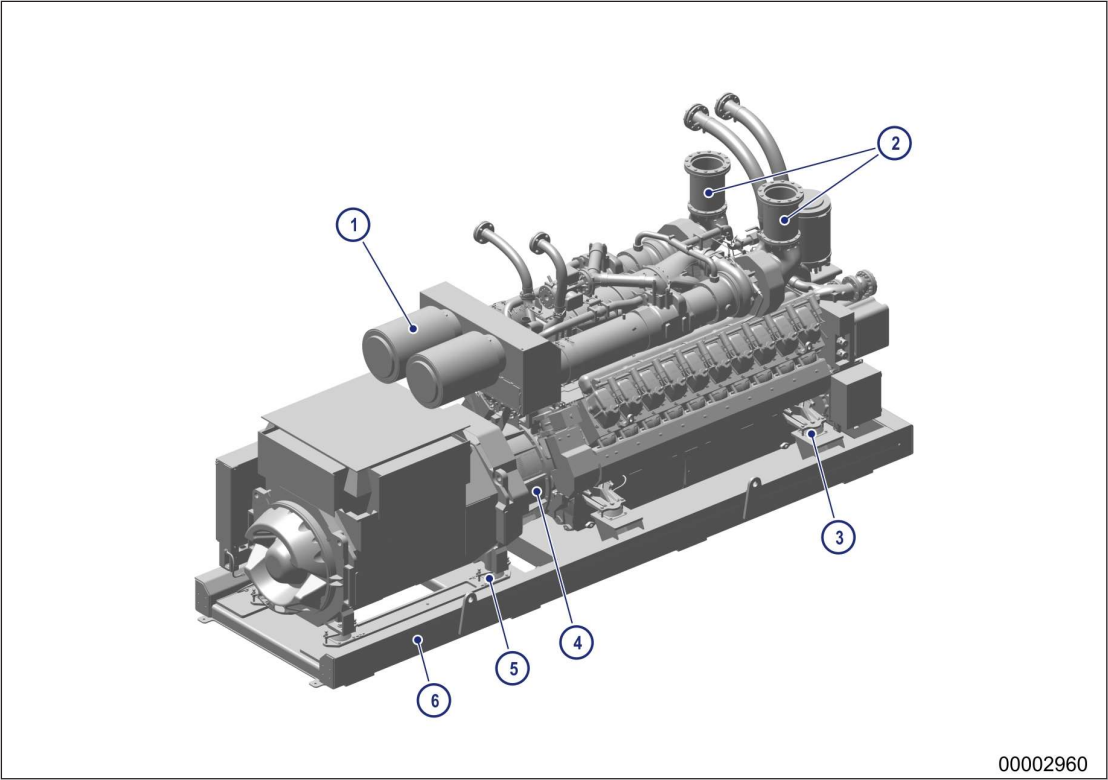

00002960

Figure 5: Engine-generator set – 20V engine, generator side

- | | | |
|------------------|-------------------|----------------------|
| 1 Air filter | 3 Engine mounting | 5 Generator mounting |
| 2 Exhaust outlet | 4 Coupling | 6 Baseframe |