DIAGNOBOT | BODY BUILD MEASUREMENTS

Proposed enclosure: 300 x 300 x 250 mm overall | 5 mm plywood | dimensions in mm

FRONT VIEW

300 mm wide x 250 mm body height; chassis and wheels add height below.

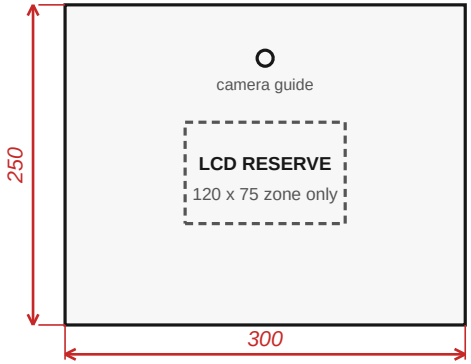

Front panel: 300 x 240 x 5

LCD and camera openings are placeholders. Measure actual parts *before cutting.*

TOP VIEW | LID OFF

Outer footprint 300 x 300 mm; front / display edge shown at bottom.

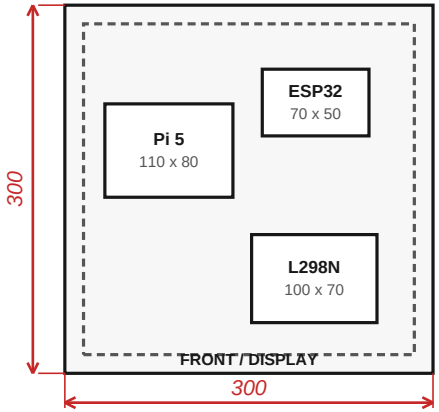

Upper tray: 270 x 240 mm (3 mm).

Dashed outline = tray boundary.

Boxes show approximate keep-clear zones, not mounting-hole patterns.

Keep Pi ports and airflow clear.

Route motor wires away from sensors.

SIDE VIEW

300 mm deep x 250 mm body height; front is left, rear is right.

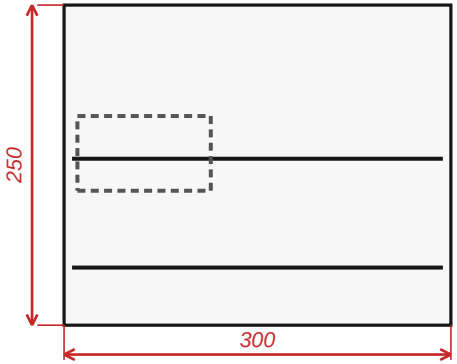

Upper tray level: 135 mm

Lower tray level: 45 mm

Measure levels from inside floor.

Adjust after checking battery size, connectors, airflow and cable bends.

INTERNAL CUTAWAY

Front wall removed; shelves removable; component blocks are placement zones.

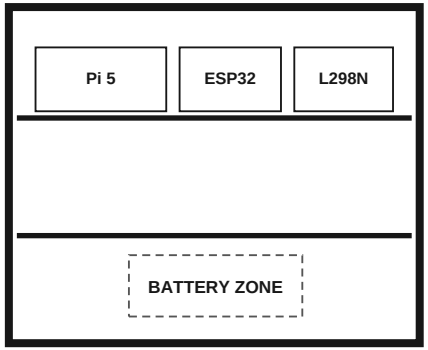

Lower tray: 270 x 270 mm (3 mm)

Battery kept low and centered.

Upper tray: 270 x 240 mm (3 mm)

Pi zone 110 x 80 | ESP32 70 x 50

L298N zone 100 x 70 mm.

Leave vents and connectors accessible.

CUT LIST | 5 mm plywood body; 3 mm removable trays

Base + removable lid	*300 x 300*	2
Front + back walls	*300 x 240*	2
Left + right walls	*290 x 240*	2
Lower tray (3 mm)	*270 x 270*	1
Upper tray (3 mm)	*270 x 240*	1

BEFORE CUTTING

Confirm chassis, wheel clearance, battery, display, webcam, and cable bends. Adapt base mounting holes to your chassis.

Proposed enclosure plan, not a verified chassis drawing.

SCHEMATIC | NOT TO SCALE | Check hardware physically before cutting.