卷册检索号 SEARCH NO. OF THE VOLUME
MLHVDC-LCS-ECI-DD-EC-0514 30-B003701S-D0514

第 1 页 共 1 页
PAGE 1 OF 1

图纸文件目录（首页）

CATALOG OF DRAWING DOCUMENTS (HEAD PAGE)

拉合尔±660kV换流站 工程 施工图 阶段
±660kV Lahore Converter Station PROJECT Detail Design DESIGN STAGE

电气 专业 第 05 卷 第 14 册
Electrical SPECIALITY VOLUME 05 BOOK 14

卷册名称 中方食堂建筑电气
Volume name Refectory for Chinese Electrical

批 准 APPROVED BY	
审 核 REVIEWED BY	
设计/勘测 DESIGNED BY/ SURVEYED BY	
图 纸 8 张 DRAWING 8 NOS.	打印件 本 PRINTED COPIES NOS.

序号 No.	图 号 DRAWING NO.	文 件 名 称 DOCUMENT TITLE	版本 EDITION	张 NOS.	本 NOS.	备注 REMARKS
1	30-B003701S-D0514-001	电气设计施工说明及图例一 Electrical design construction instructions and legend 1	A	1		
2	30-B003701S-D0514-002	电气设计施工说明及图例二 Electrical design construction instructions and legend 2	A	1		
3	30-B003701S-D0514-003	配电箱系统图、电力干线图及SPD分布图 power distribution system diagram、electric power	A	1		
		main line diagram and SPD distribution diagram				
4	30-B003701S-D0514-004	电气平面图 Electrical plan	A	1		
5	30-B003701S-D0514-005	屋顶防雷平面图 Roof lightning protection plan	A	1		
6	30-B003701S-D0514-006	基础接地平面图 foundation earthing plan	A	1		
7	30-B003701S-D0514-007	弱电平面图及弱电图例 Weak current plan and Weak current legend	A	1		
8	30-B003701S-D0514-008	材料表 Material list	A	1		

注:

电气设计施工说明及图例一

Electrical design construction instructions and legend 1

一、项目概况：
First: Project overview

项目名称：巴基斯坦默蒂亚里－拉合尔±660kV直流输电工程/拉合尔±660kV换流站
Project name：±660kV HVDC Project from Matiari to Lahore in Pakistan
建设单位：国家电网/中国电力技术装备有限公司
Development organization：State Grid / China Electric Power Equipment And Technology CO .TD
本次出图范围为站前区中方食堂
Design scope: Refectory for Chinese (The first Building Area)

单体名称 Name	建筑层数 Building Storey	建筑高度 Height	建筑面积 Area	室内外高差 Altitude intercept
中方食堂 Refectory for Chinese	1	6.1m	279.02m²	0.45m

二、设计依据
Second: Design basis

1、其它专业提供的相关资料
1. Relevant information provided by other majors
2、有关规范：
2. About the specification

三、设计内容
Third：Design content

1、本卷册设计内容包括；低压配电系统；电力、照明系统；防雷接地系统；通信网络系统；有线电视系统
1、This volume content including: Low voltage distribution system; Power and lighting system; Lightning protection earthing system; Communication system; TV system.
2、厨房动力设计待二次装修时深化完成，本次设计仅预留配电回路，配电间配电设计详见其他卷册.
2、The kitchen power design needs to be deepened in the second decoration, this design only reserved distribution loop. The distribution design of the distribution room is shown in the other volume.

四、供配电系统
Fourth：Design content

1、本工程由变电所引380/220V低压电源至站前区配电室，位于站前区办公楼一层，配电线缆由低配柜经电缆沟敷设，向各单体电气设备供电，计量表设于低压配电柜中.
1、In this project, the 380/220v low voltage power is led to the distribution room in the first floor of the Office Building (The first Building Area) from the Electrical substation. And the power distribution cables is led to power supply to the electrical equipment of each unit from the low voltage distribution tank by led in the cable trench, the electric energy measure meter is set in low voltage distribution cabinet.
2、本工程设备负荷为三级。
2、The equipment's load level in this project is three-level.
3、配电采用放射式配电方式，由低压配电柜引出电缆分别向至单体配电总箱。
3、Distribution adopts radio-type power distribution, the cables are led to distribution box of each unit from the low voltage distribution tank in the distribution room.
4、食堂的用电指标为400W/m².
4、The electricity rate of the Refectory is 400W/m².

五、导线选择与敷设
Fifth: Wire selection and installation

1．导线选择
1．Conductor choice

除图中已标注外，普通照明、动力支线选用BV-450/750型2.5平方毫米铜芯线。
Except marked in the drawing, the lighting and power wires are selected the BV-450/750 type that its copper wire is 2.5mm².
应急及疏散指示照明导线均采用耐火导线N-BV-450/750型2.5平方毫米铜芯线。
both emergency and evacuation lighting wires are used fire-resistant wire N-BV-450/750type that its copper wire is 2.5mm².

2．敷设方式
2．The system of laying

所有建筑物内出墙至室外的埋管均应采用镀锌钢管（镀锌钢管敷设壁厚大于2.0mm），如户内配电箱，弱电箱引至户外电缆沟或电缆井的预埋管等
All the buried pipes that is laid out of buildings should be threaded by galvanized welded steel pipe(the pipe's wall thickness is greater than 2.0mm) to project, Such as the buried pipe that is laid from the Power distribution box or weak box indoor to the outdoor Cable hand wel or cable trench
除图中已标注外，普通照明、动力、弱电分支线于墙内或混凝土内暗敷时穿阻燃型PVC管，要求选用中型及以上管材，半硬质（壁厚大于1.5mm），在吊顶、活动地板等明敷场所仍要求采用镀锌钢管或金属槽盒（镀锌钢管敷设壁厚大于1.5mm）；
Except marked in the drawing, when the general lighting、power、weak current wires is laid inside the wall or the concrete it can be threaded by flame retardant PVC pipe and it should choose medium and above semi-rigid tubing(the PC pipe's wall thickness is greater than 1.5mm).
And when it is laid in place such as condole top, activity floor where it should be exposed laying, it should be threaded by galvanized welded steel pipe (the pipe's wall thickness is greater than 1.5mm) to project.

当线路采用PVC导管敷设时，当其当穿过建筑物基础时，应加保护管保护；当穿过建筑物变形缝时，应设补偿装置。刚性塑料导管暗敷或埋地敷设时，引出地(楼)面的管路应采取防止机械损伤的措施。
If the line is threaded by PVC pipe, the protective tube protection shall be added when it passes through the building foundation；Compensation devices shall be installed when passing through the deformation joints of buildings. When the rigid plastic catheter is concealed or buried under the ground, the piping out of the ground (floor) shall be taken to prevent mechanical damage.

除图中已标注外，应急疏散照明线线路均穿镀锌钢管敷设（壁厚大于1.5mm）
Except marked in the drawing, the emergency and evacuation lighting wires are threaded by galvanized welded steel pipe(the pipe's wall thickness is greater than 1.5mm) to project.

应急疏散照明线路暗敷设时，应采用耐火导线，暗敷在不燃烧体结构内，其保护层厚度不应小于30mm；
When the emergency and evacuation lighting circuit is laid by concealed laying in the construction, it must use the Fire-resistant wire. And the construction must be Non-combustible component, and its protective thickness shall not be less than 30mm;
明敷时，应穿金属管或金属线槽，并应采取防火保护措施。为消防设备供电的线路则采用阻燃耐火导线。
When the fire power circuit and the emergency lighting circuit is laid by exposed laying, it must be laid in galvanized welded steel pipe or metal trunking, and the fire protection measures should be taken. The wires power supply to the fire equipment must use the fire - retardant and fire-resistant wire.
所有布线埋管均需在转弯处设置弯头，转弯半径不小于15倍电线式电缆外径。
All wiring must be setted the elbow, at the corner, and the turning radius is not less than 15 times wire cable diameter

六、节能
sixth: Energy saving

1．荧光灯灯具的效率
1. The fluorescent lamp lunminaire efficiency

灯具出光口形式 the light outlet from of the lunminaire	开敞式 open type	保护罩（玻璃或塑料） protection cover（glass or Hard plastic）		格栅 grille
		透明 Transparent	磨砂、棱镜 frosted、prism	
灯具效率 lunminaire efficiency	75%	70%	55%	65%

2．本工程采用节能吸顶灯及荧光灯，照明光源的显色指数(Ra)不小于80。所有荧光灯镇流器要求采用节能型电子式，单灯功率因数不小于0.9，采用的镇流器应满足国家能耗标准。
2. This project use the Energy - saving ceiling lamps and fluorescent lamps, the colour rendering index(Ra) of the lighting source should be not less than 80. All the fluorescent lamps must use the energy-saving electronic ballast, the single-lamp power factor is not less than 0.9, and the ballast used should meet the national energy standards.

七、设备安装
seventh: equipment installation

1．卫生间内灯具采用防水防尘型。
1. The lamp in the toilet uses Waterproof and dustproof type
疏散标志灯嵌墙安装，下沿距地0.5米，安全出口标志灯嵌墙安装，门框上0.1米。其余灯具见平面标注或图例说明。
The escape sign lamp should be embedded wall installation, its lower edge is apart from the ground 0.5 meters
The exit sign lamp should be embedded wall installation, and it is apart from the top of the door 0.1 meters
The Installation of other lamps is shown in the graphic annotation or illustration instructions.
2．照明、动力配电箱（柜）安装方式及高度参见系统图。
2. The installation mode and height of the lighting or power distribution box (cabinet) is shown in the system diagram.
3．照明开关嵌墙暗装，厕所排风机启停按钮明装，距地1.3米，面板边沿离门框内边距离为0.15米。
3. The lighting switch is concealed installed in the wall, the Rev. Stop button of exhaust fan in the toilet is open installed, and it is apart from the ground 1.3 meters, the edge of the pane it is apart from the inside edge of the door 0.15m.
插座均嵌墙暗装，距地0.3米。电源插座与信息插座保持0.3米间距。
The sockets are all concealed installed in the wall, and they are apart from the ground 0.3m. The power socket and the information socket are spaced at 0.3m
4．公共部位的配电设备及弱电设备均嵌墙安装，下沿距地1.5m；各电话、信息、电视插座均暗装，采用安全型插座。
4. The power distribution equipment and the weak current equipment in the public place should be concealed installed in the wall, and its lower edge is apart from the ground 1.5 meters; The telephone、information and TV sockets are concealed installed in the wal, and they should be use safety socket.

八 防雷接地设计说明.
eighth: Design description of lightning protection and eatthing.

1. 屋面采用热镀锌圆钢Ø12明敷作为接闪带，组成不大于20mX20m或24mX16m接闪网格。所有高出屋面的各种金属构件均须与接闪带焊接连通。
1. Using hot dip galvanized round steel (Ø12) as the exposed laying air-termination system on the roof, and making up the air-termination system grid on the roof which size is not bigger than 20m*20m or (24m*16m). All metal components above the roof must be welded to the air-termination system.
采用镀锌扁钢（50*6）作为防雷引下线，沿墙柱暗敷，引至接地干线。引下线沿建筑四周均匀布置，间距不应大于20m。
Using the hot galvanizing flat steel(50*6) as lighting protection down-conductor system, and it is led to the earth-termination system by being laid in the wall or column. The down-conductor system should be set spread evenly around the building, and its spacing should not be greater than 20m.
本工程采用环房暗敷接地线为主接地网，接地电阻应小于1欧姆，具体设计详见其他卷册。
This project's main earth-termination system is buried underground around the building, the earthing resistance should be less than 1 ohm, and The detailed designs is shown in the other volume.
2. 卫生间局部等电位联结应包括卫生间内金属给水排水管、金属活盆、金属洗脸盆、金属采暖管、金属散热器、卫生间电源插座的PE线以及建筑物钢筋网，
The local equipotential connection of the toilet including: metal feed water drainpipe、metal living basin、metal wash basin、metal heating tube、metal radiator、the PE line of the toilet power socket and reinforcing mesh
具体做法参考图集08D800-8《民用建筑电气设计与施工－防雷与接地》－P132. 厨房及洗衣房等电位做法参考卫生间相应做法。
The specific practice refer to the atlas 08D800-8《Electrical design and construction of civil buildings-lightning protection and earthing》-P132. Equipotential practices and requirements of the kitchen and wash house refer to toilet.
强电电源进线及弱电电源进线处等电位具体做法详见图集08D800-8《民用建筑电气设计与施工》－P123
Equipotential practices and requirements of place where the power supply line and weak current power supply line enter to the duilding refer to the atlas 08D800-8《Electrical design and construction of civil buildings-lightning protection and earthing》-P123
所有进出建筑物的金属管道（包括垂直管道）、建筑物内的水管、采暖和空调管道等各种金属干管、建筑物金属结构部分等应作等电位联接。
具体做法参照图集《等电位联结安装》15D502和图集08D800-8《民用建筑电气设计与施工》
All metal pipes in and out of buildings (including vertical pipes)、various metal pipes, such as water pipe, heating and air conditioning pipe and metal structure part of the building Should be done equal potential connection, The specific practice refer to the atlas《Equal potential connection installation》15D502 and atlas 08D800-8《Electrical design and construction of civil buildings-lightning protection and earthing》

Reference Drawings

Drwg. No.	Title

Revisions

	Name	Date	Notes

巴基斯坦默蒂亚里－拉合尔±660kV直流输电工程
±660kV HVDC Project from Matiari to Lahore in Pakistan

NATIONAL TRANSMISSION & DESPATCH COMPANY (NTDC) LIMITED PAKTSTAN

CONTRACTOR 国家电网 STATE GRID 中国电力技术装备有限公司 CHINA ELEC POWER EQUIPMENT AND TECHNOLOGY CO.,LTD.

SUBCONTRACTOR East China Electric Power Design Institute Co.,Ltd.

拉合尔±660kV换流站
±660kV Lahore Converter Station

设计阶段 PHASE: 施工图 Detail Design

M L H V D C - L C S - E C I - D D - E C - 0 5 1 4 - 0 0 1 A

	姓名	日期
设计 Designed		2018.1.10
校核 Checked		2018.1.10
审核 Reviewed		2018.1.10
批准 Approved		2018.1.10

电气设计施工说明及图例一
Electrical design construction instructions and legend 1

比例 Scale	1:100	图号 DWG NO.	30-B003701S-D0514-001	版本 REV.	A

594X841

电气设计施工说明及图例二

Electrical design construction instructions and legend 2

3. 为防止过电压对电气设备造成的损害，在各级低压电源进线处将设置防过压的电涌保护器。在室外进户的通信电缆以及同轴电缆上设置信号浪涌保护器。
3. To prevent the damage for electrical equipment caused by voltage, the Surge protection Device should be set where all levels of low voltage power supply enter the building.The communication cable and coaxial-cable should be set with signal Surge protection Devic.
4. 其余要求详见基础接地平面图及屋顶防雷平面图。
4. The other requirements are shown in the foundation earthing plan and Roof lightning protection plan.
5. 施工及验收请参照国标图集15D501、15D502、15D503、14D504、08D800-8相关页次。
5. Construction and acceptance, please refering to the standard atlas 15D501、15D502、15D503、14D504、08D800-8.
6. 接地装置施工过程中，电气安装单位应与机电安装单位在现场密切配合，所有隐蔽工程均需现场验收，桩位具体尺寸详见结施图。
6. During the construction of earth-termination system,the electrical installation unit shall cooperate closely with the civil construction units in the field. All concealed works shall be subject to on-site acceptance,The detailed dimensions of pile position are shown in the pape structural drawings.

九、建筑机电工程抗震措施：
ninth.Building mechanical and electrical engineering anti-seismic measures:

1. 当采用硬母线敷设且直线段长度大于80m时，应每50m设置伸缩节；在电缆桥架、电缆槽盒内敷设的缆线在引进、引出和转弯处，应在长度上留有余量；接地线应采取防止地震时被切断的措施。
1.When the hard bus line is used and the length of the line segment is greater than 80m,The telescopic section should be set every 50m. It should be left with a residual amount in the length when the cable lines are introduced in , introduced out and turned around in cable bridge and cable tray. The grounding line shall take measures to prevent the earthquake from being cut off.
2. 缆线穿管敷设时宜采用弹性和延性较好的管材。
2.The cable tube shall be well equipped with good flexibility and ductility.
3. 引入建筑物的电气管路敷设时应符合下列规定：a）在进口处应采用绕性线管或采取其他抗震措施；b）当进户井贴邻建筑物设置时，缆线应在井中留有余量；c）进户套管与引入管之间的间隙应采用柔性防腐、防水材料密封。
3.The installation of electrical pipes being led to the buildings shall meet the following requirements: a) the winding tube should be used in the import department or adopt other seismic measures;b) the cable shall have a residual amount in the well when it is installed in the adjacent building;c) the gap between the inlet casing and the pipe should be sealed with flexible anticorrosion and waterproof material.
4. 电气管路不宜穿越抗震缝，当必须穿越时应符合下列规定：a）采用金属导管、刚性塑料导管敷设时宜靠近建筑物下部穿越，且在抗震缝两侧应各设置一个柔性管接头；b）电缆梯架、电缆槽盒、母线槽在抗震缝两侧应设置伸缩节；c）抗震缝的两端应设置抗震支撑节点并与结构可靠连接。
4.The electric pipe shall not be used to cross the aseismic joint, and shall meet the following requirements when crossing: a）when use metal ducts and rigid plastic catheters it should be close to the lower part of the building and a flexible pipe joint shall be installed on both sides of the aseismatic joint. b）cable ladder, cable tray and busbar shall set expansion joints on both sides of the aseismatic joint. c）anti-seismic support nodes should be set at both ends of earthquake joints and reliable connections with the structure.
5. 电气管路敷设时应符合下列规定：a）当线路采用金属导管、刚性塑料导管、电缆梯架或电缆槽盒敷设时，应使用刚性托架或支架固定，不宜使用吊架，当必须使用吊架时，应安装横向防晃吊架；b）当金属导管、刚性塑料导管、电缆梯架或电缆槽盒穿越防火分区时，其缝隙应采用柔性防火封堵材料封堵，并应在贯穿部位附近设置抗震支撑；c）金属导管、刚性塑料导管的直线段部分每隔30m应设置伸缩节。
5.Electrical piping shall be laid in accordance with the following provisions: a) when the wires are used ducts, rigid plastic conduits, cable ladders or cable tray boxes to led it should use rigid bracket or bracket to fix, unfavorable use condole frame, when it must use condole, should install transverse anti-sway condole frame; b) when metal ducts, rigid plastic pipe, cable ladder or cable tray through the fire zone, the gap should adopt flexible fireproof plugging material block, and should be set near the throughout the site aseismatic support; c) the straight-line segment of the metallic conduit and rigid plastic catheter should be set with a telescopic section every 30m.

十、其它
tenth: others

1. 各用电设备出线口位置请配合水施、风施有关专业图纸进行施工定位。
1. The position of the outlet of each electrical equipment shall be confirmed by cooperating with the related professional drawings like water profession and hvac profession.
2. 线路长度过长时应遵照相关施工规范增加过路接线盒。
2. If the length of the circuit is too long, the connection box should be added by complying with related construction specifications
3. 配电间内安装完毕后，楼板缝隙处需做防火封堵。
3. When the distribution room is constructed finish,the floor cracks should be fireproof sealing.
4. 其它未提之处均参照地方相关施工安装法规。
4. Other unmentioned places shall refer to local construction and installation regulations
5. 本卷册设计以中文部分为主，英文部分仅作参考。
5. This volume is mainly designed in Chinese, and the English part is for reference only
6. 本单体火灾报警系统，工业电视监控系统、呼叫系统的管线预埋及开列，详见各系统卷册。
6. Pipeline embedded and pipeline's material list of Weak current system、Industrial television monitoring system、fire alarm system and call system in this building should be shown in volume of each system .
7. 通信网络系统及有线电视系统相关说明详见卷册：30-B003701S-D0301~30-B003701S-D0305.
7.The related instructions of Communication system and TV system is shown in the volume: 30-B003701S-D0301~30-B003701S-D0305.
8. 配电箱、配电盒、照明灯具、插座、开关面板均应按招标文件要求采用质量可靠，性能稳定的产品，符合巴基斯坦当地的使用习惯，且全站要统一品牌，由总包，监理统一批准。需注意，空调、热水器、洗衣机等用电器的插座需与对应电器匹配
8. Distribution box, power distribution box, lighting, socket, switch panel shall be in accordance with the tender documents require it should use the product which is reliable quality, stable performance and it is in accordance with local practices in Pakistan, And the whole station should unify the brand, and it should be unified approvalled by the total package and the supervision . The electrical socket of air conditioning, water heater and washing machine should be matched with the corresponding electrical appliances

敷设方式 system of laying		穿管型号 the pipe type	
CC	沿顶板暗敷 hidden laying in the apical plate	RC	镀锌钢管 galvanized welded steel pipe
WC	沿墙暗敷 hidden laying in the wall	PC	阻燃型塑料导管 Flame retardant plastic catheters
FC	沿地面暗敷 hidden laying in the floor		
MR	沿金属线槽敷设 laying in the metal trunking		

燃烧特性 Combustion characteristic		电线电缆规格 Wire and cable specifications	
ZRB-	B级阻燃 the class B Flame retardant	BV-	聚氯乙烯绝缘电线 polyvinil chloride insulated wire
N-	耐火 fire-resistant		

图例 legend	设备名称 Equipment name	型号及规格 Model and specification	安装方式 Installation
	照明配电箱 lighting distribution box		详见系统图 See the system diagram
	照明配电箱 lighting distribution box		详见系统图 See the system diagram
	出口指示灯 exit sign lighting	光源LED 3W（自带蓄电池） light source: LED 3w（Built-in battery）	门洞上沿0.1m（应急时间不小于120分钟） From the top of the door 0.1 m The emergency time is not less than 120 minutes
	方向指示灯 escape sign lighting	光源LED 3W（自带蓄电池） light source: LED 3w（Built-in battery）	下口距地0.5m（应急时间不小于120分钟） its lower edge isapart from the ground 0.5 m The emergency time is not less than 120 minutes
	单管荧光灯 single tube fluorescent lamp	32W 配电子镇流器 Electronic ballast	吊杆式安装，距地2.8m Derrick installation and it is from the ground 2.8 m
	双管荧光灯 double tube fluorescent lamp	2 x 32W 配电子镇流器 Electronic ballast	吊杆式安装，距地2.8m Derrick installation and it is from the ground 2.8 m
	吸顶灯（防水型） Suction lamp（waterproof type）	1*18W	吸顶 Suction
	吸顶灯 Suction lamp	1*18W	吸顶 Suction
E	E表示灯自带蓄电池 E means Built-in battery	自带蓄电池一般应急时间≥120min Built-in battery general emergency time≥120 min 配电间≥180min Distribution room, substation, fire equipment room≥180min	平时及应急时就地可控 In normal times and emergency times, it is in situ controllable
S	S表示防水 S means waterproofing		
	卫生间二，三极单相防溅组合插座（安全型） The diode triode single phase anti-splash combinated socket in the toilet（safety type）	250V,10A	暗装，下口距地 1.5m concealed installation, its lower edge isapart from the ground 1.5 m
	洗衣机带开关防溅二，三极组合插座（IP54安全型） The washer diode triode anti-splash combinated socket with switche（IP54 safety type）	250V,10A	暗装，下口距地 1.5m concealed installation, its lower edge isapart from the ground 1.5 m
	热水器带开关防溅二，三极组合插座（IP54安全型） The colorifier diode triode anti-splash combinated socket with switche（IP54 safety type）	250V,20A	暗装，下口距地 2.4m concealed installation, its lower edge isapart from the ground 2.4 m
	二，三极单相组合插座（安全型） The diode triode single phase combinated socke（safety type）	250V,10A	暗装，下口距地 0.3m concealed installation, its lower edge isapart from the ground 0.3 m
	柜式空调插座（三相四极安全型） The Cabinet air-conditioner socket（Three-phase quadrupole safety type）	380V,16A	暗装，下口距地 0.3m concealed installation, its lower edge isapart from the ground 0.3 m
	壁挂空调插座（单相三极安全型） The Wall hang air-conditioner socket（triode single phase safety type）	250V,16A	暗装，下口距地 2.0m concealed installation, its lower edge isapart from the ground 2.0 m
	应急灯 emergency lamp	2*23W（自带蓄电池） 2*23W（Built-in battery）	距地2.5m（应急时间不小于120分钟） its lower edge isapart from the ground 2.5 m The emergency time is not less than 120 minutes
	单联单控开关 single connection planet single control switch	250V,10A	暗装，下口距地 1.3m concealed installation, its lower edge isapart from the ground 1.3 m
	双联单控开关 two connection planet single control switch	250V,10A	暗装，下口距地 1.3m concealed installation, its lower edge isapart from the ground 1.3 m
	三联单控开关 three connection planet single control switch	250V,10A	暗装，下口距地 1.3m concealed installation, its lower edge isapart from the ground 1.3 m
	单联双控开关 single connection planet double control switch	250V,10A	暗装，下口距地 1.3m concealed installation, its lower edge isapart from the ground 1.3 m
	单联单控开关（IP54安全型） single connection planet single control switch（IP54 safety type）	250V,10A	暗装，下口距地 1.3m concealed installation, its lower edge isapart from the ground 1.3 m
	双联单控开关（IP54安全型） two connection planet single control switch（IP54 safety type）	250V,10A	暗装，下口距地 1.3m concealed installation, its lower edge isapart from the ground 1.3 m
LEB	LEB端子板 Local Equipotential Bonding		下口距地0.3m its lower edge isapart from the ground 0.3 m
MEB	MEB总等电位端子板 Main Equipotential Bonding		下口距地0.3m its lower edge isapart from the ground 0.3 m
	排气扇 Exhaust fan		详见暖通图纸 See the hvac drawing

注：
note:
1、本建筑空调插座采用国标，热水器、电视、饮水机、排 风扇、冰箱等电器强电插座均采用巴方标准 公共区域插座国标和巴方标准 每房间各安装一半原则实施，最终实施方案以业主及监理要求为准。
1、In this building, the air conditioning socket adopts Chinese standard; The High-voltage electrical socket of Water heater, TV, water dispenser, fan, refrigerator adopt Pakistani standard.The High-voltageelectrical sockets areas and each room according to the implementation principle that one half adopt Chinese standard and in the public anothet half adopt Pakistani standard,and the final implementation plan should be subject to the requirements of the owner and the supervisor.

Reference Drawings

Drwg. No.	Title

Revisions

	Name	Date	Notes

巴基斯坦默蒂亚里—拉合尔±660kV直流输电工程
±660kV HVDC Project from Matiari to Lahore in Pakistan

NATIONAL TRANSMISSION & DESPATCH COMPANY (NTDC) LIMITED PAKISTAN

CONTRACTOR 国家电网 STATE GRID 中国电力技术装备有限公司 CHINA ELECTRIC POWER EQUIPMENT AND TECHNOLOGY CO.,LTD.

SUBCONTRACTOR East China Electric Power Design Institute Co.,Ltd.

拉合尔±660kV换流站
±660kV Lahore Converter Station

设计阶段 PHASE：施工图 Detail Design

M L H V D C - L C S - E C I - D D - E C - 0 5 1 4 - 0 0 2 A

	姓名	日期
设计 Designed		2018.1.10
校核 Checked		2018.1.10
审核 Reviewed		2018.1.10
批准 Approved		2018.1.10

电气设计施工说明及图例二
Electrical design construction instructions and legend 2

比例 Scale 1:100　图号 DWG NO. 30-B003701S-D0514-002　版本 REV. A

594X841

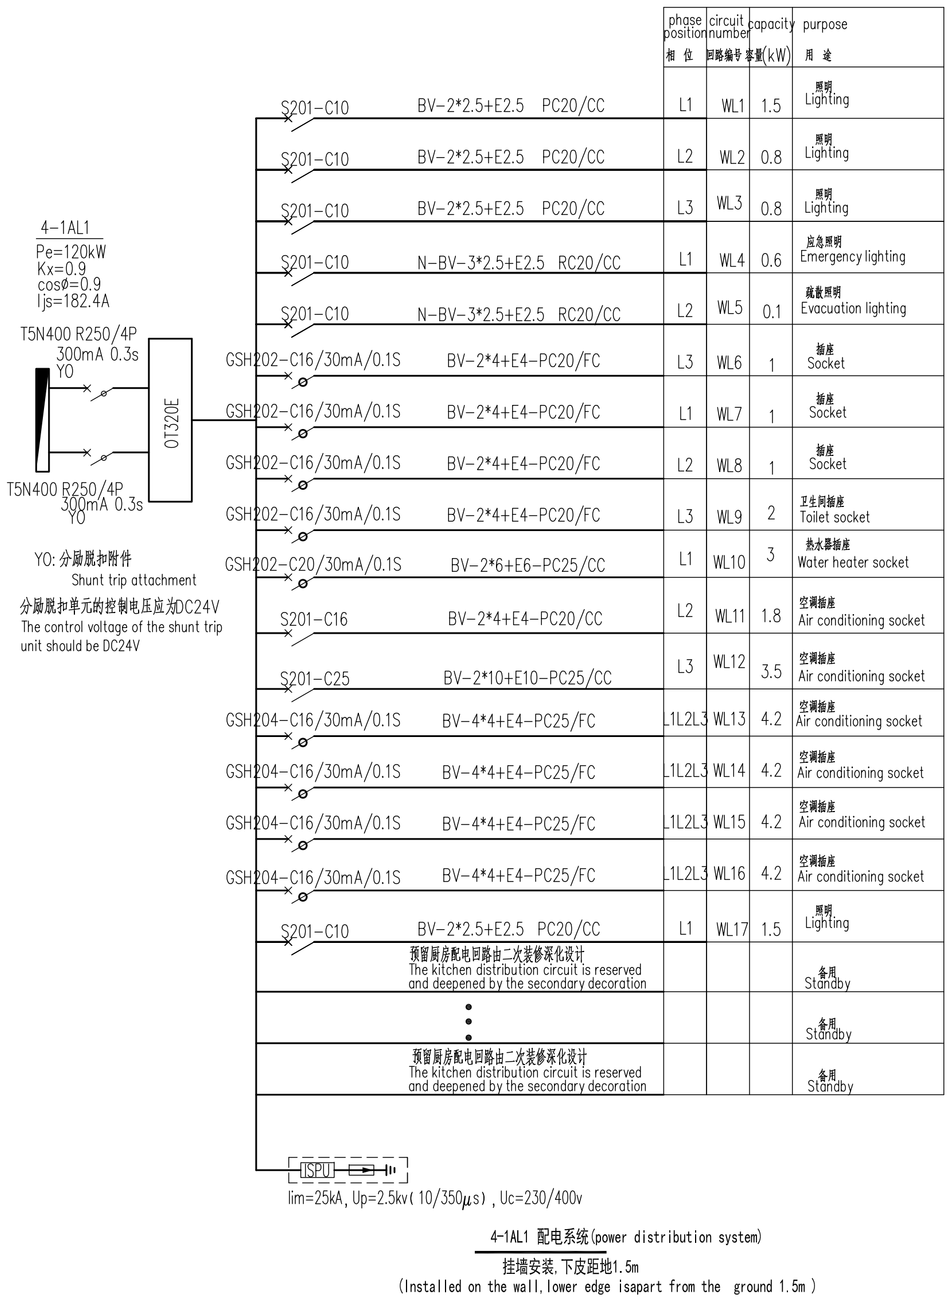

		phase position 相位	circuit number 回路编号	capacity 容量(kW)	purpose 用途
S201-C10	BV-2*2.5+E2.5 PC20/CC	L1	WL1	1.5	照明 Lighting
S201-C10	BV-2*2.5+E2.5 PC20/CC	L2	WL2	0.8	照明 Lighting
S201-C10	BV-2*2.5+E2.5 PC20/CC	L3	WL3	0.8	照明 Lighting
S201-C10	N-BV-3*2.5+E2.5 RC20/CC	L1	WL4	0.6	应急照明 Emergency lighting
S201-C10	N-BV-3*2.5+E2.5 RC20/CC	L2	WL5	0.1	疏散照明 Evacuation lighting
GSH202-C16/30mA/0.1S	BV-2*4+E4-PC20/FC	L3	WL6	1	插座 Socket
GSH202-C16/30mA/0.1S	BV-2*4+E4-PC20/FC	L1	WL7	1	插座 Socket
GSH202-C16/30mA/0.1S	BV-2*4+E4-PC20/FC	L2	WL8	1	插座 Socket
GSH202-C16/30mA/0.1S	BV-2*4+E4-PC20/FC	L3	WL9	2	卫生间插座 Toilet socket
GSH202-C20/30mA/0.1S	BV-2*6+E6-PC25/CC	L1	WL10	3	热水器插座 Water heater socket
S201-C16	BV-2*4+E4-PC20/CC	L2	WL11	1.8	空调插座 Air conditioning socket
S201-C25	BV-2*10+E10-PC25/CC	L3	WL12	3.5	空调插座 Air conditioning socket
GSH204-C16/30mA/0.1S	BV-4*4+E4-PC25/FC	L1L2L3	WL13	4.2	空调插座 Air conditioning socket
GSH204-C16/30mA/0.1S	BV-4*4+E4-PC25/FC	L1L2L3	WL14	4.2	空调插座 Air conditioning socket
GSH204-C16/30mA/0.1S	BV-4*4+E4-PC25/FC	L1L2L3	WL15	4.2	空调插座 Air conditioning socket
GSH204-C16/30mA/0.1S	BV-4*4+E4-PC25/FC	L1L2L3	WL16	4.2	空调插座 Air conditioning socket
S201-C10	BV-2*2.5+E2.5 PC20/CC	L1	WL17	1.5	照明 Lighting
预留厨房配电回路由二次装修深化设计 The kitchen distribution circuit is reserved and deepened by the secondary decoration					备用 Standby
⋮					备用 Standby
预留厨房配电回路由二次装修深化设计 The kitchen distribution circuit is reserved and deepened by the secondary decoration					备用 Standby

4-1AL1 配电系统(power distribution system)

挂墙安装,下皮距地1.5m
(Installed on the wall, lower edge isapart from the ground 1.5m)

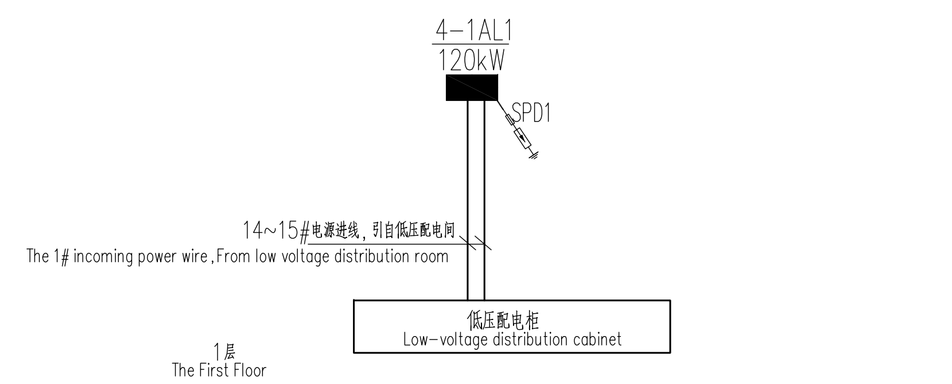

电力干线图及SPD分布图
(Electric power main line diagram and SPD distribution diagram)

注:
note:
1. 进线电缆规格由上级配电设计确定
1. Specification of incoming cable is determined by superior distribution design
2. 所有配电箱应预留加装接触器的位置。
2. All distribution boxes shall be reserved for loading contacts.

The earthing system: TN-S
Back-up protection device of the front-end of the surge protector: fuse

parameter / SPD level	waveform	In/Iimp	Up	Uc	Wire specifications (phase line side)	Wire specifications (earthing line side)	Installation position	Back-up protection fuse	wiring mode	The numerical of Impact resistance voltage rating Uw
SPD1	10/350	Iimp=25kA	2.5kV	230/400v	16(mm²)	25(mm²)	where the power wire enter and out	100A	The phase line and neutral line protection mode	6kV
	8/20	In=80kA	2.5kV	230/400v	16(mm²)	25(mm²)	The equipment distribution tank	80A	The phase line and neutral line protection mode	4kV
SPD2	8/20	In=40kA	1.8kV~2.0KV	230/400v	10(mm²)	16(mm²)	the floor distribution tank	50A	The phase line and neutral line protection mode	4kV

注:
note:
各个配电箱体内应单独设置PE排，并应接地。
PE platoon should be set separately in the each power distribution box, and it should be lead to the earthing

Reference Drawings

Drwg. No.	Title

Revisions

	Name	Date	Notes

巴基斯坦默蒂亚里—拉合尔±660kV直流输电工程
±660kV HVDC Project from Matiari to Lahore in Pakistan

NATIONAL TRANSMISSION & DESPATCH COMPANY (NTDC) LIMITED PAKISTAN

CONTRACTOR 国家电网 STATE GRID 中国电力技术装备有限公司 CHINA ELECTRIC POWER EQUIPMENT AND ENGINEERING CO.,LTD.

SUBCONTRACTOR East China Electric Power Design Institute Co.,Ltd.

拉合尔±660kV换流站
±660kV Lahore Converter Station

设计阶段 PHASE: 施工图 Detail Design

M L H V D C - L C S - E C I - D D - E C - 0 5 1 4 - 0 0 3 A

	姓名	日期
设计 Designed		2018.1.10
校核 Checked		2018.1.10
审核 Reviewed		2018.1.10
批准 Approved		2018.1.10

配电箱系统图、电力干线图及SPD分布图
power distribution system diagram, electric power main line diagram and SPD distribution diagram

比例 Scale: 1:100
图号 DWG NO.: 30-B003701S-D0514-003
版本 REV.: A

594X841

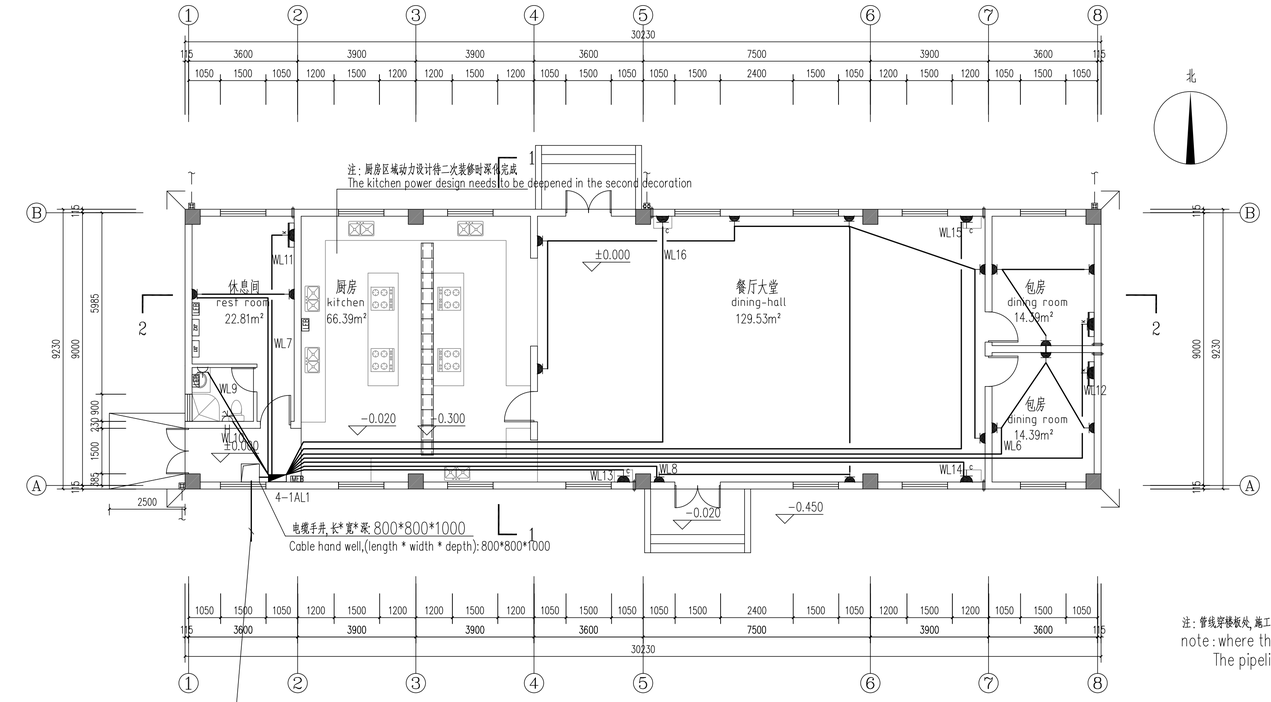

电力平面图 1:100

Electric power plan

S=279.02m²

注：管线穿楼板处，施工时需在楼板内预留洞口。在楼层顶板内暗敷的管线，施工时在楼板内预埋相关管线

note：where the pipeline through the floor,should reserve the hole in the floor during construction.

The pipeline that is concealed inside the roof of the floor，should embed the pipe in the floor during construction.

14~15#电源进线，引自站前区低压配电间

室外地坪0.5m 以下敷设

14~15# incoming power wire，

From low voltage distribution cabinet of The first Building Area

Laied under the outdoor floor 0.5m

由室外电缆沟预埋4根Φ150镀锌钢管至室内电缆竖井

4*RC150 should be embedded from the outdoor

cable conduit to the indoor cable hand well

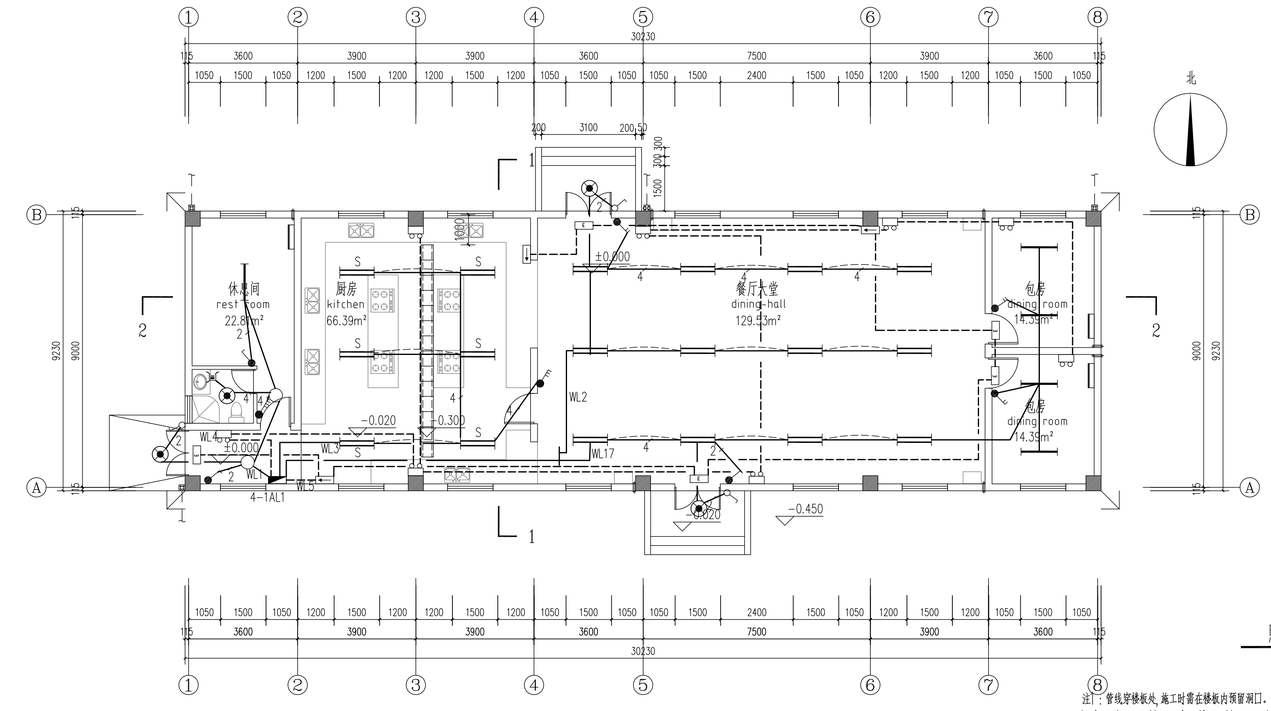

照明平面图 1:100

Lighting plan

S=279.02m²

注1：管线穿楼板处，施工时需在楼板内预留洞口。在楼层顶板内暗敷的管线，施工时在楼板内预埋相关管线

note1：where the pipeline through the floor,should reserve the hole in the floor during construction.

The pipeline that is concealed inside the roof of the floor，should embed the pipe in the floor during construction.

注2：照明管线中电线芯数为3根的管线不标注。

note2：The wire in the lighting pipeline is not marked when the quantity of the wire is there.

注3：线型 ：表示由此线连接的灯具由同一开关控制。

note3：The linetype : The lamp that connects with this line is controlled by the same switch

Speciality	Sign	Date
结构 Structure		2017.10.15
电气 Electrical		2017.10.15
暖通 HVAC		2017.10.15
给排水 Water supply and drainage		2017.10.15

Reference Drawings

Drwg. No.	Title

Revisions

	Name	Date	Notes

巴基斯坦默蒂亚里一拉合尔±660kV直流输电工程

±660kV HVDC Project from Matiari to Lahore in Pakistan

NATIONAL TRANSMISSION & DESPATCH COMPANY (NTDC) LIMITED PAKISTAN

CONTRACTOR 国家电网 STATE GRID 中国电力技术装备有限公司 CHINA ELECTRIC POWER EQUIPMENT AND TECHNOLOGY CO.,LTD.

SUBCONTRACTOR East China Electric Power Design Institute Co.,Ltd.

拉合尔±660kV换流站

±660kV Lahore Converter Station

设计阶段 PHASE: 施工图 Detail Design

M L H V D C - L C S - E C I - D D - E C - 0 5 1 4 - 0 0 4 A

	姓名	日期
设计 Designed		2018.1.10
校核 Checked		2018.1.10
审核 Reviewed		2018.1.10
批准 Approved		2018.1.10

电气平面图

Electrical plan

比例 Scale	图号 DWG NO.	版本 REV.
1:100	30-B003701S-D0514-004	A

594X841

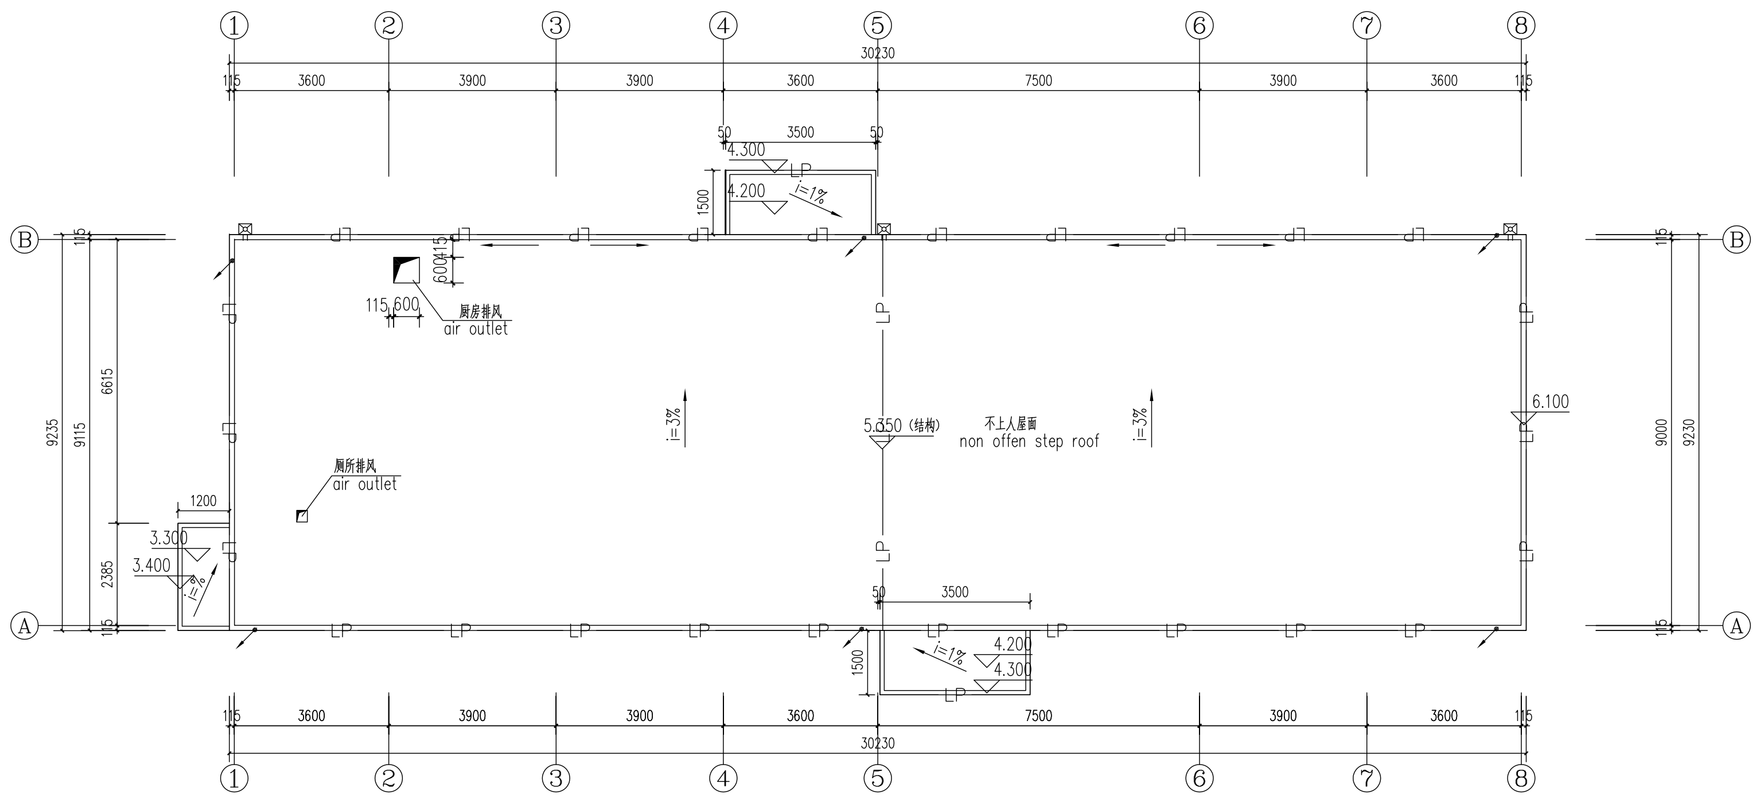

屋顶防雷平面图1:100

Roof lightning protection plan

Description:

1、Setting the air-termination system on the parapet wall of roof. And setting the air-termination system grid on the roof which size is not bigger than 20m*20m or(24m*16m).

2、This design use hot dip galvanized round steel (ø12) as the exposed laying air-termination system.The air-termination system is laid along the outside of the parapet , the ridge and the eave.The support card spacing for 0.5m.The suspension section of the corner should be not longer than 0.3 meters.The air-termination system shall be 0.15m higher than the roof,and the lightning protection belt fixed part adopts 8 galvanized round steel,L≈200mm.The other metal structures of the roof shall be connected to the air-termination system , and the connection shall be not less than two.The connection of different materials should have anti - corrosion measures.

3、Using the hot galvanizing flat steel(50*6) as lighting protection down-conductor system , and it is led to the earth-termination system by being laid in the wall or column. The impact grounding resistance of every down-conductor system should be less than 10 ohms,the galvanized flat steel lead to the outside of concrete, should remove the slag and apply 2 epoxy zinc rich paint to the welding place after being welded.And embeding a steel plate which size is 100x100x8 in the column,that used to be the transfer point of the connection between the down-conductor system and the air-termination system.The down-conductor system should set the breaking test box.

4、The top and the end of the metal pipes and metal object which is laided verticall yshall be connected to the lightning protection system.The metal components on the building external wall shall be connected to the nearest lighting protection down-conductor system. The connection line adopts hot-dip galvanized flat steel (25 * 4) ,and be concealed laied alone wall.

5、Using metal balusters as air-termination system,and its wall thickness is not less than 2.5 mm.

6、Using guard bar and warning board , which can reduce the possibility that entering the groud where distance from the down-conductor system of 3m to a minumum.

7、 ——LP—— the hot dip galvanized round steel (ø12) that is uesd as the exposed laying air-termination system

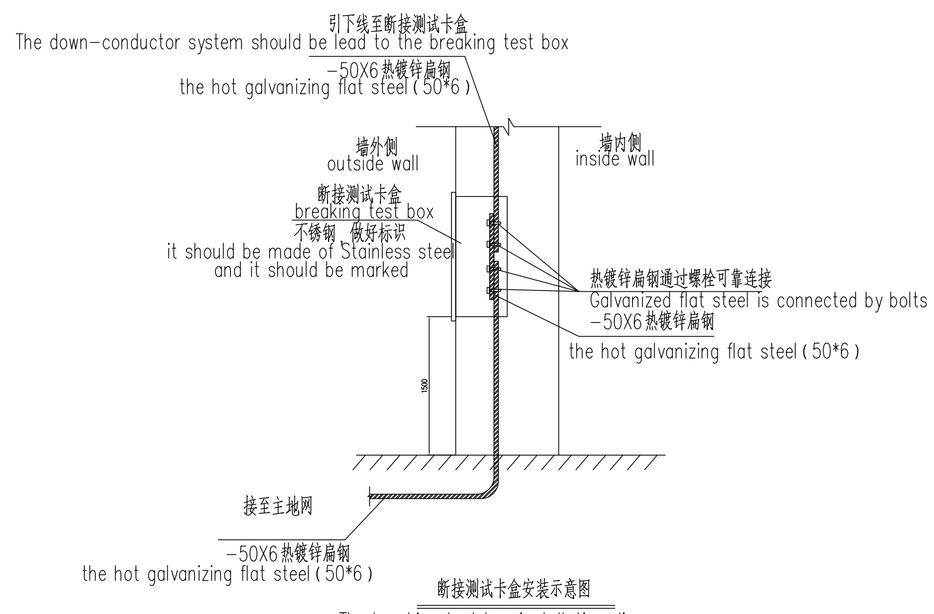

断接测试卡盒安装示意图

The breaking test box installation diagram

1、在屋顶女儿墙上装设接闪带,并在屋面上装设不大于20m*20m (24m*16m)接闪网格.

2、本设计利用热镀锌圆钢ø12作明敷接闪带，接闪带沿女儿墙外侧、屋脊、屋檐敷设。支持卡子间距为0.5米，转角处悬空段不大于 0.3米，接闪带高出屋面 0.2米，防雷带固定件采用ø8热镀锌圆钢,L≈200mm。屋顶其它金属物、构筑物均须与接闪带连接且不得少于二处，不同材质的连接要有防电化腐蚀措施。

3、采用热镀锌扁钢(50*6)作为防雷引下线，沿墙柱暗敷，引至接地干线。每根引下线的冲击接地电阻应小于10欧姆，引至混凝土外的引下线采用热镀锌扁钢，焊接后应除去焊渣并在焊接处涂2道环氧富锌漆。并于引下线所在柱上端预埋一块100x100x8钢板，用于引下线与接闪带连接的转换点，引下线设置断接测试卡盒。

4、竖直敷设的金属管道及金属物顶端及底端均须与防雷装置连接。建筑物外墙面金属构件须与就近的防雷引下线连通，联结线采用热镀锌扁钢25*4沿墙暗敷。

5、利用金属栏杆作接闪带，其壁厚不小于2.5mm。

6、用护栏、警告牌使进入距引下线3m范围内地面的可能性减小到最低限度。

7、——LP—— 热镀锌圆钢ø12作明敷接闪带

Reference Drawings

Drwg. No.	Title

Revisions

	Name	Date	Notes

巴基斯坦默蒂亚里—拉合尔±660kV直流输电工程

±660kV HVDC Project from Matiari to Lahore in Pakistan

NATIONAL TRANSMISSION & DESPATCH COMPANY (NTDC) LIMITED PAKISTAN

CONTRACTOR 国家电网 STATE GRID 中国电力技术装备有限公司 CHINA ELECTRIC POWER EQUIPMENT AND TECHNOLOGY CO.,LTD.

SUBCONTRACTOR East China Electric Power Design Institute Co.,Ltd.

拉合尔±660kV换流站

±660kV Lahore Converter Station

设计阶段 PHASE: 施工图 Detail Design

MLHVDC-LCS-ECI-DD-EC-0514-005A

	姓名	日期
设计 Designed		2018.1.10
校核 Checked		2018.1.10
审核 Reviewed		2018.1.10
批准 Approved		2018.1.10

屋顶防雷平面图

Roof lightning protection plan

比例 Scale: 1:100

图号 DWG NO.: 30-B003701S-D0514-005

版本 REV.: A

594X841

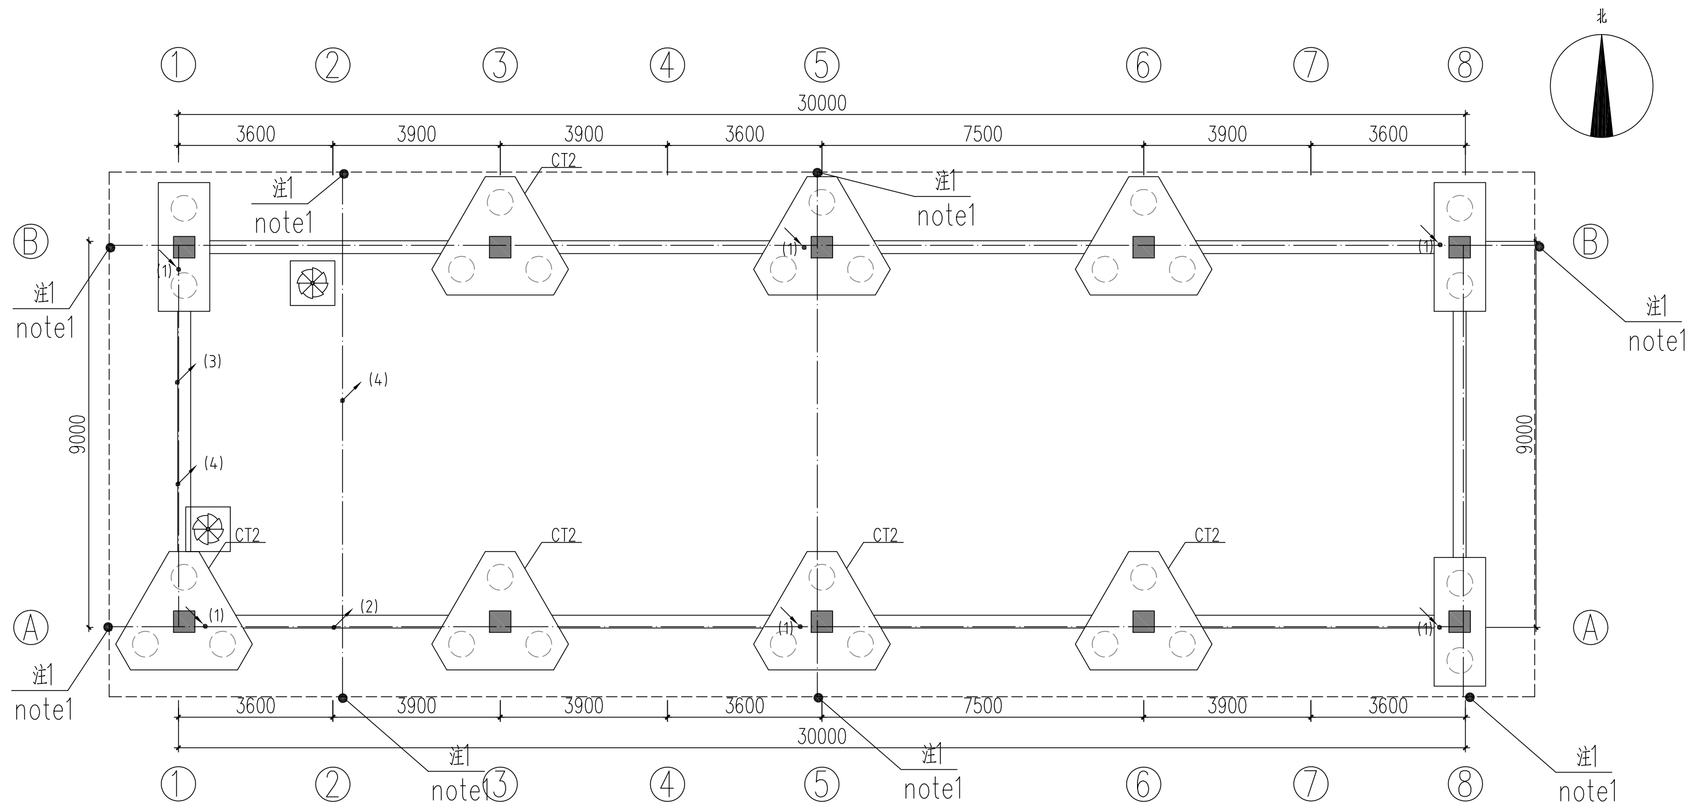

基础接地平面图 1:100
foundation earthing plan

图例

------- 表示环房暗敷接地线，距建筑物1~1.5m，埋深为地下0.8m，并设垂直接地体（L=3m），具体设计详见其他卷册。

—— —— 表示热镀锌扁钢50*6，用作室内基础接地线，并与环房暗敷接地线连接。

防雷接地引下线 50x6热镀锌扁钢沿墙或柱子暗敷，并与基础接地网连接。

设备、等电位接地引上线

1、标号"(1)"：为防雷接地引下线

2、标号"(2)"：在总配电箱设置处，离地0.3M处，预埋接地端子箱，采用热镀锌扁钢25*4沿墙或柱子暗敷，与主接地网焊接。

3、标号"(3)"：在弱电箱设置处，离地0.3M处，预埋接地端子箱，采用热镀锌扁钢25*4沿墙或柱子暗敷，与主接地网焊接。

4、标号"(4)"：在卫生间、厨房预埋局部等电位端子箱，采用热镀锌扁钢25*4沿墙或柱子暗敷，与主接地网焊接。

5、室内各种金属构件（如金属门、窗，楼梯扶手，金属栏杆、金属槽盒等）均应采用-25x4热镀锌 扁钢就近与主接地网焊接。

6、金属门/窗扇与门/窗框之间应采用铜编织线连接。

7、若铜绞线和镀锌扁钢的连接点在土壤中，需在连接点2m范围内，在铜绞线和镀锌扁钢上包裹沥青，以免发生腐蚀。

注1：室内基础接地线利用50x6镀锌扁钢与环房暗敷接地线焊接

note1: the place where the indoor earth-termination system is welded with the earth-termination system around the building by using the hot-dip galvanized flat steel 50*6

legend:

------- The earth-termination system buried at 0.8m underground around the building and it's 1 ~ 1.5m from the building, and setting the vertical earth electrode(L=3m). The detailed designs is shown in the other volume.

—— —— using the hot-dip galvanized flat steel 6*50 as the indoor earth-termination system.And the Indoor earth-termination system should be electrical connected with the earth-termination system around the building.

Lightning protection down-conductor using the hot galvanizing flat steel 50*6 that is laid in the wall or column ,and it should be connected with the main foundation earth-termination system .

Electrical equipment, equipotential earthing up wire

1、The label "(1)":Lightning protection down-conductor system

2、The label "(2)":Embeding total boning conductor terminal box in the wall from the ground 0.3 m , the wall where the total distribution box setting.and it is led to be welded with the main earth-termination system by using the hot galvanized flat steel 25*4 that is laied in the column.

3、The label "(3)":Embeding boning conductor terminal box in the wall from the ground 0.3 m,the wall where the weak current box setting, and it is led to be welded with the main earth-termination system by using the hot galvanized flat steel 25*4 that is laied in the column.

4、The label "(4)":Embeding boning conductor terminal box in the bathroom and kitchen ,and it is led to be welded with the main earth-termination system by using the hot galvanized flat steel 25*4 that is laied in the column.

5.All kinds of metal components indoor (metal doors, Windows, stair handrails, metal railings, metal tank etc.) shall be welded with the main earth-termination system by using the -25x4 hot galvanizing flat steel.

6. Metal door/window/ frame should be connected with each other by using the copper braided wire .

7、If the connection point of the copper strand and galvanized flat steel is in the soil,it is necessary to wrap asphalt on copper strand and galvanized flat steel to avoid corrosion,within 2m of the connection point.

Reference Drawings

Drwg. No.	Title

Revisions

Name	Date	Notes

巴基斯坦默蒂亚里—拉合尔±660kV直流输电工程
±660kV HVDC Project from Matiari to Lahore in Pakistan

NATIONAL TRANSMISSION & DESPATCH COMPANY (NTDC) LIMITED PAKISTAN

CONTRACTOR 国家电网 STATE GRID 中国电力技术装备有限公司 CHINA ELECTRIC EQUIPMENT & TECHNOLOGY CO.,LTD.

SUBCONTRACTOR East China Electric Power Design Institute Co.,Ltd.

拉合尔±660kV换流站
±660kV Lahore Converter Station

设计阶段 PHASE: 施工图 Detail Design

MLHVDC-LCS-ECI-DD-EC-0514-0006A

	姓名	日期
设计 Designed		2018.1.10
校核 Checked		2018.1.10
审核 Reviewed		2018.1.10
批准 Approved		2018.1.10

基础接地平面图
foundation earthing plan

比例 Scale: 1:100
图号 DWG NO.: 30-B003701S-D0514-006
版本 REV.: A

594X841

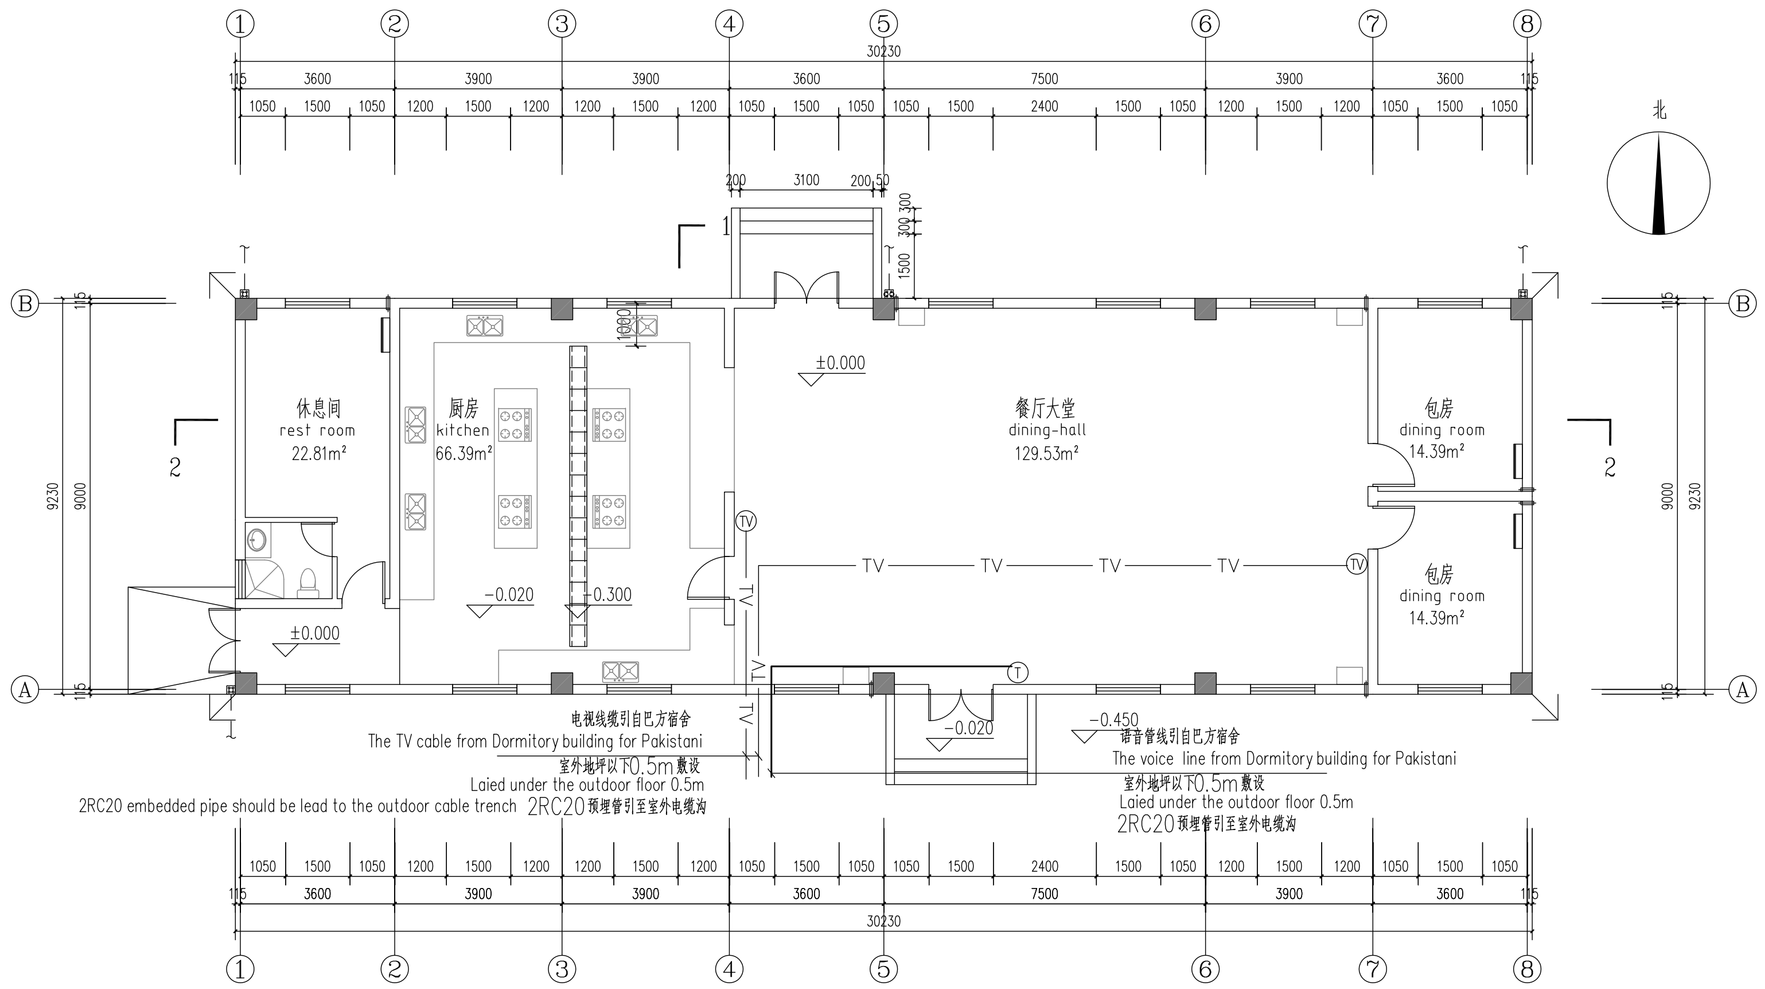

弱电平面图 1:100

Weak current plan

S=279.02㎡

TV TV cable 电视电缆 employ RC20-FC 采用RC20-FC

注:

1.管线穿楼板处,施工时需在楼板内预留洞口。在楼层顶板内暗敷的管线,施工时在楼板内预埋相关管线

1.where the pipeline through the floor,should reserve the hole in the floor during construction.
The pipeline that is concealed inside the roof of the floor ,should embed the pipe in the floor during construction.

弱电图例

Weak current legend

图例 legend	设备名称 Equipment name	型号及规格 Model and specification	安装方式 way to install
TD	双孔信息插座 Information double-hole outlet box	预埋86H60配双口RJ11+RJ45塑插座面板 pre-embedded 86H60 with double-hole RJ11+RJ45 socket panel	暗装,下口距地 0.3m concealed installation, its lower edge isapart from the ground 0.3 m
TV	电视插座 TV socket	预埋86H60接线盒 pre-embedded 86H60 terminal box	暗装,下口距地 0.3m concealed installation, its lower edge isapart from the ground 0.3 m
T	电话插座 The phone socket	预埋86H60接线盒 pre-embedded 86H60 terminal box	暗装,下口距地 0.3m concealed installation, its lower edge isapart from the ground 0.3 m

Reference Drawings

Drwg. No.	Title

Revisions

Name	Date	Notes

巴基斯坦默蒂亚里—拉合尔±660kV直流输电工程

±660kV HVDC Project from Matiari to Lahore in Pakistan

NATIONAL TRANSMISSION & DESPATCH COMPANY (NTDC) LIMITED PAKISTAN

CONTRACTOR 国家电网 STATE GRID 中国电力技术装备有限公司 CHINA ELECTRIC POWER EQUIPMENT AND TECHNOLOGY CO.,LTD.

SUBCONTRACTOR East China Electric Power Design Institute Co.,Ltd.

拉合尔±660kV换流站

±660kV Lahore Converter Station

设计阶段 PHASE: 施工图 Detail Design

MLHVDC-LCS-ECI-DD-EC-051 4-007 A

	姓名	日期
设计 Designed		2018.1.10
校核 Checked		2018.1.10
审核 Reviewed		2018.1.10
批准 Approved		2018.1.10

弱电平面图及弱电图例

Weak current plan and Weak current legend

比例 Scale: 1:100 图号 DWG NO. 30-B003701S-D0514-007 版本 REV. A

594X841

电气材料表
Electrical material list

图例 legend	设备名称 Equipment name	型号及规格 Model and specification	数量 quantity
	电线 Wire	BV-2*10+E10	0m
	RC管 RC conduit	φ150	30m
	RC管 RC conduit	φ100	0m
	电线 Wire	BV-2*10+E10	35m
	电线 Wire	BV-2*6+E6	5m
	电线 Wire	BV-4*4+E4	90m
	PC管 PC conduit	φ25	130m
	电线 Wire	BV-2*4+E4	120m
	电线 Wire	BV-2*2.5+E2.5	100m
	电线 Wire	N-BV-3*2.5+E2.5	130m
	PC管 PC conduit	φ20	220m
	RC管 RC conduit	φ20	130m
	SPD1		1
	SPD2		0
	断路器 Circuit breaker	T3N250 R160/4P 300mA 0.3s Y0	2
		OT200E	1
		S201-C25	1
		S201-C16	1
		S201-C10	6
		GSH202-C16/30mA/0.1S	4
		GSH202-C20/30mA/0.1S	1
		GSH202-C32/30mA/0.1S	0
		GSH202-C40/30mA/0.1S	0
		GSH204-C16/30mA/0.1S	4
	隔离开关 Isolating switch	E203/125	0
	隔离开关 Isolating switch	E203/32	0
	电力线槽 electric power trunking	100*100	0
	电力线槽 electric power trunking	200*100	0
	热镀锌圆钢 the hot dip galvanized round steel	ø12/ø8	115m/46m
	镀锌扁钢 the hot-dip galvanized flat steel	50x6	155m
	镀锌扁钢 the hot-dip galvanized flat steel	25x4	40m
	断接测试卡盒安装示意图 The breaking test box installation diagram		6
	螺栓 bolts		24
LEB	LEB端子板 Local Equipotential Bonding		3
MEB	MEB总等电位端子板 Main Equipotential Bonding		1
•	放热焊点 Exothermic Welding point	扁钢与接地线焊接点 Welding point of flat steel and the earth-termination system	18

图例 legend	设备名称 Equipment name	型号及规格 Model and specification	数量 quantity
	双切换配电箱 Double switch distribution box		1
	配电箱 distribution box		0
	户内照明配电盒 indoor lighting distribution box	PZ30	0
	出口指示灯 exit sign lighting	光源LED 3W(自带蓄电池) light source: LED 3w(Built-in battery)	5
	方向指示灯 escape sign lighting	光源LED 3W(自带蓄电池) light source: LED 3w(Built-in battery)	3
	单管荧光灯 single tube fluorescent lamp	32W	5
	双管荧光灯 double tube fluorescent lamp	2 x 32W	12
E	单管荧光灯(自带蓄电池) single tube fluorescent lamp (Built-in battery)	32W	0
S	双管荧光灯(防水型) double tube fluorescent lamp (waterproof type)	2 x 32W	6
	吸顶灯(防水型) Suction lamp (waterproof type)	1*18W	4
	吸顶灯 Suction lamp	1*18W	2
	卫生间二、三极单相防溅组合插座(安全型) The diode triode single phase anti-splash combinated socket in the toilet (safety type)	250V,10A	1
	洗衣机带开关防溅二、三极组合插座(IP54安全型) The washer diode triode anti-splash combinated socket with switche (IP54 safety type)	250V,10A	0
	热水器带开关防溅二、三极组合插座(IP54安全型) The calorifier diode triode anti-splash combinated socket with switche (IP54 safety type)	250V,20A	1
	二、三极单相组合插座(安全型) The diode triode single phase combinated socke (safety type)	250V,10A	16
	柜式空调插座(三相四极安全型) The Cabinet air-conditioner socket (Three-phase quadrupole safety type)	380V,16A	4
	壁挂空调插座(单相三极安全型) The Wall hang air-conditioner socket (triode single phase safety type)	250V,16A	3
	应急灯 emergency lamp	2*23W(自带蓄电池) 2*23W(Built-in battery)	8
	单联单控开关 single connection planet single control switch	250V,10A	2
	双联单控开关 two wire single control switch	250V,10A	3
	三联单控开关 three wire single control switch	250V,10A	2
	单联双控开关 single connection planet double control switch	250V,10A	0
	单联单控开关(IP54安全型) single connection planet single control switch (IP54 safety type)	250V,10A	3
	双联单控开关(IP54安全型) two connection planet single control switch (IP54 safety type)	250V,10A	0
	铜编织线 Braided copper wire		50m

注:
note:

1、开列材料均由乙方提供

1、All the materials shall be provided by party B

2、此材料表设备具体数量统计仅供参考。

2、The quantity of equipment in this material table is for reference only.

3、本建筑空调插座采用国标，热水器、电视、饮水机、排 风扇、冰箱等电器强电插座均采用巴方标准,公共区域插座国标和巴方标准 每房间各安装一半原则实施,最终实施方案以业主及监理要求为准。

3、In this building, the air conditioning socket adopts Chinese standard; The High-voltage electrical socket of Water heater, TV, water dispenser, fan, refrigerator adopt Pakistani standard.The High-voltageelectrical sockets areas and each room according to the implementation principle that one half adopt Chinese standard and in the public anothet half adopt Pakistani standard,and the final implementation plan should be subject to the requirements of the owner and the supervisor.

弱电材料表
Weak current Material list

图例 legend	设备名称 Equipment name	型号及规格 Model and specification	数量 quantity	施工方 contractor	安装方式 way to install
	电视电缆 TV cable	ZR-SYWV-75-9	0m	机电安装单位 Electromechanical installation unit	详见系统图和平面图 See system diagram and the plan
	电视电缆 TV cable	ZR-SYWV-75-7	0m	机电安装单位 Electromechanical installation unit	详见系统图和平面图 See system diagram and the plan
	电视电缆 TV cable	ZR-SYWV-75-5	30m	机电安装单位 Electromechanical installation unit	详见系统图和平面图 See system diagram and the plan
	语音线路 The voice line		15m	机电安装单位 Electromechanical installation unit	详见系统图和平面图 See system diagram and the plan
	RC管 RC conduit	φ32	0m	土建施工单位 civil engineering construction unit	
	RC管 RC conduit	φ20	60m	土建施工单位 civil engineering construction unit	
TD	双孔信息插座 Information double-hole outlet box	预埋86H60配双口RJ11+RJ45型插座面板 pre-embedded 86H60 with double-hole RJ11+RJ45 socket panel	0	机电安装单位 Electromechanical installation unit	暗装,下口距地 0.3m concealed installation, its lower edge isapart from the ground 0.3 m
TV	电视插座 TV socket	预埋86H60接线盒 pre-embedded 86H60 terminal box	2	机电安装单位 Electromechanical installation unit	暗装,下口距地 0.3m concealed installation, its lower edge isapart from the ground 0.3 m
T	电话插座 The phone socket	预埋86H60接线盒 pre-embedded 86H60 terminal box	1	机电安装单位 Electromechanical installation unit	暗装,下口距地 0.3m concealed installation, its lower edge isapart from the ground 0.3 m

Reference Drawings

Drwg. No.	Title

Revisions

	Name	Date	Notes

巴基斯坦默蒂亚里—拉合尔±660kV直流输电工程
±660kV HVDC Project from Matiari to Lahore in Pakistan

NATIONAL TRANSMISSION & DESPATCH COMPANY (NTDC) LIMITED PAKISTAN

CONTRACTOR 国家电网 STATE GRID 中国电力技术装备有限公司 CHINA ELECTRIC POWER TECHNICAL EQUIPMENT CO.,LTD.

SUBCONTRACTOR East China Electric Power Design Institute Co.,Ltd.

拉合尔±660kV换流站
±660kV Lahore Converter Station

设计阶段 PHASE: 施工图 Detail Design

M L H V D C - L C S - E C I - D D - E C - 0 5 1 4 - 0 0 8 A

	姓名	日期
设计 Designed		2018.1.10
校核 Checked		2018.1.10
审核 Reviewed		2018.1.10
批准 Approved		2018.1.10

材料表
Material list

比例 Scale: 1:100 | 图号 DWG NO.: 30-B003701S-D0514-008 | 版本 REV.: A

594X841