



MundoStreamer FPV Ground Station

DJI FPV Video Receiver & Ground Station

OFFICIAL USER MANUAL • RASPBERRY PI 4B EDITION

Hardware Model	MundoStreamer Ground Station (Raspberry Pi 4B Edition)
Goggles Compatibility	DJI Goggles V1, V2, Goggles 2, Goggles Integra, and Goggles 3
Monitor Display Output	HDMI Full HD 1080p @ 60 FPS (Ultra-Smooth Live Feed)
Wireless Connectivity	Wi-Fi Hotspot: MundoStreamer (Default Password: 1234512345)
DVR Video Recording	Automatic Full HD 1080p MP4 Recording to USB Flash Drive / SSD
Management Portal	Connect phone/laptop browser to: http://192.168.50.1:8000
Document Version	v2.4.1 Production Release — September 2026

[MAIN FEATURES] WELCOME TO MUNDOSTREAMER

KEY ADVANTAGES OF MUNDOSTREAMER:

- Ultra-Smooth 60 FPS Live Feed on TV: High-speed racing maneuvers and aerial acrobatics appear crystal-clear without dropped frames or stutter.
- Direct Phone Viewing Without Any App: Spectators, pit crews, and judges can connect to the MundoStreamer Wi-Fi and watch live in their web browser.
- Automatic DVR Video Recording: Every flight is recorded cleanly in Full HD directly to an external USB flash drive or SSD.
- Instant Replay on TV Screen: Review flight footage on the monitor with a single tap from your phone dashboard without unplugging the pilot's goggles.
- Rapid Technical Support & Log Export: Export full system diagnostic logs in 1 click to send via WhatsApp (+62 856-4722-9919) for immediate remote assistance.

Retain this manual as your official field operating reference and appliance care guide.

TABLE OF CONTENTS

1. Introduction to MundoStreamer FPV Ground Station	Page 2
2. Cable Wiring Guide & Physical Port Layout	Pages 3-4
3. Quick Start & Powering On Guide	Page 5
4. Connecting Smartphone & Opening Web Portal	Page 6
5. Dashboard Guide (Tab 1: Goggles Mode & Tab 2: TV Display)	Page 7
6. Dashboard Guide (Tab 3: Color Tuning & Tab 4: Standby Screen)	Page 8
7. Dashboard Guide (Tab 5: Audio & Tab 6: Live Streaming)	Page 9
8. Dashboard Guide (Tab 7: DVR Recording & Tab 8: Video Gallery)	Page 10
9. Dashboard Guide (Tab 9: Change Wi-Fi & Tab 10: System)	Page 11
10. Video Recording Guide & Instant HDMI Replay	Page 12
11. Connecting Video Feed to Laptop OBS & vMix	Page 13
12. Field Operations & Pre-Flight Checklist	Page 14
13. Troubleshooting & Field Problem Solving	Page 15
14. Official Licensing, Security & Customer Support	Page 16

CHAPTER 1: INTRODUCTION TO MUNDOSTREAMER

MundoStreamer is a dedicated, plug-and-play FPV ground station engineered for drone racing pilots, freestyle enthusiasts, aerial cinematographers, and event organizers. It receives the digital video transmission directly from DJI FPV goggles and projects it instantly onto TV monitors, stage projectors, while wirelessly broadcasting the live stream to spectator smartphones around the field.


Key Advantages in the Field

MundoStreamer works instantly in the field without requiring a laptop or sluggish companion software. The system processes the live video feed directly to your display monitor with peak performance:

- **Ultra-Smooth 60 FPS Video:** Displays high-speed racing drone flights at a locked 60 frames per second on the TV monitor, rendering fast maneuvers crystal-clear without motion jitter.
- **Wireless Spectator Viewing:** Spectators in the pit tent can watch the live camera feed right from their own smartphone browsers simply by connecting to the MundoStreamer Wi-Fi.
- **Automatic Flight Recording:** Plug in a flash drive to the blue USB port, and your flight footage is cleanly captured in Full HD for judging, debriefing, or social media sharing.
- **Instant TV Replay:** Review race finishes or freestyle stunts directly on the big screen with a single tap in the smartphone dashboard without unplugging the pilot's goggles.

CHAPTER 2: PHYSICAL PORT LAYOUT & WIRING DIAGRAM

To ensure MundoStreamer powers up and displays video correctly, follow the cabling setup illustrated in the diagram below:

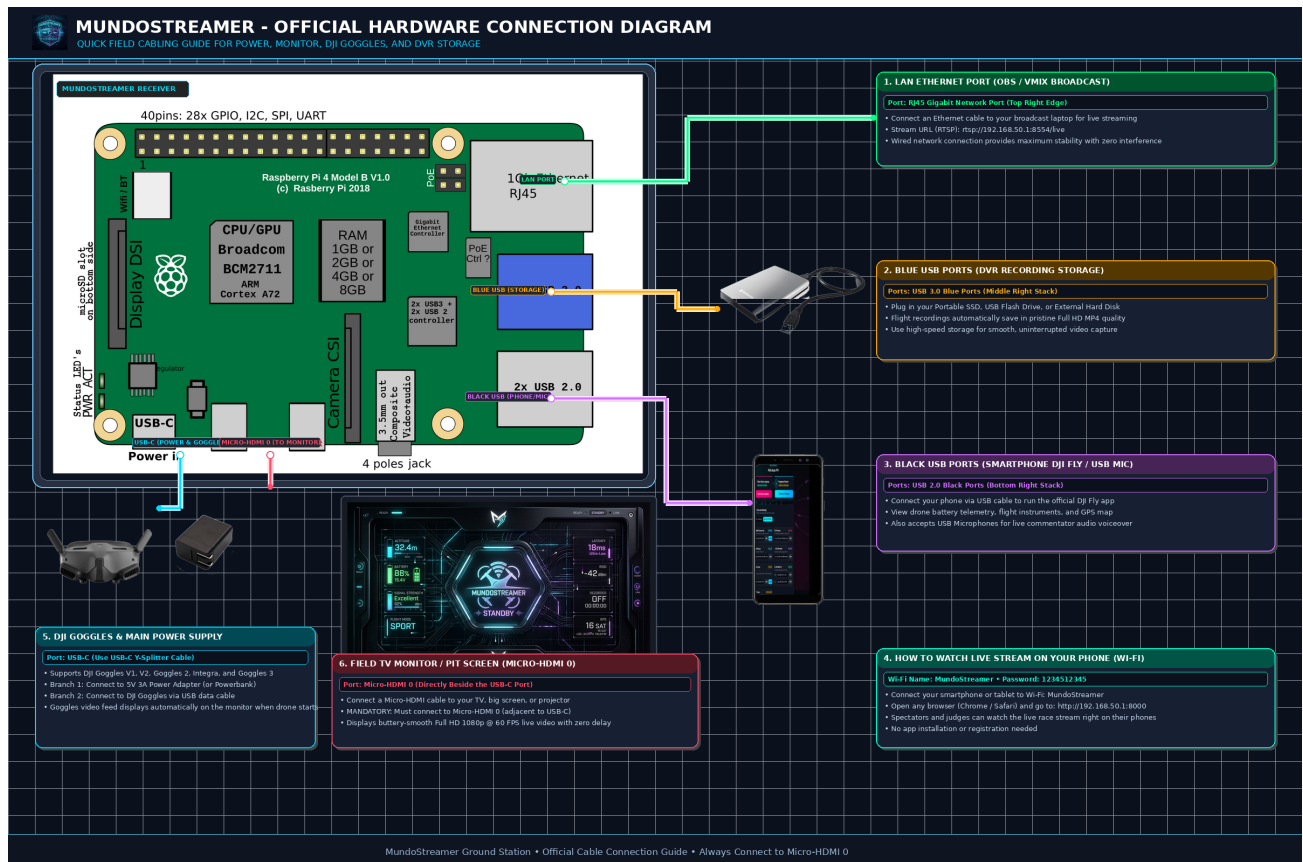

[CABLING RULES] CRITICAL FIELD WIRING INSTRUCTIONS

Field Cabling Quick Summary (Raspberry Pi 4B):

- **USB-C Port (DJI Goggles & Power):** Connect via USB-C Y-Splitter cable (power branch to 5V 3A adapter, data branch to DJI Goggles).
- **Micro-HDMI 0 Port (TV Monitor):** MANDATORY: USE MICRO-HDMI 0 (the port adjacent to the USB-C plug). Connect to field TV or FPV monitor.
- **USB 3.0 Blue Ports (DVR Storage):** Plug your USB 3.0 Portable SSD or fast flash drive here for automatic video recording.
- **USB 2.0 Black Ports (DJI Fly Phone / Mic):** Connect phone for DJI Fly or attach a USB microphone for commentator audio.
- **Wi-Fi Hotspot (Spectator Phones):** Spectators join Wi-Fi: MundoStreamer (pass: 1234512345) -> open <http://192.168.50.1:8000>.

CHAPTER 2 (CONT.): PORT ROLES & FIELD CABLING RULES

The following matrix outlines the functional role and mandatory usage guidelines for each physical port on your MundoStreamer unit:

PORT NAME	CONNECTED HARDWARE	MANDATORY FIELD GUIDELINES
USB Type-C Port (Lower Left)	DJI Goggles & Power Adapter	DJI GOGGLES & MAIN POWER CONNECTION. Connect using the USB-C Y-Splitter cable: plug one branch into the 5V 3A power supply (or a quality powerbank) and the other branch into your DJI Goggles.
Micro-HDMI 0 Port (Next to USB-C Port)	TV Monitor / Stage Display	PRIMARY DISPLAY OUTPUT (MANDATORY HDMI 0). Connect the Micro-HDMI cable to your TV or field monitor. Delivers ultra-smooth 1080p @ 60 FPS live video. IMPORTANT: Do not plug into Micro-HDMI 1!
Micro-HDMI 1 Port (Middle Lower Side)	Auxiliary / Backup Display	SECONDARY PORT. Reserved for a secondary monitor if required.
USB 3.0 Blue Ports (Middle Right Stack)	USB Flash Drive / SSD DVR Storage	DVR RECORDING STORAGE. Plug your USB 3.0 flash drive or external SSD into one of the blue USB ports. Flight footage is saved automatically in crisp Full HD.
USB 2.0 Black Ports (Lower Right Stack)	DJI Fly Phone / USB Microphone	DJI FLY PHONE & AUDIO MIC. Connect a smartphone for the official DJI Fly app, or plug in a USB microphone for live commentator audio.
LAN RJ45 Port (Upper Right Stack)	Broadcast Laptop (OBS / vMix)	BROADCAST LAPTOP FEED. Connect an Ethernet LAN cable to your broadcast computer for live streaming to YouTube or Facebook via OBS Studio or vMix.
Wi-Fi Hotspot (Wireless)	Spectator & Pilot Smartphones	LIVE VIEWING ON SMARTPHONES. Enable Wi-Fi on your phone, join MundoStreamer (Password: 1234512345), then open a browser to: http://192.168.50.1:8000 .
3.5mm Audio Jack (Lower Right)	Speakers / Headphones	STEREO AUDIO OUTPUT. Route drone flight audio to stage PA speakers or judges' monitoring headphones.

[PORT WARNING] MICRO-HDMI 0 MANDATORY FOR DISPLAY

CRITICAL FIELD WARNING: ALWAYS USE MICRO-HDMI 0

The Raspberry Pi 4B features two Micro-HDMI ports. The MundoStreamer display engine outputs exclusively to Micro-HDMI 0 (the port immediately next to the USB-C plug). If plugged into Micro-HDMI 1, the monitor screen will remain black!

CHAPTER 3: QUICK START & POWERING ON GUIDE

Follow these 7 practical steps when powering up MundoStreamer in the field:

Step 1	Verify MicroSD Card is Inserted Ensure the official MundoStreamer MicroSD card is securely inserted into the underside memory slot.
Step 2	Connect Display Cable to Micro-HDMI 0 Port Plug the Micro-HDMI cable into Micro-HDMI 0 (adjacent to the USB-C plug) and connect the other end to your TV or monitor.
Step 3	Connect USB-C Y-Splitter & DJI Goggles Plug the male USB-C Y-splitter into the USB-C port. Connect the power branch to a 5V 3A power source and the data branch to your DJI Goggles.
Step 4	Attach Flash Drive / SSD to Blue USB Port Plug your USB 3.0 flash drive or SSD into one of the blue USB ports to enable automatic video recording.
Step 5	Power On & Await Standby Video (~20 Seconds) Supply power. In approximately 20-25 seconds, the TV screen will display the official MundoStreamer standby video indicating readiness.
Step 6	Connect Smartphone to MundoStreamer Wi-Fi On your phone or laptop, join Wi-Fi network: MundoStreamer (Password: 1234512345). Open any browser and enter: http://192.168.50.1:8000 .
Step 7	Power Up Drone & Enjoy Pure 60 FPS Live Feed! Power up your drone. The instant camera transmission starts, the TV monitor automatically switches to display the ultra-smooth 1080p @ 60 FPS live feed!

HDMI Display Visual Status Indicators

The TV monitor display clearly indicates current device status:

- Moving Standby Video Animation: MundoStreamer is ready and awaiting drone / goggles signal.
- Full-Screen Live Drone Video: Goggles connected and drone actively transmitting.
- Black Screen / No Signal: Verify cable is in Micro-HDMI 0 and check that the 5V 3A power supply is adequate.

[FIELD OPERATIONS] INSTANT USB RE-SYNC (TAB 1)

TIPS IF GOGGLES CABLE IS BUMPED OR BATTERY IS SWAPPED:

If you swap goggles batteries or the cable is accidentally disconnected in the field, you do NOT need to restart the device! Simply open the web page on your smartphone and tap the blue [Re-sync USB] button on Tab 1 to restore live video instantly.

CHAPTER 4: SMARTPHONE LIVE VIEW & WEB DASHBOARD

MundoStreamer features two user-friendly web portals: the Spectator Live View for anyone wanting to watch on their smartphone, and the Admin Dashboard for configuring device settings.

Spectator Live View Portal

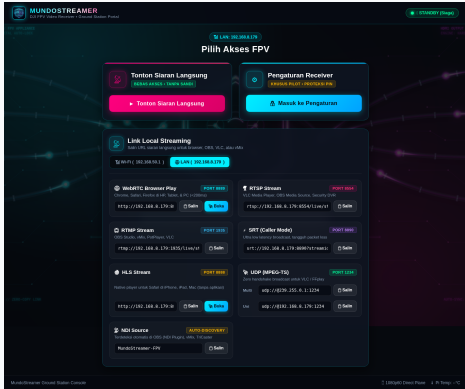


Figure 4.1: Mobile Live Spectator Feed

Opens automatically when connecting to the web portal. Spectators, pit crews, and judges can watch the live camera stream on their phones without installing any app.

Admin Settings Login Portal

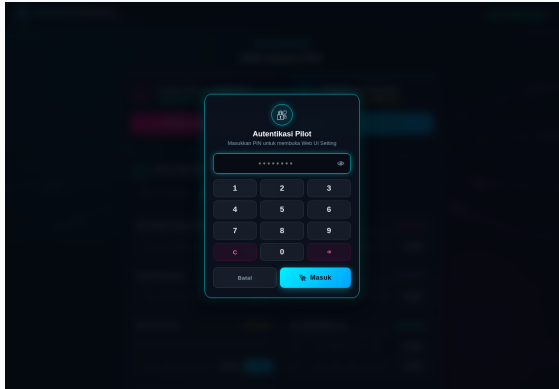


Figure 4.2: Admin Dashboard Login Screen

Click the Admin Login button in the upper right corner to access full controls (change goggles mode, configure DVR recording, tune TV display, or update Wi-Fi name).

Default Wi-Fi & Management Credentials

Parameter	Default Value	Usage Instructions
Wi-Fi SSID Name	MundoStreamer	Join this wireless network on your phone or laptop
Wi-Fi Password	1234512345	Can be customized in Tab 9 if desired
Web URL (Browser)	http://192.168.50.1:8000	Type into Chrome, Safari, or Firefox address bar
Alternative URL	http://mundostreamer.local:8000	Automatic mDNS domain name without remembering numbers
Admin Username	admin	Login name for device configuration portal
Admin Password	11118888	Default administrator access password

CHAPTER 5: WEB DASHBOARD CONFIGURATION GUIDE

Upon logging into the Admin Dashboard, you have access to intuitive settings tabs. Here is the practical operating guide for Tab 1 (Goggles Mode) and Tab 2 (TV Display):

Tab 1: Goggles Mode (Receiver Mode)

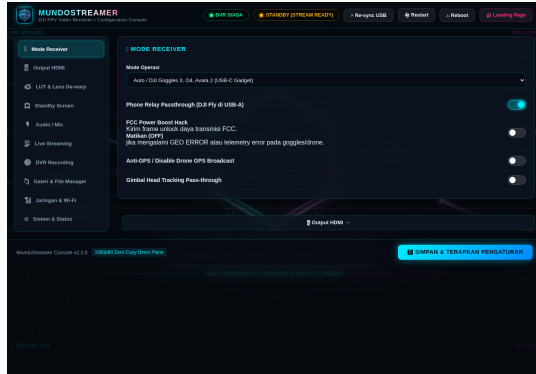


Figure 5.1: DJI Goggles Mode Selection

Usage Instructions:

- **DJI Goggles (Auto):** Standard setting for DJI Goggles V1, V2, Goggles 2, Integra, and G3.
- **UVC Capture Card:** Select when using an external USB capture card.
- **Re-sync USB Button:** Reconnects goggles instantly if cable was bumped.
- **Reboot Button:** Restarts the appliance safely.

Tab 2: TV Display (HDMI Output)

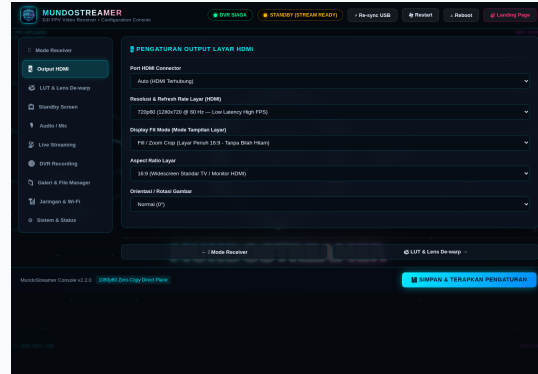


Figure 5.2: TV Display & Aspect Ratio Setup

Usage Instructions:

- **Display Resolution:** Full HD 1080p @ 60 FPS ultra-smooth output.
- **Fit Mode:** Choose Fit (original ratio) or Cover (fill entire TV screen without side borders).
- **Aspect Ratio:** Preserve 16:9 or 4:3 native camera ratios.
- **HDMI Audio:** Route flight audio directly to TV speakers.

Emergency Quick Actions in Tab 1

At the top of Tab 1 are emergency recovery buttons designed for race events:

- **[Re-sync USB]:** Refreshes the USB goggles connection instantly without rebooting the device. Clears frozen video if a cable was bumped.
- **[Restart Streamer]:** Re-spawns video receiving services cleanly in under 2 seconds.
- **[Reboot]:** Gracefully restarts the entire appliance.

CHAPTER 5: WEB DASHBOARD GUIDE (CONT.)

Configuration overview for Tab 3 (Color & Lens Tuning) and Tab 4 (Standby Screen & Custom Videos):

Tab 3: Display Quality Tuning

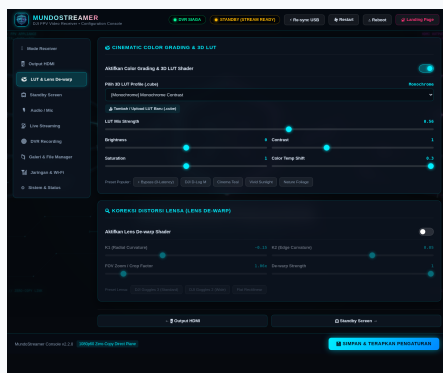


Figure 5.3: Display Quality & Performance

Feature Overview:

- The fisheye lens de-warp and 3D LUT color grading features on this tab are designed specifically for Radxa hardware variants.
- On your MundoStreamer unit, the video engine has been automatically optimized to deliver a locked, super-clear 60 FPS live feed without requiring any complex configuration!

Tab 4: Standby Screen & Custom Video

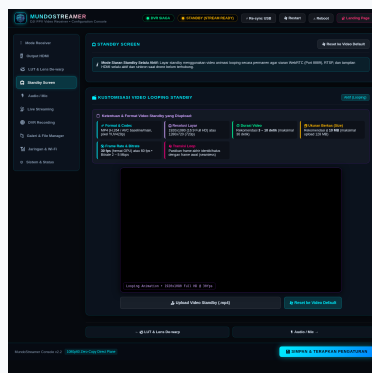


Figure 5.4: Custom Standby Video & Branding

Usage Instructions:

- **Default Standby Animation:** High-tech official MundoStreamer video that plays automatically while awaiting drone flight.
- **Custom Video Upload:** You can upload your team's promotional MP4, event sponsor loops, or race bumper videos.
- **Clean Standby Broadcast:** Standby video loops seamlessly on the TV monitor while the pilot prepares for takeoff.

[EVENT CUSTOMIZATION] CUSTOM STANDBY VIDEO TIPS

EVENT CUSTOMIZATION TIPS: SELECTING A CUSTOM STANDBY VIDEO

If you wish to upload custom sponsor or team videos in Tab 4:

- Use standard video files in MP4 format with Full HD (1920x1080) resolution.
- The video will play continuously in a loop on the TV monitor between race heats or while pilots are resting.

CHAPTER 5: WEB DASHBOARD GUIDE (CONT.)

Configuration breakdown for Tab 5 (Audio Settings) and Tab 6 (Live Streaming Broadcasts):

Tab 5: Audio Configuration

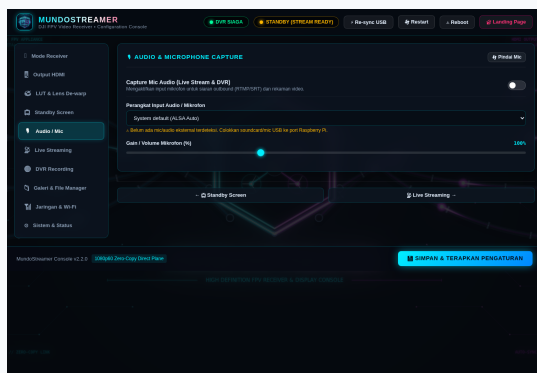


Figure 5.5: Sound Volume & Mic Levels

Usage Instructions:

- **HDMI Audio Out:** Routes drone telemetry and motor audio to TV speakers.
- **3.5mm Stereo Out:** Analog output for headphones and judges' monitor speakers.
- **USB Microphone Input:** Plug USB mic into black USB port for live commentator voice.
- **Volume Sliders:** Adjust output levels and mic gain cleanly.

Tab 6: Live Streaming Broadcast

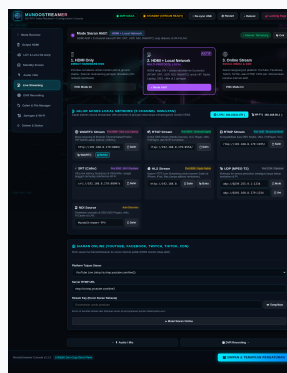


Figure 5.6: YouTube, TikTok & OBS Streaming

Usage Instructions:

- **RTSP Address (rtsp://192.168.50.1:8554/live):** Add to OBS Studio or vMix on your broadcast laptop.
- **YouTube / Facebook RTMP:** Enter RTMP URL and Stream Key to broadcast live to cloud video platforms.
- **WebRTC Stream:** Zero-lag live viewing in mobile web browsers.

Simultaneous Multi-Destination Broadcast

MundoStreamer distributes live video to multiple destinations at the same time without performance degradation:

1. **Main Stage Display (Micro-HDMI 0):** Watched live by event spectators, judges, and commentators on the big screen.
2. **Spectator Smartphones (Wi-Fi):** Attendees around the track watch live directly in their mobile phone web browsers.
3. **Broadcast Production Feed (Gigabit LAN):** High-speed Ethernet to your OBS/vMix laptop for graphics overlays and cloud streaming.

CHAPTER 5: WEB DASHBOARD GUIDE (CONT.)

Configuration breakdown for Tab 7 (DVR Recording) and Tab 8 (Video Gallery & Instant HDMI Replay):

Tab 7: Video Recording (DVR)

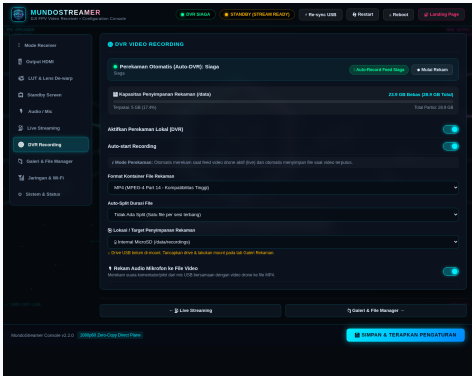


Figure 5.7: Automatic DVR Recording Setup

Usage Instructions:

- **Auto-Start Recording:** Automatically triggers recording when the drone arms and flies.
- **Full HD MP4 Quality:** Captures clean Full HD video without quality degradation.
- **Direct USB Storage:** Video saves directly to the flash drive or SSD plugged into the blue USB port.

Tab 8: Video Gallery & TV Replay

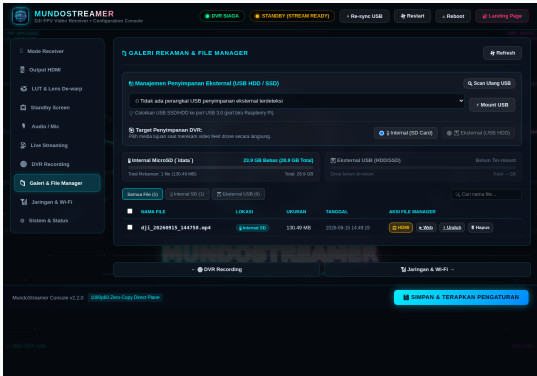


Figure 5.8: Replaying Flights on TV Monitor

Usage Instructions:

- **Recording List:** Displays all saved flight video files.
- **Play on HDMI Button:** Replay flights on the TV screen without disconnecting goggles cables!
- **Download Video:** Save recordings directly to your smartphone.

[FEATURE SPOTLIGHT] INSTANT HDMI REPLAY & FLIGHT SAFETY

INSTANT HDMI REPLAY & AUTOMATIC FLIGHT SAFETY INTERLOCK:

On Tab 8, click the blue [Play on HDMI] button next to any flight recording to review it on the big screen with judges or spectators.

- **Automatic Safety Sensor:** If a pilot arms and takes off while a replay is running, the safety sensor instantly terminates playback and switches the screen back to the live flight feed!

CHAPTER 5: WEB DASHBOARD GUIDE (CONT.)

Configuration breakdown for Tab 9 (Wi-Fi Settings) and Tab 10 (System, Log Export & Technical Support):

Tab 9: Wi-Fi & Network Settings

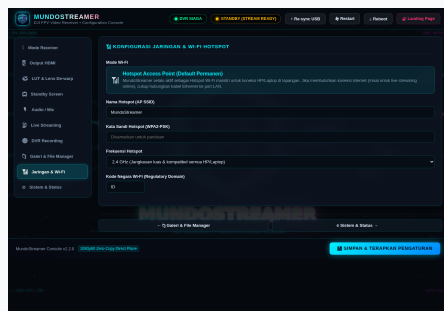


Figure 5.9: Change Wi-Fi Name & Password

Usage Instructions:

- **Change Wi-Fi Name (SSID):** Customize the hotspot name to match your race event or team brand.
- **Change Wi-Fi Password:** Update your wireless network password.
- **Connect to Venue Wi-Fi:** Connect MundoStreamer to venue internet for live streaming to YouTube.

Tab 10: System & Technical Support




Figure 5.10: Diagnostics & Safe Power Off

Usage Instructions:

- **Export Diagnostic Logs:** 1-click button to download system logs when consulting technicians via WhatsApp.
- **Offline Patch Update:** Install hotfixes or feature updates from engineers with no internet needed.
- **Power Off System:** Clean shutdown prior to disconnecting power.

[SPECTATOR VIEWING] HOW TO WATCH LIVE ON SMARTPHONES

HOW SPECTATORS CAN WATCH LIVE ON THEIR PHONES:

Your MundoStreamer unit features a built-in Wi-Fi transmitter that activates automatically upon boot.

- Instruct spectators or judges to connect their smartphone Wi-Fi to: MundoStreamer (Password: 1234512345).
- Open any web browser (Chrome / Safari) and navigate to: <http://192.168.50.1:8000>. The live camera feed will appear immediately on their screens!

[DEVICE CARE] HOW TO PROPERLY POWER OFF

SAFE SYSTEM SHUTDOWN PROCEDURE (POWER OFF):

MundoStreamer features a protected memory architecture, making it resilient against accidental power disconnections.

- However, for a clean shutdown at the end of an event: Go to Tab 10: System and tap the red Power Off System button. Wait ~10 seconds until the TV screen powers down before unplugging the power supply.

CHAPTER 6: DVR RECORDING & INSTANT REPLAY

MundoStreamer features automatic video recording that stores flight footage directly onto an external USB flash drive without degrading live video quality or adding latency to the pilot's goggles.

1. Recommended Storage Media & USB Guidelines

To ensure video recordings are stored smoothly and reliably:

- Use high-speed USB 3.0 Flash Drives or Portable USB SSDs.
- Always plug into the Blue USB 3.0 Ports (Middle Stack) for fast and stable data transfer.
- Format the drive as exFAT so recordings can be copied and viewed directly on Windows PC or MacBook laptops.

2. How to Replay Flight Recordings on TV Monitor (HDMI)

You can replay flight recordings on the big-screen TV monitor without disconnecting the pilot's goggles:

Stage	Operational Replay Steps
Step 1	Open the web dashboard on your phone or laptop and go to Tab 8: Video Gallery.
Step 2	Select the recorded flight file you wish to review with judges or spectators.
Step 3	Click the blue [Play on HDMI] button next to the recording filename.
Step 4	The video will immediately play on the HDMI display in smooth 60 FPS without disconnecting any cables.
Step 5	To conclude playback and return to the standby animation, click [Stop HDMI Playback].

[FLIGHT SAFETY] AUTOMATIC LIVE FLIGHT OVERRIDE

AUTOMATIC LIVE FLIGHT OVERRIDE SENSOR:

MundoStreamer incorporates an automated flight safety sensor: The instant live transmission from a drone is detected, any active HDMI video replay is immediately halted and the display switches to the live flight feed! This guarantees that live race flights are never obscured by recorded video.

CHAPTER 7: CONNECTING FEED TO LAPTOP OBS & VMIX

For event organizers broadcasting race video to production mixers like OBS Studio, vMix, venue projectors, or social media live streaming platforms:

1. Connecting Drone Video to OBS Studio / vMix (LAN Cable)

A wired Ethernet LAN connection delivers pristine Full HD video quality that is stable and interference-free:

1. Connect an Ethernet cable from the MundoStreamer LAN port to your broadcast laptop.
2. Open OBS Studio -> Click + (Add Source) -> Select Media Source.
3. Uncheck Local File.
4. In the Input field, enter: `rtsp://192.168.50.1:8554/live`
5. Click OK. The live drone video will appear immediately on your OBS canvas!

2. Mobile Spectator Viewing (WebRTC Live View)

Spectators and race judges can watch the live stream on their mobile phones without installing any app:

- Connect your phone to Wi-Fi network MundoStreamer (Password: 1234512345).
- Open any web browser (Chrome, Safari, Firefox) and enter: `http://192.168.50.1:8000`
- The live camera feed streams instantly with ultra-low latency directly on your phone!

Error response
Error code: 404
Message: Not Found.
Error code explanation: 404 - Nothing matches the given URL.

Figure 7.1: Mobile Spectator Web Browser Player

3. Direct Streaming to YouTube, TikTok & Facebook

When MundoStreamer has internet access (via venue Wi-Fi on Tab 9 or Gigabit LAN):

- Navigate to Tab 6: Live Streaming.
- Enter the RTMP URL and Stream Key provided by your streaming platform.
- Check Enable RTMP Stream and click Save Settings.
- MundoStreamer broadcasts directly to cloud streaming platforms autonomously!

CHAPTER 8: COMMENTATOR AUDIO & MICROPHONE GUIDE

MundoStreamer supports complete audio integration: drone telemetry sound to TV speakers, headphone monitoring for judges via the 3.5mm jack, and live commentator microphone input via USB.

1. Drone Sound to TV Monitor Speakers (Micro-HDMI)

Drone motor and telemetry sound from your DJI goggles is automatically routed directly to the TV monitor speakers through the Micro-HDMI 0 cable without requiring any extra audio wires.

2. 3.5mm Audio Jack for Judges' Headphones / Pit Speakers

The 3.5mm audio jack on the front lower edge provides clean analog stereo sound output:

- You can plug in headphones for judges or connect an AUX cable to pit speakers so the crowd can clearly hear propeller audio during the race.

3. Adding Live Commentator Microphones via USB

To add commentator voice or event announcements into video recordings and live streams:

1. Plug a USB Microphone (or wireless mic USB receiver such as DJI Mic or Hollyland) into one of the Black USB Ports.
2. Open the web dashboard on your phone -> Navigate to Tab 5: Audio Configuration.
3. Select your USB microphone from the Audio Input Device dropdown.
4. Adjust audio level with the Microphone Boost slider.
5. Go to Tab 7: DVR Recording -> Ensure Audio Mode is set to Video + Mic Audio.
6. Commentary voice will blend clearly into Full HD MP4 recordings and online live streams!

[AUDIO GUIDANCE] RECOMMENDED COMMENTATOR MICROPHONE

FIELD COMMENTATOR MICROPHONE RECOMMENDATIONS:

Use a wireless clip-on lavalier USB mic with its USB-A receiver plugged into the black USB port of MundoStreamer. The commentator can roam freely along the race circuit while broadcasting live commentary without cable restrictions.

CHAPTER 9: FIELD TROUBLESHOOTING & SOLUTIONS

Refer to this quick troubleshooting matrix if you encounter any difficulties during field operations:

FIELD SYMPTOM	PROBABLE CAUSES	IMMEDIATE FIELD REMEDY
TV Screen Dark / No Signal	- Cable plugged into Micro-HDMI 1. - Loose HDMI cable. - Power supply below 5V 3A.	1. Move cable to Micro-HDMI 0 (port adjacent to USB-C). 2. Ensure HDMI cable is seated securely. 3. Use a verified 5.0V / 3.0A pure DC power adapter.
Display Stays on Standby Video	- USB cable is charge-only (no data). - Drone not yet armed/powerd. - USB link not synchronized.	1. Ensure USB cable supports high-speed data. 2. Open web dashboard Tab 1 and tap [Re-sync USB]. 3. Ensure drone is powered up and bound to goggles.
Appliance Warm to the Touch	- Operating in direct sunlight. - Cooling fan or vents blocked.	1. Keep the device shaded inside a pit stop tent. 2. Ensure the cooling fan airflow is clean and unobstructed.
Wi-Fi Name Not Appearing on Phone	- Phone Wi-Fi list needs refresh. - Wireless mode changed to Client.	1. Toggle Wi-Fi off and back on in your phone settings. 2. Open Tab 9 in the web dashboard and verify Mode is set to Access Point (AP).

[OFFICIAL SUPPORT] RAPID WHATSAPP ASSISTANCE SOP

RAPID WHATSAPP TECHNICAL SUPPORT (+62 856-4722-9919):

If you encounter any operational difficulties requiring direct engineer guidance:

1. Download Diagnostics Archive: Go to Tab 10: System -> tap the green [Export Diagnostics Logs] button. A ZIP archive will download to your phone.
2. Send via WhatsApp: Forward the ZIP file to our official technical support WhatsApp: +62 856-4722-9919.
3. Receive Patch File: Our engineering team will analyze the logs and send back a targeted fix file (.mscf / .zip).
4. Apply Patch: In Tab 10, select the received file and click [Apply Update]. The device recovers immediately without needing internet in the field!

CHAPTER 10: CUSTOMER SUPPORT & OFFICIAL LICENSING

Each MundoStreamer unit includes an official hardware-bound license and built-in system stability protection to ensure dependable, zero-downtime operation during practice heats and championship drone races.

System Reliability & Operating Security

- **Hardware-Bound Official License:** The license is securely tied to your hardware unit. You enjoy complete Card-Swap Freedom to upgrade or replace your MicroSD card at any time without losing your official license.
- **Power-Cut Resilient System:** The operating system uses protected storage partitions, safeguarding system integrity even if power is abruptly unplugged during field operations.
- **Offline Field Updates:** Software improvements and patches can be installed directly through your smartphone browser without an internet connection.

Hardware Activation & Board Replacement

If you ever transfer your MundoStreamer MicroSD card to a replacement board, the HDMI monitor will present an activation code. Simply contact our support team via WhatsApp for instant activation assistance.

Official Support Channel	Contact & Resource Links
WhatsApp Customer & Technical Support	+62 856-4722-9919 (Fast Response & Field Assistance)
Telegram Pilot Community	@MundoStreamerSupport
Web Portal & Documentation	http://mundostreamer.local:8000
Technical Support Hours	Mon – Sun: 08:00 – 22:00 WIB (Race Event Standby)

[OUR COMMITMENT] FLY SAFE, BROADCAST FAST

THANK YOU FOR CHOOSING MUNDOSTREAMER:

MundoStreamer is dedicated to providing the ultimate FPV video broadcast experience for pilots, race organizers, and spectators worldwide.

Enjoy effortless big-screen TV broadcasts, crisp Full HD DVR recordings, and seamless smartphone viewing on every flight. Fly Safe, Broadcast Fast!