

MUNDOSTREAMER

DJI FPV Video Receiver & Ground Station

OFFICIAL USER MANUAL • RADXA ROCK 3A EDITION

Hardware Model	MundoStreamer Ground Station (Radxa ROCK 3A Edition)
Goggles Compatibility	DJI Goggles V1, V2, Goggles 2, Goggles Integra, and Goggles 3
Monitor Display Output	HDMI Full HD 1080p @ 60 FPS (Ultra-Smooth Live Feed)
Wireless Connectivity	Wi-Fi Hotspot: MundoStreamer (Default Password: 1234512345)
DVR Video Recording	Automatic Full HD 1080p MP4 Recording to USB Flash Drive / SSD
Management Portal	Connect phone/laptop browser to: http://192.168.50.1:8000
Document Version	v2.4.1 Production Release — September 2026

[MAIN FEATURES] WELCOME TO MUNDOSTREAMER

KEY ADVANTAGES OF MUNDOSTREAMER (RADXA ROCK 3A EDITION):

- Ultra-Smooth 60 FPS Live Feed on TV: High-speed racing maneuvers and aerial acrobatics appear crystal-clear without dropped frames or stutter.
- Direct Phone Viewing Without Any App: Spectators, pit crews, and judges can connect to the MundoStreamer Wi-Fi and watch live in their web browser.
- Real-Time Fisheye Lens De-Warp & 3D LUT Grading: Exclusive hardware feature to straighten wide-angle lens curves and enrich colors with cinematic LUTs.
- Automatic DVR Video Recording: Every flight is recorded cleanly in Full HD directly to an external USB flash drive or SSD.
- Instant Replay on TV Screen: Review flight footage on the monitor with a single tap from your phone dashboard without unplugging the pilot's goggles.
- Rapid Technical Support & Log Export: Export full system diagnostic logs in 1 click to send via WhatsApp (+62 856-4722-9919) for immediate remote assistance.

Retain this manual as your official field operating reference and appliance care guide.

TABLE OF CONTENTS

1. Introduction to MundoStreamer FPV Ground Station	Page 2
2. Physical Port Layout & Slide Switch Guide	Pages 3-4
3. Quick Start & Powering On Guide	Page 5
4. Connecting Smartphone & Opening Web Portal	Page 6
5. Dashboard Guide (Tab 1: Goggles Mode & Tab 2: TV Display)	Page 7
6. Dashboard Guide (Tab 3: LUT Colors & Tab 4: Standby Screen)	Page 8
7. Dashboard Guide (Tab 5: Audio & Tab 6: Live Streaming)	Page 9
8. Dashboard Guide (Tab 7: DVR Storage & Tab 8: Media Player)	Page 10
9. Dashboard Guide (Tab 9: Change Wi-Fi & Tab 10: System)	Page 11
10. Video Recording Guide & Instant HDMI Replay	Page 12
11. Connecting Video Feed to Laptop OBS & vMix	Page 13
12. Commentator Microphone & 3.5mm Headphone Jack Guide	Page 14
13. Field Troubleshooting & Problem Solving	Page 15
14. Official Licensing, Security & Customer Support	Page 16

CHAPTER 1: INTRODUCTION TO MUNDOSTREAMER

MundoStreamer is a dedicated, plug-and-play digital FPV video receiver engineered to project live drone camera feeds from DJI FPV goggles directly onto stage TV monitors (HDMI) and wirelessly broadcast the feed to spectator smartphones or laptops.


Key Advantages in the Field

MundoStreamer works instantly in the field without requiring a laptop or sluggish companion software. The system processes the live video feed directly to your display monitor with peak performance:

- **Ultra-Smooth 60 FPS Video:** Displays high-speed racing drone flights at a locked 60 frames per second on the TV monitor, rendering fast maneuvers crystal-clear without motion jitter.
- **Wireless Spectator Viewing:** Spectators in the pit tent can watch the live camera feed right from their own smartphone browsers simply by connecting to the MundoStreamer Wi-Fi.
- **Lens De-warp & Cinematic 3D LUT:** Straightens wide fisheye camera curves and applies cinematic film color profiles in real time.
- **Automatic Flight Recording:** Plug in a flash drive or external SSD to the USB port, and your flight footage is cleanly captured in Full HD.
- **Instant TV Replay:** Review race finishes or freestyle stunts directly on the big screen with a single tap in the smartphone dashboard without unplugging the pilot's goggles.

CHAPTER 2: PHYSICAL PORT LAYOUT & WIRING DIAGRAM

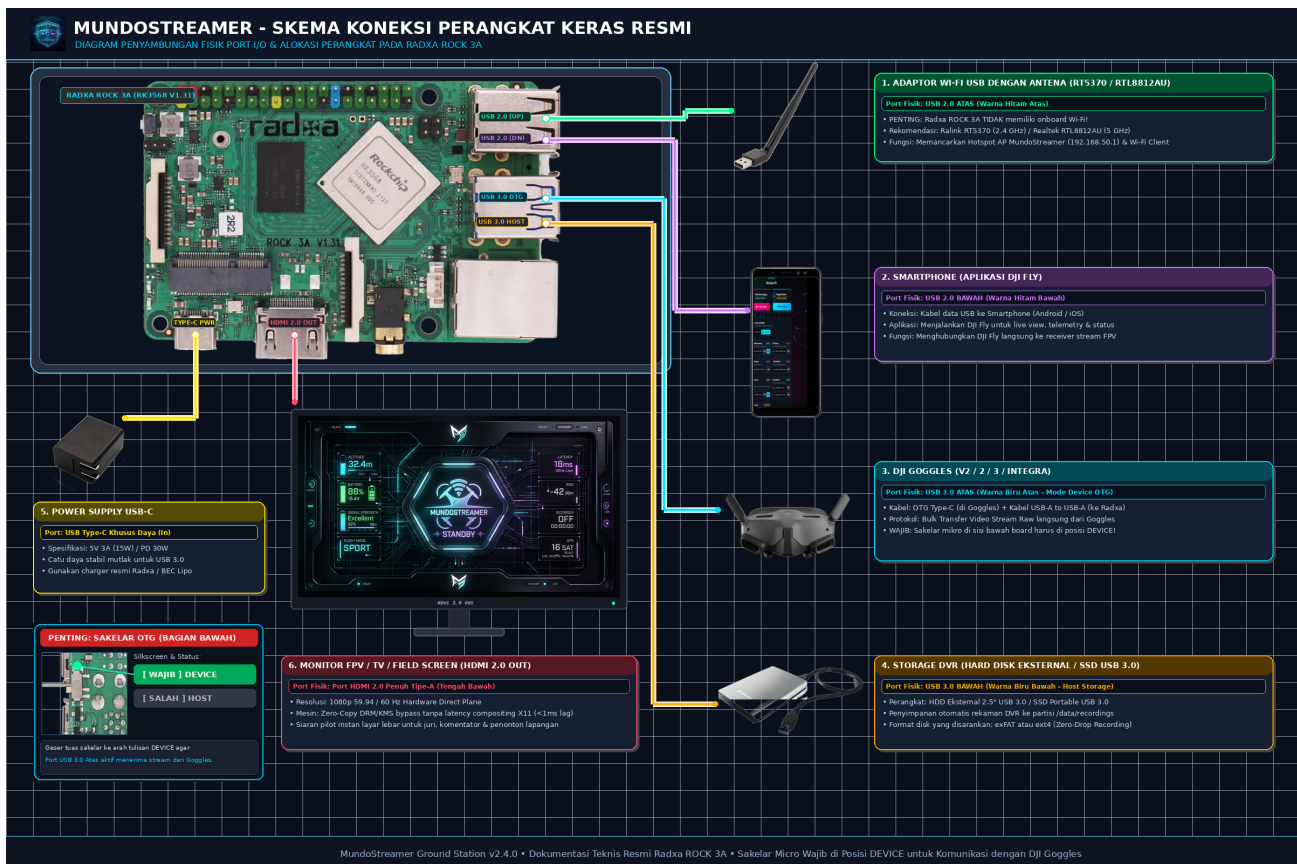To ensure MundoStreamer operates reliably, it is essential to understand the physical cabling layout on the Radxa ROCK 3A board. The high-resolution technical diagram below illustrates the official setup:



[CABLING RULES] CRITICAL FIELD WIRING INSTRUCTIONS

Field Cabling Quick Summary (Radxa ROCK 3A):

- Blue USB 3.0 UPPER Port (DJI Goggles): Connect the DJI Goggles data cable here. The slide switch under the PCB MUST REMAIN IN DEVICE POSITION.
- Blue USB 3.0 LOWER Port (DVR Storage): Attach a high-speed USB 3.0 flash drive or SSD for automatic video recording.
- Black USB 2.0 UPPER Port (Wi-Fi Dongle): Attach the external antenna Wi-Fi dongle to broadcast the MundoStreamer hotspot.
- Black USB 2.0 LOWER Port (Smartphone): Connect phone to run the official DJI Fly application.

CHAPTER 2 (CONT.): PORT ROLES & FIELD CABLING RULES

The following matrix outlines the functional role and mandatory usage guidelines for each physical port on your Radxa ROCK 3A unit:

PHYSICAL PORT	CONNECTED HARDWARE	MANDATORY FIELD GUIDELINES
Blue USB 3.0 UPPER (Top Blue Port)	DJI Goggles Cable	DEDICATED DJI GOGGLES PORT. Connect your DJI Goggles USB cable to this top blue port. The physical slide switch on the underside of the board must remain in DEVICE mode.
Blue USB 3.0 LOWER (Bottom Blue Port)	USB Flash Drive / SSD DVR	DVR STORAGE TARGET. Plug your USB 3.0 flash drive or portable SSD here to store automatic flight video recordings.
Black USB 2.0 UPPER (Top Black Port)	Wi-Fi Dongle (Antenna)	WI-FI HOTSPOT TRANSMITTER. Attach the external antenna USB Wi-Fi adapter here so spectator phones can join the MundoStreamer network across outdoor race fields.
Black USB 2.0 LOWER (Bottom Black Port)	DJI Fly Phone / USB Mic	DJI FLY SMARTPHONE LINK. Connect your phone via USB data cable to run the official DJI Fly app, or connect a secondary USB microphone.
Standard HDMI Port	TV Monitor / Stage Projector	PRIMARY MONITOR OUTPUT. Connect standard HDMI cable to stage display or monitor. Delivers ultra-smooth 1080p @ 60 FPS live video.
3.5mm TRRS Audio Jack	Microphone & Headphones	MIC INPUT & STEREO AUDIO OUT. Supports clip-on commentator microphones and stereo headphones for judges or pit audio speakers.
USB Type-C Power Port	5V / 3A DC Power Supply	MAIN POWER INPUT. Always use a certified 5.0V / 3.0A pure DC power adapter or high-grade power bank (15 Watts minimum).

[CRITICAL WARNING] SLIDE SWITCH MUST BE SET TO DEVICE

CRITICAL FIELD WARNING: UNDERSIDE PCB SLIDE SWITCH

On the underside of the Radxa ROCK 3A PCB is a small physical slide switch.

- This switch MUST ALWAYS REMAIN IN THE 'DEVICE' POSITION (SLID TOWARDS THE HDMI PORT).
- If set to 'HOST', the Blue USB 3.0 UPPER port cannot receive video transmissions from DJI Goggles.
- Never move this switch to the Host position during normal operation!

CHAPTER 3: QUICK START & POWERING ON GUIDE

Follow these 6 practical steps to power on and operate MundoStreamer in under 2 minutes:

Step 1	Connect HDMI Cable to Monitor / TV Plug a standard HDMI cable from the MundoStreamer HDMI port into your TV, monitor, or venue projector.
Step 2	Connect DJI Goggles Connect the USB data cable from your DJI Goggles into the Blue USB 3.0 UPPER (Top Blue Port) on MundoStreamer.
Step 3	Attach Flash Drive / SSD Storage (Optional) If you wish to record flights, plug a flash drive (exFAT / FAT32) into the Blue USB 3.0 LOWER (Bottom Blue Port).
Step 4	Supply DC Power (Power On) Connect a 5V 3A adapter or power bank into the USB Type-C Power port. The power LED will illuminate.
Step 5	Await Standby Wallpaper on Screen (~25 Seconds) In approximately 20-25 seconds, the HDMI screen will display the official MundoStreamer standby wallpaper indicating readiness.
Step 6	Power Up DJI Goggles & Drone Turn on your goggles and drone. As soon as the video link connects, the screen seamlessly switches to the Ultra-Smooth 1080p @ 60 FPS Live FPV Feed!

[FIELD OPERATIONS] INSTANT USB RE-SYNC (TAB 1)

TIPS IF GOGGLES CABLE IS BUMPED OR BATTERY IS SWAPPED:

- Ensure the USB cable connecting your goggles is a high-speed data cable, not a charge-only wire.
- If you swap batteries or the cable is bumped and video pauses, simply open the web dashboard on your phone and tap [Re-sync USB] on Tab 1 to restore live video instantly.

HDMI Display Visual Status Indicators

The TV monitor display clearly indicates current device status:

- Moving Standby Video Animation: MundoStreamer is active and awaiting drone / goggles signal.
- Full-Screen Live Drone Video: Drone actively connected and transmitting live video at 60 FPS.
- Black Screen / No Signal: Check HDMI cable seating or ensure the 5V 3A power supply is adequate.


CHAPTER 4: SMARTPHONE LIVE VIEW & WEB DASHBOARD

MundoStreamer features two user-friendly web portals: the Spectator Live View for anyone wanting to watch on their smartphone, and the Admin Dashboard for configuring device settings.

1. Connecting to the Wi-Fi Hotspot

- Open the Wi-Fi settings on your smartphone.
- Connect to network (SSID): MundoStreamer (Default Password: 1234512345).
- Open any web browser (Chrome / Safari) and navigate to: `http://192.168.50.1:8000`

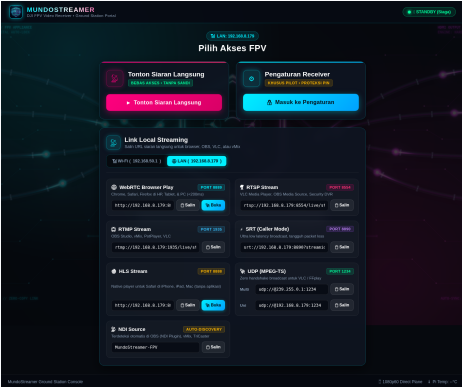Spectator Live View Portal



Admin Settings Login Portal

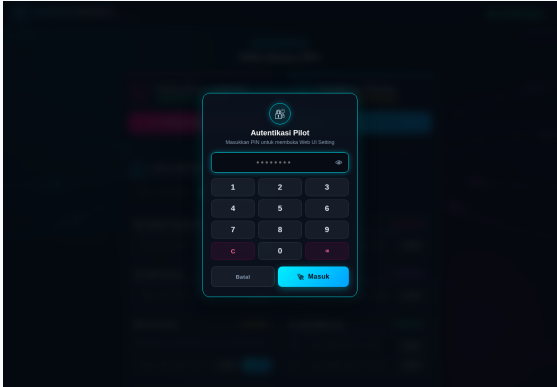


Figure 4.1: Mobile Live Spectator Feed

Opens automatically when connecting to the web portal. Spectators and judges can watch the live camera stream on their phones without installing any app.

Figure 4.2: Admin Dashboard Login Screen

Click the Admin Login button to access full controls (PIN: 11118888).

Parameter	Default Value	Usage Instructions
Wi-Fi SSID Name	MundoStreamer	Join this wireless network on your phone or laptop
Wi-Fi Password	1234512345	Can be customized in Tab 9 if desired
Web URL (Browser)	<code>http://192.168.50.1:8000</code>	Type into Chrome, Safari, or Firefox address bar
Alternative URL	<code>http://mundostreamer.local:8000</code>	Automatic mDNS domain name without remembering numbers
Admin Username / PIN	admin / 11118888	Credentials to access device configuration menu

CHAPTER 5: WEB DASHBOARD CONFIGURATION GUIDE

Upon logging into the Admin Dashboard, you have access to intuitive settings tabs. Here is the practical operating guide for Tab 1 (Goggles Mode) and Tab 2 (TV Display):

Tab 1: Goggles Mode (Receiver Mode)

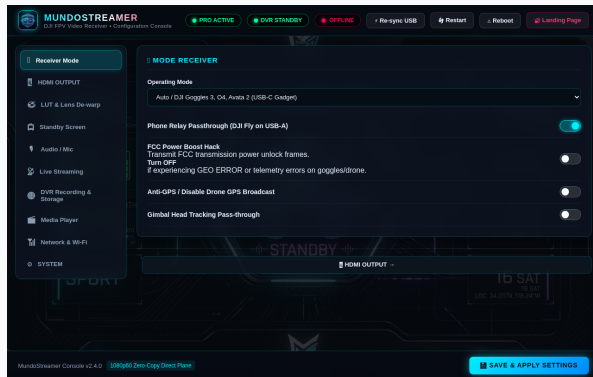


Figure 5.1: DJI Goggles Mode Selection

Usage Instructions:

- **DJI Goggles (Auto):** Standard setting for DJI Goggles V1, V2, Goggles 2, Integra, and G3.
- **UVC Capture Card:** Select when using an external USB capture card.
- **Re-sync USB Button:** Reconnects goggles instantly if cable was bumped.
- **Reboot Button:** Restarts the appliance safely.

Tab 2: TV Display (HDMI Output)

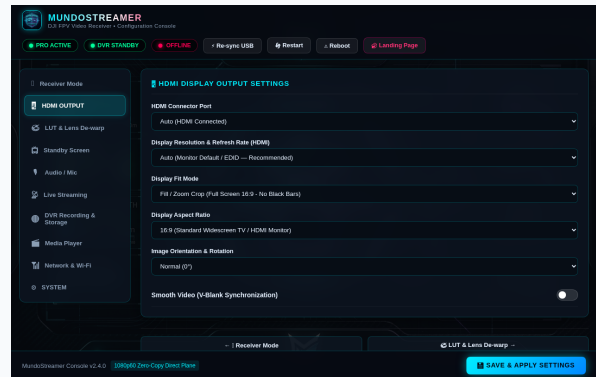


Figure 5.2: TV Display & Aspect Ratio Setup

Usage Instructions:

- **Display Resolution:** Full HD 1080p @ 60 FPS ultra-smooth output.
- **Fit Mode:** Choose Fit (original ratio) or Cover (fill entire TV screen without side borders).
- **Aspect Ratio:** Preserve 16:9 or 4:3 native camera ratios.
- **HDMI Audio:** Route flight audio directly to TV speakers.

Emergency Quick Actions in Tab 1

At the top of Tab 1 are emergency recovery buttons designed for race events:

- **[Re-sync USB]:** Refreshes the USB goggles connection instantly without rebooting the device. Clears frozen video if a cable was bumped.
- **[Restart]:** Re-spawns video receiving services cleanly in under 2 seconds.
- **[Reboot]:** Gracefully restarts the entire appliance.

CHAPTER 5: WEB DASHBOARD GUIDE (CONT.)

Configuration overview for Tab 3 (LUT & Lens De-warp) and Tab 4 (Standby Screen & Wallpaper):


Tab 3: LUT & Lens De-warp (Active)

Figure 5.3: Lens Flattening & Color Grading

Radxa Hardware Exclusive:

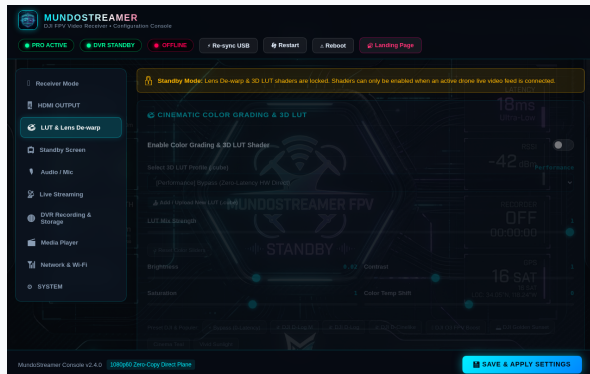- **Lens De-warp (O3 / Action):** Real-time fisheye curvature flattening for DJI O3 Air Unit cameras so horizon lines appear natural.
- **Cinematic 3D LUT:** Applies instant cinematic film color profiles.
- **Direct Passthrough:** When disabled, raw video passes directly to HDMI at 60 FPS with zero GPU load.

Tab 4: Standby Screen (Custom Wallpaper)

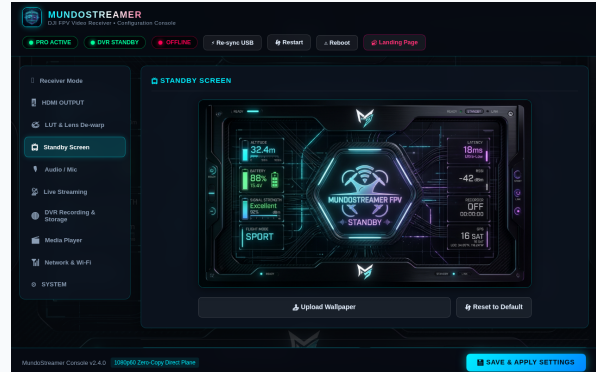


Figure 5.4: Standby Screen & Team Branding

Usage Instructions:

- **Crisp Standby Display:** Razor-sharp display that activates automatically while awaiting drone video.
- **Custom Wallpaper Upload:** Upload your team logo or sponsor graphics (PNG, JPG, or WebP).
- **Direct DRM Scanout:** Renders directly to display planes so VPU decoders remain idle and cold for instant drone linkup.

[FLIGHT SAFETY] CODEC-SAFE STANDBY WALLPAPER SCANOUT

MULTI-CODEC SAFETY & ZERO BLACK-SCREEN RISK:

MundoStreamer utilizes Direct DRM Framebuffer Scanout for the standby display. By avoiding looping video files during standby, the VPU hardware decoder is protected from bitstream codec collisions (H.264 vs H.265). When an active drone feed arrives, handover occurs instantly in under 20ms with zero risk of mid-flight black screens!

CHAPTER 5: WEB DASHBOARD GUIDE (CONT.)

Configuration breakdown for Tab 5 (Audio Settings) and Tab 6 (Live Streaming Broadcasts):

Tab 5: Audio & 3.5mm Mic Settings

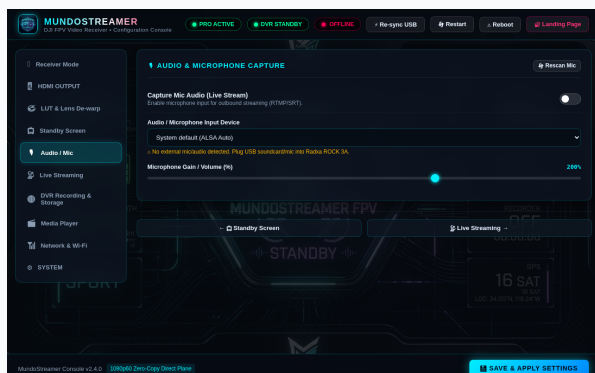


Figure 5.5: Sound Volume & Mic Levels

Usage Instructions:

- **HDMI Audio Out:** Routes drone telemetry and motor audio to TV speakers.
- **3.5mm Stereo Out:** Analog output for headphones and judges' monitor speakers.
- **3.5mm Mic In:** Plug clip-on lavalier mic into 3.5mm jack for live commentary.
- **Volume Sliders:** Adjust output levels and mic gain cleanly.

Tab 6: Live Streaming Broadcast

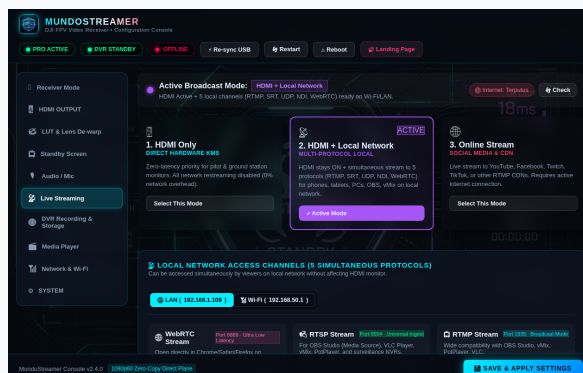


Figure 5.6: YouTube, TikTok & OBS Streaming

Usage Instructions:

- **RTSP Address (rtsp://192.168.50.1:8554/live):** Add to OBS Studio or vMix on your broadcast laptop.
- **YouTube / Facebook RTMP:** Enter RTMP URL and Stream Key to broadcast live to cloud video platforms.
- **WebRTC Stream:** Zero-lag live viewing in mobile web browsers.

Simultaneous Multi-Destination Broadcast

MundoStreamer distributes live video to multiple destinations at the same time without performance degradation:

1. **Main Stage Display (HDMI):** Watched live by event spectators, judges, and commentators on the big screen.
2. **Spectator Smartphones (Wi-Fi):** Attendees around the track watch live directly in their mobile phone web browsers.
3. **Broadcast Production Feed (Gigabit LAN):** High-speed Ethernet to your OBS/vMix laptop for graphics overlays and cloud streaming.

CHAPTER 5: WEB DASHBOARD GUIDE (CONT.)

Configuration breakdown for Tab 7 (DVR Recording & Storage) and Tab 8 (Media Player & TV Replay):

Tab 7: DVR Recording & Storage

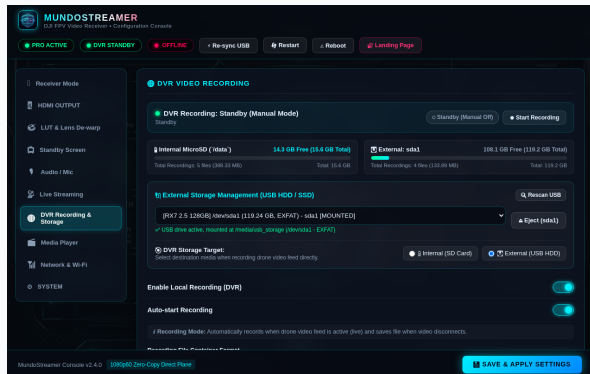


Figure 5.7: Automatic DVR & Storage Setup

Usage Instructions:

- **Dual Storage Capacity:** Monitor internal MicroSD and external USB SSD capacity simultaneously.
- **USB Drive Management:** Mount, safe unmount, and rescan USB media directly from the web.
- **Auto-Start Recording:** Pure H.264/H.265 bitstream capture without HDMI performance loss.

Tab 8: Media Player (HDMI Replay)

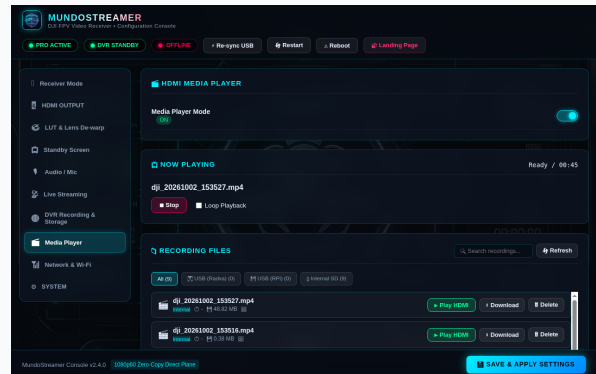


Figure 5.8: Dedicated HDMI Media Player & Replay

Usage Instructions:

- **Hardware Accelerated Playback:** Review Full HD 60 FPS flight replays on HDMI Plane 112.
- **Flight Safety Interlock:** Automatically locks while drone is active to protect live FPV stream.
- **Smart Playlist & Filters:** Category filter pills for USB vs MicroSD, instant search, and downloads.

[FEATURE SPOTLIGHT] INSTANT HDMI REPLAY & FLIGHT SAFETY

DEDICATED MEDIA PLAYER & FLIGHT SAFETY INTERLOCK:

On Tab 8, click the blue [Play HDMI] button next to any flight recording to review it on the big screen with judges or spectators.

- **Flight Safety Lock:** The system locks the Media Player menu while a live drone stream is active. If a pilot powers up to fly during playback, HDMI immediately reverts to the live flight feed!

CHAPTER 5: WEB DASHBOARD GUIDE (CONT.)

Configuration breakdown for Tab 9 (Wi-Fi Settings) and Tab 10 (System, Log Export & Technical Support):

Tab 9: Wi-Fi & Network Settings

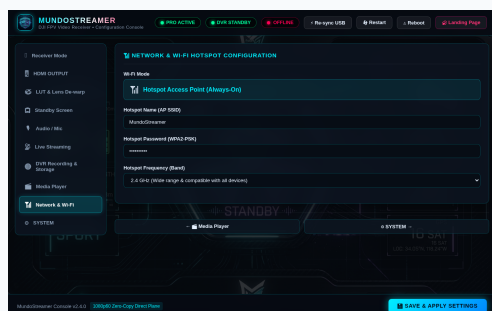


Figure 5.9: Change Wi-Fi Name & Password

Usage Instructions:

- **Change Wi-Fi Name (SSID):** Customize the hotspot name to match your race event or team brand.
- **Change Wi-Fi Password:** Update your wireless network password.
- **Connect to Venue Wi-Fi:** Connect MundoStreamer to venue internet for live streaming to YouTube.

Tab 10: System & Technical Support

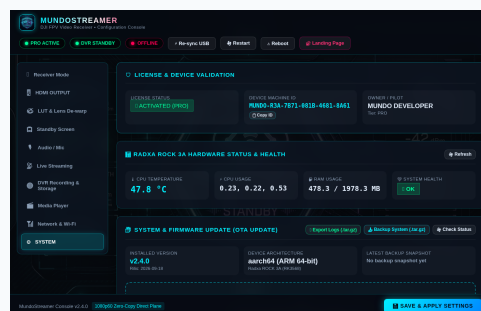


Figure 5.10: Diagnostics & Safe Power Off

Usage Instructions:

- **Export Diagnostic Logs:** 1-click button to download system logs when consulting technicians via WhatsApp.
- **Offline Patch Update:** Install hotfixes or feature updates from engineers with no internet needed.
- **Power Off System:** Clean shutdown prior to disconnecting power.

[WI-FI GUIDANCE] OFFICIAL USB WI-FI ADAPTER

WI-FI USB DONGLE GUIDANCE ON RADXA ROCK 3A:

Radxa ROCK 3A uses an external antenna USB Wi-Fi dongle plugged into the Black USB 2.0 UPPER port.

- Use a verified high-gain external antenna USB adapter (e.g. Ralink RT5370 or MT7601U) for optimal signal coverage across open outdoor race tracks.
- Instruct spectators to join Wi-Fi network: MundoStreamer (Password: 1234512345) and navigate to <http://192.168.50.1:8000>.

[DEVICE CARE] HOW TO PROPERLY POWER OFF

SAFE SYSTEM SHUTDOWN PROCEDURE (POWER OFF):

MundoStreamer features a protected memory architecture, making it resilient against accidental power disconnections.

- However, for a clean shutdown at the end of an event: Go to Tab 10: System and tap the red Power Off System button. Wait ~10 seconds until the TV screen powers down before unplugging the power supply.

CHAPTER 6: DVR RECORDING & INSTANT REPLAY

MundoStreamer features automatic video recording that stores flight footage directly onto an external USB flash drive without degrading live video quality or adding latency to the pilot's goggles.

1. Recommended Storage Media & USB Guidelines

To ensure video recordings are stored smoothly and reliably:

- Use high-speed USB 3.0 Flash Drives or Portable USB SSDs.
- Always plug into the Blue USB 3.0 Lower Port (Blue USB 3.0 LOWER).
- Format the drive as exFAT so recordings can be copied and viewed directly on Windows PC or MacBook laptops.

2. How to Replay Flight Recordings on TV Monitor (HDMI)

You can replay flight recordings on the big-screen TV monitor without disconnecting the pilot's goggles:

Stage	Operational Replay Steps
Step 1	Open the web dashboard on your phone or laptop and go to Tab 8: Media Player.
Step 2	Select the recorded flight file you wish to review (use category filter pills or search).
Step 3	Click the blue [Play HDMI] button next to the recording filename.
Step 4	The video will immediately play on the HDMI display in smooth 60 FPS without disconnecting any cables.
Step 5	To conclude playback and return to the standby wallpaper, click [Stop].

[FLIGHT SAFETY] AUTOMATIC LIVE FLIGHT OVERRIDE

AUTOMATIC LIVE FLIGHT OVERRIDE SENSOR:

MundoStreamer incorporates an automated flight safety sensor: The instant live transmission from a drone is detected, any active HDMI video replay is immediately halted and the display switches to the live flight feed! This guarantees that live race flights are never obscured by recorded video.

CHAPTER 7: CONNECTING FEED TO LAPTOP OBS & VMIX

For event organizers broadcasting race video to production mixers like OBS Studio, vMix, venue projectors, or social media live streaming platforms:

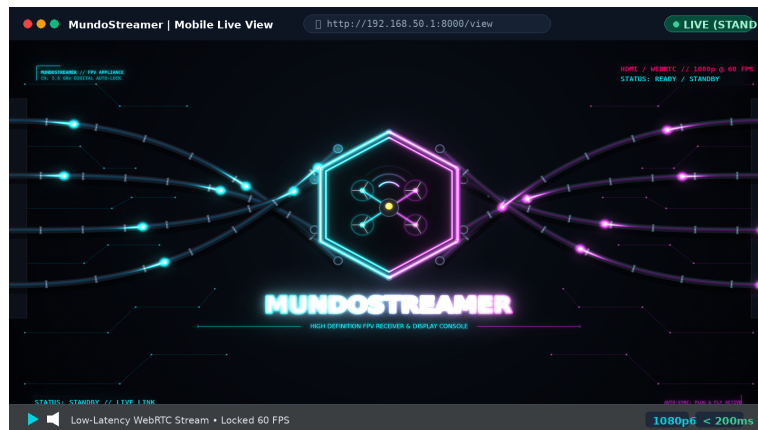


Figure 7.1: Mobile Spectator Web Browser Player

1. Connecting Drone Video to OBS Studio / vMix (LAN Cable)

A wired Ethernet LAN connection delivers pristine Full HD video quality that is stable and interference-free:

1. Connect an Ethernet cable from the MundoStreamer LAN port to your broadcast laptop.
2. Open OBS Studio -> Click + (Add Source) -> Select Media Source.
3. Uncheck Local File.
4. In the Input field, enter: `rtsp://192.168.50.1:8554/live`
5. Click OK. The live drone video will appear immediately on your OBS canvas!

2. Mobile Spectator Viewing (WebRTC Live View)

Spectators and race judges can watch the live stream on their mobile phones without installing any app:

- Connect your phone to Wi-Fi network MundoStreamer (Password: 1234512345).
- Open any web browser (Chrome, Safari, Firefox) and enter: `http://192.168.50.1:8000`
- The live camera feed streams instantly with ultra-low latency directly on your phone!

3. Direct Streaming to YouTube, TikTok & Facebook

When MundoStreamer has internet access (via venue Wi-Fi on Tab 9 or Gigabit LAN):

- Navigate to Tab 6: Live Streaming.
- Enter the RTMP URL and Stream Key provided by your streaming platform.
- Check Enable RTMP Stream and click Save Settings.
- MundoStreamer broadcasts directly to cloud streaming platforms autonomously!

CHAPTER 8: COMMENTATOR AUDIO & MICROPHONE GUIDE

MundoStreamer supports complete audio integration: drone telemetry sound to TV speakers, headphone monitoring for judges via the 3.5mm jack, and live commentator microphone input.

1. Drone Sound to TV Monitor Speakers (HDMI)

Drone motor and telemetry sound from your DJI goggles is automatically routed directly to the TV monitor speakers through the HDMI cable without requiring any extra audio wires.

2. 3.5mm Audio Jack for Judges' Headphones / Pit Speakers

The 3.5mm audio jack on the front edge provides clean analog stereo sound output:

- You can plug in headphones for judges or connect an AUX cable to pit speakers so the crowd can clearly hear propeller audio during the race.

3. Adding Live Commentator Microphones

To add commentator voice or event announcements into video recordings and live streams:

1. Plug a standard 3.5mm TRRS clip-on microphone (or USB mic) into the MundoStreamer unit.
2. Open the web dashboard on your phone -> Navigate to Tab 5: Audio Configuration.
3. Enable the microphone option and adjust audio level with the Microphone Boost slider.
4. Go to Tab 7: DVR Recording & Storage -> Ensure Audio Mode is set to Video + Mic Audio.
5. Commentary voice will blend clearly into Full HD MP4 recordings and online live streams!

[AUDIO GUIDANCE] RECOMMENDED COMMENTATOR MICROPHONE

FIELD COMMENTATOR MICROPHONE RECOMMENDATIONS:

Use a wireless clip-on lavalier mic so the commentator can roam freely along the race circuit while broadcasting live commentary without cable restrictions.

CHAPTER 9: FIELD TROUBLESHOOTING & SOLUTIONS

Refer to this quick troubleshooting matrix if you encounter any difficulties during field operations:

FIELD SYMPTOM	PROBABLE CAUSES	IMMEDIATE FIELD REMEDY
TV Screen Dark / No Signal	- Loose HDMI cable. - Wrong TV input selected. - Power supply below 5V 3A.	- Ensure TV is switched to the correct HDMI input port. - Verify HDMI cable is firmly seated. - Use a verified 5.0V / 3.0A pure DC power adapter.
Display Stays on Standby Wallpaper	- Underside slide switch set to Host. - USB cable is charge-only. - Drone not yet armed/powerd.	- Verify underside slide switch is set to DEVICE. - Ensure USB cable supports high-speed data. - Open Tab 1 and tap [Re-sync USB].
Appliance Warm to the Touch	- Operating in direct sunlight. - Cooling fan or vents blocked.	- Keep the device shaded inside a pit stop tent. - Ensure the cooling fan airflow is clean and unobstructed.
Wi-Fi Name Not Appearing on Phone	- USB Wi-Fi dongle loose/unplugged. - Phone Wi-Fi list needs refresh.	- Ensure external antenna USB Wi-Fi dongle is seated in top black USB port. - Toggle Wi-Fi off and on in your phone settings.

[OFFICIAL SUPPORT] RAPID WHATSAPP ASSISTANCE SOP

RAPID WHATSAPP TECHNICAL SUPPORT (+62 856-4722-9919):

If you encounter any operational difficulties requiring direct engineer guidance:

- Download Diagnostics Archive: Go to Tab 10: System -> tap the green [Export Diagnostics Logs] button. A ZIP archive will download to your phone.
- Send via WhatsApp: Forward the ZIP file to our official technical support WhatsApp: +62 856-4722-9919.
- Receive Patch File: Our engineering team will analyze the logs and send back a targeted fix file (.mscf / .zip).
- Apply Patch: In Tab 10, select the received file and click [Apply Update]. The device recovers immediately without needing internet in the field!

CHAPTER 10: CUSTOMER SUPPORT & OFFICIAL LICENSING

Each MundoStreamer unit includes an official hardware-bound license and built-in system stability protection to ensure dependable, zero-downtime operation during practice heats and championship drone races.

System Reliability & Operating Security

- **Hardware-Bound Official License:** The license is securely tied to your hardware unit. You enjoy complete Card-Swap Freedom to upgrade or replace your MicroSD card at any time without losing your official license.
- **Power-Cut Resilient System:** The operating system uses protected storage partitions, safeguarding system integrity even if power is abruptly unplugged during field operations.
- **Offline Field Updates:** Software improvements and patches can be installed directly through your smartphone browser without an internet connection.

Hardware Activation & Board Replacement

If you ever transfer your MundoStreamer MicroSD card to a replacement board, the HDMI monitor will present an activation code. Simply contact our support team via WhatsApp for instant activation assistance.

Official Support Channel	Contact & Resource Links
WhatsApp Customer & Technical Support	+62 856-4722-9919 (Fast Response & Field Assistance)
Telegram Pilot Community	@MundoStreamerSupport
Web Portal & Documentation	http://mundostreamer.local:8000
Technical Support Hours	Mon – Sun: 08:00 – 22:00 WIB (Race Event Standby)

[OUR COMMITMENT] FLY SAFE, BROADCAST FAST

THANK YOU FOR CHOOSING MUNDOSTREAMER:

MundoStreamer is dedicated to providing the ultimate FPV video broadcast experience for pilots, race organizers, and spectators worldwide.

Enjoy effortless big-screen TV broadcasts, crisp Full HD DVR recordings, and seamless smartphone viewing on every flight. Fly Safe, Broadcast Fast!