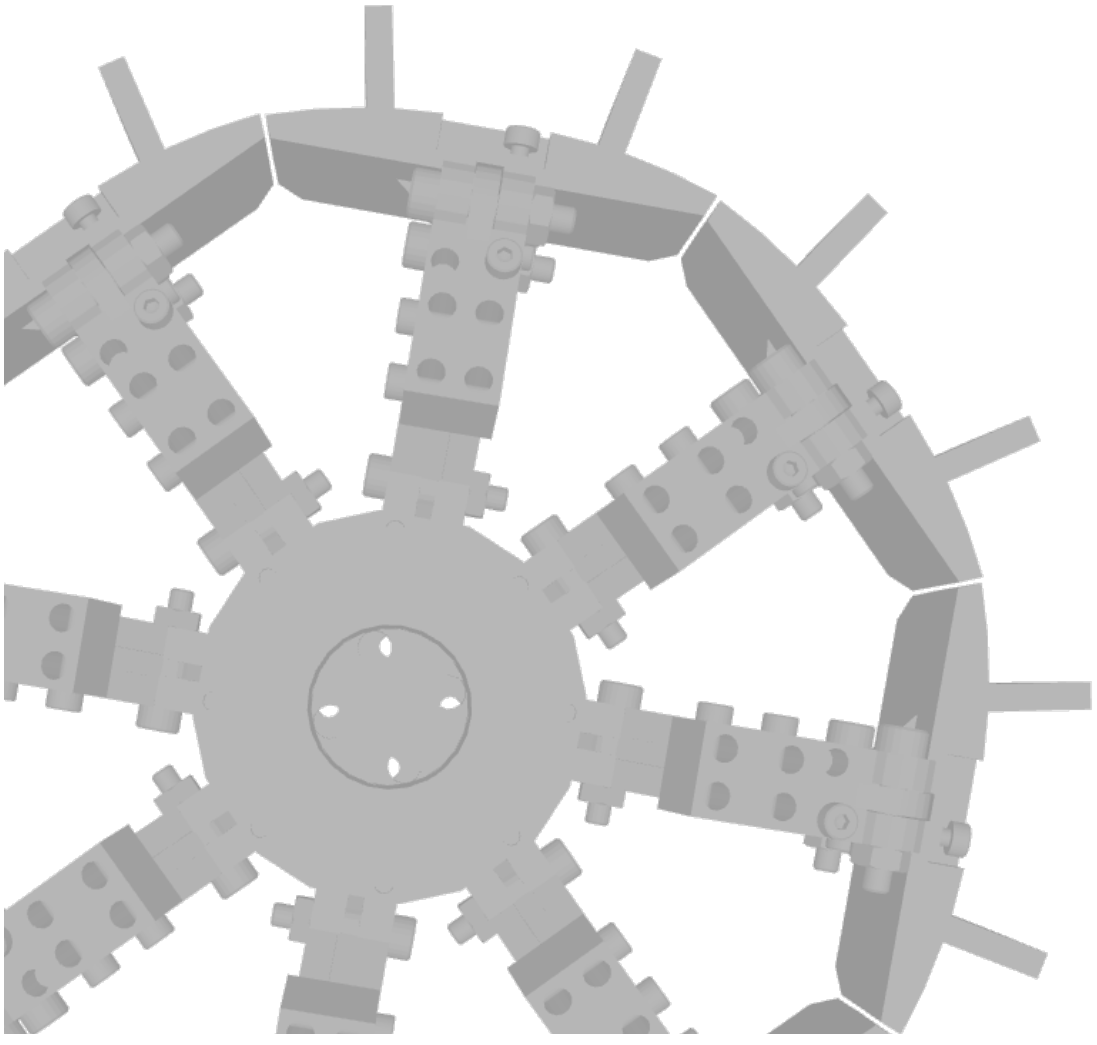


Bibliography

[1] How can robots succeed in unstructured environments ? blind submission. 2008. URL https://api.semanticscholar.org/CorpusID:14390138.

[2] A. Al-Salameh, S. H. M. Amin, and R. bin Mamat. Mechanical design of a quadruped robot for horizontal ground to vertical wall movement. *2000 TENCON Proceedings. Intelligent Systems and Technologies for the New Millennium (Cat. No.00CH37119)*, 1:213–217 vol.1, 2000. URL https://api.semanticscholar.org/CorpusID:62100829.

[3] J. Angeles. *Fundamentals of Robotic Mechanical Systems: Theory, Methods, and Algorithms (Mechanical Engineering Series)*. Springer Publishing Company, Incorporated, 4th ed. 2014 edition, 2013. ISBN 3319018507.

[4] T. Arai, N. Koyachi, H. Adachi, and K. Homma. Integrated arm and leg mechanism and its kinematic analysis. In *Proceedings of 1995 IEEE International Conference on Robotics and Automation*, volume 1, pages 994–999 vol.1, 1995. doi: 10.1109/ROBOT.1995.525412.

[5] J. C. Arevalo and E. Garcia. Impedance control for legged robots: An insight into the concepts involved. *IEEE Transactions on Systems, Man, and Cybernetics, Part C (Applications and Reviews)*, 42(6):1400–1411, 2012. doi: 10.1109/TSMCC.2012.2187190.

[6] H. Asada. A geometrical representation of manipulator dynamics and its application to arm design. *Journal of Dynamic Systems, Measurement, and Control*, 105(3):131–142, 09 1983. ISSN 0022-0434. doi: 10.1115/1.3140644. URL https://doi.org/10.1115/1.3140644.

[7] K. J. Åstrom and L. Rundqwist. Integrator windup and how to avoid it. *1989 American Control Conference*, pages 1693–1698, 1989. URL https://api.semanticscholar.org/CorpusID:36848080.

[8] Y. Bar-Cohen. Biomimetics –using nature to inspire human innovation. *Bioinspiration & biomimetics*, 1:P1–P12, 04 2006. doi: 10.1088/1748-3182/1/1/P01.

[9] C. D. Bellicoso, M. Bjelonic, L. Wellhausen, K. Holtmann, F. Günther, M. Tranzatto, P. Fankhauser, and M. Hutter. Advances in real-world applications for legged robots. *Journal of Field Robotics*, 35(8):1311–1326, 2018. doi: https://doi.org/10.1002/rob.21839. URL https://onlinelibrary.wiley.com/doi/abs/10.1002/rob.21839.

[10] A. Bicchi, C. Melchiorri, and D. Balluchi. On the mobility and manipulability of general multiple limb robots. *IEEE Transactions on Robotics and Automation*, 11 (2):215–228, 1995. doi: 10.1109/70.370503.

[11] R. Bischoff, J. Kurth, G. Schreiber, R. Koeppe, A. Albu-Schaeffer, A. Beyer, O. Eiberger, S. Haddadin, A. Stemmer, G. Grunwald, and G. Hirzinger. The kuka-dlr lightweight robot arm - a new reference platform for robotics research and manufacturing. In *ISR 2010 (41st International Symposium on Robotics) and ROBOTIK 2010 (6th German Conference on Robotics)*, pages 1–8, 2010.

[12] M. Bjelonic. *Planning and control for hybrid locomotion of wheeled-legged robots*. PhD thesis, 2021.

[13] M. Bjelonic, P. K. Sankar, C. D. Bellicoso, H. Vallery, and M. Hutter. Rolling in the deep –hybrid locomotion for wheeled-legged robots using online trajectory optimization. *IEEE Robotics and Automation Letters, vol. 5, no. 2, pp. 3626-3633, April 2020*, 2020. doi: 10.1109/LRA.2020.2979661.

[14] P. Bolzern, R. Scattolini, and N. Schiavoni. *Fondamenti di controlli automatici*. Collana di istruzione scientifica. McGraw-Hill Education, 2015. ISBN 9788838668821. URL https://books.google.it/books?id=nVEhrgEACAAJ.

[15] P. Borges, T. Peynot, S. Liang, B. Arain, M. Wildie, M. Minareci, S. Lichman, G. Samvedi, I. Sa, N. Hudson, M. Milford, P. Moghadam, and P. Corke. A survey on terrain traversability analysis for autonomous ground vehicles: Methods, sensors, and challenges. *Field Robotics*, 2:1567–1627, 2022. URL https://api.semanticscholar.org/CorpusID:250597832.

[16] F. Caccavale and M. Uchiyama. *Cooperative Manipulators*, pages 701–718. Springer Berlin Heidelberg, Berlin, Heidelberg, 2008. ISBN 978-3-540-30301-5. doi: 10.1007/978-3-540-30301-5_30. URL https://doi.org/10.1007/978-3-540-30301-5_30.

[17] M. Camurri, M. Ramezani, S. Nobili, and M. Fallon. Pronto: A multi-sensor state estimator for legged robots in real-world scenarios. *Frontiers in Robotics and AI*, 7, 2020. ISSN 2296-9144. doi: 10.3389/frobt.

2020.00068. URL https://www.frontiersin.org/journals/robotics-and-ai/articles/10.3389/frobt.2020.00068.

[18] A. Candalot, M.-M. Hashim, B. Hickey, M. Laine, M. Hunter-Scullion, and K. Yoshida. Soft gripping system for space exploration legged robots, 2024. URL https://arxiv.org/abs/2411.05482.

[19] A. Candalot, M.-M. Hashim, B. Hickey, M. Laine, M. Hunter-Scullion, and K. Yoshida. Soft gripping system for space exploration legged robots, 2024. URL https://arxiv.org/abs/2411.05482.

[20] H. Chai, Y. Li, R. Song, G. Zhang, Q. Zhang, S. Liu, J. Hou, Y. Xin, M. Yuan, G. Zhang, and Z. Yang. A survey of the development of quadruped robots: Joint configuration, dynamic locomotion control method and mobile manipulation approach. *Biomimetic Intelligence and Robotics*, 2(1):100029, 2022. ISSN 2667-3797. doi: https://doi.org/10.1016/j.birob.2021.100029. URL https://www.sciencedirect.com/science/article/pii/S2667379721000292.

[21] P. Chiacchio, S. Chiaverini, L. Sciavicco, and B. Siciliano. On the manipulability of dual cooperative robots. 1989. URL https://api.semanticscholar.org/CorpusID:11436616.

[22] P. Chiacchio, S. Chiaverini, L. Sciavicco, and B. Siciliano. Global task space manipulability ellipsoids for multiple-arm systems. *IEEE Trans. Robotics Autom.*, 7: 678–685, 1991. URL https://api.semanticscholar.org/CorpusID:17597553.

[23] S. Chiu. Control of redundant manipulators for task compatibility. In *Proceedings. 1987 IEEE International Conference on Robotics and Automation*, volume 4, pages 1718–1724, 1987. doi: 10.1109/ROBOT.1987.1087795.

[24] S. L. Chiu. Task compatibility of manipulator postures. *The International Journal of Robotics Research*, 7(5):13–21, 1988. doi: 10.1177/027836498800700502. URL https://doi.org/10.1177/027836498800700502.

[25] Y.-S. Choi, I. Rhee, P. T. Hoang, and H. R. Choi. Simple desired manipulability ellipsoid with velocity and force for control of redundant manipulator. *Journal of Mechanical Science and Technology*, 37:2033–2041, 2023. URL https://api.semanticscholar.org/CorpusID:257887990.

[26] J. Collins, S. Chand, A. Vanderkop, and D. Howard. A review of physics simulators for robotic applications. *IEEE Access*, 9:51416–51431, 2021. doi: 10.1109/ACCESS.2021.3068769.

[27] P. Corke. Robotics, vision and control - fundamental algorithms in matlab®. In *Springer Tracts in Advanced Robotics*, 2011. URL `https://api.semanticscholar.org/CorpusID:19381082`.

[28] A. de Luca and R. Mattone. Sensorless robot collision detection and hybrid force/-motion control. In *Proceedings of the 2005 IEEE International Conference on Robotics and Automation*, pages 999–1004, 2005. doi: 10.1109/ROBOT.2005.1570247.

[29] A. de Luca and R. Mattone. Sensorless robot collision detection and hybrid force/-motion control. In *Proceedings of the 2005 IEEE International Conference on Robotics and Automation*, pages 999–1004, 2005. doi: 10.1109/ROBOT.2005.1570247.

[30] A. De Luca, A. Albu-Schaffer, S. Haddadin, and G. Hirzinger. Collision detection and safe reaction with the dlr-iii lightweight manipulator arm. In *2006 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 1623–1630, 2006. doi: 10.1109/IROS.2006.282053.

[31] J. Delmerico, S. Mintchev, A. Giusti, B. Gromov, K. Melo, T. Horvat, C. Cadena, M. Hutter, A. Ijspeert, D. Floreano, L. M. Gambardella, R. Siegwart, and D. Scaramuzza. The current state and future outlook of rescue robotics. *Journal of Field Robotics*, 36(7):1171–1191, 2019. doi: https://doi.org/10.1002/rob.21887. URL `https://onlinelibrary.wiley.com/doi/abs/10.1002/rob.21887`.

[32] J. Denavit and R. S. Hartenberg. A Kinematic Notation for Lower-Pair Mechanisms Based on Matrices. *Journal of Applied Mechanics*, 22(2):215–221, June 1955. doi: 10.1115/1.4011045.

[33] G. C. Devol and J. F. Engelberger. Programmed article handling machine, Aug 1964. URL `https://patents.google.com/patent/US3141746A/en`. Filed in 1956, issued in 1964.

[34] I. I. di Tecnologia (IIT). Hyqreal robot, 2025. URL `https://dls.iit.it/hyqreal`.

[35] B. Dieber and B. Breiling. Security considerations in modular mobile manipulation. In *2019 Third IEEE International Conference on Robotic Computing (IRC)*, pages 70–77, 2019. doi: 10.1109/IRC.2019.00019.

[36] M. Djawdan. Locomotor performance of bipedal and quadrupedal heteromyid rodents. *Functional Ecology*, 7(2):195–202, 1993. ISSN 02698463, 13652435. URL `http://www.jstor.org/stable/2389887`.

[37] A. I. Doroshenko. Problems of modelling proportional–integral–derivative controller in automated control systems. 2017. URL https://api.semanticscholar.org/CorpusID:62833925.

[38] B. Dynamics. Spot robot, 2025. URL https://bostondynamics.com/products/spot/.

[39] G. Endo and S. Hirose. Study on roller-walker. multi-mode steering control and self-contained locomotion. volume 3, pages 2808 – 2814 vol.3, 02 2000. ISBN 0-7803-5886-4. doi: 10.1109/ROBOT.2000.846453.

[40] S. Fahmi, C. Mastalli, M. Focchi, and C. Semini. Passive whole-body control for quadruped robots: Experimental validation over challenging terrain, 2019. URL https://arxiv.org/abs/1811.00884.

[41] S. Fahmi, C. Mastalli, M. Focchi, and C. Semini. Passive whole-body control for quadruped robots: Experimental validation over challenging terrain, 2019. URL https://arxiv.org/abs/1811.00884.

[42] Y. Fan, Z. Pei, C. Wang, M. Li, Z. Tang, and Q. Liu. A review of quadruped robots: Structure, control, and autonomous motion. *Advanced Intelligent Systems*, 6(6):2300783, 2024. doi: https://doi.org/10.1002/aisy.202300783. URL https://advanced.onlinelibrary.wiley.com/doi/abs/10.1002/aisy.202300783.

[43] B. M. Fard and S. M. Bruijn. On the manipulability of swing foot and stability of human locomotion. *Multibody System Dynamics*, 46:109–125, 2019. URL https://api.semanticscholar.org/CorpusID:127223126.

[44] B. M. Fard and M. Mosadeghzad. Manipulability based hierarchical control of perturbed walking. *International Journal of Control, Automation and Systems*, 17 (9):2343–2353, September 2019. ISSN 2005-4092. doi: 10.1007/s12555-018-0577-9. URL https://doi.org/10.1007/s12555-018-0577-9.

[45] D. Feller. Dexterity, workspace and performance analysis of the conceptual design of a novel three-legged, redundant, lightweight, compliant, serial-parallel robot. *J. Intell. Robotics Syst.*, 109(1), Aug. 2023. ISSN 0921-0296. doi: 10.1007/s10846-023-01900-8. URL https://doi.org/10.1007/s10846-023-01900-8.

[46] G. Fink and C. Semini. Proprioceptive sensor fusion for quadruped robot state estimation. In *2020 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages 10914–10920, 2020. doi: 10.1109/IROS45743.2020.9341521.

[47] R. Finotello, T. Grasso, G. Rossi, and A. Terribile. Computation of kinetostatic

performances of robot manipulators with polytopes. In *Proceedings. 1998 IEEE International Conference on Robotics and Automation (Cat. No.98CH36146)*, volume 4, pages 3241–3246 vol.4, 1998. doi: 10.1109/ROBOT.1998.680928.

[48] O. S. R. Foundation. Gazebo - robot simulation made easy, 2025. URL `https://gazebosim.org/`.

[49] M. Fourmy. *State estimation and localization of legged robots : a tightly-coupled approach based on a-posteriori maximization*. Theses, INSA de Toulouse, Mar. 2022. URL `https://theses.hal.science/tel-03715727`.

[50] A. A. Frank. Automatic control systems for legged locomotion machines. 1968. URL `https://api.semanticscholar.org/CorpusID:60095056`.

[51] G. Freitas, G. Gleizer, F. Lizarralde, L. Hsu, and N. R. S. dos Reis. Kinematic reconfigurability control for an environmental mobile robot operating in the amazon rain forest. *Journal of Field Robotics*, 27(2):197–216, 2010. doi: https://doi.org/10.1002/rob.20334. URL `https://onlinelibrary.wiley.com/doi/abs/10.1002/rob.20334`.

[52] G. Gabrielli, T. Von Karman, et al. What price speed. *Mechanical engineering*, 72 (10):775–781, 1950.

[53] E. Garcia and P. G. de Santos. An improved energy stability margin for walking machines subject to dynamic effects. *Robotica*, 23(1):13–20, 2005. doi: 10.1017/S0263574704000487.

[54] A. Ghasempoor and N. Sepehri. A measure of stability for mobile manipulators with application to heavy-duty hydraulic machines. *Journal of Dynamic Systems, Measurement, and Control*, 120(3):360–370, 09 1998. ISSN 0022-0434. doi: 10.1115/1.2805410. URL `https://doi.org/10.1115/1.2805410`.

[55] D. Gnad, H. Gattringer, A. Müller, W. Höbarth, R. Riepl, and L. Meßner. Identification of physically consistent dynamics parameter of the abb irb 360-6/1600 delta robot and its use for time-optimal motion planning under consideration of constraint forces. *Robotics and Autonomous Systems*, 182:104823, 2024. ISSN 0921-8890. doi: https://doi.org/10.1016/j.robot.2024.104823. URL `https://www.sciencedirect.com/science/article/pii/S0921889024002070`.

[56] P. Gonzalez-de Santos, E. Garcia, and J. Estremera. Quadrupedal locomotion. an introduction to the control of four-legged robots. *Quadrupedal Locomotion: An Introduction to the Control of Four-legged Robots*, 01 2006. doi: 10.1007/1-84628-307-8.

[57] C. Grand, F. Ben Amar, P. Bidaud, and F. Plumet. Stability and traction optimization of a wheel-legged robot. *The International Journal of Robotics Research*, 23(10-11):1041–1058, 2004. doi: 10.1177/0278364904047616. URL https://hal.science/hal-03135896.

[58] P. Gregorio, M. Ahmadi, and M. Buehler. Design, control, and energetics of an electrically actuated legged robot. *IEEE Transactions on Systems, Man, and Cybernetics, Part B (Cybernetics)*, 27(4):626–634, 1997. doi: 10.1109/3477.604106.

[59] S. Haddadin, A. O. Albu-Schäffer, A. D. Luca, and G. Hirzinger. Collision detection and reaction: A contribution to safe physical human-robot interaction. *2008 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 3356–3363, 2008. URL https://api.semanticscholar.org/CorpusID:1661654.

[60] S. Haddadin, A. De Luca, and A. Albu-Schäffer. Robot collisions: A survey on detection, isolation, and identification. *IEEE Transactions on Robotics*, 33(6):1292–1312, 2017. doi: 10.1109/TRO.2017.2723903.

[61] K. Hashimoto, S. Kimura, N. Sakai, S. Hamamoto, A. Koizumi, X. Sun, T. Matsuzawa, T. Teramachi, Y. Yoshida, A. Imai, K. Kumagai, T. Matsubara, K. Yamaguchi, G. Ma, and A. Takanishi. Warec-1 —a four-limbed robot having high locomotion ability with versatility in locomotion styles. *2017 IEEE International Symposium on Safety, Security and Rescue Robotics (SSRR)*, pages 172–178, 2017. URL https://api.semanticscholar.org/CorpusID:1595187.

[62] K. Hashimoto, T. Matsuzawa, X. Sun, T. Fujiwara, X. Wang, Y. Konishi, N. Sato, T. Endo, F. Matsuno, N. Kubota, Y. Toda, N. Takesue, K. Wada, T. Mouri, H. Kawasaki, A. Namiki, Y. Liu, A. Takanishi, and S. Tadokoro. *WAREC-1 – A Four-Limbed Robot with Advanced Locomotion and Manipulation Capabilities*, pages 327–397. Springer International Publishing, Cham, 2019. ISBN 978-3-030-05321-5. doi: 10.1007/978-3-030-05321-5_7. URL https://doi.org/10.1007/978-3-030-05321-5_7.

[63] J. He and F. Gao. Mechanism, actuation, perception, and control of highly dynamic multilegged robots: A review. *Chinese Journal of Mechanical Engineering*, 33, 2020. URL https://api.semanticscholar.org/CorpusID:226292307.

[64] S. HIROSE. Ceiling walking of quadruped wall climbing robot ninja-ii. *Proc. 1st Int. Conf. on Climbing and Walking Robots, Brussels, 1998*, pages 143–147, 1998. URL https://cir.nii.ac.jp/crid/1572824501055950976.

[65] S. Hirose, A. Nagakubo, and R. Toyama. Machine that can walk and climb on

floors, walls and ceilings. *Fifth International Conference on Advanced Robotics 'Robots in Unstructured Environments*, pages 753–758 vol.1, 1991. URL https://api.semanticscholar.org/CorpusID:38855282.

[66] S. Hirose, H. Tsukagoshi, and K. Yoneda. Normalized energy stability margin and its contour of walking vehicles on rough terrain. In *Proceedings 2001 ICRA. IEEE International Conference on Robotics and Automation (Cat. No.01CH37164)*, volume 1, pages 181–186 vol.1, 2001. doi: 10.1109/ROBOT.2001.932550.

[67] S. Hirose, Y. Fukuda, K. Yoneda, A. Nagakubo, H. Tsukagoshi, K. Arikawa, G. Endo, T. Doi, and R. Hodoshima. Quadruped walking robots at tokyo institute of technology. *IEEE Robotics & Automation Magazine*, 16(2):104–114, 2009. doi: 10.1109/MRA.2009.932524.

[68] M. A. Hoepflinger, C. D. Remy, M. Hutter, L. Spinello, and R. Siegwart. Haptic terrain classification for legged robots. In *2010 IEEE International Conference on Robotics and Automation*, pages 2828–2833, 2010. doi: 10.1109/ROBOT.2010.5509309.

[69] M. H. A. Jalil, M. N. Taib, M. H. F. Rahiman, and R. Hamdan. Back calculation anti windup pid controller on several well-known tuning method for glycerin bleaching process temperature regulation. *International Journal of Integrated Engineering*, 6, 2014. URL https://api.semanticscholar.org/CorpusID:55801339.

[70] R. N. Jazar. *Introduction*, pages 1–34. Springer International Publishing, Cham, 2022. ISBN 978-3-030-93220-6. doi: 10.1007/978-3-030-93220-6_1. URL https://doi.org/10.1007/978-3-030-93220-6_1.

[71] S. Kagami, K. Nishiwaki, T. Kitagawa, T. Sugihiara, M. Inaba, and H. Inoue. A fast generation method of a dynamically stable humanoid robot trajectory with enhanced zmp constra. 2000. URL https://api.semanticscholar.org/CorpusID:54080212.

[72] S. Kajita and B. Espiau. *Legged Robots*, pages 361–389. Springer Berlin Heidelberg, Berlin, Heidelberg, 2008. ISBN 978-3-540-30301-5. doi: 10.1007/978-3-540-30301-5_17. URL https://doi.org/10.1007/978-3-540-30301-5_17.

[73] S. M. Kargar, B. Yordanov, C. Harvey, and A. Asadipour. Emerging trends in realistic robotic simulations: A comprehensive systematic literature review. *IEEE Access*, 12:191264–191287, 2024. doi: 10.1109/ACCESS.2024.3404881.

[74] O. Khatib, M. Jorda, J. Park, L. Sentis, and S.-Y. Chung. Constraint-consistent task-oriented whole-body robot formulation: Task, posture, constraints, multiple contacts, and balance. *The International Journal of Robotics Research*, 41(13-14): 1079–1098, 2022. doi: 10.1177/02783649221120029. URL https://doi.org/10.1177/02783649221120029.

[75] S. Kim and P. M. Wensing. Design of dynamic legged robots. *Foundations and Trends® in Robotics*, 5(2):117–190, 2017. ISSN 1935-8253. doi: 10.1561/2300000044. URL http://dx.doi.org/10.1561/2300000044.

[76] Y. Kobayashi, M. Minami, A. Yanou, and T. Maeba. Dynamic reconfiguration manipulability analyses of humanoid bipedal walking. *2013 IEEE International Conference on Robotics and Automation*, pages 4779–4784, 2013. URL https://api.semanticscholar.org/CorpusID:13505421.

[77] A. Konez. Preliminary design analysis of like-grasshopper jumping mechanism. 2006. URL https://api.semanticscholar.org/CorpusID:17822154.

[78] N. Koyachi, T. Arai, H. Adachi, and Y. Itoh. Integrated limb mechanism of manipulation and locomotion for dismantling robot-basic concept for control and mechanism. In *Proceedings of 1993 IEEE/Tsukuba International Workshop on Advanced Robotics*, ICAR-93, page 81–84. IEEE, 1993. doi: 10.1109/icar.1993.337213. URL http://dx.doi.org/10.1109/ICAR.1993.337213.

[79] I. Kruijff-Korbayová, L. Freda, M. Gianni, V. Ntouskos, V. Hlaváč, V. Kubelka, E. Zimmermann, H. Surmann, K. Dulic, W. Rottner, et al. Deployment of ground and aerial robots in earthquake-struck amatrice in italy (brief report). In *2016 IEEE International Symposium on Safety, Security, and Rescue Robotics (SSRR)*, pages 278–279. IEEE, 2016.

[80] M. Körber, J. Lange, S. Rediske, S. Steinmann, and R. Glück. Comparing popular simulation environments in the scope of robotics and reinforcement learning, 2021. URL https://arxiv.org/abs/2103.04616.

[81] A. R. Laboratory. Aerospace robotics laboratory –tohoku university, n.d. URL https://astro.mech.tohoku.ac.jp/e/.

[82] T. Laboratory. Rescue robot research. URL http://www.takanishi.mech.waseda.ac.jp/top/research/rescue/index.htm.

[83] J. Lee, I. Kim, and B.-H. Jeon. Velocity workspace analysis for multi-legged walking robots. In *2001 IEEE/ASME International Conference on Advanced Intelligent*

Mechatronics. Proceedings (Cat. No.01TH8556), volume 1, pages 458–463 vol.1, 2001. doi: 10.1109/AIM.2001.936505.

[84] J. Lee, M. Bjelonic, and M. Hutter. Control of wheeled-legged quadrupeds using deep reinforcement learning. In J. M. Cascalho, M. O. Tokhi, M. F. Silva, A. Mendes, K. Goher, and M. Funk, editors, *Robotics in Natural Settings*, pages 119–127, Cham, 2023. Springer International Publishing. ISBN 978-3-031-15226-9.

[85] S. Lee. Dual redundant arm configuration optimization with task-oriented dual arm manipulability. *IEEE Transactions on Robotics and Automation*, 5(1):78–97, 1989. doi: 10.1109/70.88020.

[86] S. Leuthard, T. Eugster, N. Faesch, R. Feingold, C. Flynn, M. Fritsche, N. Hürlimann, E. Morbach, F. Tischhauser, M. Müller, M. Montenegro, V. Schelbert, J.-R. Chiu, P. Arm, and M. Hutter. Magnecko: Design and control of a quadrupedal magnetic climbing robot. In K. Berns, M. O. Tokhi, A. Roennau, M. F. Silva, and R. Dillmann, editors, *Walking Robots into Real World*, pages 55–67, Cham, 2024. Springer Nature Switzerland. ISBN 978-3-031-71301-9.

[87] H. Li, C. Qi, F. Gao, X. Chen, Y. Zhao, and Z. Chen. Mechanism design and workspace analysis of a hexapod robot. *Mechanism and Machine Theory*, 174: 104917, 2022. ISSN 0094-114X. doi: https://doi.org/10.1016/j.mechmachtheory.2022.104917. URL `https://www.sciencedirect.com/science/article/pii/S0094114X22001768`.

[88] X. Li, X. Zhang, J. Niu, and C. Li. A stable walking strategy of quadruped robot based on zmp in trotting gait. In *2022 IEEE International Conference on Mechatronics and Automation (ICMA)*, pages 858–863, 2022. doi: 10.1109/ICMA54519.2022.9855991.

[89] B. Lindqvist, S. Karlsson, A. Koval, I. Tevetzidis, J. Haluška, C. Kanellakis, A. akbar Agha-mohammadi, and G. Nikolakopoulos. Multimodality robotic systems: Integrated combined legged-aerial mobility for subterranean search-and-rescue. *Robotics and Autonomous Systems*, 154:104134, 2022. ISSN 0921-8890. doi: https://doi.org/10.1016/j.robot.2022.104134. URL `https://www.sciencedirect.com/science/article/pii/S0921889022000756`.

[90] K. M. Lynch and F. C. Park. *Modern Robotics: Mechanics, Planning, and Control*. Cambridge University Press, USA, 1st edition, 2017. ISBN 1107156300.

[91] S. Macenski, T. Foote, B. Gerkey, C. Lalancette, and W. Woodall. Robot operating system 2: Design, architecture, and uses in the wild. *Science Robotics*, 7(66), May

2022. ISSN 2470-9476. doi: 10.1126/scirobotics.abm6074. URL http://dx.doi.org/10.1126/scirobotics.abm6074.

[92] S. Macenski, A. Soragna, M. Carroll, and Z. Ge. Impact of ros 2 node composition in robotic systems. *IEEE Robotics and Autonomous Letters (RA-L)*, 2023. doi: 10.48550/arXiv.2305.09933. URL https://arxiv.org/abs/2305.09933.

[93] E. Magrini, F. Flacco, and A. De Luca. Estimation of contact forces using a virtual force sensor. In *2014 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 2126–2133, 2014. doi: 10.1109/IROS.2014.6942848.

[94] T. Maneewarn and A. Boonprakob. Walking pattern modification using manipulability ellipsoid for biped robot. In *2008 IEEE International Conference on Robotics and Biomimetics*, pages 160–165, 2009. doi: 10.1109/ROBIO.2009.4912997.

[95] A. S. Manohar, S. A. Komakula, K. Gunasekaran, and K. P. Panchu. Comparative study on the reachable workspaces of regular and irregular axially symmetric hexapod robots. *Journal of Mechanical Science and Technology*, 35(10):4695–4714, sep 2021. doi: 10.1007/s12206-021-0936-y. URL https://doi.org/10.1007/s12206-021-0936-y.

[96] H. Markaroğlu, M. Guzelkaya, I. Eksin, and E. Yesil. Tracking time adjustment in back calculation anti-windup scheme. 2006. URL https://api.semanticscholar.org/CorpusID:16428437.

[97] C. Mastalli, M. Focchi, I. Havoutis, A. Radulescu, S. Calinon, J. Buchli, D. Caldwell, and C. Semini. Trajectory and foothold optimization using low-dimensional models for rough terrain locomotion. 05 2017. doi: 10.1109/ICRA.2017.7989131.

[98] R. McGhee. Some finite state aspects of legged locomotion. *Mathematical Biosciences*, 2(1):67–84, 1968. ISSN 0025-5564. doi: https://doi.org/10.1016/0025-5564(68)90007-2. URL https://www.sciencedirect.com/science/article/pii/0025556468900072.

[99] R. B. McGhee and A. A. Frank. On the stability properties of quadruped creeping gaits. *Bellman Prize in Mathematical Biosciences*, 3:331–351, 1968. URL https://api.semanticscholar.org/CorpusID:120962927.

[100] R. B. Mcghee and G. I. Iswandhi. Adaptive locomotion of a multilegged robot over rough terrain. *IEEE Transactions on Systems, Man, and Cybernetics*, 9(4):176–182, 1979. doi: 10.1109/TSMC.1979.4310180.

[101] C. Melchiorri, P. Chiaccio, S. Chiaverini, L. Sciavicco, and B. Siciliano. Comments

on "global task space manipulability ellipsoids for multiple-arm systems" and further considerations" [with reply] p. chiacchio, et al. *IEEE Transactions on Robotics and Automation*, 9(2):232–236, 1993. doi: 10.1109/70.238288.

[102] D. A. Messuri and C. A. Klein. Automatic body regulation for maintaining stability of a legged vehicle during rough-terrain locomotion. *IEEE J. Robotics Autom.*, 1: 132–141, 1985. URL `https://api.semanticscholar.org/CorpusID:40084197`.

[103] F. Michaud, M. Arsenault, Y. Bergeron, R. Cadrin, F. Gagnon, M.-A. Legault, M. Millette, J.-F. Paré, M.-C. Tremblay, D. Létourneau, P. Lepage, Y. Morin, S. Caron, and J. Bisson. Co-design of azimut: A multi-modal robotic platform. 2003. URL `https://api.semanticscholar.org/CorpusID:18842145`.

[104] L. Mingmin, D. Qu, F. Xu, F. Zou, P. Di, and C. Tang. Quadrupedal robots whole-body motion control based on centroidal momentum dynamics. *Applied Sciences*, 9:1335, 03 2019. doi: 10.3390/app9071335.

[105] K. Murphy. Reinforcement learning: An overview, 2024. URL `https://arxiv.org/abs/2412.05265`.

[106] G. Muscato, D. Caltabiano, S. Guccione, D. Longo, M. Coltelli, A. Cristaldi, E. Pecora, V. Sacco, P. Sim, G. S. Virk, P. Briole, A. Semerano, and T. White. Robovolc: a robot for volcano exploration result of first test campaign. *Industrial Robot: An International Journal*, 30(3):231–242, 2003. ISSN 0143-991X. doi: 10.1108/01439910310473942. URL `https://doi.org/10.1108/01439910310473942`.

[107] G. Muscato, F. Bonaccorso, L. Cantelli, D. Longo, and C. Melita. Volcanic environments: Robots for exploration and measurement. *IEEE Robotics & Automation Magazine*, 19(1):40–49, 2012. doi: 10.1109/MRA.2011.2181684.

[108] E. Muybridge. *Animals in motion : an electro-photographic investigation of consecutive phases of animal progressive movements*, page 0. London, Chapman & Hall, 1902, 1902. URL `https://www.biodiversitylibrary.org/page/57972839`. https://www.biodiversitylibrary.org/bibliography/158724.

[109] K. Nagaoka, H. Minote, K. Maruya, Y. Shirai, K. Yoshida, T. Hakamada, H. Sawada, and T. Kubota. Passive spine gripper for free-climbing robot in extreme terrain. *IEEE Robotics and Automation Letters*, 3(3):1765–1770, 2018. doi: 10.1109/LRA.2018.2794517.

[110] D. N. Nenchev, A. Konno, and T. Tsujita. Chapter 4 - dynamics. In D. N. Nenchev, A. Konno, and T. Tsujita, editors, *Humanoid Robots*, pages 125–202.

Butterworth-Heinemann, 2019. ISBN 978-0-12-804560-2. doi: https://doi.org/10.1016/B978-0-12-804560-2.00011-0. URL https://www.sciencedirect.com/science/article/pii/B9780128045602000110.

[111] Open Robotics. *ROS 2 Documentation: Humble Hawksbill*, 2022. URL https://docs.ros.org/en/humble/index.html.

[112] D. Ordoñez-Apraez, G. Turrisi, V. Kostic, M. Martin, A. Agudo, F. Moreno-Noguer, M. Pontil, C. Semini, and C. Mastalli. Morphological symmetries in robotics, 2024. URL https://arxiv.org/abs/2402.15552.

[113] A. Parness, N. Abcouwer, C. Fuller, N. Wiltsie, J. Nash, and B. Kennedy. Lemur 3: A limbed climbing robot for extreme terrain mobility in space. In *2017 IEEE International Conference on Robotics and Automation (ICRA)*, pages 5467–5473, 2017. doi: 10.1109/ICRA.2017.7989643.

[114] M. Quigley. Ros: an open-source robot operating system. In *IEEE International Conference on Robotics and Automation*, 2009. URL https://api.semanticscholar.org/CorpusID:6324125.

[115] M. H. Raibert and E. R. Tello. Legged robots that balance. *IEEE Expert*, 1:89–89, 1986. URL https://api.semanticscholar.org/CorpusID:10520163.

[116] M. H. Raibert, K. Blankespoor, G. M. Nelson, and R. Playter. Bigdog, the rough-terrain quadruped robot. *IFAC Proceedings Volumes*, 41:10822–10825, 2008. URL https://api.semanticscholar.org/CorpusID:8414062.

[117] W. Reid, F. J. Pérez-Grau, A. H. Göktoğan, and S. Sukkarieh. Actively articulated suspension for a wheel-on-leg rover operating on a martian analog surface. In *2016 IEEE International Conference on Robotics and Automation (ICRA)*, pages 5596–5602, 2016. doi: 10.1109/ICRA.2016.7487777.

[118] W. Reid, R. Fitch, A. H. Göktoğan, and S. Sukkarieh. Sampling-based hierarchical motion planning for a reconfigurable wheel-on-leg planetary analogue exploration rover. *Journal of Field Robotics*, 37(5):786–811, 2020. doi: https://doi.org/10.1002/rob.21894. URL https://onlinelibrary.wiley.com/doi/abs/10.1002/rob.21894.

[119] W. Ribeiro, K. Uno, K. Yoshida, and K. Nagaoka. Dynamic equilibrium of climbing robots based on stability polyhedron for gravito-inertial acceleration. In V. Gradetsky, N. Bolotnik, M. Tokhi, M. Silva, and G. Virk, editors, *Robots in Human Life-Proceedings of the 23rd International Conference on Climbing and Walking Robots*

and the Support Technologies for Mobile Machines, CLAWAR 2020, Robots in Human Life- Proceedings of the 23rd International Conference on Climbing and Walking Robots and the Support Technologies for Mobile Machines, CLAWAR 2020, pages 297–304. CLAWAR Association Ltd, 2020. ISBN 9781916449046. doi: 10.13180/clawar.2020.24-26.08.18. Funding Information: This work is partly supported by JSPS KAKENHI Grant Number 19J20685. Publisher Copyright: © CLAWAR Association Ltd.; 23rd International Conference on Climbing and Walking Robots and the Support Technologies for Mobile Machines, CLAWAR 2020 ; Conference date: 24-08-2020 Through 26-08-2020.

[120] W. Ribeiro, K. Uno, K. Nagaoka, and K. YOSHIDA. Analysis of motion control for a quadruped ground-gripping robot for minor body exploration on uneven terrain. *TRANSACTIONS OF THE JAPAN SOCIETY FOR AERONAUTICAL AND SPACE SCIENCES, AEROSPACE TECHNOLOGY JAPAN*, 19:794–801, 09 2021. doi: 10.2322/tastj.19.794.

[121] W. F. R. Ribeiro. Motion Control and Stability Analysis of a Free-Climbing Robot for Exploration under Microgravity. Master's thesis, Tohoku University, Japan, 2019. Master's thesis.

[122] W. F. R. Ribeiro. *Reaction-Aware Robotic Locomotion in Microgravity*. PhD thesis, Tohoku University, Japan, 2023. Doctoral thesis.

[123] J. Richter, H. Kolvenbach, G. Valsecchi, and M. Hutter. Multi-objective global path planning for lunar exploration with a quadruped robot. In *2024 International Conference on Space Robotics (iSpaRo)*, page 48–55. IEEE, June 2024. doi: 10.1109/isparo60631.2024.10688158. URL `http://dx.doi.org/10.1109/iSpaRo60631.2024.10688158`.

[124] R. E. Ritzmann, R. D. Quinn, and M. S. Fischer. Convergent evolution and locomotion through complex terrain by insects, vertebrates and robots. *Arthropod Structure & Development*, 33(3):361–379, 2004. ISSN 1467-8039. doi: https://doi.org/10.1016/j.asd.2004.05.001. URL `https://www.sciencedirect.com/science/article/pii/S1467803904000271`. Arthropod Locomotion Systems: from Biological Materials and Systems to Robotics.

[125] ROBOTIS. DYNAMIXEL Official Website, 2025. URL `https://www.dynamixel.com/`.

[126] U. Robots. Dh parameters for calculations of kinematics and dynamics, 2024. URL `https://www.`

universal-robots.com/articles/ur/application-installation/dh-parameters-for-calculations-of-kinematics-and-dynamics/.

[127] D. Rodríguez-Martínez, K. Uno, K. Sawa, M. Uda, G. Kudo, G. H. Diaz, A. Umemura, S. Santra, and K. Yoshida. Enabling faster locomotion of planetary rovers with a mechanically-hybrid suspension. *IEEE Robotics and Automation Letters*, 9(1):619–626, Jan. 2024. ISSN 2377-3774. doi: 10.1109/lra.2023.3335769. URL http://dx.doi.org/10.1109/LRA.2023.3335769.

[128] T. M. Roehr, F. Cordes, and F. Kirchner. Reconfigurable integrated multirobot exploration system (rimres): Heterogeneous modular reconfigurable robots for space exploration. *Journal of Field Robotics*, 31(1):3–34, 2014. doi: https://doi.org/10.1002/rob.21477. URL https://onlinelibrary.wiley.com/doi/abs/10.1002/rob.21477.

[129] E. Rohmer, T. Yoshida, K. Ohno, K. Nagatani, S. Tadokoro, and E. Konayagi. Quince : A collaborative mobile robotic platform for rescue robots research and development. 2010. URL https://api.semanticscholar.org/CorpusID:110402936.

[130] S. S. Roy and D. K. Pratihar. Dynamic modeling, stability and energy consumption analysis of a realistic six-legged walking robot. *Robotics and Computer-Integrated Manufacturing*, 29(2):400–416, 2013. ISSN 0736-5845. doi: https://doi.org/10.1016/j.rcim.2012.09.010. URL https://www.sciencedirect.com/science/article/pii/S0736584512001135.

[131] J. Science and T. Agency. 革新的研究開発推進プログラム impact: プログラム 07 深海資源探査技術開発プログラム. URL https://www.jst.go.jp/impact/program/07.html.

[132] C. Semini and P.-B. Wieber. Legged Robots. In *Encyclopedia of Robotics*, pages 1–11. Springer, 2020. doi: 10.1007/978-3-642-41610-1_59-1. URL https://hal.science/hal-02461604.

[133] K. Shen, X. Li, H. Tian, D. Izawa, M. Minami, and T. Matsuno. Application and analyses of dynamic reconfiguration manipulability shape index into humanoid biped walking. *2016 IEEE International Conference on Robotics and Biomimetics (ROBIO)*, pages 1436–1441, 2016. URL https://api.semanticscholar.org/CorpusID:18458215.

[134] B. Siciliano, L. Sciavicco, L. Villani, and G. Oriolo. *Robotics: Modelling, Planning and Control*. Springer Publishing Company, Incorporated, 2010. ISBN 1849966346.

[135] E. Sihite, A. Kalantari, R. Nemovi, A. Ramezani, and M. Gharib. Multi-modal mobility morphobot (m4) with appendage repurposing for locomotion plasticity enhancement. *Nature Communications*, 14, 2023. URL `https://api.semanticscholar.org/CorpusID:259273393`.

[136] M. Silva, J. Tenreiro Machado, and A. Lopes. Performance analysis of multi-legged systems. In *Proceedings 2002 IEEE International Conference on Robotics and Automation (Cat. No.02CH37292)*, volume 3, pages 2234–2239 vol.3, 2002. doi: 10.1109/ROBOT.2002.1013564.

[137] M. Silva, J. Tenreiro Machado, and J. Tar. A survey of technologies for climbing robots adhesion to surfaces. pages 127 – 132, 12 2008. doi: 10.1109/ICCCYB.2008.4721392.

[138] S. Sivcev, J. Coleman, E. Omerdic, G. Dooly, and D. Toal. Underwater manipulators: A review. *Ocean Engineering*, 163:431–450, 09 2018. doi: 10.1016/j.oceaneng.2018.06.018.

[139] Y. Song, H. Wang, Z. Dai, A. Ji, H. Wu, and S. N. Gorb. Multiple forces facilitate the aquatic acrobatics of grasshopper and bioinspired robot. *Proceedings of the National Academy of Sciences*, 121(14):e2313305121, 2024. doi: 10.1073/pnas.2313305121. URL `https://www.pnas.org/doi/abs/10.1073/pnas.2313305121`.

[140] X. Sun, H. Naito, A. Namiki, Y. Liu, T. Matsuzawa, and A. Takanishi. Assist system for remote manipulation of electric drills by the robot "warec-1r"using deep reinforcement learning. *Robotica*, 40(2):365–376, 2022. doi: 10.1017/S0263574721000618.

[141] X. Sun, A. Ito, T. Matsuzawa, and A. Takanishi. Limb stiffness improvement of the robot warec-1r for a faster and stable new ladder climbing gait. *Journal of Bionic Engineering*, 20(1):57–68, Jan. 2023. ISSN 1672-6529. doi: 10.1007/s42235-022-00245-6. Funding Information: This research was funded by ImPACT TRC Program of Council for Science, Technology and Innovation (Cabinet Office, Government of Japan). This study was conducted with the support of Research Institute for Science and Engineering, Waseda University; Future Robotics Organization, Waseda University, and as a part of the humanoid project at the Humanoid Robotics Institute, Waseda University. This research was also partially supported by SolidWorks Japan K. K; DYDEN Corporation; and KITO Corporation whom we thank for their financial and technical support. Publisher Copyright: © 2022, Jilin University.

[142] K. Tadakuma, R. Tadakuma, A. Maruyama, E. Rohmer, K. Nagatani, K. Yoshida, A. Ming, S. Makoto, M. Higashimori, and M. Kaneko. Armadillo-inspired wheel-leg retractable module. In *2009 IEEE International Conference on Robotics and Biomimetics (ROBIO)*, pages 610–615, 2009. doi: 10.1109/ROBIO.2009.5420604.

[143] K. Takada. Scaffolding and Path Planning Methodology for Legged Robots Based on Graph Theory. Master's thesis, Tohoku University, Japan, 2024. Master's thesis.

[144] K. TAKADA, K. Uno, K. MURASE, T. OKAWARA, M. IMAI, W. Ribeiro, S. YAMAGUCHI, R. ITAKURA, A. OTSUKA, T. INAGAKI, M. WADA, and K. YOSHIDA. The simulated micro-gravity experiment of the intra-vehicular legged mobile robot for iss automationiss 船内伝い歩き移動ロボットの微小重力模擬移動実験. *The Proceedings of JSME annual Conference on Robotics and Mechatronics (Robomec)*, 2023:1A2–B27, 01 2023. doi: 10.1299/jsmermd.2023.1A2-B27.

[145] Y. Takahashi, T. Arai, Y. Mae, K. Inoue, and N. Koyachi. Development of multi-limb robot with omnidirectional manipulability and mobility. pages 2012–2017, 2000. 2000 IEEE/RSJ International Conference on Intelligent Robots and Systems ; Conference date: 31-10-2000 Through 05-11-2000.

[146] T. Tanaka and S. Hirose. Development of leg-wheel hybrid quadruped "airhopper" design of powerful light-weight leg with wheel. In *2008 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 3890–3895, 2008. doi: 10.1109/IROS.2008.4650880.

[147] Y. Tanaka, Y. Shirai, A. Schperberg, X. Lin, and D. Hong. Scaler: Versatile multi-limbed robot for free-climbing in extreme terrains, 2024. URL `https://arxiv.org/abs/2312.04856`.

[148] C. Thorpe and H. Durrant-Whyte. Field robots. In R. A. Jarvis and A. Zelinsky, editors, *Robotics Research*, pages 329–340, Berlin, Heidelberg, 2003. Springer Berlin Heidelberg. ISBN 978-3-540-36460-3.

[149] S. Thrun, W. Burgard, and D. Fox. *Probabilistic Robotics (Intelligent Robotics and Autonomous Agents)*. The MIT Press, 2005. ISBN 0262201623.

[150] D. J. Todd. Walking machines : an introduction to legged robots. 1985. URL `https://api.semanticscholar.org/CorpusID:109626168`.

[151] TRADR Project. Tradr - long-term human-robot teaming for disaster response. URL `https://www.tradr-project.eu/`.

[152] M. Uda. Development and Evaluation of Multimodal Robots Gripper-Wheel De-

formable Mechanism. Master's thesis, Tohoku University, Japan, 2023. Master's thesis.

[153] M. Uda, K. Sawa, K. Uno, T. Kato, L. Z. T. Lim, and K. Yoshida. Development and grasping performance evaluationof a wheel-gripper transformable mechanism. *Journal of the Robotics Society of Japan*, 42(6):580–583, 2024. doi: 10.7210/jrsj.42.580.

[154] K. Uno. *Autonomous Limbed Climbing Robots for Challenging Terrain Exploration*. PhD thesis, Department of Aerospace Engineering, Tohoku University, Sendai, Japan, 2021.

[155] K. Uno, N. Takada, T. Okawara, K. Haji, A. Candalot, W. F. R. Ribeiro, K. Nagaoka, and K. Yoshida. Hubrobo: A lightweight multi-limbed climbing robot for exploration in challenging terrain. In *2020 IEEE-RAS 20th International Conference on Humanoid Robots (Humanoids)*, pages 209–215, 2021. doi: 10.1109/HUMANOIDS47582.2021.9555799.

[156] K. Uno, K. Takada, K. Nagaoka, T. Kato, A. Candalot, and K. Yoshida. Lower gravity demonstratable testbed for space robot experiments. *2024 IEEE/SICE International Symposium on System Integration (SII)*, pages 1183–1184, 2023. URL `https://api.semanticscholar.org/CorpusID:262054097`.

[157] M. Vukobratovic and B. Borovac. Zero-moment point - thirty five years of its life. *Int. J. Humanoid Robotics*, 1:157–173, 2004. URL `https://api.semanticscholar.org/CorpusID:36579412`.

[158] M. Vukobratović and J. Stepanenko. On the stability of anthropomorphic systems. *Mathematical Biosciences*, 15(1):1–37, 1972. ISSN 0025-5564. doi: https://doi.org/10.1016/0025-5564(72)90061-2. URL `https://www.sciencedirect.com/science/article/pii/0025556472900612`.

[159] Y. Wang, M. Hong, H. Chai, Y. Zhang, G. Wang, C. Wu, and M. Guo. Research on foot contact state detection technology of wheel-legged robot. *Sensors*, 24(12), 2024. ISSN 1424-8220. doi: 10.3390/s24123956. URL `https://www.mdpi.com/1424-8220/24/12/3956`.

[160] M. Wasik. Leg's tip-ground contact detection based on drive currents in a real walking robot. *J. Autom. Mob. Robotics Intell. Syst.*, 9:62–67, 2015. URL `https://api.semanticscholar.org/CorpusID:55673880`.

[161] P.-B. Wieber. *Holonomy and Nonholonomy in the Dynamics of Articulated Motion*,

pages 411–425. Springer Berlin Heidelberg, Berlin, Heidelberg, 2006. ISBN 978-3-540-36119-0. doi: 10.1007/978-3-540-36119-0_20. URL https://doi.org/10.1007/978-3-540-36119-0_20.

[162] P.-B. Wieber, R. Tedrake, and S. Kuindersma. Modeling and Control of Legged Robots. In *Springer Handbook of Robotics*, pages 1203–1234. Springer International Publishing, 2016. doi: 10.1007/978-3-319-32552-1_48. URL https://inria.hal.science/hal-02487855.

[163] D. M. Wilson. Insect walking. *Annual review of entomology*, 11:103–22, 1966. URL https://api.semanticscholar.org/CorpusID:33526426.

[164] Woods Hole Oceanographic Institution. Up close and personal, August 2023. URL https://www.whoi.edu/oceanus/feature/up-close-and-personal/. Accessed: 2025-03-01.

[165] Z. Wu, K. Zheng, Z. Ding, and H. Gao. A survey on legged robots: Advances, technologies and applications. *Engineering Applications of Artificial Intelligence*, 138:109418, 2024. ISSN 0952-1976. doi: https://doi.org/10.1016/j.engappai.2024.109418. URL https://www.sciencedirect.com/science/article/pii/S0952197624015768.

[166] K. Xu, R. Qin, C. Chen, G. Dong, J. Chen, and X. Ding. Design and multimodal locomotion plan of a hexapod robot with improved knee joints. *Journal of Field Robotics*, 41(5):1279–1296, 2024. doi: https://doi.org/10.1002/rob.22324. URL https://onlinelibrary.wiley.com/doi/abs/10.1002/rob.22324.

[167] R. Xu, J. Luo, and M. Wang. Kinematic and dynamic manipulability analysis for free-floating space robots with closed chain constraints. *Robotics and Autonomous Systems*, 130:103548, 2020. ISSN 0921-8890. doi: https://doi.org/10.1016/j.robot.2020.103548. URL https://www.sciencedirect.com/science/article/pii/S0921889019309236.

[168] K. Yoneda and S. Hirose. Tumble stability criterion of integrated locomotion and manipulation. In *Proceedings of IEEE/RSJ International Conference on Intelligent Robots and Systems. IROS '96*, volume 2, pages 870–876 vol.2, 1996. doi: 10.1109/IROS.1996.571067.

[169] T. Yoshida, K. Nagatani, S. Tadokoro, T. Nishimura, and E. Koyanagi. *Improvements to the Rescue Robot Quince Toward Future Indoor Surveillance Missions in the Fukushima Daiichi Nuclear Power Plant*, pages 19–32. Springer Berlin

Heidelberg, Berlin, Heidelberg, 2014. ISBN 978-3-642-40686-7. doi: 10.1007/978-3-642-40686-7_2. URL https://doi.org/10.1007/978-3-642-40686-7_2.

[170] T. Yoshikawa. Manipulability of robotic mechanisms. *The International Journal of Robotics Research*, 4(2):3–9, 1985. doi: 10.1177/027836498500400201. URL https://doi.org/10.1177/027836498500400201.

[171] T. Yoshikawa. Manipulability and redundancy control of robotic mechanisms. In *Proceedings. 1985 IEEE International Conference on Robotics and Automation*, volume 2, pages 1004–1009, 1985. doi: 10.1109/ROBOT.1985.1087283.

[172] T. Yoshikawa. *Foundations of robotics: analysis and control*. MIT Press, Cambridge, MA, USA, 1990. ISBN 0262240289.

[173] T. Yoshikawa. Translational and rotational manipulability of robotic manipulators. In *Proceedings IECON '91: 1991 International Conference on Industrial Electronics, Control and Instrumentation*, pages 1170–1175 vol.2, 1991. doi: 10.1109/IECON.1991.239275.

[174] A. Zanotti. *Development and applications of quadruped robots: from rigid-body model to flexible body*. PhD thesis, Sapienza University of Rome, 2025. URL https://hdl.handle.net/11573/1732474.

[175] G. Zhang, S. Ma, J. Liu, X. Zeng, L. Kong, and Y. Li. Q-whex: A simple and highly mobile quasi-wheeled hexapod robot. *Journal of Field Robotics*, 40(6):1444–1459, 2023. doi: https://doi.org/10.1002/rob.22186. URL https://onlinelibrary.wiley.com/doi/abs/10.1002/rob.22186.

[176] S. Zhang, J. Gao, X. Duan, H. Li, Z. Yu, X. Chen, J. Li, H. Liu, X. Li, Y. Liu, and Z. Xu. Trot pattern generation for quadruped robot based on the zmp stability margin. In *2013 ICME International Conference on Complex Medical Engineering*, pages 608–613, 2013. doi: 10.1109/ICCME.2013.6548322.

[177] Z. Zhang, Z. Li, Y. Chen, D. Wang, J. Yu, R. Xiong, and Y. Wang. Invariant ekf based state estimator for quadruped robots. In *2023 42nd Chinese Control Conference (CCC)*, pages 4311–4317, 2023. doi: 10.23919/CCC58697.2023.10240429.

[178] Y. Zhao, J. Wang, G. Cao, Y. Yuan, X. Yao, and L. Qi. Intelligent control of multilegged robot smooth motion: A review. *IEEE Access*, 11:86645–86685, 2023. doi: 10.1109/ACCESS.2023.3304992.

[179] Q. Zhou, G. Li, R. Tang, Y. Xu, H. Wen, and Q. Shi. Stable jumping control based on deep reinforcement learning for a locust-inspired robot. *Biomimetics*, 9(9), 2024.

ISSN 2313-7673. doi: 10.3390/biomimetics9090548. URL https://www.mdpi.com/2313-7673/9/9/548.

[180] Q. Zhu, X. Guan, B. Yu, J. Zhang, K. Ba, X. Li, M. Xu, and X. Kong. Overview of structure and drive for wheel-legged robots. *Robotics and Autonomous Systems*, 181:104777, 2024. ISSN 0921-8890. doi: https://doi.org/10.1016/j.robot.2024.104777. URL https://www.sciencedirect.com/science/article/pii/S0921889024001611.

[181] H.-C. Zhuang, H.-B. Gao, and Z.-Q. Deng. Gait planning research for an electrically driven large-load-ratio six-legged robot. *Applied Sciences*, 7(3), 2017. ISSN 2076-3417. doi: 10.3390/app7030296. URL https://www.mdpi.com/2076-3417/7/3/296.

List of Figures

1.1 Examples of unstructured and extreme environment 1
1.2 Wheeled robot 3
1.3 Tracked robots for search and rescue 3
1.4 Quadruped legged robots 4
1.5 Multi-Limb climbing robots 5
1.6 Asteroid Mining Corporation (AMC) SCAR-E. 6
1.7 Hybrid locomotion examples 7
1.8 Morphobot, driving-flying robot 8
1.9 Multimodal legged robots 8
1.10 WAREC1, Disaster Response Robot for Extreme Environment 9

2.1 Examples of manipulators fixed and not. 16
2.2 Scheme of Limb mechanism.[78] 17
2.3 Diagram of some robot classes 19
2.4 Scheme of possible kinematic chains 20
2.5 Roll Pitch Yaw angles 22
2.6 Block scheme of FK problem 22
2.7 forward kinematic in manipulators 23
2.8 [134]Three-link planar arm 24
2.9 [138]Reference frames of fixed manipulator TITAN4 25
2.10 Open Kinematic chain Leg DH 26
2.11 Reference frames of single leg 26
2.12 [104] Quadruped kinematic model 27
2.13 Floating base model 28
2.14 Floating base kinematic position vectors 29
2.15 Kinematic model of stance leg from foot tip to leg root 30
2.16 [122] model of multi-limb robot 31
2.17 Scheme of FK problem for different robots 32
2.18 Scheme of general IK problems 33
2.19 Scheme of FK problem for different robots 33

2.20 Leg/Limb and Arm IK . . . 35
2.21 Limbed Robot IK Motion . . . 37
2.22 Parallel Manipulator . . . 38
2.23 Closed Kinematic chain Leg DH . . . 38
2.24 Arm and Leg/Limb DK . . . 42
2.25 Legged robot DK relation . . . 43
2.26 Parallelism between limbed/legged robot and cooperative manipulator . . . 44
2.27 [134] Schematic representation of mechanical gear . . . 47
2.28 Schematic representation of decoupled manipulator model . . . 48
2.29 [134] Closed loop sense-plan-act architecture . . . 50
2.30 Schematic representation of manipulator control architecture . . . 52
2.31 Schematic representation of a decentralized control structure for a manipulator . . . 53
2.32 Block scheme of P+PI controller of each joint motor . . . 54
2.33 Schematic representation of one possible legged robot control architecture (some figures are taken from [56]) . . . 56

3.1 Examples of support pattern . . . 60
3.2 Examples of stability evaluation . . . 63
3.3 Overview of SSM and SMP usage . . . 64
3.4 Schematic representation of GIA and support polyhedron . . . 65
3.5 Example of undesired limbed robot configuration with optimal SSM . . . 68
3.6 Schematic representation of multi-limbed robots and cooperative arms duality . . . 71
3.7 Multi-limb robots frames and vectors . . . 72
3.8 Schematic representation of single limb differential kinematic relation . . . 73
3.9 [134] representation of an anthropomorphic arm, with DH frames . . . 77
3.10 LimbedEx1 in zero and walking configuration . . . 78
3.11 LimbedEx1 ME in walking configuration . . . 79
3.12 LimbedEx1 ME after z base translation . . . 80
3.13 LimbedEx1 ME after generic base translation . . . 81
3.14 LimbedEx1 ME after LF limb up and base translation . . . 82
3.15 LimbedEx2 in zero and walking configuration . . . 83
3.16 LimbedEx2 ME in walking configuration . . . 83
3.17 LimbedEx2 ME after z base translation . . . 84
3.18 LimbedEx2 ME after base x=-0.2, y=0.1, z=0.15 translation . . . 84
3.19 LimbedEx2 ME after limbs raise and base translation . . . 85

3.20 Grasshopper picture and anatomic table 86
3.21 Approximated kinematic model of a grasshopper in the zero configuration. 88
3.22 Manipulability analysis in the jumping configuration 90
3.23 C2F and F2T jumping sensitivity 91
3.24 B2C jumping sensitivity 92
3.25 Asymmetric back legs performances 93
3.26 Jumping performances without one of the back leg 94
3.27 Manipulability without jumping legs 95
3.28 Jumping with different CoM 95

4.1 Different views of LIMERO limb model 100
4.2 GRIEEL module and actuation mechanism 101
4.3 Different views of LIMBERO-GRIEEL limb model and real system 102
4.4 Schematic model of actuated joints of LIMBERO-GRIEEL limb 103
4.5 Links structure of LIMBERO-GRIEEL Limb, neglecting gripper-wheel transformation fingers' joints 104
4.6 LIMBERO-GRIEEL links and joints scheme with DH convention 105
4.7 LIMBERO-GRIEEL robot 106
4.8 LIMBERO-GRIEEL robot in wheel and gripper mode 106
4.9 gripper-wheel mechanism G2W finger sequence 107
4.10 Single Finger and overall gripper-wheel mechanism 108
4.11 Links structure of LF GRIEEL module joints, it is the expansion of LF_gripper/wheel_Link of Fig.4.5, with a complete links-joints structure of the module, the same holds for LH,RH, and RF. 108
4.12 W2G transition sequence 109
4.13 LIMBERO-GRIEEL model in wolking/climbing configuration 111
4.14 LIMBERO-GRIEEL model in driving configuration 111
4.15 Simplified ROS architecture 117
4.16 Simulation in Gazebo Classic 119
4.17 Simulation in Gazebo Harmonic 120
4.18 Simulink scheme used to test single limb IJC performance 122

5.1 [152]Driving to walking locomotion transition with the previous algorithm (transformation of all limbs W2G). 126
5.2 LIMBERO-GRIEEL in a stable configuration ready for single limb transition. 128
5.3 Schematic representation of base translation rule of thumb 130
5.4 Single limb transition sequence 132
5.5 Schematic representation of the transformation algorithm 134

5.6 First limb (LF) transition sequence, rule of thumb . . . 136
5.7 Final limb (RF) transition sequence, rule of thumb . . . 137
5.8 First limb (LF) transition sequence, base centering . . . 138
5.9 Final limb (RF)transition sequence, base centering . . . 139
5.10 SSM and ATBVME in driving configuration after G2W transition (perspective, xy, and xz view) . . . 140
5.11 Conceptual representation of hexapod LIMBERO-GRIEEL . . . 145

6.1 Block scheme of DYNAMIXEL's position and velocity control mode . . . 150
6.2 Dynamixel Wizard user interface, a tool to manage DYNAMIXEL motors. 151
6.3 DYNAMIXELs joint trajectory tracking performance . . . 152
6.4 Block scheme of each joint's IJC, integrated into ROS2 architecture by discretization. . . . 153

7.1 Single Limb testbench . . . 159
7.2 Schematic representation of current based contact estimation . . . 161
7.3 Assembled LIMBERO-GRIEEL robot, supported for testing . . . 162
7.4 Empirical counterweight system for experiments . . . 163

8.1 G2W motion sequence in Gazebo Classic . . . 166
8.2 Joint tracking performance for LF limb, with JTC in Gazebo Classic . . . 166
8.3 G2W Experiment time-lapse (LF, LH, RH) . . . 167
8.4 LF limb, Joint tracking performance during G2W experiment . . . 168
8.5 LH limb, Joint tracking performance during G2W experiment . . . 168
8.6 RH limb, Joint tracking performance during G2W experiment . . . 169
8.7 RF limb, Joint tracking performance during G2W experiment . . . 169
8.8 SSM and normalized SSM during G2W transformation . . . 170
8.9 Manipulability Ellipsoid during LF G2W transformation . . . 170
8.10 Manipulability Ellipsoid during LH and RH G2W transformation . . . 171
8.11 G2W Transition sequence in Gazebo Harmonic . . . 172
8.12 LF limb, Joint tracking during G2W . . . 173
8.13 LF limb, Joint torques during G2W . . . 173
8.14 LH limb, Joint tracking during G2W . . . 174
8.15 LH limb, Joint torques during G2W . . . 174
8.16 RH limb, Joint tracking during G2W . . . 175
8.17 RH limb, Joint torques during G2W . . . 175
8.18 RF limb, Joint tracking during G2W . . . 176
8.19 RF limb, Joint torques during G2W . . . 176

8.20 SSM and $SSM_{\%}$, during G2W 177
8.21 driving with four or three support wheels in Gazebo Harmonic 178
8.22 Driving joint rotational velocity, during driving test 179
8.23 LF limb, Joint torques during driving test 179
8.24 LH limb, Joint torques during driving test 180
8.25 RH limb, Joint torques during driving test 180
8.26 RF limb, Joint torques during driving test 181
8.27 SSM and $SSM_{\%}$, during driving test 181
8.28 W2G Transition in Gazebo Harmonic 182
8.29 LF limb, Joint tracking during W2G 183
8.30 LF limb, Joint torques during W2G 183
8.31 LH limb, Joint tracking during W2G 184
8.32 LH limb, Joint torques during W2G 184
8.33 RH limb, Joint tracking during W2G 185
8.34 RH limb, Joint torques during W2G 185
8.35 RF limb, Joint tracking during W2G 186
8.36 RF limb, Joint torques during W2G 186
8.37 SSM and $SSM_{\%}$, during W2G 187
8.38 Limb model to estimate joints gravitational load 189

9.1 New GRIEEL mechanism, separate locking motor 195
9.2 New limb design 196
9.3 LIMBERO-GRIEELv2 196
9.4 Future development roadmap 201

List of Tables

1.1 Summary of locomotion performances for different terrains and tasks, where the average performance is measured from 0 to 3 6

3.1 LimbedEx1 DH parameters 78
3.2 Grasshopper legs DH parameters 87

4.1 LIMBERO-GRIEEL DH parameters 105
4.2 LIMBERO-GRIEEL links masses 105
4.3 DYNAMIXEL servo motors of limbs joints 112