


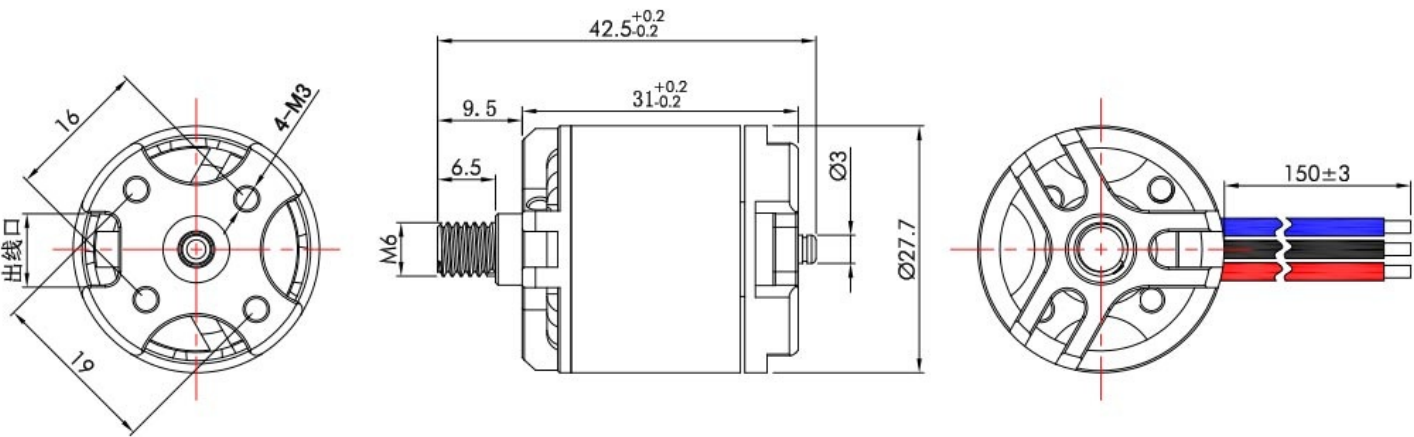

Specification

AIR2216II-Specifications			
KV	920	Rated Voltage(Lipo)	4S(4.2V/PC) / 16V
Idle Current(10V)	0.8A	Internal Resistance	115±10mΩ
Peak Current(180s)	17A	Weight (Incl. Cable)	64±2g
Max. Power(180s)	272W	Package Weight	/
AIR 20A-Specifications			
Size(L x W x H)	53x22x7mm	Rated Voltage(Lipo)	3-4s
Con.Current	20A	BEC	/
Peak Current(10s)	30A	Weight (Incl. Cable)	21g
Banana Plug	3.5mm	Throttle Signal Frequency	50Hz-600Hz
T1045-Specifications			
Plastic Propeller	10" *4.5 (254x114.3mm)	working Temp	-10℃ ~40℃
Weight (Single Propeller)	13g	Storage Temp	10℃ ~35℃
Material	Nylon+Glass fiber	Storage Humidity	65±20%RH
Surface Treatment	Matte Technology	Optimum RPM	6000-7000RPM/min
Propeller Type	Polymer Propeller	Thrust Limitation	1.2kg

Test Data

Type	Propeller	Throttle	Voltage (V)	Thrust (g)	Torque (N*m)	Current (A)	RPM	Power (W)	Efficiency (g/W)	Operating Temperature (°C)
		30%	16	210	0.03	1.44	4042	23	9.12	
		35%	16	259	0.04	1.87	4469	30	8.67	
		40%	16	309	0.05	2.29	4855	37	8.45	
		45%	16	373	0.05	2.86	5301	46	8.15	
		50%	16	447	0.06	3.60	5780	58	7.76	
		55%	16	536	0.08	4.53	6298	72	7.39	
		60%	16	628	0.09	5.61	6800	90	7.01	

AIR2216II-KV920	T1045	65%	16	729	0.10	6.78	7281	108	6.73	80°C
		70%	16	814	0.11	7.92	7679	126	6.44	
		75%	16	906	0.12	9.20	8096	147	6.18	
		80%	16	993	0.14	10.59	8468	169	5.88	
		85%	16	1087	0.15	12.11	8867	193	5.65	
		90%	16	1191	0.16	13.81	9257	219	5.43	
		95%	16	1289	0.18	15.68	9675	249	5.18	
		100%	16	1332	0.18	16.37	9857	260	5.13	
Note: Motor temperature is motor surface temperature @100% throttle running 10mins. (Date above based on benchtest are for reference only, comparion with that of other motor types is not recommended.)										