


J9 PWM


JST-GH 1x10, side entry · 3.3 V logic outputs

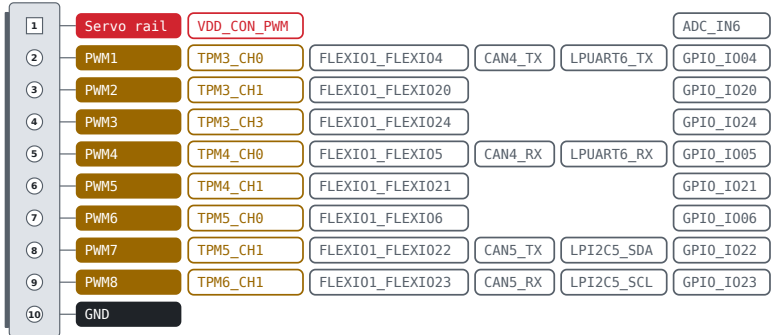

Pin 1: measured on ADC_IN6
Pin 9: shared with the buzzer while S1 is ON

J8 GPS


JST-GH 1x10, side entry · DS-009 GPS · 3.3 V logic

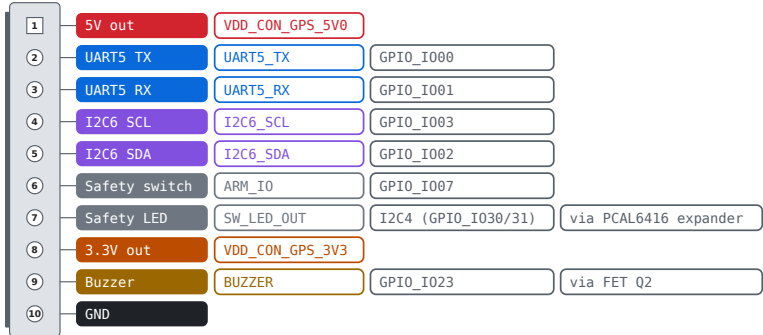

Pin 9: enabled by DIP switch S1


J6 TELEM

JST-GH 1x6, top entry · DS-009 TELEM · 3.3 V logic

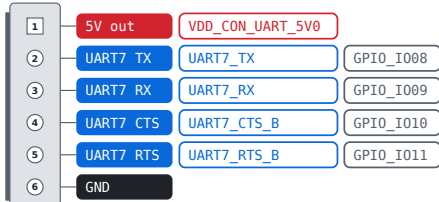


J7 I2C

JST-GH 1x4, top entry · DS-009 I2C · 3.3 V logic

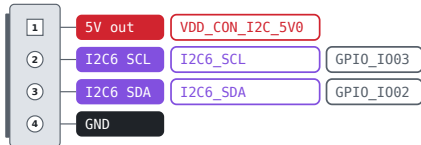

J12 AUDIO


3.5 mm 4-pole TRRS jack with insertion switch, board underside · CTIA / AHJ (tip L, ring 1 R, ring 2 GND, sleeve MIC)

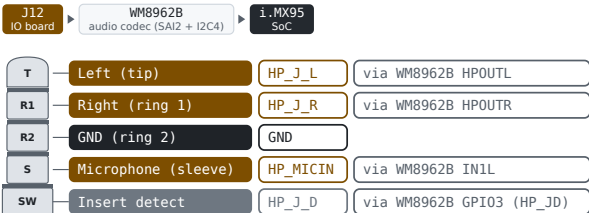

S: bias voltage comes from the codec

J4 CAN2

JST-GH 1x4, side entry · DS-009 CAN

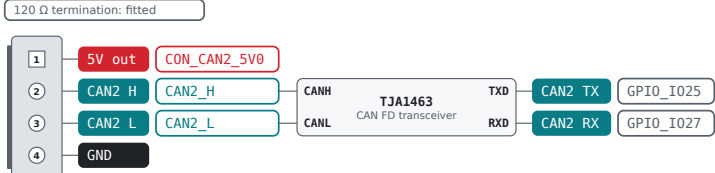

J2 SPKR


JST-PH 2.0 mm 1x4



Pin 1: not GND
Pin 3: not GND

J3 CAN3

JST-GH 1x4, side entry · DS-009 CAN

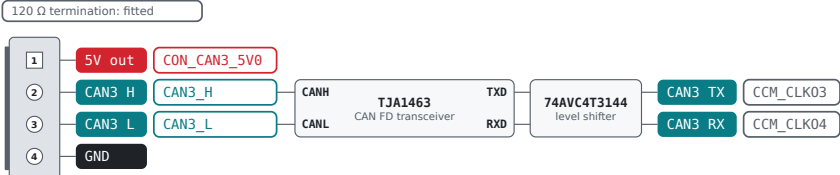


J5 CAN1

JST-GH 1x4, side entry · DS-009 CAN




J16 M.2 KEY B
M.2 Socket 2 Key B / B+M, 2242 / 3042 / 3052 standoffs, bottom side, 3.3 V up to 5 A · GPIO, RESET# and SMBus 1.8 V logic

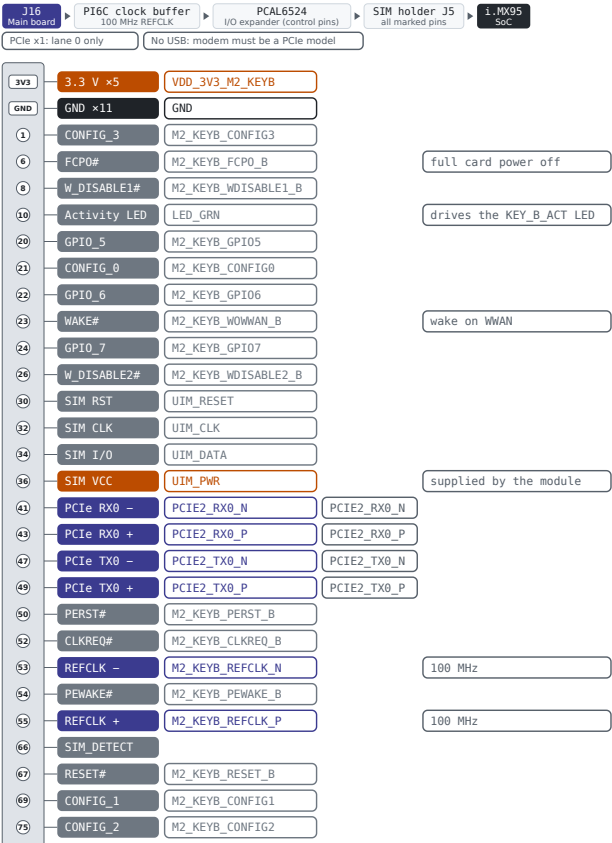


3V3: pins 2, 4, 70, 72, 74
GND: pins 3, 5, 11, 27, 33, 39, 45, 51, 57, 71, 73

J3 CSI
22-pin 0.5 mm FPC/FFC, contacts away from the PCB · RPI 22-pin CSI layout · 1.2 V MIPI, 3.3 V I2C and GPIO

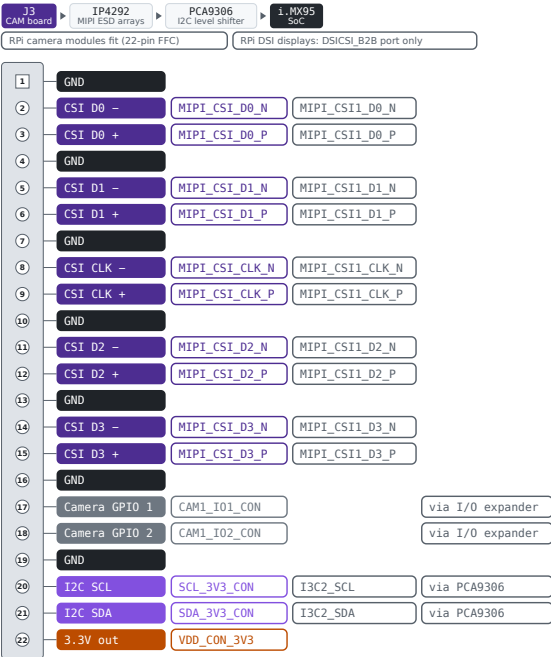


J1 M.2 KEY M
M.2 Socket 3 Key M, 2242 / 2280 standoffs, 3.3 V up to 3.5 A · SMBus 1.8 V logic

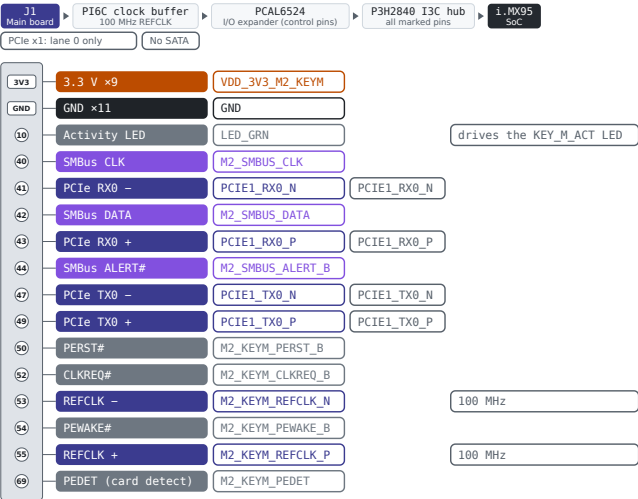


3V3: pins 2, 4, 12, 14, 16, 18, 70, 72, 74
GND: pins 3, 9, 15, 27, 33, 39, 45, 51, 57, 71, 73

J2 CONSOLE
JST-GH 1x6 (SM06B-GHS-TB) · DS-009 TELEM · 3.3 V logic

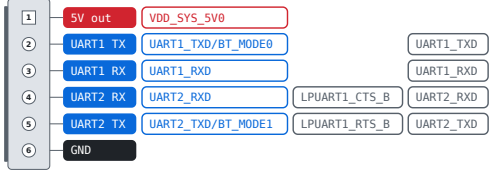


Pin 2: Linux console; boot strap BT_MODE0
Pin 4: M7 console by default; the pad can be muxed to UART1 CTS
Pin 5: M7 console by default; the pad can be muxed to UART1 RTS; boot strap BT_MODE1

J7 DEBUG
2x5 1.27 mm (Samtec SHF-105-01-L-D-RA) · Arm Cortex 10-pin debug · 1.8 V logic (VTref)

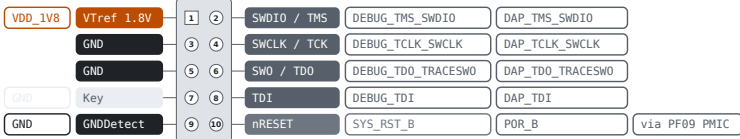

Pin 7: tied to GND
Pin 10: open drain

J5 SIM
SIM card holder, 6 contacts + card-detect switch, bottom side




C1: from the module
CD: closes to GND

J9 PWR_IN
Molex Micro-Fit 3.0 2-pin (0430450222)



J11 RTC_BAT
JST-SH 1.0 mm 2-pin (SM02B-SR55-TB), top entry



Pin 2: charged slowly, about 3 V

J4 5V
1x3 2.54 mm right-angle header, not fitted

