

Kinematics Calculations for Hexapod Robot

Nabeel Chowdhury

October 2, 2021

1 Servo Angles for each Leg

Looking from above, the first angle of each leg that makes contact with the floor at $P(x, y, z)$ is found as $\theta_C = \tan^{-1} \left(\frac{L_y}{L_x} \right) = \tan^{-1} \left(\frac{P_y}{P_x} \right)$.

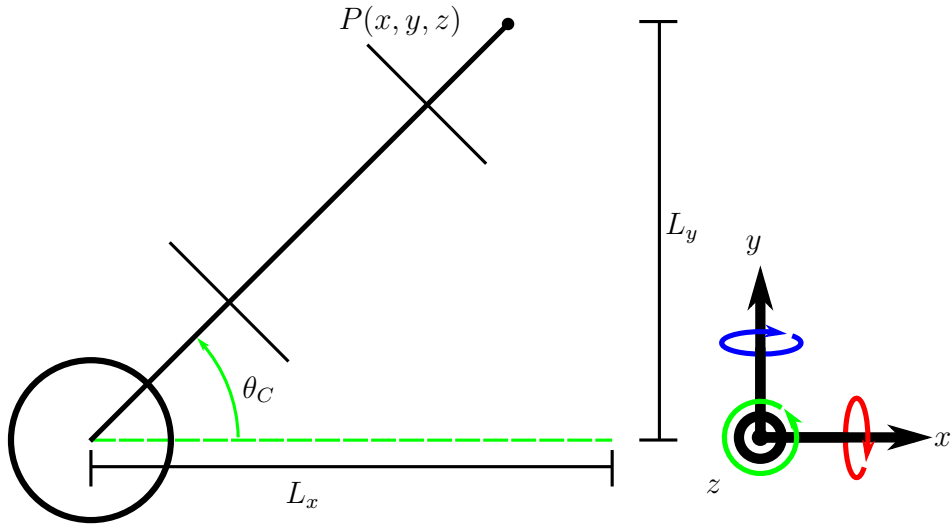


Figure 1: The top view of the leg. θ_C is the Coax angle of the servo attached to the body of the Hexapod. L_x is the length of the leg from the body in the x direction and L_y is the length of the leg in the y direction.

Looking from the side of the leg, we can define several parameters.

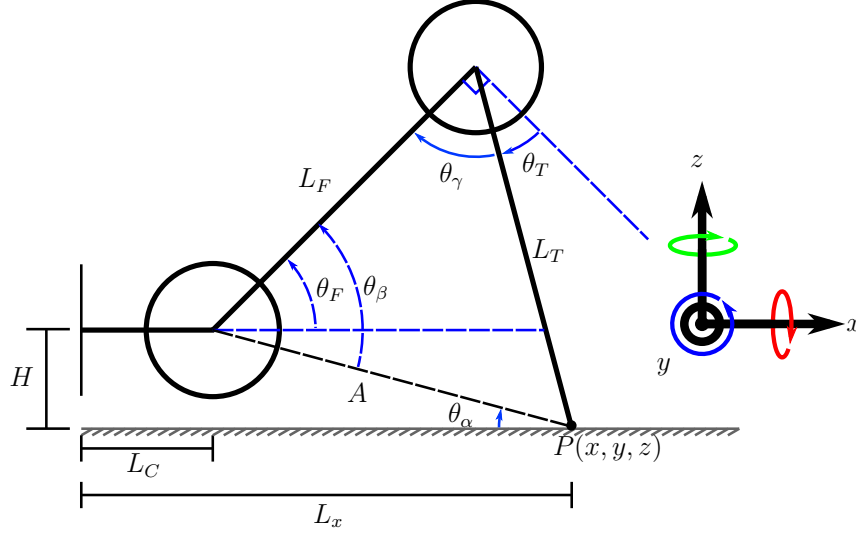


Figure 2: The side view of the leg. θ_F is the Femur angle and θ_T is the tibia angle. L_C is the offset of the femur servo from the body, or the coax length. L_F is the length of the Femur and L_T is the length of the Tibia. L_x is the x distance of the leg's point of contact with the ground. H is the height of the body off of the ground. The rest of the parameters are needed in interim steps to find θ_F and θ_T .

First, we need to find the length of A .

$$A = \sqrt{H^2 + (L_x - L_C)^2} = \sqrt{P_z^2 + (P_x - L_C)^2}$$

Using A we can use the law of cosines to find θ_F .

$$\begin{aligned} \theta_F &= \theta_\beta - \theta_\alpha \\ \theta_\alpha &= \tan^{-1} \left(\frac{H}{L_x - L_C} \right) \\ L_T^2 &= L_F^2 + A^2 - 2L_F A \cos(\theta_\beta) \\ \therefore \theta_F &= \cos^{-1} \left(\frac{L_T^2 - L_F^2 - A^2}{-2L_F A} \right) - \tan^{-1} \left(\frac{H}{L_x - L_C} \right) \end{aligned}$$

We can also use the law of cosines to find the tibia angle as well.

$$\begin{aligned}\theta_T &= 90^\circ - \theta_\gamma \\ A^2 &= L_F^2 + L_T^2 - 2L_FL_T \cos(\theta_\gamma) \\ \therefore \theta_T &= 90^\circ - \cos^{-1} \left(\frac{A^2 - L_F^2 - L_T^2}{-2L_FL_T} \right)\end{aligned}$$

In summary:

$$\theta_C = \tan^{-1} \left(\frac{P_y}{P_x} \right)$$

$$\theta_F = \cos^{-1} \left(\frac{L_T^2 - L_F^2 - P_z^2 + (P_x - L_C)^2}{-2L_F \left(\sqrt{P_z^2 + (P_x - L_C)^2} \right)} \right) - \tan^{-1} \left(\frac{-P_z}{L_x - L_C} \right)$$

$$\theta_T = 90^\circ - \cos^{-1} \left(\frac{P_z^2 + (P_x - L_C)^2 - L_F^2 - L_T^2}{-2L_FL_T} \right)$$