

# Fourier Analysis

Autumn 2017

Last updated:  
27th October 2017 at 10:03

James Cannon  
Kyushu University

<http://www.jamescannon.net/teaching/fourier-analysis>

[http://raw.githubusercontent.com/NanoScaleDesign/FourierAnalysis/master/fourier\\_analysis.pdf](http://raw.githubusercontent.com/NanoScaleDesign/FourierAnalysis/master/fourier_analysis.pdf)

License: *CC BY-NC 4.0*.



# Contents

|          |  |           |
|----------|--|-----------|
| <b>0</b> | <b>Course information</b>                                      | <b>5</b>  |
| 0.1      | This course . . . . .  | 6         |
| 0.1.1    | How this works . . . . .                                       | 6         |
| 0.1.2    | Assessment . . . . .   | 6         |
| 0.1.3    | What you need to do . . . . .                                  | 7         |
| 0.2      | Timetable . . . . .  | 8         |
| 0.3      | Hash-generation . . . . .                                      | 9         |
| <b>1</b> | <b>Hash practise</b>   | <b>11</b> |
| 1.1      | Hash practise: Integer . . . . .                               | 12        |
| 1.2      | Hash practise: Decimal . . . . .                               | 12        |
| 1.3      | Hash practise: String . . . . .                                | 12        |
| 1.4      | Hash practise: Scientific form . . . . .                       | 12        |
| 1.5      | Hash practise: Numbers with real and imaginary parts . . . . . | 12        |
| 1.6      | $\pi$ and imaginary numbers . . . . .                          | 13        |
| 1.7      | Imaginary exponentials . . . . .                               | 13        |
| <b>2</b> | <b>Periods and frequencies</b>                                 | <b>15</b> |
| 2.1      | Period at 50 THz . . . . .                                     | 16        |
| 2.2      | Frequency with $k=1$ . . . . .                                 | 17        |
| 2.3      | Frequency with $k=2$ . . . . .                                 | 18        |
| 2.4      | The meaning of $k$ . . . . .                                   | 19        |
| 2.5      | Smallest period with $k=1$ . . . . .                           | 20        |
| 2.6      | Smallest period with $k=2$ . . . . .                           | 21        |
| 2.7      | Phase . . . . .  | 22        |
| 2.8      | Amplitude . . . . .  | 23        |
| 2.9      | Periodic and non-periodic signals . . . . .                    | 24        |
| 2.10     | Making non-periodic signals from periodic signals . . . . .    | 25        |
| 2.11     | Fundamental frequency . . . . .                                | 26        |
| <b>3</b> | <b>Fourier Series</b>  | <b>27</b> |
| 3.1      | Even and odd functions . . . . .                               | 28        |
| 3.2      | Introduction to sine and cosine Fourier coefficients . . . . . | 30        |
| 3.3      | The significance of the fourier coefficients . . . . .         | 32        |
| 3.4      | Integral of $\sin(kt)$ and $\cos(kt)$ . . . . .                | 33        |
| 3.5      | Integral of product of sines and cosines . . . . .             | 34        |
| 3.6      | First term in a trigonometric Fourier series . . . . .         | 35        |
| 3.7      | The Fourier coefficient $a_k$ . . . . .                        | 36        |
| 3.8      | The Fourier coefficient $b_k$ . . . . .                        | 37        |
| 3.9      | Trigonometric Fourier series of a square wave . . . . .        | 38        |
| 3.10     | Trigonometric Fourier series of another square wave . . . . .  | 39        |
| 3.11     | Fourier sine and cosine series . . . . .                       | 40        |
| 3.12     | Complex numbers . . . . .                                      | 41        |
| 3.13     | Complex form of sine and cosine . . . . .                      | 43        |

|      |  |    |
|------|--|----|
| 3.14 | An alternative way to write Fourier series . . . . .             | 44 |
| 3.15 | Integral of a complex exponential over a single period . . . . . | 45 |
| 3.16 | Derivation of the complex Fourier coefficients . . . . .         | 46 |
| 3.17 | Complex Fourier series of a square wave . . . . .                | 47 |
| 3.18 | Non-unit periods . . . . .                                       | 48 |

## Chapter 0

# Course information

## 0.1 This course

This is the Autumn 2017 Fourier Analysis course studied by 3rd-year undergraduate international students at Kyushu University.

### 0.1.1 How this works

- In contrast to the traditional lecture-homework model, in this course the learning is self-directed and active via publicly-available resources.
- Learning is guided through solving a series of carefully-developed challenges contained in this book, coupled with suggested resources that can be used to solve the challenges with instant feedback about the correctness of your answer.
- There are no lectures. Instead, there is discussion time. Here, you are encouraged to discuss any issues with your peers, teacher and any teaching assistants. Furthermore, you are encouraged to help your peers who are having trouble understanding something that you have understood; by doing so you actually increase your own understanding too.
- Discussion-time is from 10:30 to 12:00 on Wednesdays at room W4-529.
- Peer discussion is encouraged, however, if you have help to solve a challenge, always make sure you do understand the details yourself. You will need to be able to do this in an exam environment. If you need additional challenges to solidify your understanding, then ask the teacher. The questions on the exam will be similar in nature to the challenges. If you can do all of the challenges, you can get 100% on the exam.
- Every challenge in the book typically contains a **Challenge** with suggested **Resources** which you are recommended to utilise in order to solve the challenge. Occasionally the teacher will provide extra **Comments** to help guide your thinking. A **Solution** is also made available for you to check your answer. Sometimes this solution will be given in encrypted form. For more information about encryption, see section 0.3.
- For deep understanding, it is recommended to study the suggested resources beyond the minimum required to complete the challenge.
- The challenge document has many pages and is continuously being developed. Therefore it is advised to view the document on an electronic device rather than print it. The date on the front page denotes the version of the document. You will be notified by email when the document is updated. The content may differ from last-year's document.
- A target challenge will be set each week. This will set the pace of the course and defines the examinable material. It's ok if you can't quite reach the target challenge for a given week, but then you will be expected to make it up the next week.
- You may work ahead, even beyond the target challenge, if you so wish. This can build greater flexibility into your personal schedule, especially as you become busier towards the end of the semester.
- Your contributions to the course are strongly welcomed. If you come across resources that you found useful that were not listed by the teacher or points of friction that made solving a challenge difficult, please let the teacher know about it!

### 0.1.2 Assessment

In order to prove to outside parties that you have learned something from the course, we must perform summative assessments. This will be in the form of a mid-term exam (weighted 30%), coursework (weighted 20%), a satisfactory challenge-log (weighted 10%) and a final exam (weighted 40%).

Your final score is calculated as  $\text{Max}(\text{final exam score}, \text{weighted score})$ , however you must pass the final exam to pass the course.

### 0.1.3 What you need to do

- Prepare a challenge-log in the form of a workbook or folder where you can clearly write the calculations you perform to solve each challenge. This will be a log of your progress during the course and will be occasionally reviewed by the teacher.
- You need to submit a brief report at <https://goo.gl/forms/sUZwHSpu48Bh3wMQ2> by 8am on the day of the class. Here you can let the teacher know about any difficulties you are having and if you would like to discuss anything in particular.
- Please bring a wifi-capable internet device to class, as well as headphones if you need to access online components of the course during class. If you let me know in advance, I can lend computers and provide power extension cables for those who require them (limited number).

## 0.2 Timetable

|           | Discussion | Target       | Note                     |
|-----------|------------|--------------|--------------------------|
| <b>1</b>  | 11 Oct     | -            |                          |
| <b>2</b>  | 18 Oct     | 2.11         |                          |
| <b>3</b>  | 25 Oct     | 3.10         |                          |
| <b>4</b>  | 27 Oct     | 3.13         | Friday class             |
| <b>5</b>  | 10 Nov     | 3.18         |                          |
| <b>6</b>  | 16 Nov     |              | Thursday class at 16:40  |
| <b>7</b>  | 22 Nov     |              |                          |
| <b>8</b>  | 29 Nov     |              | Coursework instructions  |
| <b>9</b>  | 6 Dec      | Midterm exam |                          |
| <b>10</b> | 13 Dec     |              |                          |
| <b>11</b> | 20 Dec     |              |                          |
| <b>12</b> | 10 Jan     |              | Submission of coursework |
| <b>13</b> | 17 Jan     |              |                          |
| <b>14</b> | 24 Jan     |              |                          |
| <b>15</b> | 7 Feb      | Final exam   |                          |



### 0.3 Hash-generation

Some solutions to challenges are encrypted using MD5 hashes. In order to check your solution, you need to generate its MD5 hash and compare it to that provided. MD5 hashes can be generated at the following sites:

- Wolfram alpha: (For example: md5 hash of “q1.00”) <http://www.wolframalpha.com/input/?i=md5+hash+of+%22q1.00%22>
- [www.md5hashgenerator.com](http://www.md5hashgenerator.com)

Since MD5 hashes are very sensitive to even single-digit variation, you must enter the solution *exactly*. This means maintaining a sufficient level of accuracy when developing your solution, and then entering the solution according to the format suggested by the question. Some special input methods:

| Solution  | Input                        |
|---|------------------------------|
| $5 \times 10^{-476}$                                      | 5.00e-476                    |
| $5.0009 \times 10^{-476}$                                 | 5.00e-476                    |
| $-\infty$   | -infinity (never “infinite”) |
| $2\pi$  | 6.28                         |
| i   | im(1)                        |
| 2i  | im(2)                        |
| $1 + 2i$  | re(1)im(2)                   |
| $-0.0002548 i$  | im(-2.55e-4)                 |
| $1/i = i/-1 = -i$   | im(-1)                       |
| $e^{i2\pi} [= \cos(2\pi) + i\sin(2\pi) = 1 + i0 = 1]$     | 1.00                         |
| $e^{i\pi/3} [= \cos(\pi/3) + i\sin(\pi/3) = 0.5 + i0.87]$ | re(0.50)im(0.87)             |
| Choices in order A, B, C, D                               | abcd                         |

The first 6 digits of the MD5 sum should match the first 6 digits of the given solution.



## Chapter 1

# Hash practise

## 1.1 Hash practise: Integer

$X = 46.3847$

Form: Integer.

Place the indicated letter in front of the number.

Example: aX where  $X = 46$  is entered as a46

hash of aX = e77fac

## 1.2 Hash practise: Decimal

$X = 49$

Form: Two decimal places.

Place the indicated letter in front of the number.

Example: aX where  $X = 46.00$  is entered as a46.00

hash of bX = 82c9e7

## 1.3 Hash practise: String

$X = abcdef$

Form: String.

Place the indicated letter in front of the number.

Example: aX where  $X = abc$  is entered as aabc

hash of cX = 990ba0

## 1.4 Hash practise: Scientific form

$X = 500,765.99$

Form: Scientific notation with the mantissa in standard form to 2 decimal place and the exponent in integer form.

Place the indicated letter in front of the number.

Example: aX where  $X = 4 \times 10^{-3}$  is entered as a4.00e-3

hash of dX = be8a0d

## 1.5 Hash practise: Numbers with real and imaginary parts

$X = 1 + 2i$

Form: Integer (*for imaginary numbers, “integer” means to write both the real and imaginary parts of the number as integers. If you were instructed to enter to two decimal places, then you would need to enter each of the real and imaginary parts to two decimal places. Refer to section 0.3 to see an example of how to handle input of imaginary numbers.*)

Place the indicated letter in front of the number.

Example: aX where  $X = 46$  is entered as a46

hash of eX = 4aa75a

## 1.6 $\pi$ and imaginary numbers

$$X = -2\pi i$$

Form: Two decimal places. Place the indicated letter in front of the number.

Example: aX where  $X = 46.00$  is entered as a46.00

hash of fX = ad3e8b

## 1.7 Imaginary exponentials

Note that you will need to understand how to expand exponentials in terms of their sines and cosines in order to do this. If you do not understand how to do this yet, skip this challenge and come back to it later.

$$X = 4e^{i3\pi/4}$$

Form: Two decimal places. Place the indicated letter in front of the number.

Example: aX where  $X = 46.00$  is entered as a46.00

hash of gX = 59a753



## Chapter 2

# Periods and frequencies

## 2.1 Period at 50 THz

### Resources

- Video: <https://www.youtube.com/watch?v=v3CvAW8BDHI>

### Challenge

A signal is oscillating at a frequency of 50 THz. What is the period?

### Solution

X = Your solution

Form: Scientific notation with the mantissa in standard form to 2 decimal places and the exponent in integer form.

Place the indicated letter in front of the number.

Example: aX where  $X = 4.0543 \times 10^{-3}$  is entered as a4.05e-3

Hash of qX = 3faf81



## 2.2 Frequency with $k=1$

### Comment

Note that we're working in radians here. From now on a factor of  $2\pi$  will be included in the oscillations so that  $\sin(2\pi t)$  will complete 1 cycle in 1 second. (If your calculator defaults to degrees, be sure to change it to radians for this course.)

### Challenge

What is the frequency of  $\sin(2\pi kt)$ , where  $t$  is time in seconds and  $k = 1$ ?

### Solution

(Hz)

X = Your solution

Form: Decimal to 2 decimal places.

Place the indicated letter in front of the number.

Example: aX where  $X = 46.00$  is entered as a46.00

Hash of eX = 720149

## 2.3 Frequency with k=2

### Challenge

What is the frequency of  $\sin(2\pi kt)$ , where  $t$  is time in seconds and  $k = 2$ ?

### Solution

(Hz)

X = Your solution

Form: Decimal to 2 decimal places.

Place the indicated letter in front of the number.

Example: aX where  $X = 46.00$  is entered as a46.00

Hash of rX = 96ba66

## 2.4 The meaning of $k$

### Challenge

Considering the previous two challenges, what does  $k$  physically represent in those challenges?

### Solution

Please compare your answer with your partner in class or discuss with the teacher.

## 2.5 Smallest period with $k=1$

### Resources

- Book: 1.3 (<https://see.stanford.edu/materials/lsoftaee261/book-fall-07.pdf>)
- Video (14m10s to 17m00s): <https://youtu.be/1rqJl7Rs6ps?t=14m10s>

### Challenge

What is the smallest period of  $\sin(2\pi kt)$ , where  $t$  is time in seconds and  $k = 1$ ?

### Solution

(s)

X = Your solution

Form: Decimal to 2 decimal places.

Place the indicated letter in front of the number.

Example: aX where  $X = 46.00$  is entered as a46.00

Hash of wX = 25c4fb

## 2.6 Smallest period with $k=2$

### Resources

- Book: 1.3 (<https://see.stanford.edu/materials/lsoftaee261/book-fall-07.pdf>)
- Video (14m10s to 17m00s): <https://youtu.be/1rqJl7Rs6ps?t=14m10s>

### Challenge

What is the smallest period of  $\sin(2\pi kt)$ , where  $t$  is time in seconds and  $k = 2$ ?

### Solution

(s)

X = Your solution

Form: Decimal to 2 decimal places.

Place the indicated letter in front of the number.

Example: aX where  $X = 46.00$  is entered as a46.00

Hash of tX = bb995f

## 2.7 Phase

### Comments

Another important concept is phase. For a simple sine signal  $\theta(t) = \sin(2\pi t)$ , at  $t = 0$  the angle  $\theta$  is zero, but one can shift the phase (starting point) of the signal by effectively making the sine-curve non-zero at  $t = 0$ . Another way to think about it is to say the sine curve doesn't reach zero until a time  $t - \phi$  where  $\phi$  is the phase-shift added.

### Challenge

Place the following four graphs in the following order:

$$\sin(2\pi t + \pi/2)$$

$$\sin(2\pi t - \pi/2)$$

$$\sin(2\pi t + \pi/4)$$

$$\sin(2\pi t + 2\pi)$$



### Solution

X = Your solution

Form: String.

Place the indicated letter in front of the string.

Example: aX where X=abcd is entered as aabcd

Hash of iX = 5c0e8b

## 2.8 Amplitude

### Comments

Another important concept is amplitude.  $\sin(2\pi t)$  has an amplitude of 1, but this can be easily modified to go between  $\pm A$  by multiplication with  $A$ .

### Challenge

The following 4 graphs correspond to the equation  $A \sin(2\pi kt)$  with variation in the values of  $A$  and  $k$ . What is the sum of the values of  $A$  for the following graphs?



### Solution

X = Your solution

Form: Integer.

Place the indicated letter in front of the number.

Example: aX where  $X = 46$  is entered as a46

Hash of uX = 6bce05

## 2.9 Periodic and non-periodic signals

### Resources

- Video: [https://www.youtube.com/watch?v=F\\_pdpbu8bgA](https://www.youtube.com/watch?v=F_pdpbu8bgA)
- Book: 1.3 (<https://see.stanford.edu/materials/lsoftaee261/book-fall-07.pdf>)

### Challenge

The list below contains periodic and non-periodic signals. Sum the points of the signals below that are *periodic*.

1 point:  $x(t) = t^2$

2 points:  $x(t) = \sin(t)$

4 points:  $x(t) = \sin(2\pi t)$

8 points:  $x(t) = \sin(2\pi t + t)$

16 points:  $x(t) = \sin(2\pi t) + \sin(t)$

32 points:  $x(t) = \sin(5\pi t) + \sin(2\pi t)$

64 points:  $x(t) = \sin(5\pi t) + \sin(37\pi t)$

128 points:  $x(t) = \sin(5\pi t) + \sin(37.01\pi t)$

256 points:  $x(t) = \sin(5\pi t) + \sin(\sqrt{2}\pi t)$

512 points:  $x(t) = \sin(5\sqrt{2}\pi t) + \sin(\sqrt{2}\pi t)$

### Solution

X = Your solution

Form: Integer.

Place the indicated letter in front of the number.

Example: aX where  $X = 46$  is entered as a46

Hash of uX = 5d906b



## 2.10 Making non-periodic signals from periodic signals

### Challenge

It is not immediately intuitive that it is possible to make a non-periodic signal by simply adding two periodic signals. Referring to the previous challenge, in no-more than 1 paragraph, explain how this is possible.

### Solution

Please compare your answer with your partner or ask the teacher in class.

## 2.11 Fundamental frequency

### Challenge

Considering the periodic signals in challenge 2.9 in order of increasing point-score, calculate the fundamental frequency and period of the last periodic signal in the list.

### Solution

Frequency (Hz) (be careful about rounding up or down to 2 decimal places):

X = Your solution

Form: Decimal to 2 decimal places.

Place the indicated letter in front of the number.

Example: aX where  $X = 46.00$  is entered as a46.00

Hash of aX = ac6698

Period (s):

X = Your solution

Form: Decimal to 2 decimal places.

Place the indicated letter in front of the number.

Example: aX where  $X = 46.00$  is entered as a46.00

Hash of bX = 6fdff9

## Chapter 3

# Fourier Series

## 3.1 Even and odd functions

### Resources

- Wikipedia: [https://en.wikipedia.org/wiki/Even\\_and\\_odd\\_functions](https://en.wikipedia.org/wiki/Even_and_odd_functions)

### Challenge

Sum the points of all the following *true* statements:

1 point:  $f(x) = \sin(x)$  is an odd function

2 points:  $f(x) = \sin(x)$  is an even function

4 points:  $f(x) = \cos(x)$  is an odd function

8 points:  $f(x) = \cos(x)$  is an even function

16 points:  $f(x) = x$  is an odd function

32 points:  $f(x) = x$  is an even function

64 points:  $f(x) = \sin(x) + \cos(x)$  is an odd function

128 points:  $f(x) = \sin(x) + \cos(x)$  is an even function

256 points: The infinitely repeating square wave (see figure below) where  $f(x) = \begin{cases} 1 & \text{for } 0 < x < 1 \\ -1 & \text{for } 1 < x < 2 \end{cases}$  is an odd function.

512 points:  $f(x)$  above is an even function.

1024 points: The infinitely repeating square wave where  $g(x) = \begin{cases} 1 & \text{for } 0 < x < 2 \\ 0 & \text{for } 2 < x < 4 \end{cases}$  is an odd function.

2048 points:  $g(x)$  above is an even function.



## Solution

$X$  = Your solution

Form: Integer.

Place the indicated letter in front of the number.

Example: aX where  $X = 46$  is entered as a46

Hash of gX = 205d04

## 3.2 Introduction to sine and cosine Fourier coefficients

### Comment

Fourier series involves the construction of a signal by summing multiple periodic signals and careful choice of each frequency's amplitude and phase. For example, considering the following 3 signals:

1.  $f_1(t) = 2 \sin(2\pi t)$
2.  $f_2(t) = 1 \sin(4\pi t + \pi)$
3.  $f_3(t) = 0.3 \sin(6\pi t + \pi/5)$

Their sum ( $k = 1$  to  $3$ ) produces a much more complex shape:



Here we will consider Fourier sine and cosine series. We will go beyond this description later, but you should be aware of their existence and a method of their derivation.

### Challenge

As shown above, a complex function (signal) can be made up of a sum of sine signals:

$$f(t) = A_0 + \sum_{k=1}^N A_k \sin(2\pi kt + \phi_k) \quad (3.1)$$

Using basic trigonometric relations, show that this can be re-written in terms of a sum of sines and cosines:

$$f(t) = \frac{a_0}{2} + \sum_{k=1}^N a_k \cos(2\pi kt) + b_k \sin(2\pi kt) \quad (3.2)$$

I want you to see how the phase information is encoded in the representation of equation 3.2.  $a_k$  and  $b_k$  are referred to as Fourier coefficients. Write an expression for the coefficients  $a_k$ ,  $b_k$  and  $a_0$ .

### Solutions

To check your answer, calculate  $a_0$ ,  $a_1$  and  $b_1$  given the following information:

$$A_0 = -1/2, A_1 = 0.7, \phi_1 = \pi/5.$$

(make sure your calculator is using radians)

$a_1 = 0.41145$ ,  $b_1 = 0.566312$ .

$a_0$ :  $X$  = Your solution

Form: Decimal to 2 decimal places.

Place the indicated letter in front of the number.

Example: aX where  $X = 46.00$  is entered as a46.00

Hash of fX = 75d06e

### 3.3 The significance of the Fourier coefficients

#### Resources

- Video: <https://www.khanacademy.org/science/electrical-engineering/ee-signals/ee-fourier-series/v/ee-fourier-series-intro>

#### Comments

I recommend to view the suggested resource as this gives a nice introduction to the subject and challenges ahead. Note that the period used in the video is different to that we're using in our description, but you should become comfortable with moving between different notations.

#### Challenge

Write a few sentences describing in qualitative terms what the significance of the magnitude of the fourier coefficients  $a_k$  and  $b_k$  in challenge 3.2 is.

#### Solutions

Please compare your answer with your partner or discuss with the teacher in class.



### 3.4 Integral of $\sin(kt)$ and $\cos(kt)$

#### Resources

- Video: <https://www.khanacademy.org/science/electrical-engineering/ee-signals/ee-fourier-series/v/ee-integral-of-sinmt-and-cosmt>

#### Challenge

Show that the following integrals evaluate to zero:

$$\int_0^1 \sin(2\pi kt) dt = 0 \quad (3.3)$$

$$\int_0^1 \cos(2\pi kt) dt = 0 \quad (3.4)$$

given that  $k$  is a non-zero positive integer.

#### Solutions

Please compare your answer with your partner or discuss with the teacher in class.

## 3.5 Integral of product of sines and cosines

### Resources

- Video: <https://www.khanacademy.org/science/electrical-engineering/ee-signals/ee-fourier-series/v/ee-integral-sine-times-sine>
- Video: <https://www.khanacademy.org/science/electrical-engineering/ee-signals/ee-fourier-series/v/ee-integral-cosine-times-cosine>

### Challenge

Considering the following integrals, show under what conditions the following integrals evaluate to zero, and what condition they don't evaluate to zero. What is the non-zero evaluation result?

$$\int_0^1 \sin(2\pi mt) \sin(2\pi nt) dt \quad (3.5)$$

$$\int_0^1 \cos(2\pi mt) \cos(2\pi nt) dt \quad (3.6)$$

You may assume that  $m$  and  $n$  are non-zero positive integers.

### Solutions

Please compare your answer with your partner or discuss with the teacher in class.

## 3.6 First term in a trigonometric Fourier series

### Resources

- Video: <https://www.khanacademy.org/science/electrical-engineering/ee-signals/ee-fourier-series/v/ee-first-term-fourier-series>

### Challenge

Considering a fourier series represented by

$$f(t) = \frac{a_0}{2} + \sum_{k=1}^N a_k \cos(2\pi kt) + b_k \sin(2\pi kt) \quad (3.7)$$

What is  $a_0$  for the following functions?

1.  $f(t) = \sin(10\pi t)$
2. Square wave function  $f(t) = \begin{cases} 2 & \text{for } 0 < t < 1 \\ 1 & \text{for } 1 < t < 2 \end{cases}$
3.  $f(t) = t^2$  considered only over the interval from  $t = 0$  to  $t = 1$

### Solutions

1.

X = Your solution

Form: Decimal to 2 decimal places.

Place the indicated letter in front of the number.

Example: aX where  $X = 46.00$  is entered as a46.00

Hash of dX = 705887

2.

X = Your solution

Form: Decimal to 2 decimal places.

Place the indicated letter in front of the number.

Example: aX where  $X = 46.00$  is entered as a46.00

Hash of eX = e1509d

3.

X = Your solution

Form: Decimal to 2 decimal places.

Place the indicated letter in front of the number.

Example: aX where  $X = 46.00$  is entered as a46.00

Hash of fX = 98680d

## 3.7 The Fourier coefficient $a_k$

### Resources

- Video: <https://www.khanacademy.org/science/electrical-engineering/ee-signals/ee-fourier-series/v/ee-fourier-coefficients-cosine>

### Challenge

Derive an expression for the Fourier coefficient  $a_k$  in

$$f(t) = \frac{a_0}{2} + \sum_{k=1}^N a_k \cos(2\pi kt) + b_k \sin(2\pi kt) \quad (3.8)$$

Note the difference in period between the above equation and the suggested resource.

### Solutions

Please compare your answer with your partner or discuss with the teacher in class.

## 3.8 The Fourier coefficient $b_k$

### Resources

- Video: <https://www.khanacademy.org/science/electrical-engineering/ee-signals/ee-fourier-series/v/ee-fourier-coefficients-sine>

### Challenge

Derive an expression for the Fourier coefficient  $b_k$  in

$$f(t) = \frac{a_0}{2} + \sum_{k=1}^N a_k \cos(2\pi kt) + b_k \sin(2\pi kt) \quad (3.9)$$

Note the difference in period between the above equation and the suggested resource.

### Solutions

Please compare your answer with your partner or discuss with the teacher in class.

### 3.9 Trigonometric Fourier series of a square wave


#### Resources

- Video: <https://www.khanacademy.org/science/electrical-engineering/ee-signals/ee-fourier-series/v/ee-fourier-coefficients-for-square-wave>

#### Challenge

Calculate the Fourier series for the following square-wave:

$$f(t) = \begin{cases} 1 & \text{for } 0 < t < \frac{1}{2} \\ 0 & \text{for } \frac{1}{2} < t < 1 \end{cases} \quad (3.10)$$

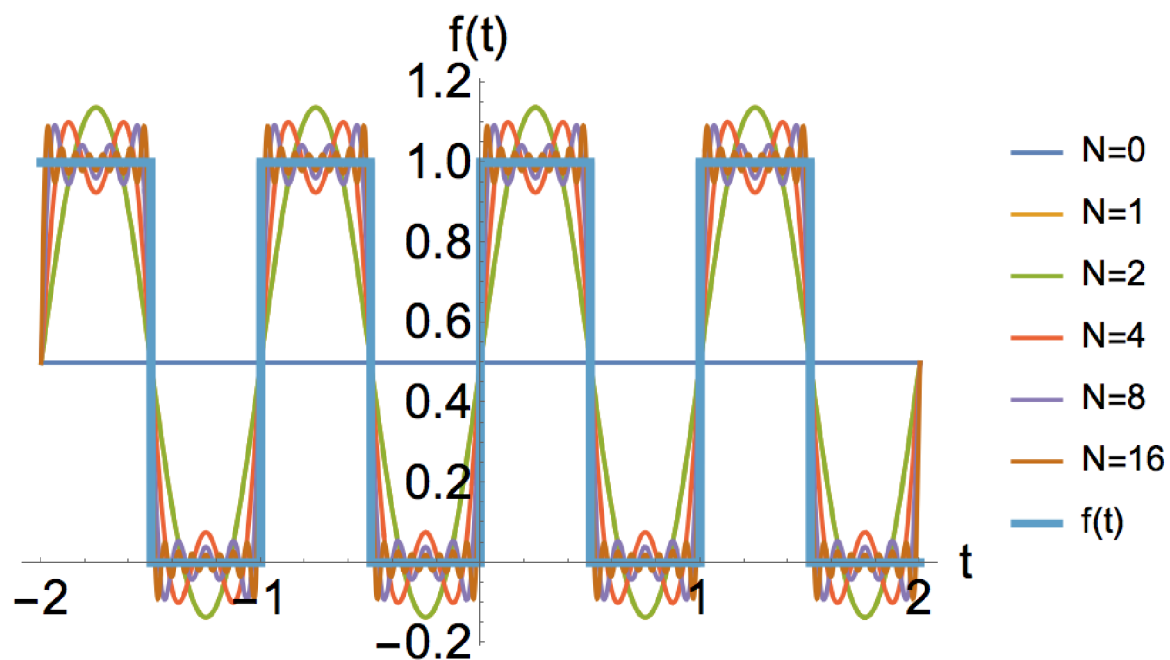

#### Solutions

To check your solution, write out the sum up to  $k = 2$  and then evaluate  $f(0.9)$

0.1258

### 3.10 Trigonometric Fourier series of another square wave

#### Challenge

Calculate the Fourier series for the following square-wave:

$$f(t) = \begin{cases} 1 & \text{for } -\frac{1}{4} < t < \frac{1}{4} \\ 0 & \text{for } \frac{1}{4} < t < \frac{3}{4} \end{cases} \quad (3.11)$$



#### Solutions

To check your solution, write out the sum up to  $k = 2$  and then evaluate  $f(0.7)$

0.30327

### 3.11 Fourier sine and cosine series

#### Challenge

Considering challenges 3.9 and 3.10, one corresponds to a Fourier sine series, and the other to a Fourier cosine series. Such series only contain sine and cosine terms, respectively. (1) State which challenge corresponds to which series, and (2) write a square-wave function that you think would involve both sine and cosine terms.

#### Solutions

If you are unsure about your answer, you can either try to solve it to prove it, or please discuss with your partner or ask the teacher.



## 3.12 Complex numbers

### Resources

- Book: Appendix A starting at page 403 (<https://see.stanford.edu/materials/lsoftae261/book-fall-07.pdf>)

### Challenge

Considering  $z = a + bi$  and  $w = c + di$ , determine:

1.  $z + w$
2.  $zw$
3.  $z\bar{z}$
4.  $z/w$
5.  $|z|$

### Solutions

To check your answers, substitute the following values:  $a = 1$ ,  $b = 2$ ,  $c = 3$ ,  $d = 4$ .

1.

X = Your solution

Form: Imaginary form with integers.

Place the indicated letter in front of the number.

Example: aX where  $X = 1 + 2i$  is entered as are(1)im(2)

Hash of hX = d8c7d5

2.

X = Your solution

Form: Imaginary form with integers.

Place the indicated letter in front of the number.

Example: aX where  $X = 1 + 2i$  is entered as are(1)im(2)

Hash of iX = 3c520b

3.

X = Your solution

Form: Imaginary form with integers.

Place the indicated letter in front of the number.

Example: aX where  $X = 1 + 2i$  is entered as are(1)im(2)

Hash of jX = 66248e

4.

X = Your solution

Form: Imaginary form with numbers to two decimal places.

Place the indicated letter in front of the number.

Example: aX where  $X = 1.23 + 4.56i$  is entered as are(1.23)im(4.56)

Hash of kX = 39577d

5.

X = Your solution

Form: Imaginary form with numbers to two decimal places.

Place the indicated letter in front of the number.

Example: aX where  $X = 1.23 + 4.56i$  is entered as are(1.23)im(4.56)

Hash of mX = b12a23

### 3.13 Complex form of sine and cosine

#### Challenge

Write sine and cosine in terms of complex exponentials.

#### Solutions

If you are unsure about your answer, please discuss in class.

## 3.14 An alternative way to write Fourier series

### Comments

It turns out that a more mathematically-convenient and ultimately intuitive way to write Fourier series is in terms of complex exponentials in the form

$$f(t) = \sum_{k=-n}^{k=n} c_k e^{i2\pi kt} \quad (3.12)$$

A few things to note:

- The sum now runs from  $-n$  to  $n$ .
- The  $k = 0$  term that was originally excluded from the sum in equation 3.2 is now included.
- The  $c_k$ 's, unlike the  $a_k$ 's and  $b_k$ 's, are complex.
- $c_{-k} = \bar{c}_k$ .
- $c_0 = a_0/2$ .

You see how we started with equation 3.1 and now end up with equation 3.12? Do you see more-or-less how the phase information is encoded in the  $c_k$ 's?

### Challenge

This *challenge* section is optional. The information in the *comments* section however is crucial. If you have time, I recommend doing this challenge to help integrate the above information into your personal knowledge-structure, however if time is an issue, then the following challenges must take priority over this one.

1. By comparing equation 3.2 to equation 3.12, write  $c_k$  in terms of  $a_k$  and  $b_k$  for  $k < 0$  and  $k > 0$ .
2. Show that  $c_{-k} = \bar{c}_k$
3. Show that  $c_0$  must be  $a_0/2$

### Solutions

If you have trouble with the derivation, please discuss in class.

### 3.15 Integral of a complex exponential over a single period

#### Challenge

Integrate the following function over one period, assuming that  $k$  must be a non-zero integer:

$$g(t) = e^{i2\pi kt} \tag{3.13}$$

#### Solution

The numerical answer is given below. Be sure you understand why the answer comes out as this number.

X = Your solution

Form: Decimal to 2 decimal places.

Place the indicated letter in front of the number.

Example: aX where  $X = 46.00$  is entered as a46.00

Hash of nX = f979e9

## 3.16 Derivation of the complex Fourier coefficients

### Resources

- Video starting at 41m 56s: <https://www.youtube.com/watch?v=1rqJl7Rs6ps&t=41m56s>

### Comments

This is the last major derivation for Fourier series, and parallels what you learned for trigonometric Fourier series. The video does a great job of showing the derivation. Try to become comfortable with manipulating complex exponentials and their periodicity.

### Challenge

Derive an expression for the  $c_k$ 's in the equation

$$f(t) = \sum_{k=-n}^n c_k e^{i2\pi kt} dt \quad (3.14)$$

in terms of the function  $f(t)$ .

### Solution

Please discuss in class if you are unsure of your derivation.


### 3.17 Complex Fourier series of a square wave

#### Challenge

1. Determine an expression for the Fourier coefficients for the following square wave:

$$f(t) = \begin{cases} 5 & \text{for } 0 < t < \frac{1}{2} \\ 0 & \text{for } \frac{1}{2} < t < 1 \end{cases} \quad (3.15)$$

2. Write the Fourier series for the square wave.

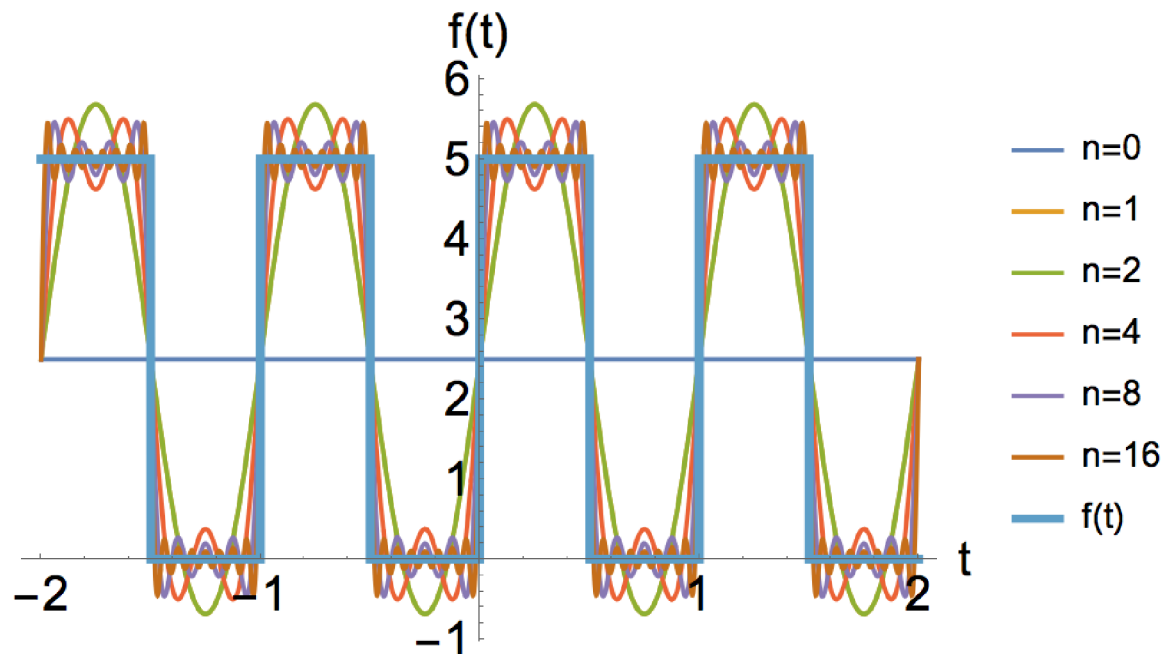

#### Solution

1.  
You should find that  $c_{-7} = i0.227$ .
2.  
If you perform the sum for  $n = 1$  and evaluate at  $t = 0.7$ , you should obtain a value of  $-0.527$ .

## 3.18 Non-unit periods

### Resources

- Book: Chapter 1.6 of the book (<https://see.stanford.edu/materials/lsoftae261/book-fall-07.pdf>)

### Comment

Until now we considered signals with periodicity 1, but this will not always be the case, and in fact as we make the jump from Fourier series to Fourier transforms this will become more important. The resource gives the intuition behind the non-periodic case for complex Fourier series. For trigonometric Fourier series, the Fourier coefficients become:

$$a_k = \frac{2}{T} \int_{t_0}^{t_0+T} f(t) \cos(2\pi kt/T) dt \quad (3.16)$$

$$b_k = \frac{2}{T} \int_{t_0}^{t_0+T} f(t) \sin(2\pi kt/T) dt \quad (3.17)$$


while for complex Fourier series the Fourier coefficients become:

$$c_k = \frac{1}{T} \int_{t_0}^{t_0+T} f(t) e^{-i2\pi kt/T} dt \quad (3.18)$$

### Challenge

Obtain an expression for the exponential Fourier series for the pulsing sawtooth function

$$f(t) = \begin{cases} t & \text{for } 0 < t < \frac{1}{4} \\ 0 & \text{for } \frac{1}{4} < t < \frac{1}{2} \end{cases} \quad (3.19)$$

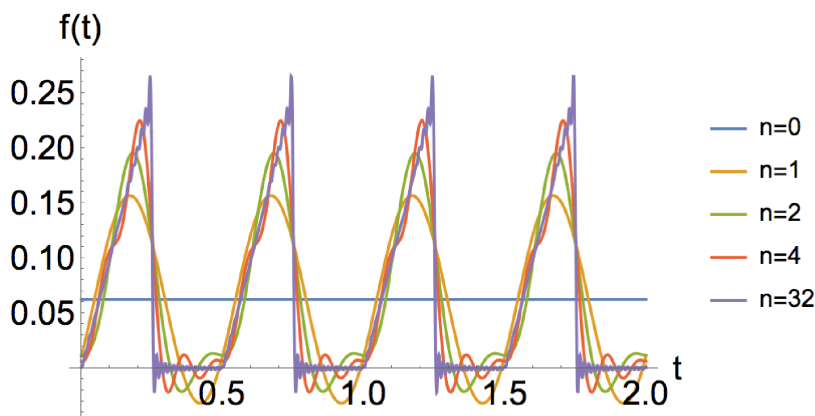

### Solution

You should find the  $c_k$ 's for  $k \neq 0$  are

$$\frac{i\pi k e^{-i\pi k} + e^{-i\pi k} - 1}{16\pi^2 k^2} \quad (3.20)$$