



GENSET NO LOAD – LOAD & PRE-TEST CHECKING REPORT

Date :	27 / 06 / 2017		
PI Model :	PI 625C	Type :	OPEN
prime :	563 KVA	Skid Color :	BLACK
Frq. :	60 Hz	P.F. _{LOAD} :	1
Serial No :			
Job No :	8526		

CLIENT : S . A SERVICE COMPANY SAR A/C

PROJECT :

GENSET DETAILS :

Engine :	CUMMINS	Model No :	QSX15 – G9	Serial No :	79968358
Alternator :	STAMFORD	Model No :	HCI 544D1	Serial No :	A17A037996
Controller :	DEEP SEA	Model No :	7320	Serial No :	6384101
C. Breaker :	LS	Amps	1200 A	Model No :	ABS1203b
C. Transformer :	ELMEX	Amps	1200/5 A	Serial No :	N/A
AVR :	STAMFORD	Model No :	N/A	Serial No :	N/A
		Model No :	AS 440	Serial No :	110768-2201

GENSET RATING :

Testing Full Load Current :	684 Amps	Nominal Current :	855 Amps
-----------------------------	----------	-------------------	----------

LOAD TEST WILL BE IMPLEMENTED AT AMBIENT CONDITIONS

Temperature :	42° C	Altitude :	
---------------	-------	------------	--

LOAD TEST

LOAD	RUN TIME	FREQ	SPEED	VOLTAGE L-L			CURRENT			POWER	COOLANT TEMP.	OIL PRESSURE	CHARGING ALTERNATOR
				L1	L2	L3	L1	L2	L3				
%	Min	Hz	RPM	V	V	V	A	A	A	KW	°C	BAR	VDC
0%	5	60.0	1800	380	380	380	--	--	--	--	70	3.08	27.8
25%	5	60.0	1800	380	380	381	170	169	169	112	75	2.96	27.8
50%	5	60.0	1800	380	382	382	341	340	340	225	80	2.88	28.0
75%	5	60.0	1800	381	382	383	512	511	510	341	82	2.80	28.0
100%	10	60.0	1800	382	383	383	684	682	686	454	85	2.76	28.0
110%	10	60.0	1800	383	383	383	752	754	754	500	88	2.70	28.0

LOAD ACCEPTANCE TEST:

SUDDENLY BLOCK LOAD	VOLTAGE	FREQUENCY	CURRENT	RESPONSE TIME
%	V	Hz	A	SEC
50%	380	60.0	340	0
0%	388 – 380	61.5 – 60.0	0	2
51%	372 – 380	58.4 – 60.0	346	2


PROTECTION SYSTEM TEST:

OVER FREQUENCY WRN/SD	UNDER FREQUENCY WRN/SD	OVER VOLTAGE WRN/SD	UNDER VOLTAGE WRN/SD	OIL PRESSURE WRN/SD	COOLANT LEVEL SD	COOLANT TEMP WRN/SD	AUTO START
65 / 67	55 / 53	440 / 460	360 / 340	2.0 / 1.0	Ok	ECM 95 / 100	OK

ACCESSORIES DETAILS :

	Model	Serial No
	Model	Serial No
	Model	Serial No

Test Carried out by PI Supervisor :	Witnessed and approved by Client :
Name : Eng. Malek Talbishi	Name :
Signature :	Signature :
Date : 28 / 06 / 2017	Date :

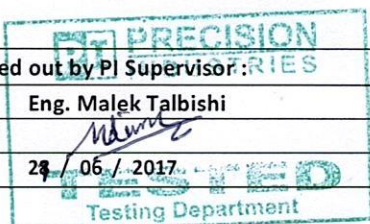



الصناعات الدقيقة
PRECISION INDUSTRIES®

Power Generator Packagers And Canopy Builders

WARRANTY CERTIFICATE

Customer:	SAUDI ARABIAN SERVICE COMPANY
-----------	-------------------------------

Date:	03/07/2017
Sales Order No:	

Invoice No:	17933ARI
Invoice Date:	02/07/2017

Equipment: Diesel Generator Set with Enclosure					
KVA	Alternator Model:	Serial No.:	Engine Model:	Serial No.:	Service Duty:
625	STAMFORD	A17A037996	CUMMINS	79968358	STANDBY

We hereby guarantee and stand responsible for any warranty against defects in materials or workmanship that is set out by the original manufacturers or any component parts of the new equipment. This equipment has been satisfactorily tested according to **Precision Industries** standard.

The manufacturer, **PRECISION INDUSTRIES**, warrants that it will either repair or replace any components that is found defective in material and workmanship under normal use within a non-extendible and exclusive period of **Twelve month (One year)** from the date of delivery to the customer or **One thousand (1,000)** run hours as recorded by the machine, whichever comes first.

Warranty applies to engine, alternator-generator, controller, enclosure, paint and electromechanical parts.

Warranty repairs (parts and/or labor) will be made free of charge except for consumable items needed in the repair.

Non-warrantable terms

1. Alterations, tampering or modifications not approved by the manufacturer.
2. Parts not originally installed or not approved by the manufacturer.
3. Failure to follow manufacturer's recommended periodic maintenance.
4. Damage resulting from abuse, improper use, improper maintenance and repair, negligence, sabotage, failure to use manufacturer's recommended parts, lubricants, fuel, coolant and other fluids.
5. Damage resulting from the use of contaminated diesel fuel, oil, coolant and other fluids.
6. Damage resulting from the use of fluid additives not approved by the manufacturer.
7. Damage resulting from continuous operation under light or low load, that is, below **thirty percent (30%)** of its rated capacity.
8. Damage caused by installation of parts or devices not approved by the manufacturer.
9. Damaged caused by improper installation of the machine, poor room ventilation and improper installation of feeders, except those designed and installed by personnel authorized by the manufacturer.

PI-SRV-08-WC-00