


Dual Electrodes for Surface EMG Applications

Disposable Ag/AgCl electrodes for surface EMG applications with low impedance solid gel, stainless steel snaps, and latex free, hypoallergenic foam adhesive backing.

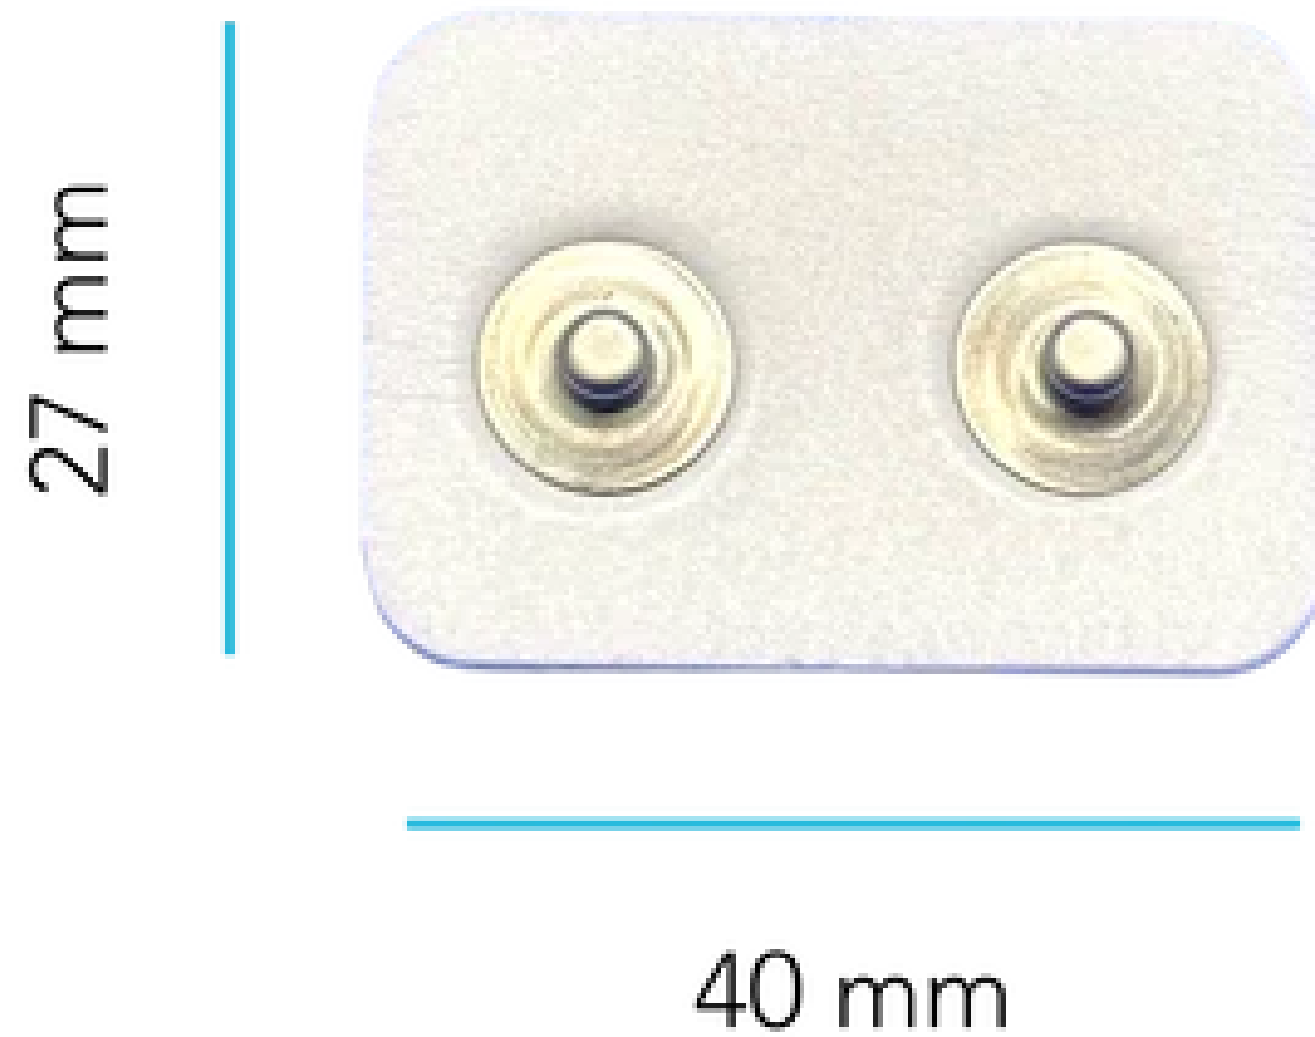

Technical Specifications

Dimensions: 40 x 21 mm

Interelectrode Distance: 20 mm

Shelf life: 2 years

Storage Conditions (min/max): +10°C / +32°C

Duration of Use:

DC-Offset: 2 mVDC

AC-Impedance (at 10 Hz): 5 ohms

Internal Noise Test: 45 uVrms

Bias-Current Tolerance: 70 mVDC

NORAXON®