

SPECTRUM REPORT

Applicant: Nebra Ltd

Address of Applicant: Unit 4 Bells Yew Green Business Court, Bells Yew Green,
Tunbridge Wells TN3 9BJ

Equipment Under Test (EUT)

Product Name: Nebra Smart Indoor LoRa Gateway / Nebra HNT Indoor Hotspot Miner

Model No.: HNTIN-470-G, HNTIN-868-G, HNTIN-915-G, HNTIN-433-G,
HNTIN-470, HNTIN-868, HNTIN-915, HNTIN-433

Applicable standards: ETSI EN 300 220-1 V3.1.1 (2017-02)
ETSI EN 300 220-2 V3.2.1 (2018-06)

Date of sample receipt: 12 Mar., 2021

Date of Test: 13 Mar., to 19 Apr., 2021

Date of report issue: 23 Apr., 2021

Test Result: PASS*

*In the configuration tested, the EUT complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EC Declaration of Conformity and compliance with all relevant EC Directives. The protection requirements with respect to electromagnetic compatibility contained in Directive 2014/53/EU are considered.



Bruce Zhang
Laboratory Manager



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the JYT product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	23 Apr., 2021	Original

Tested by: Yao Wu
Test Engineer

Date: 23 Apr., 2021

Reviewed by: Winner Zhang
Project Engineer

Date: 23 Apr., 2021

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF E.U.T.	5
5.3 TEST ENVIRONMENT AND MODE, AND TEST SAMPLES PLANS	6
5.4 DESCRIPTION OF SUPPORT UNITS.....	6
5.5 MEASUREMENT UNCERTAINTY	6
5.6 LABORATORY FACILITY	6
5.7 LABORATORY LOCATION	6
5.8 TEST INSTRUMENTS LIST.....	7
6 RADIO TECHNICAL REQUIREMENTS SPECIFICATION IN EN 300 220-2.....	8
6.1 OPERATING FREQUENCY	8
6.2 DUTY CYCLE.....	8
6.3 ADJACENT CHANNEL POWER.....	8
6.4 ADAPTIVE POWER CONTROL.....	8
6.5 FHSS EQUIPMENT.....	8
6.6 SHORT TERM BEHAVIOUR	8
6.7 EFFECTIVE RADIATED POWER.....	9
6.8 OCCUPIED BANDWIDTH.....	11
6.9 TX OUT OF BAND EMISSIONS	12
6.10 TRANSIENT POWER	14
6.11 TX BEHAVIOUR UNDER LOW-VOLTAGE CONDITIONS.....	15
6.12 UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN.....	16
6.13 RECEIVER REQUIREMENTS	18
6.13.1 RX sensitivity.....	18
6.13.2 Blocking	19
6.14 POLITE SPECTRUM ACCESS REQUIREMENTS	21
6.14.1 Clear Channel Assessment threshold.....	21
6.14.2 Polite spectrum access timing parameters.....	21
6.14.3 Adaptive Frequency Agility	21
7 TEST SETUP PHOTO	22
8 EUT CONSTRUCTIONAL DETAILS	23

4 Test Summary

Test Items	Test Requirement	Test method	Result
Transmitter Part			
Operating frequency	EN 300 220-2 Clause 4.2.1	EN 300 220-1 Clause 5.1.2	PASS*
Effective Radiated Power	EN 300 220-2 Clause 4.3.1	EN 300 220-1 Clause 5.2.2	PASS*
Maximum e.r.p. spectral density	EN 300 220-2 Clause 4.3.2	EN 300 220-1 Clause 5.3.2	PASS*
Duty Cycle	EN 300 220-2 Clause 4.3.3	EN 300 220-1 Clause 5.4.2	PASS*
Occupied Bandwidth	EN 300 220-2 Clause 4.3.4	EN 300 220-1 Clause 5.6.3	PASS*
Tx Out of Band Emissions	EN 300 220-2 Clause 4.3.5	EN 300 220-1 Clause 5.8.3	PASS*
Transient power	EN 300 220-2 Clause 4.3.6	EN 300 220-1 Clause 5.10.3	PASS*
Adjacent Channel Power	EN 300 220-2 Clause 4.3.7	EN 300 220-1 Clause 5.11.3	N/A
TX behaviour under Low Voltage Conditions	EN 300 220-2 Clause 4.3.8	EN 300 220-1 Clause 5.12.3	PASS*
Adaptive Power Control	EN 300 220-2 Clause 4.3.9	EN 300 220-1 Clause 5.13.3	N/A
FHSS equipment	EN 300 220-2 Clause 4.3.10	EN 300 220-2 Clause 4.3.10.3	N/A
Short term behaviour	EN 300 220-2 Clause 4.3.11	EN 300 220-1 Clause 5.5.2	N/A
Unwanted emissions in the spurious domain	EN 300 220-2 Clause 4.2.2	EN 300 220-1 Clause 5.9.3	PASS*
Receiver Part			
RX sensitivity	EN 300 220-2 Clause 4.4.1	EN 300 220-1 Clause 5.14.3	N/A
Blocking	EN 300 220-2 Clause 4.4.2	EN 300 220-1 Clause 5.18.6	PASS
Polite spectrum access conformance requirement			
Clear Channel Assessment threshold	EN 300 220-2 Clause 4.5.2	EN 300 220-1 Clause 5.21.2.3	N/A
Polite spectrum access timing parameters	EN 300 220-2 Clause 4.5.3	EN 300 220-1 Clause 5.21.2.3	N/A
Adaptive Frequency Agility	EN 300 220-2 Clause 4.5.4	EN 300 220-1 Clause 5.21.4.2	N/A
Remark: <ol style="list-style-type: none"> 1. Pass: Meet the requirement. 2. N/A: Not Applicable for Non-adaptive equipment. 3. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer). 4. Pass*: refer to the Report No.: SZAWW180830005-04W 			

5 General Information

5.1 Client Information

Applicant:	Nebra Ltd
Address:	Unit 4 Bells Yew Green Business Court, Bells Yew Green, Tunbridge Wells TN3 9BJ
Manufacturer:	Nebra Ltd
Address:	Unit 4 Bells Yew Green Business Court, Bells Yew Green, Tunbridge Wells TN3 9BJ
Factory:	SUNSOAR TECH CO., LIMITED
Address:	4/F, Block E, Fengze Building, Huafeng No.2 Industrial Park, Hangkong Road, XiXiang Town, BaoAn District, Shenzhen, China

5.2 General Description of E.U.T.

Product Name:	Nebra Smart Indoor LoRa Gateway / Nebra HNT Indoor Hotspot Miner
Model No.:	HNTIN-470-G, HNTIN-868-G, HNTIN-915-G, HNTIN-433-G, HNTIN-470, HNTIN-868, HNTIN-915, HNTIN-433
Operation Frequency:	868.1MHz~868.5MHz
Hardware version:	V12-15-2020-1614
Software version:	a98bfc8
Modulation:	OOK
Antenna type:	Cylindrical Antenna
Antenna Gain:	3 dBi
Power supply:	DC 12V
Adapter:	Model: TM-K018VP-01201500PE-Z Input: 100-240V~50/60Hz 0.45A Output: 12.0V , 1.5A
Remark:	<p>Model No.: HNTIN-470-G, HNTIN-868-G, HNTIN-915-G, HNTIN-433-G, HNTIN-470, HNTIN-868, HNTIN-915, HNTIN-433 has the same internal circuit design, layout, components and internal wiring. The difference is that the ones with the -G suffix have GPS function, while those without the suffix do not. Each model has two appearances, except for the appearance, the interior is exactly the same. In addition, the corresponding frequency of each model of LoRa module is different, as follows:</p> <p>The Nebra HNT Indoor Hotspot is available in 4 variants to support multiple regions:</p> <p>It is available in the following frequency variants:</p> <ul style="list-style-type: none"> • 433 MHz (HNTIN-433) • 470 Mhz (HNTIN-470) • 868 Mhz (HNTIN-868) • 915 Mhz (HNTIN-915)

5.3 Test environment and mode, and test samples plans

Transmitting mode:	Keep the TX unit in transmitting mode with modulation.
Receiving mode:	Keep the RX unit in receiving mode.
Operating Environment:	
Temperature:	Normal: 15°C ~ 35°C, Extreme: -20°C ~ +55°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	Normal: 12.0Vdc, Extreme: Low 10.8Vdc, High 13.2Vdc

5.4 Description of Support Units

The EUT has been tested as an independent unit.

5.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%)
Radio frequency	±0.5 ppm
RF output power, conducted	±1.5 dB
Conducted spurious emission of transmitter, valid up to 6 GHz	±3.0 dB
Conducted emission of receivers	±3.0 dB
RF level uncertainty for a given BER	±1.5 dB
Occupied BandWidth	±5 %
Temperature	±3 °C
Humidity	±10 %
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB
Radiated Emission (1GHz ~ 18GHz)	±5.16 dB

5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.7 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax:+86-755-23116366

Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>

5.8 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	01-19-2021	01-18-2024
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-03-2021	03-02-2022
Biconical Antenna	SCHWARZBECK	VUBA9117	359	06-18-2020	06-17-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-03-2021	03-02-2022
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-18-2020	06-17-2021
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-03-2021	03-02-2022
Pre-amplifier	CD	PAP-1G18	11804	03-03-2021	03-02-2022
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-03-2021	03-02-2022
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-03-2021	03-02-2022
Signal Generator	Rohde & Schwarz	SMX	835454/016	03-03-2021	03-02-2022
Signal Generator	R&S	SMR20	1008100050	03-03-2021	03-02-2022
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-03-2021	03-02-2022
Cable	MICRO-COAX	MFR64639	K10742-5	03-03-2021	03-02-2022
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-03-2021	03-02-2022
RF Switch Unit	MWRFTTEST	MW200	N/A	N/A	N/A
Test Software	MWRFTTEST	MTS8200	Version: 2.0.0.0		

6 Radio Technical Requirements Specification in EN 300 220-2

6.1 Operating Frequency

Declared by the manufacturer operating frequency for 433.92MHz and OCW for 100kHz.

6.2 Duty Cycle

The manufacturer has declared that due to the time between transmissions by the devices, the duty cycle is less than 10%.

6.3 Adjacent Channel Power

Not applicable, only applies to transmitters with OCW \leq 25 kHz.

6.4 Adaptive Power Control

Not applicable, only applies to EUT with adaptive power control using annex C band AF.

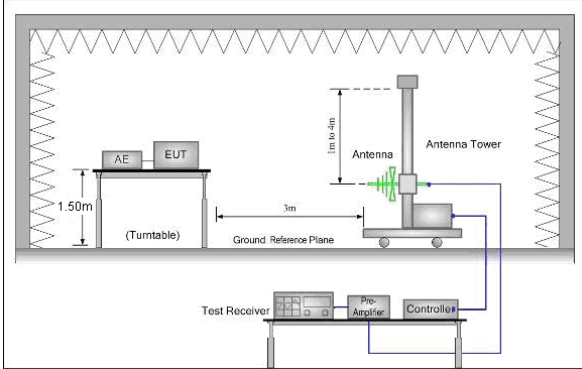
6.5 FHSS equipment

Not applicable, since the test applies to FHSS equipment.

6.6 Short term behaviour

Not applicable, only applies to EUT using annex C bands AD, AE, AF, AG, AH, or AI.

6.7 Effective Radiated Power

Test Requirement:	ETSI EN300 220-2 clause 4.3.1
Test Method:	ETSI EN300 220-1 clause 5.2.2.2
Receiver Setup:	RBW=100 kHz, VBW=300 kHz, Detector= peak
Limit:	10dBm (Refer to ETSI EN300 220-2 Annex B)
Test Setup:	
Test Procedure:	<p>Substitution method was performed to determine the actual ERP emission levels of the EUT.</p> <p>The following test procedure as below:</p> <ol style="list-style-type: none"> 1. On the test site as test setup graph above, the EUT shall be placed at the 1.5m support on the turntable and in the position closest to normal use as declared by the provider. 2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter. The output of the test antenna shall be connected to the measuring receiver. 3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test. 4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver. 5. Repeat step 4 for test frequency with the test antenna polarized horizontally. 6. Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At the lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground. 7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output. 8. Repeat step 7 with both antennas horizontally polarized for each test

	<p>frequency.</p> <p>9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula: $\text{ERP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBd)}$ where: Pg is the generator output power into the substitution antenna.</p>
Test Instruments:	Refer to section 5.8 for details
Test Mode:	Refer to section 5.3 for details
Test Results:	Refer to the Report No.: SZAWW180830005-04W

6.8 Occupied Bandwidth

Test Requirement:	EN300 220-2 Clause 4.3.4																					
Test Method:	EN 300 220-1 Clause 5.6.3																					
Limit:	Within of 433.05MHz to 434.79MHz																					
Test Procedure:	<div>1. The spectrum analyser shall be configured as appropriate for the parameters shown in Table 12.</div> <div>Table 12: Test Parameters for Max Occupied Bandwidth Measurement</div> <table><tr><th>Setting</th><th>Value</th><th>Notes</th></tr><tr><td>Centre frequency</td><td>The nominal Operating Frequency</td><td>The highest or lowest Operating Frequency as declared by the manufacturer</td></tr><tr><td>RBW</td><td>1 % to 3 % of OCW without being below 100 Hz</td><td></td></tr><tr><td>VBW</td><td>3 x RBW</td><td>Nearest available analyser setting to 3 x RBW</td></tr><tr><td>Span</td><td>At least 2 x Operating Channel width</td><td>Span should be large enough to include all major components of the signal and its side bands</td></tr><tr><td>Detector Mode</td><td>RMS</td><td></td></tr><tr><td>Trace</td><td>Max hold</td><td></td></tr></table> <div>2. Step 1: Operation of the EUT shall be started, on the highest operating frequency as declared by the manufacturer, with the appropriate test signal.</div> <div>The signal attenuation shall be adjusted to ensure that the signal power envelope is sufficiently above the noise floor of the analyser to avoid the noise signals on either side of the power envelope being included in the measurement.</div> <div>Step 2: When the trace is completed the peak value of the trace shall be located and the analyser marker placed on this peak.</div> <div>Step 3: The 99 % occupied bandwidth function of the spectrum analyser shall be used to measure the occupied bandwidth of the signal.</div>	Setting	Value	Notes	Centre frequency	The nominal Operating Frequency	The highest or lowest Operating Frequency as declared by the manufacturer	RBW	1 % to 3 % of OCW without being below 100 Hz		VBW	3 x RBW	Nearest available analyser setting to 3 x RBW	Span	At least 2 x Operating Channel width	Span should be large enough to include all major components of the signal and its side bands	Detector Mode	RMS		Trace	Max hold	
Setting	Value	Notes																				
Centre frequency	The nominal Operating Frequency	The highest or lowest Operating Frequency as declared by the manufacturer																				
RBW	1 % to 3 % of OCW without being below 100 Hz																					
VBW	3 x RBW	Nearest available analyser setting to 3 x RBW																				
Span	At least 2 x Operating Channel width	Span should be large enough to include all major components of the signal and its side bands																				
Detector Mode	RMS																					
Trace	Max hold																					
Test Instruments:	Refer to section 5.8 for details																					
Test Mode:	Refer to section 5.3 for details																					
Test Results:	Refer to the Report No.: SZAWW180830005-04W																					

6.9 Tx Out of Band Emissions

Test Requirement:	EN300 220-2 Clause 4.3.5																																									
Test Method:	EN 300 220-1 Clause 5.8.3																																									
Limit:	Refer to ETSI EN300 220-1 Clause 5.8.2																																									
Test Procedure:	<div><div><div>Table 16: Test Parameters for Out Of Band for Operating Channel Measurement</div><table><tr><th>Spectrum Analyser Setting</th><th>Value</th><th>Notes</th></tr><tr><td>Centre frequency</td><td>Operating Frequency</td><td></td></tr><tr><td>Span</td><td>6 x Operating Channel width</td><td></td></tr><tr><td>RBW</td><td>1 kHz (see note)</td><td>Resolution bandwidth for Out Of Band domain measurements</td></tr><tr><td>Detector Function</td><td>RMS</td><td></td></tr><tr><td rowspan="2">Trace Mode</td><td>Linear AVG</td><td>Applies only for EUT generating D-M2 test signal. An appropriate number of samples should be averaged to give a stable reading</td></tr><tr><td>Max Hold</td><td>Applies only for EUT generating D-M2a or D-M3 test signal.</td></tr><tr><td colspan="3">NOTE: If the value of RBW used is different from RBW_{REF} in clause 5.8.2, use the bandwidth correction in clause 4.3.10.1.</td></tr></table></div><div><p>The test equipment shall be configured as appropriate for the parameters shown in Table 16.</p><p>Step 1: Operation of the EUT shall be started, on the highest operating frequency as declared by the manufacturer, with the appropriate test signal. The signal shape is recorded when stable and shall be below the spectrum mask Out Of Band for operating channel.</p><p>Step 2: The test equipment shall be reconfigured as appropriate for the parameter shown in Table 17.</p><div><div>Table 17: Test Parameter Setting for Lower Out Of Band Measurement</div><table><tr><th>Spectrum Analyser Setting</th><th>Value</th><th>Notes</th></tr><tr><td>Centre frequency</td><td>$f_{c_{low}}$</td><td>The lowest Operating Frequency in the band</td></tr><tr><td>Span</td><td>$2 \times (500 \text{ kHz} + f_{c_{low}} - f_{low_OFB})$</td><td>Ensures that the left most mask specification remains within the span</td></tr></table><p>NOTE: f_{low_OFB} is the lower edge of the Operational Frequency Band.</p></div><p>Operation of the EUT is restarted, with the appropriate test signal, on the lowest operating frequency as declared by the manufacturer. If the equipment is using only one operating Frequency in the operational Frequency Band, measurement shall be performed the nominal operating frequency. The signal shape is recorded when stable; and shall be below the spectrum mask for operating channel and the spectrum mask for operational frequency band.</p><p>Step 3: The test equipment shall be reconfigured as appropriate for the parameter shown in Table 18.</p><div><div>Table 18: Test Parameter Setting for upper Out Of Band Measurement</div><table><tr><th>Spectrum Analyser Setting</th><th>Value</th><th>Notes</th></tr><tr><td>Centre frequency</td><td>$f_{c_{high}}$</td><td>the highest Operating Frequency in the band</td></tr><tr><td>Span</td><td>$2 \times (500 \text{ kHz} + f_{high_OFB} - f_{c_{high}})$</td><td>Ensures that the rightmost mask specification remains within the span</td></tr></table><p>NOTE: f_{high_OFB} is the higher edge of the operational frequency Band.</p></div><p>Operation of the EUT is restarted, with the appropriate test signal, on the highest Operating Frequency as declared by the manufacturer. If the equipment is using only one Operating Frequency in the Operational Frequency Band, measurement shall be performed at the nominal Operating Frequency. The signal shape is recorded when stable and shall be below the spectrum mask for Out Of Band emissions for operating channel and for operational</p></div></div>	Spectrum Analyser Setting	Value	Notes	Centre frequency	Operating Frequency		Span	6 x Operating Channel width		RBW	1 kHz (see note)	Resolution bandwidth for Out Of Band domain measurements	Detector Function	RMS		Trace Mode	Linear AVG	Applies only for EUT generating D-M2 test signal. An appropriate number of samples should be averaged to give a stable reading	Max Hold	Applies only for EUT generating D-M2a or D-M3 test signal.	NOTE: If the value of RBW used is different from RBW_{REF} in clause 5.8.2, use the bandwidth correction in clause 4.3.10.1.			Spectrum Analyser Setting	Value	Notes	Centre frequency	$f_{c_{low}}$	The lowest Operating Frequency in the band	Span	$2 \times (500 \text{ kHz} + f_{c_{low}} - f_{low_OFB})$	Ensures that the left most mask specification remains within the span	Spectrum Analyser Setting	Value	Notes	Centre frequency	$f_{c_{high}}$	the highest Operating Frequency in the band	Span	$2 \times (500 \text{ kHz} + f_{high_OFB} - f_{c_{high}})$	Ensures that the rightmost mask specification remains within the span
Spectrum Analyser Setting	Value	Notes																																								
Centre frequency	Operating Frequency																																									
Span	6 x Operating Channel width																																									
RBW	1 kHz (see note)	Resolution bandwidth for Out Of Band domain measurements																																								
Detector Function	RMS																																									
Trace Mode	Linear AVG	Applies only for EUT generating D-M2 test signal. An appropriate number of samples should be averaged to give a stable reading																																								
	Max Hold	Applies only for EUT generating D-M2a or D-M3 test signal.																																								
NOTE: If the value of RBW used is different from RBW_{REF} in clause 5.8.2, use the bandwidth correction in clause 4.3.10.1.																																										
Spectrum Analyser Setting	Value	Notes																																								
Centre frequency	$f_{c_{low}}$	The lowest Operating Frequency in the band																																								
Span	$2 \times (500 \text{ kHz} + f_{c_{low}} - f_{low_OFB})$	Ensures that the left most mask specification remains within the span																																								
Spectrum Analyser Setting	Value	Notes																																								
Centre frequency	$f_{c_{high}}$	the highest Operating Frequency in the band																																								
Span	$2 \times (500 \text{ kHz} + f_{high_OFB} - f_{c_{high}})$	Ensures that the rightmost mask specification remains within the span																																								

	<p>Frequency Band.</p> <p>Step 4: For frequency agile devices, the measurement shall be repeated in each Operational Frequency Band.</p> <p>Step 5: Where required (see clause 5.8.3.1 condition 1), the measurements in step 1 to step 5 shall be repeated under extreme test conditions.</p>
Test Instruments:	Refer to section 5.8 for details
Test Mode:	Refer to section 5.3 for details
Test Results:	Refer to the Report No.: SZAWW180830005-04W

6.10 Transient power

Test Requirement:	EN300 220-2 Clause 4.3.6																																							
Test Method:	EN 300 220-1 Clause 5.10.3																																							
Limit:	<table><tr><th colspan="3">Table 23: Transmitter Transient Power limits</th></tr><tr><th>Absolute offset from centre frequency</th><th>RBW_{REF}</th><th>Peak power limit applicable at measurement points</th></tr><tr><td>≤ 400 kHz</td><td>1 kHz</td><td>0 dBm</td></tr><tr><td>> 400 kHz</td><td>1 kHz</td><td>-27 dBm</td></tr></table>	Table 23: Transmitter Transient Power limits			Absolute offset from centre frequency	RBW _{REF}	Peak power limit applicable at measurement points	≤ 400 kHz	1 kHz	0 dBm	> 400 kHz	1 kHz	-27 dBm																											
Table 23: Transmitter Transient Power limits																																								
Absolute offset from centre frequency	RBW _{REF}	Peak power limit applicable at measurement points																																						
≤ 400 kHz	1 kHz	0 dBm																																						
> 400 kHz	1 kHz	-27 dBm																																						
Test Procedure:	<p>The output of the EUT shall be connected to a spectrum analyser or equivalent measuring equipment.</p> <p>The measurement shall be undertaken in zero span mode. The analyser's centre frequency shall be set to an offset from the operating centre frequency. These offset values and their corresponding RBW configurations are listed in Table 24.</p> <p>Table 24: RBW for Transient Measurement</p> <table><tr><th>Measurement points: offset from centre frequency</th><th>Analyser RBW</th><th>RBW_{REF}</th></tr><tr><td>-0,5 x OCW - 3 kHz 0,5 x OCW + 3 kHz Not applicable for OCW < 25 kHz</td><td>1 kHz</td><td>1kHz</td></tr><tr><td>±12,5 kHz or ±OCW whichever is the greater</td><td>Max (RBW pattern 1, 3, 10 kHz) ≤ Offset frequency/6 (see note)</td><td>1 kHz</td></tr><tr><td>-0,5 x OCW - 400 kHz 0,5 x OCW + 400 kHz</td><td>100 kHz</td><td>1 kHz</td></tr><tr><td>-0,5 x OCW -1 200 kHz 0,5 x OCW + 1 200 kHz</td><td>300 kHz</td><td>1 kHz</td></tr></table> <p>NOTE: Max (RBW pattern 1, 3, 10 kHz) means the maximum bandwidth that falls into the commonly implemented 1, 3, 10 kHz RBW filter bandwidth incremental pattern of spectrum analysers.</p> <p>EXAMPLE: If OCW is 25 kHz then the RBW value corresponding to one OCW offset frequency is 3 kHz. The rest of the analyser settings are listed in Table 25, and if OCW is 250 kHz then the RBW value corresponding to one OCW offset frequency is 30 kHz.</p> <p>Table 25: Parameters for Transient Measurement</p> <table><tr><th>Spectrum Analyser Setting</th><th>Value</th><th>Notes</th></tr><tr><td>VBW/RBW</td><td>10</td><td>At higher RBW values VBW may be clipped to its maximum value</td></tr><tr><td>Sweep time</td><td>500 ms</td><td></td></tr><tr><td>RBW filter</td><td>Gaussian</td><td></td></tr><tr><td>Trace Detector Function</td><td>RMS</td><td></td></tr><tr><td>Trace Mode</td><td>Max hold</td><td></td></tr><tr><td>Sweep points</td><td>501</td><td></td></tr><tr><td>Measurement mode</td><td>Continuous sweep</td><td></td></tr></table> <p>NOTE: The ratio between the number of sweep points and the sweep time shall be the same ratio as above if different number of sweep points is used.</p> <p>The used modulation shall be D-M3. The analyser shall be set to the settings of Table 25 and a measurement shall be started for each offset frequency. The EUT shall transmit at least five D-M3 test signal. The peak value shall be recorded and the measurement shall be repeated at each offset frequency mentioned in Table 24.</p> <p>The recorded power values shall be converted to power values measured in RBW_{REF} by the formula in clause 4.3.10.1.</p>	Measurement points: offset from centre frequency	Analyser RBW	RBW _{REF}	-0,5 x OCW - 3 kHz 0,5 x OCW + 3 kHz Not applicable for OCW < 25 kHz	1 kHz	1kHz	±12,5 kHz or ±OCW whichever is the greater	Max (RBW pattern 1, 3, 10 kHz) ≤ Offset frequency/6 (see note)	1 kHz	-0,5 x OCW - 400 kHz 0,5 x OCW + 400 kHz	100 kHz	1 kHz	-0,5 x OCW -1 200 kHz 0,5 x OCW + 1 200 kHz	300 kHz	1 kHz	Spectrum Analyser Setting	Value	Notes	VBW/RBW	10	At higher RBW values VBW may be clipped to its maximum value	Sweep time	500 ms		RBW filter	Gaussian		Trace Detector Function	RMS		Trace Mode	Max hold		Sweep points	501		Measurement mode	Continuous sweep	
Measurement points: offset from centre frequency	Analyser RBW	RBW _{REF}																																						
-0,5 x OCW - 3 kHz 0,5 x OCW + 3 kHz Not applicable for OCW < 25 kHz	1 kHz	1kHz																																						
±12,5 kHz or ±OCW whichever is the greater	Max (RBW pattern 1, 3, 10 kHz) ≤ Offset frequency/6 (see note)	1 kHz																																						
-0,5 x OCW - 400 kHz 0,5 x OCW + 400 kHz	100 kHz	1 kHz																																						
-0,5 x OCW -1 200 kHz 0,5 x OCW + 1 200 kHz	300 kHz	1 kHz																																						
Spectrum Analyser Setting	Value	Notes																																						
VBW/RBW	10	At higher RBW values VBW may be clipped to its maximum value																																						
Sweep time	500 ms																																							
RBW filter	Gaussian																																							
Trace Detector Function	RMS																																							
Trace Mode	Max hold																																							
Sweep points	501																																							
Measurement mode	Continuous sweep																																							
Test Instruments:	Refer to section 5.8 for details																																							
Test Mode:	Refer to section 5.3 for details																																							
Test Results:	Refer to the Report No.: SZAWW180830005-04W																																							

6.11 TX behaviour under Low-voltage Conditions

Test Requirement:	EN 300 220-2 Clause 4.3.8
Test Method:	EN 300 220-1 Clause 5.12.3
Limit:	<p>The equipment shall either:</p> <ul style="list-style-type: none"> a) remain in the Operating Channel OC without exceeding any applicable limits (e.g. Duty Cycle); or b) reduce its effective radiated power below the Spurious Emission limits without exceeding any applicable limits (e.g. Duty Cycle); or c) shut down, (ceasing function); <p>as the voltage falls below the manufacturers declared operating voltage.</p>
Test Procedure:	<p>Step 1: Operation of the EUT shall be started, on Operating Frequency as declared by the manufacturer, with the appropriate test signal and with the EUT operating at nominal operating voltage. The centre frequency of the transmitted signal shall be measured and noted.</p> <p>Step 2: The operating voltage shall be reduced by appropriate steps until the voltage reaches zero. The centre frequency of the transmitted signal shall be measured and noted. Any abnormal behaviour shall be noted.</p>
Test Instruments:	Refer to section 5.8 for details
Test Mode:	Refer to section 5.3 for details
Test Results:	Refer to the Report No.: SZAWW180830005-04W

6.12 Unwanted emissions in the spurious domain

Test Requirement:	EN 300 220-2 Clause 4.2.2																						
Test Method:	EN 300 220-1 Clause 5.9.3																						
Receiver Setup:	<div>Table 20: Parameters for TX Spurious Radiations Measurement</div> <table><tr><th>Operating Mode</th><th>Frequency Range</th><th>RBW_{REF} (see note 2)</th></tr><tr><td rowspan="9">Transmit mode</td><td>9 kHz ≤ f < 150 kHz</td><td>1 kHz</td></tr><tr><td>150 kHz ≤ f < 30 MHz</td><td>10 kHz</td></tr><tr><td>30 MHz ≤ f < f_c - m</td><td>100 kHz</td></tr><tr><td>f_c - m ≤ f < f_c - n</td><td>10 kHz</td></tr><tr><td>f_c - n ≤ f < f_c - p</td><td>1 kHz</td></tr><tr><td>f_c + p < f ≤ f_c + n</td><td>1 kHz</td></tr><tr><td>f_c + n < f ≤ f_c + m</td><td>10 kHz</td></tr><tr><td>f_c + m < f ≤ 1 GHz</td><td>100 kHz</td></tr><tr><td>1 GHz < f ≤ 6 GHz</td><td>1 MHz</td></tr></table> <div><div>NOTE 1: f is the measurement frequency. f_c is the Operating Frequency. m is 10 x OCW or 500 kHz, whichever is the greater. n is 4 x OCW or 100 kHz, whichever is the greater. p is 2,5 x OCW.</div><div>NOTE 2: If the value of RBW used for measurement is different from RBW_{REF}, use bandwidth correction from clause 4.3.10.1.</div></div>	Operating Mode	Frequency Range	RBW _{REF} (see note 2)	Transmit mode	9 kHz ≤ f < 150 kHz	1 kHz	150 kHz ≤ f < 30 MHz	10 kHz	30 MHz ≤ f < f _c - m	100 kHz	f _c - m ≤ f < f _c - n	10 kHz	f _c - n ≤ f < f _c - p	1 kHz	f _c + p < f ≤ f _c + n	1 kHz	f _c + n < f ≤ f _c + m	10 kHz	f _c + m < f ≤ 1 GHz	100 kHz	1 GHz < f ≤ 6 GHz	1 MHz
Operating Mode	Frequency Range	RBW _{REF} (see note 2)																					
Transmit mode	9 kHz ≤ f < 150 kHz	1 kHz																					
	150 kHz ≤ f < 30 MHz	10 kHz																					
	30 MHz ≤ f < f _c - m	100 kHz																					
	f _c - m ≤ f < f _c - n	10 kHz																					
	f _c - n ≤ f < f _c - p	1 kHz																					
	f _c + p < f ≤ f _c + n	1 kHz																					
	f _c + n < f ≤ f _c + m	10 kHz																					
	f _c + m < f ≤ 1 GHz	100 kHz																					
	1 GHz < f ≤ 6 GHz	1 MHz																					
Limit:	<div>Table 19: Spurious domain emission limits</div> <table><tr><th>Frequency</th><th>47 MHz to 74 MHz 87,5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 790 MHz</th><th>Other frequencies below 1 000 MHz</th><th>Frequencies above 1 000 MHz</th></tr><tr><th>State</th><td></td><td></td><td></td></tr><tr><td>TX mode</td><td>-54 dBm</td><td>-36 dBm</td><td>-30 dBm</td></tr><tr><td>RX and all other modes</td><td>-57 dBm</td><td>-57 dBm</td><td>-47 dBm</td></tr></table>	Frequency	47 MHz to 74 MHz 87,5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 790 MHz	Other frequencies below 1 000 MHz	Frequencies above 1 000 MHz	State				TX mode	-54 dBm	-36 dBm	-30 dBm	RX and all other modes	-57 dBm	-57 dBm	-47 dBm						
Frequency	47 MHz to 74 MHz 87,5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 790 MHz	Other frequencies below 1 000 MHz	Frequencies above 1 000 MHz																				
State																							
TX mode	-54 dBm	-36 dBm	-30 dBm																				
RX and all other modes	-57 dBm	-57 dBm	-47 dBm																				
Test Frequency Range:	25MHz to 4GHz																						
Test Setup:	<div>Below 1GHz</div> <div></div> <div>Above 1GHz</div> <div></div>																						
Test Procedure:	<div>Substitution method was performed to determine the actual ERP emission levels of the EUT.</div> <div>The following test procedure as below:</div> <div>Below 1GHz test procedure:</div> <div>1. On the test site as test setup graph above,the EUT shall be placed at the 1.5m support on the turntable and in the position closest to normal use as declared by the provider.</div>																						

	<ol style="list-style-type: none"> 2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter. The output of the test antenna shall be connected to the measuring receiver. 3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test. 4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver. 5. Repeat step 4 for test frequency with the test antenna polarized horizontally. 6. Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At the lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground. 7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output. 8. Repeat step 7 with both antennas horizontally polarized for each test frequency. 9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula: $ERP(dBm) = Pg(dBm) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$ where: Pg is the generator output power into the substitution antenna. <p>Above 1GHz test procedure:</p> <p>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber, and the test antenna do not need to raise from 1 to 4m, just test in 1.5m height.</p>
Test Instruments:	Refer to section 5.8 for details
Test Mode:	Refer to section 5.3 for details
Test Results:	Refer to the Report No.: SZAWW180830005-04W

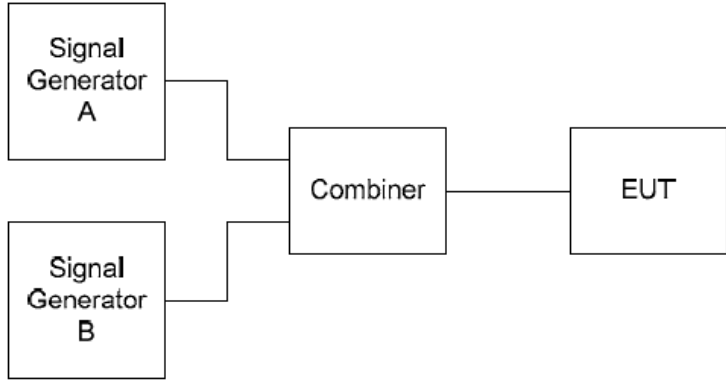
6.13 Receiver Requirements

Receiver Classification, Table 1 of EN 300 220-1.	
Table 1: Receiver categories	
Receiver category	Description
1	Category 1 is a high performance level of receiver. In particular to be used where the operation of a SRD may have inherent safety of human life implications.
1.5	Category 1.5 is an improved performance level of receiver category 2.
2	Category 2 is standard performance level of receiver.
Remark: The EUT (Rx part) belong to Class 2 with no polite spectrum access.	

6.13.1 RX sensitivity

Not applicable, since the test applied to with polite spectrum access facility only.
--

6.13.2 Blocking

Test Requirement:	EN 300 220-2 Clause 4.4.2										
Test Method:	EN 300 220-1 Clause 5.18.6										
Limit:	<p>Table 40: Blocking level parameters for RX category 3</p> <table> <tr> <th>Requirement</th><th>Limits</th></tr> <tr> <td></td><td>Receiver category 3</td></tr> <tr> <td>Blocking at ± 2 MHz from OC edge f_{high} and f_{low}</td><td>≥ -80 dBm</td></tr> <tr> <td>Blocking at ± 10 MHz from OC edge f_{high} and f_{low}</td><td>≥ -60 dBm</td></tr> <tr> <td>Blocking at $\pm 5\%$ of Centre Frequency or 15 MHz, whichever is the greater</td><td>≥ -60 dBm</td></tr> </table>	Requirement	Limits		Receiver category 3	Blocking at ± 2 MHz from OC edge f_{high} and f_{low}	≥ -80 dBm	Blocking at ± 10 MHz from OC edge f_{high} and f_{low}	≥ -60 dBm	Blocking at $\pm 5\%$ of Centre Frequency or 15 MHz, whichever is the greater	≥ -60 dBm
Requirement	Limits										
	Receiver category 3										
Blocking at ± 2 MHz from OC edge f_{high} and f_{low}	≥ -80 dBm										
Blocking at ± 10 MHz from OC edge f_{high} and f_{low}	≥ -60 dBm										
Blocking at $\pm 5\%$ of Centre Frequency or 15 MHz, whichever is the greater	≥ -60 dBm										
Test Setup:	 <p>Figure 10: Blocking measurement arrangement</p>										
Test Procedure:	<p>Step 1: Signal generator B shall be powered off. Signal generator A shall be set to the minimum level which gives the wanted performance criterion of EUT or the reference level in Table 32, whichever is the higher. The output level of generator A shall then be increased by 3 dB unless otherwise specified in technical requirement.</p> <p>Step 2: Signal generator B is powered on and set to operate at the nominal operating frequency - offset frequency. Signal generator B is then switched on and the signal amplitude is adjusted to the minimum level at which the wanted performance criterion is not achieved. With signal generator B settings unchanged, the receiver shall be replaced with a suitable RF power measuring equipment. The power into the measuring equipment shall be measured and noted. The blocking level is then the conducted power received from generator B at the EUT antenna connector. This can either be measured on the antenna connector for conducted test or be calculated for radiated test (see clause C.5.4). The blocking level shall be higher or equal to the blocking power level requested in the technical requirement clause.</p> <p>Step 3: The measurement in steps 1 to 3 shall be repeated with signal offsets at required frequencies.</p> <p>Step 4: The information shown in Table 44 shall be recorded in the test report for each measured signal level and unwanted signal offset.</p> <p>Table 44: Information Recorded in the Test Report</p> <table> <tr> <th>Value</th><th>Notes</th></tr> <tr> <td>Operating Frequency</td><td>Nominal centre frequency of the receiver</td></tr> <tr> <td>Signal generator A</td><td>Power level of signal generator A</td></tr> <tr> <td>Blocking level</td><td>Power level of signal generator B</td></tr> </table> <p>For equipment using CCA whatever is the receiver category, steps 1 to 4 shall be repeated with signal generator A level adjusted +13 dB higher than in the measurements in clause 5.18.6.4.</p>	Value	Notes	Operating Frequency	Nominal centre frequency of the receiver	Signal generator A	Power level of signal generator A	Blocking level	Power level of signal generator B		
Value	Notes										
Operating Frequency	Nominal centre frequency of the receiver										
Signal generator A	Power level of signal generator A										
Blocking level	Power level of signal generator B										

Test Instruments:	Refer to section 5.8 for details
Test Mode:	Refer to section 5.3 for details
Test Results:	Pass

Measurement Data:

Requirement	blocking level (dBm)	Limits	Test Result
		Receiver category 2	
Blocking at ± 2 MHz from OC edge fhigh and flow	-65	≥ -69 dBm	Pass
Blocking at ± 10 MHz from OC edge fhigh and flow	-46	≥ -44 dBm	Pass
Blocking at ± 5 % of Centre Frequency or 15 MHz, whichever is the greater	-45	≥ -44 dBm	Pass

6.14 Polite spectrum access requirements

6.14.1 Clear Channel Assessment threshold

Not applicable, since the test applied to with polite spectrum access facility only.

6.14.2 Polite spectrum access timing parameters

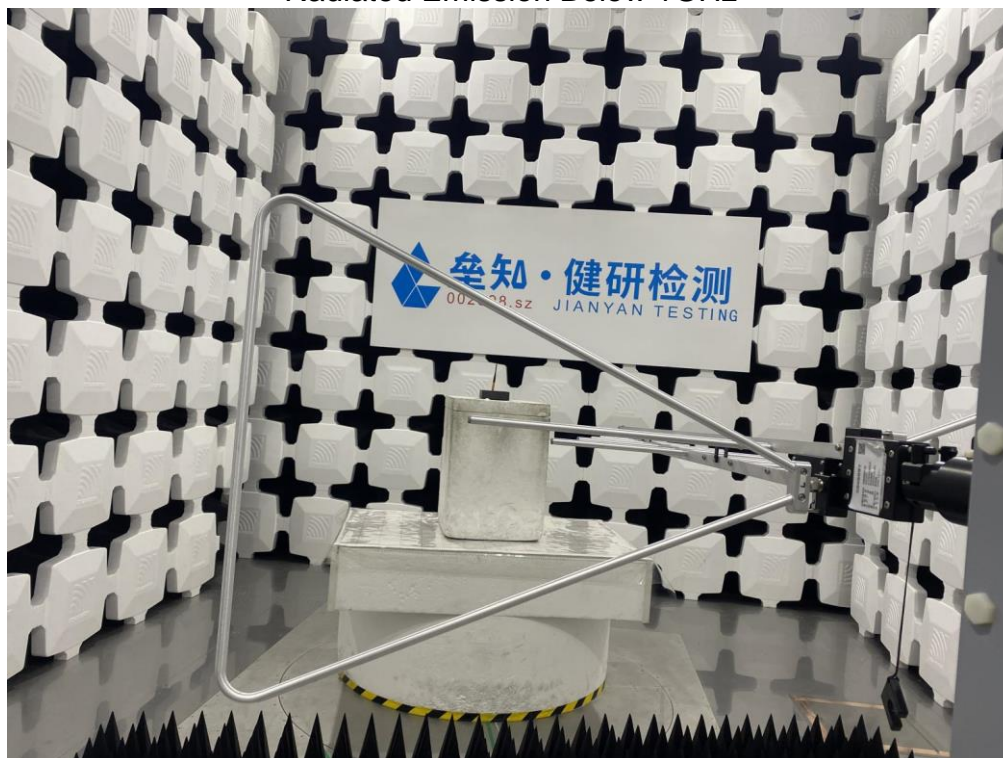
Not applicable, since the test applied to with polite spectrum access facility only.

6.14.3 Adaptive Frequency Agility

Not applicable, since the test applied to with polite spectrum access facility only.

7 Test Setup Photo

Radiated Emission Below 1GHz



Radiated Emission Above 1GHz



8 EUT Constructional Details

Reference to the test report No. JYTSZB-R01-2100168.

-----End of report-----