SPECTRUM REPORT
(BLE)

Applicant:	Nebra LTD.
Address of Applicant:	Unit 4 Bells Yew Green Business Court, Bells Yew Green, Tunbridge Wells TN3 9BJ United Kingdom
Equipment Under Test (EUT)	
Product Name:	Nebra Smart Outdoor LoRa Gateway / Nebra HNT Outdoor Hotspot Miner
Model No.:	HNTOUT-868-G-LT+, HNTOUT-868-G-LT, HNTOUT-868-LT+, HNTOUT-868-G, HNTOUT-868-LT, HNTOUT-868
Trade mark:	Nebra
Applicable standards:	ETSI EN 300 328 V2.2.2 (2019-07)
Date of sample receipt:	31 May, 2021
Date of Test:	31 May, to 08 Jul., 2021
Date of report issue:	09 Jul., 2021
Test Result:	PASS*

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EC Declaration of Conformity and compliance with all relevant EC Directives. The protection requirements with respect to electromagnetic compatibility contained in Directive 2014/53/EU are considered.

CE

Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the JYT product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

2 Version

Version No.	Date	Description
00	*09 Jul., 2021*	*Original*

Tested by: _____ ***Date:*** *09 Jul., 2021*

Test Engineer

Reviewed by: _____ ***Date:*** *09 Jul., 2021*

Project Engineer

3 Contents

Page

1 COVER PAGE 1

2 VERSION 2

3 CONTENTS 3

4 TEST SUMMARY 4

5 GENERAL INFORMATION 5

5.1 CLIENT INFORMATION 5
5.2 GENERAL DESCRIPTION OF E.U.T. 5
5.3 TEST ENVIRONMENT AND MODE, AND TEST SAMPLES PLANS 6
5.4 DESCRIPTION OF SUPPORT UNITS 6
5.5 MEASUREMENT UNCERTAINTY 6
5.6 LABORATORY FACILITY 6
5.7 LABORATORY LOCATION 6
5.8 TEST INSTRUMENTS LIST 7

6 RADIO TECHNICAL SPECIFICATION IN ETSI EN 300 328 8

6.1 JUSTIFICATION 8
6.2 TEST CONFIGURATION OF EUT 8
6.3 TEST SETUP BLOCK 8
6.4 TEST RESULTS 9
6.4.1 Test Result Summary 9
6.4.2 Transmitter unwanted emissions in the spurious domain 10
6.4.3 Receiver spurious emissions 11
6.4.4 Receiver Blocking 12

7 TEST SETUP PHOTO 14

8 EUT CONSTRUCTIONAL DETAILS 15

ANNEX APPLICATION FORM FOR TESTING 16

4 Test Summary

Test Items	Test Requirement	Test method	Limit/Severity	Result
Radio Spectrum Matter (RSM) Part of Tx				
RF Output Power	Clause 4.3.2.2	Clause 5.4.2.2.1.2	Clause 4.3.2.2.3	PASS*
Power Spectral Density	Clause 4.3.2.3	Clause 5.4.3	Clause 4.3.2.3.3	PASS*
Duty Cycle, Tx-sequence, Tx-gap	Clause 4.3.2.4	Clause 5.4.2.2.1.3	Clause 4.3.2.4.3	N/A
Medium Utilisation (MU) factor	Clause 4.3.2.5	Clause 5.4.2.2.1.4	Clause 4.3.4.5.3	N/A
Adaptivity (Adaptive Equipment using Modulations Other Than FHSS)	Clause 4.3.2.6	Clause 5.4.6.2	Clause 4.3.2.6	N/A
Occupied Channel Bandwidth	Clause 4.3.2.7	Clause 5.4.7.2	Clause 4.3.2.7.3	PASS*
Transmitter unwanted emissions in the out-of-band domain	Clause 4.3.2.8	Clause 5.4.8.2	Clause 4.3.2.8.3	PASS*
Transmitter unwanted emissions in the spurious domain	Clause 4.3.2.9	Clause 5.4.9.2	Clause 4.3.2.9.3	PASS
Radio Spectrum Matter (RSM) Part of Rx				
Receiver spurious emissions	Clause 4.3.2.10	Clause 5.4.10.2	Clause 4.3.2.10.3	PASS
Receiver Blocking	Clause 4.3.2.11	Clause 5.4.11.2	Clause 4.3.2.11.4	PASS

Remark:

1. *Tx: In this whole report Tx (or tx) means Transmitter.*
2. *Rx: In this whole report Rx (or rx) means Receiver.*
3. *Pass: Meet the requirement.*
4. *PASS*: Refer to the Report No.: AGC004051706001EE11*
5. *N/A: Not Applicable for Non-adaptive equipment.*
6. *The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer).*

5 General Information

5.1 Client Information

Applicant:	Nebra LTD.
Address:	Unit 4 Bells Yew Green Business Court, Bells Yew Green, Tunbridge Wells TN3 9BJ United Kingdom
Manufacturer:	Nebra LTD.
Address:	Unit 4 Bells Yew Green Business Court, Bells Yew Green, Tunbridge Wells TN3 9BJ United Kingdom
Factory:	SUNSOAR TECH CO., LIMITED
Address:	4/F, Block E, Fengze Building, Huafeng No.2 Industrial Park, Hangkong Road, XiXiang Town, BaoAn District, Shenzhen, China

5.2 General Description of E.U.T.

Product Name:	Nebra Smart Outdoor LoRa Gateway / Nebra HNT Outdoor Hotspot Miner
Model No.:	HNTOUT-868-G-LT+, HNTOUT-868-G-LT, HNTOUT-868-LT+, HNTOUT-868-G, HNTOUT-868-LT, HNTOUT-868
Hardware version:	V01-16-2021-1820
Software version:	4dc8745
Operation Frequency:	2402MHz ~ 2480MHz
Channel number:	40
Channel separation:	2MHz
Modulation type:	other forms of modulation
Equipment Type:	Adaptive equipment
Modulation Technology:	GFSK
Max. E.I.R.P Power:	GFSK: 3.42 dBm
Antenna Type:	IPCB Antenna
Antenna gain:	2.0 dBi (declare by Applicant)
Power supply:	AC: AC 230V / 50Hz POE: DC48V
AC adapter:	Model No.: HNTOUT-868-G-LT+, HNTOUT-868-G-LT, HNTOUT-868-LT+, HNTOUT-868-G, HNTOUT-868-LT, HNTOUT-868 The difference: we will offer the unit with or without a GPS module included. Models with the GPS Included are indicated with a -G on the end of the model number. For example a unit with model no HNTOUT-868 is 868 Mhz, no GPS. A unit with Model No HNTOUT-868-G, is 915Mhz with GPS. We offer the unit using the Raspberry Pi Compute Module 3+ 32GB by standard (no suffix) but have an -LT variant which uses the Raspberry Pi Compute Module 3 Lite with a 32 GB eMMC to SD adapter card and a -LT+ variant which uses the Raspberry Pi Compute Module 3+ Lite with a 32 GB eMMC to SD adapter card. These suffixes can be applied to the models both with and without GPS as described above. We also provide customers the ability to, optionally, add both cellular connectivity and an additional 8 channel LoRa gateway to any of these models by using an mPCIe module however these come as optional extras.

5.3 Test environment and mode, and test samples plans

Operating Environment:	
Temperature:	Normal: 15℃ ~ 35℃, Extreme: -20℃ ~ +55℃
Humidity:	52 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	POE: Nominal: 48Vdc, Extreme: Low 44Vdc, High 53Vdc
Test mode:	
Transmitting mode:	Keep the EUT in continuously transmitting mode with modulation.
Receiving mode:	Keep the EUT in receiving mode.
We have verified the construction and function in typical operation. All the test items were carried out with the EUT in above test modes.	

5.4 Description of Support Units

The EUT has been tested as an independent unit.

5.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5%
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5%
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB
Radiated Emission (1GHz ~ 18GHz)	±5.16 dB

5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- FCC **- Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

- **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: https://portal.a2la.org/scopepdf/4346-01.pdf

5.7 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.
Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.
Tel: +86-755-23118282, Fax:+86-755-23116366
Email: info-JYTee@lets.com, Website: http://www.ccis-cb.com

5.8 Test Instruments list

Radiated Emission:					
Test Equipment	**Manufacturer**	**Model No.**	**Serial No.**	**Cal. Date (mm-dd-yy)**	**Cal. Due date (mm-dd-yy)**
3m SAC	ETS	9m*6m*6m	966	01-19-2021	01-18-2024
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-03-2021	03-02-2022
Biconical Antenna	SCHWARZBECK	VUBA9117	359	06-18-2020	06-17-2021
				06-17-2021	06-16-2022
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-03-2021	03-02-2022
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-18-2020	06-17-2021
				06-17-2021	06-16-2022
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-03-2021	03-02-2022
Pre-amplifier	CD	PAP-1G18	11804	03-03-2021	03-02-2022
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-03-2021	03-02-2022
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-03-2021	03-02-2022
Signal Generator	Rohde & Schwarz	SMX	835454/016	03-03-2021	03-02-2022
Signal Generator	Rohde & Schwarz	SMR20	1008100050	03-03-2021	03-02-2022
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-03-2021	03-02-2022
Cable	MICRO-COAX	MFR64639	K10742-5	03-03-2021	03-02-2022
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-03-2021	03-02-2022
RF Switch Unit	MWRFTEST	MW200	N/A	N/A	N/A
Test Software	MWRFTEST	MTS8200	Version: 2.0.0.0		

Conducted method:					
Test Equipment	**Manufacturer**	**Model No.**	**Serial No.**	**Cal. Date (mm-dd-yy)**	**Cal. Due date (mm-dd-yy)**
Spectrum Analyzer	Keysight	N9010B	MY60240202	11-27-2020	11-26-2021
Vector Signal Generator	Keysight	N5182B	MY59101009	11-27-2020	11-26-2021
Analog Signal Generator	Keysight	N5173B	MY59100765	11-27-2020	11-26-2021
Power Detector Box	MWRF-test	MW100-PSB	MW201020JYT	11-27-2020	11-26-2021
Simulated Station	Rohde & Schwarz	CMW270	102335	11-27-2020	11-26-2021
RF Control Box	MWRF-test	MW100-RFCB	MW200927JYT	N/A	N/A
PDU	MWRF-test	XY-G10	N/A	N/A	N/A
Test Software	MWRF-tes	MTS 8310	Version: 2.0.0.0		
DC Power Supply	Keysight	E3642A	MY60296194	11-27-2020	11-26-2021
Temperature Humidity Chamber	ZhongZhi	CZ－C－150D	ZH16491	09-23-2020	09-22-2021

6 Radio Technical Specification in ETSI EN 300 328

6.1 Justification

The EUT and test equipment were configured for testing according to ETSI EN 300 328 V2.2.2 (2019-07).
The EUT was tested in the normal operating mode to represent worst-case results during the final qualification test.

6.2 Test Configuration of EUT

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Remark: The EUT operation in above frequency list, and used test software to control the EUT for staying in continuous transmitting and receiving mode. Channel 0, 20 and 39 of BLE were chosen for testing.

Clause No.	Test Conditions			Test Channel			Modulation	Test mode		
	NVNT	NVLT	NVHT	Low	Middle	High	GFSK	Tx	Rx	Normal
4.3.2.2	√	√	√	√	√	√	√	√		
4.3.2.3	√			√	√	√	√	√		
4.3.2.4										
4.3.2.5										
4.3.2.6										
4.3.2.7	√			√		√	√	√		
4.3.2.8	√	√	√	√		√	√	√		
4.3.2.9	√			√		√	√	√		
4.3.2.10	√			√		√	√		√	
4.3.2.11	√			√		√	√		√	

Note:
1. *"√" means that this configuration is chosen for test.*
2. *"NVNT" means Normal Voltage Normal Temperature, "NVLT" means Normal Voltage Low Temperature, "NVHT" means Normal Voltage High Temperature.*

6.3 Test Setup Block

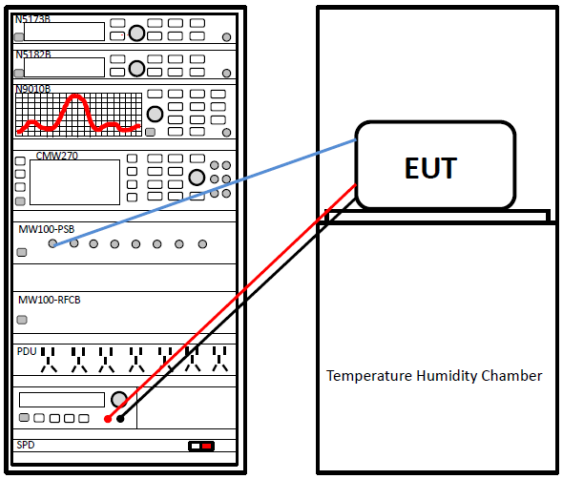

6.4 Test Results

6.4.1 Test Result Summary

Clause No.	Modulation	Test Condition	Test Data	Verdict
4.3.2.2	GFSK	NVNT	Refer to the Report No.: AGC004051706001EE11	Pass
		NVLT		
		NVHT		
4.3.2.3	GFSK	NVNT	Refer to the Report No.: AGC004051706001EE11	Pass
4.3.2.4	N/A	N/A	N/A	N/A
4.3.2.5	N/A	N/A	N/A	N/A
4.3.2.6	N/A	N/A	N/A	N/A
4.3.2.7	GFSK	NVNT	Refer to the Report No.: AGC004051706001EE11	Pass
4.3.2.8	GFSK	NVNT	Refer to the Report No.: AGC004051706001EE11	Pass
		NVLT		
		NVHT		
4.3.2.9	GFSK	NVNT	See Section 6.4.2	Pass
4.3.2.10	GFSK	NVNT	See Section 6.4.3	Pass
4.3.2.11	GFSK	NVNT	Refer to the Report No.: AGC004051706001EE11	Pass

Note: *"NVNT" means Normal Voltage Normal Temperature, "NVLT" means Normal Voltage Low Temperature, "NVHT" means Normal Voltage High Temperature.*

6.4.2 Transmitter unwanted emissions in the spurious domain

The lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level (dBm)		
123.97	Vertical	-66.64	-54.00	Pass
327.79	V	-56.26		
59.99	V	-52.52	-36.00	
721.85	V	-65.08		
4804.00	V	-46.53	-30.00	
144.22	Horizontal	-70.94	-54.00	
328.68	H	-59.79		
59.99	H	-58.30	-36.00	
720.07	H	-54.87		
4804.00	H	-47.23	-30.00	
The highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level (dBm)		
123.97	Vertical	-66.83	-54.00	Pass
327.79	V	-56.01		
59.99	V	-52.29	-36.00	
721.85	V	-65.50		
4960.00	V	-46.21	-30.00	
144.22	Horizontal	-71.10	-54.00	
328.68	H	-59.47		
59.99	H	-58.70	-36.00	
720.07	H	-54.91		
4960.00	H	-47.09	-30.00	

6.4.3 Receiver spurious emissions

The lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
623.93	Vertical	-58.41	-57.00	Pass
720.16	V	-58.73		
4804.00	V	-62.27	-47.00	
320.03	Horizontal	-58.81	-57.00	
660.99	H	-59.16		
4804.00	H	-63.41	-47.00	
The highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
623.93	Vertical	-57.99	-57.00	Pass
720.16	V	-58.97		
4960.00	V	-61.98	-47.00	
320.03	Horizontal	-58.70	-57.00	
660.99	H	-58.90		
4960.00	H	-63.60	-47.00	

6.4.4 Receiver Blocking

Condition	Mode	Frequency (MHz)	Antenna	Wanted Power (dBm)	Blocking Frequency (MHz)	Blocking Power (dBm)	PER (%)	Limit (%)	Verdict
NVNT	BLE	2402	Ant1	-68.89	2380	-32.9	2.41	10	Pass
NVNT	BLE	2402	Ant1	-68.89	2504	-32.9	1.56	10	Pass
NVNT	BLE	2402	Ant1	-68.89	2300	-32.9	2.67	10	Pass
NVNT	BLE	2402	Ant1	-68.89	2584	-32.9	3.57	10	Pass
NVNT	BLE	2480	Ant1	-68.9	2380	-32.9	2.45	10	Pass
NVNT	BLE	2480	Ant1	-68.9	2504	-32.9	4.21	10	Pass
NVNT	BLE	2480	Ant1	-68.9	2300	-32.9	3.55	10	Pass
NVNT	BLE	2480	Ant1	-68.9	2584	-32.9	2.69	10	Pass

Rx. Blockings NVNT BLE 2402MHz Ant1

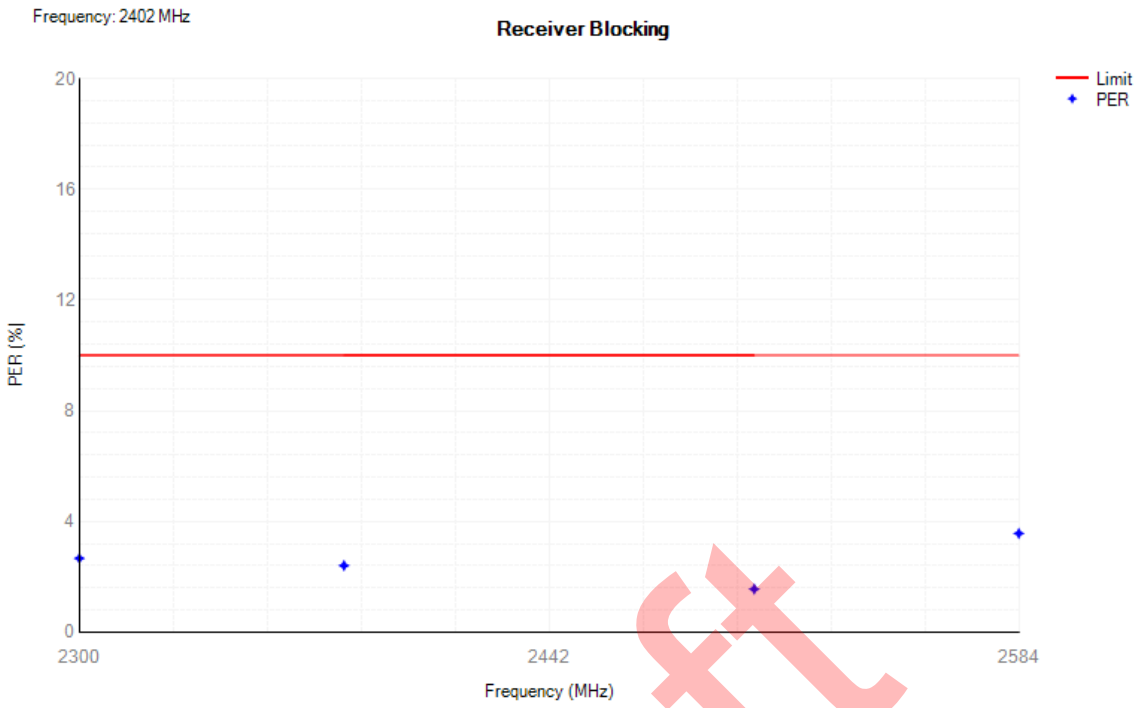

Rx. Blockings NVNT BLE 2480MHz Ant1

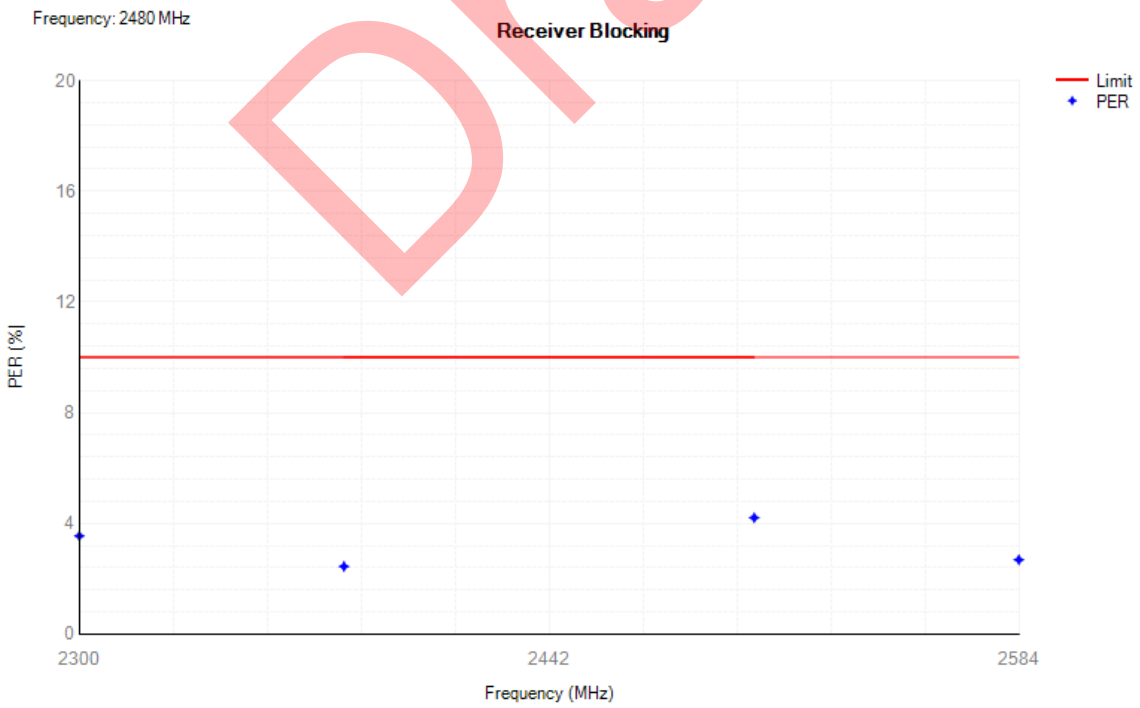

7 Test setup photo

Radiated Emission Below 1GHz

Radiated Emission Above 1GHz

8 EUT Constructional Details

Reference to the test report No. JYTSZB-R01-2100336**.**

ANNEX Application form for testing

In accordance with EN 300 328 V2.2.2, clause 5.4.1, the following information is provided by the supplier.

a) The type of modulation used by the equipment:

☐ FHSS

☒ Other forms of modulation

b) In case of FHSS modulation:

- In case of non-Adaptive Frequency Hopping equipment:
  The number of Hopping Frequencies: …
- In case of Adaptive Frequency Hopping Equipment:
  The maximum number of Hopping Frequencies: …
  The minimum number of Hopping Frequencies: …
- The Dwell Time: …
- The Minimum Channel Occupation Time: …

c) Adaptive / non-adaptive equipment:

☐ Non-adaptive Equipment
☒ Adaptive Equipment without the possibility to switch to a non-adaptive mode
☐ Adaptive Equipment which can also operate in a non-adaptive mode

d) In case of adaptive equipment:

The Channel Occupancy Time implemented by the equipment: ___ ms

☐ The equipment has implemented an LBT based DAA mechanism
- In case of equipment using modulation different from FHSS:

☐ The equipment is Frame Based equipment
☒ The equipment is Load Based equipment
☐ The equipment can switch dynamically between Frame Based and Load Based equipment
The CCA time implemented by the equipment: ___µs
The value q as referred to in clause 4.3.2.5.2.2.2: .....
☐ The equipment has implemented an non-LBT based DAA mechanism
☐ The equipment can operate in more than one adaptive mode

e) In case of non-adaptive Equipment:

The maximum RF Output Power (e.i.r.p.): ___dBm
The maximum (corresponding) Duty Cycle: ____ %
Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):

f) The worst case operational mode for each of the following tests:

- RF Output Power GFSK
- Power Spectral Density GFSK
- Duty cycle, Tx-Sequence, Tx-gap …
- Dwell time, Minimum Frequency Occupation & Hopping Sequence (only for FHSS equipment) …
- Hopping Frequency Separation (only for FHSS equipment) …
- Medium Utilisation …
- Adaptivity & Receiver Blocking GFSK
- Occupied Channel Bandwidth GFSK
- Transmitter unwanted emissions in the OOB domain GFSK
- Transmitter unwanted emissions in the spurious domain GFSK
- Receiver spurious emissions GFSK

g) The different transmit operating modes (tick all that apply):

☒ Operating mode 1: Single Antenna Equipment
☒ Equipment with only 1 antenna
☐ Equipment with 2 diversity antennas but only 1 antenna active at any moment in time

☐ Smart Antenna Systems with 2 or more antennas, but operating in a (legacy) mode where only 1 antenna is used. (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems)

☐ Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming

☐ Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode)

☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1

☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2

NOTE: Add more lines if more channel bandwidths are supported.

☐ Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming

☐ Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)

☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1

☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2

NOTE: Add more lines if more channel bandwidths are supported.

h) In case of Smart Antenna Systems:

- The number of Receive chains: .....
- The number of Transmit chains: .....

☐ Symmetrical power distribution

☐ asymmetrical power distribution

In case of beam forming, the maximum beam forming gain: .....

NOTE: Beam forming gain does not include the basic gain of a single antenna.

i) Operating Frequency Range(s) of the equipment:

- Operating Frequency Range 1: 2402 MHz to 2480 MHz
- Operating Frequency Range 2: ..... MHz to..... MHz

NOTE: Add more lines if more Frequency Ranges are supported.

j) Occupied Channel Bandwidth(s):

- Occupied Channel Bandwidth 1: 1.035 MHz
- Occupied Channel Bandwidth 2: ..... MHz

NOTE: Add more lines if more channel bandwidths are supported.

k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):

☒ Stand-alone

☐ Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)

☐ Plug-in radio device (Equipment intended for a variety of host systems)

☐ Other.....

l) The extreme operating conditions that apply to the equipment:

Operating temperature range: -20 ° C to +55° C

Operating voltage range: 44 V to 53 V ☐ AC ☒ DC

Operating voltage range: __ V to ___ V ☐ AC ☐ DC

Details provided are for the: ☒ stand-alone equipment

☐ combined (or host) equipment

☐ test jig

m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels:

- Antenna Type:

☒ Integral Antenna

☒ Antenna Gain: 2.0 dBi

If applicable, additional beamforming gain (excluding basic antenna gain): ____dB

☐ Temporary RF connector provided

☐ No temporary RF connector provided

☐ Dedicated Antennas (equipment with antenna connector)

☐ Single power level with corresponding antenna(s)

☐ Multiple power settings and corresponding antenna(s) Number of different

Power Levels: …

Power Level 1: ____dBm

Power Level 2: ____dBm

Power Level 3: ____dBm

NOTE 1: Add more lines in case the equipment has more power levels.

NOTE 2: These power levels are conducted power levels (at antenna connector).

- For each of the Power Levels, provide the intended antenna assemblies, their corresponding gains (G) and the resulting e.i.r.p. levels also taking into account the beamforming gain (Y) if applicable

Power Level 1: ____dBm

Number of antenna assemblies provided for this power level: .....

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			
3			
4			

Power Level 2: ____dBm

Number of antenna assemblies provided for this power level: .....

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			
3			
4			

Power Level 3: ____dBm

Number of antenna assemblies provided for this power level: .....

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			
3			
4			

n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:

Details provided are for the: ☒ stand-alone equipment

☐ combined (or host) equipment

☐ test jig

Supply Voltage ☐ AC mains State AC voltage ____V

☒ DC State DC voltage 48 V

In case of DC, indicate the type of power source

☐ Internal Power Supply

☒ External Power Supply or AC/DC adapter

☐ Battery

☐ Other: .....

o) Describe the test modes available which can facilitate testing:

Continuous transmitting mode control in engineer mode.

p) The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3], proprietary, etc.): Bluetooth

Configuration for testing

From all combinations of conducted power settings and intended antenna assembly(ies) specified in clause 5.4.1 m), specify the combination resulting in the highest e.i.r.p. for the radio equipment.

Unless otherwise specified in EN 300 328, this power setting is to be used for testing against the requirements of EN 300 328. In case there is more than one such conducted power setting resulting in the same (highest) e.i.r.p. level, the highest power setting is to be used for testing. See also EN 300 328, clause 5.3.2.3.

Highest overall e.i.r.p. value: 3.42dBm

Corresponding Antenna assembly gain: 2.0 dBi Antenna Assembly #: 1

Corresponding conducted power setting: 1.42 dBm Listed as Power Setting #: 7

(also the power level to be used for testing)

Additional information provided by the applicant

Modulation:

ITU Class(es) of emission: DSSS

Can the transmitter operate unmodulated? ☐ yes ☒ no

Duty Cycle

The transmitter is intended for:

☐ Continuous duty

☐ Intermittent duty

☒ Continuous operation possible for testing purposes

About the UUT

☒ The equipment submitted are representative production models

☐ If not, the equipment submitted are pre-production models?

☐ If pre-production equipment are submitted, the final production equipment will be identical in all respects with the equipment tested

☐ If not, supply full details

.....

☐ The equipment submitted is CE marked

☐ In addition to the CE mark, the Class-II identifier (Alert Sign) is affixed.

Additional items and/or supporting equipment provided

☐ Spare batteries (e.g. for portable equipment)

☐ Battery charging device

☒ External Power Supply or AC/DC adapter

☐ Test Jig or interface box

☐ RF test fixture (for equipment with integrated antennas)

☐ Host System Manufacturer: .....

Model #: .....

Model name: .....

☐ Combined equipment Manufacturer: .....

Model #: .....

Model name: .....

☒ User Manual

☒ Technical documentation (Handbook and circuit diagrams)

------End of report------