


TL6330 SERIES TACT SWITCH



APPLICATIONS / MARKETS



Handheld Devices



Wearable Electronics




Internet of Things



Smart Home



Telecommunication



Testing Equipment

RoHS

SPECIFICATIONS

Contact Rating: 1VA @ 32VDC
Electrical Life: 200,000 gf
Contact Resistance: 100mΩ Max
Insulation Resistance: 1GΩ Min @ 500VDC
Dielectric Strength: 250VAC for 1 Minute
Operating Temperature: -40°C to 85°C
Storage Temperature: -40°C to 85°C
Travel: 0.25mm
Contact Arrangement: SPST
Actuation Force: 200gf
Dust/Moisture Protection: IP67

FEATURES & BENEFITS

- Surface mount PC board design
- Long Cycle Life of 200,000 Cycles
- Small package size of 2.80mm x 4.60mm x 1.90mm
- 200 gram force
- IP67 rating

PART NUMBER CONFIGURATOR

Series

TL6330

Actuator
Options

A - 1.90mm

Actuation Force

F200 - 200 gf

Contact
Material

Q - Silver

Specifications subject to change without notice



E-SWITCH®






www.e-switch.com

800.867.2717

1

TL6330 SERIES TACT SWITCH

BODY DIMENSIONS

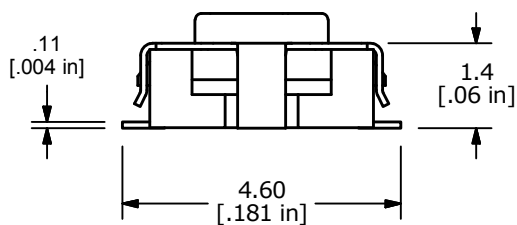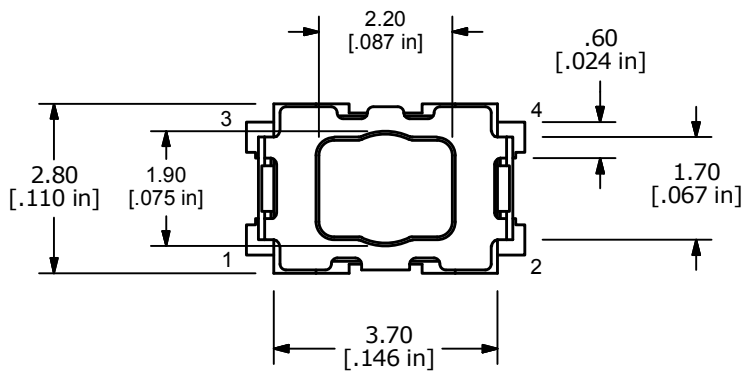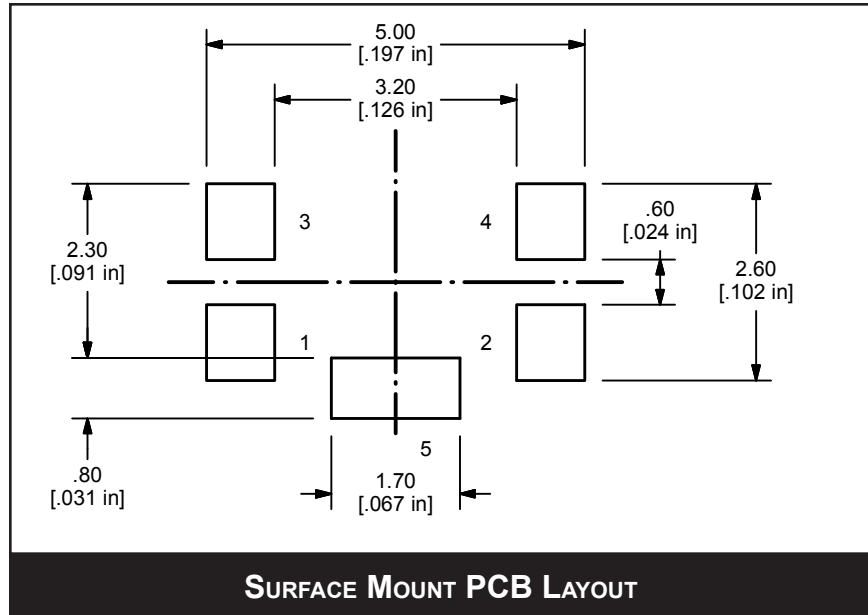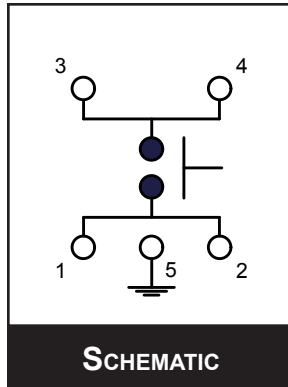

E-SWITCH®

www.e-switch.com

800.867.2717

2

ANTI-VANDAL SWITCHES
DETECTOR SWITCHES
DIP SWITCHES
KEYLOCK SWITCHES
NAVIGATION SWITCHES
PUSHBUTTON SWITCHES
ROCKER SWITCHES
ROTARY SWITCHES
SLIDE SWITCHES
SNAP ACTION SWITCHES
TACTILE SWITCHES
TOGGLE SWITCHES
CAP OPTIONS

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[TL6330AF200Q](#)