

# SCHEDULES FOR PULSAR OBSERVATIONS WITH THE SARDINIA RADIO TELESCOPE

Release 0.4

Author: Alessandro Corongiu  
Release date: 05/08/2019

## Release notes

Issue	Release date	What's new
01	12/09/2018	Document creation as a plain extraction of relevant sections from a more general purpose document.
02	06/12/2018	Contents revision and organisation
03	30/05/2019	Keyword Receiver modified after removal of "Maccaferri" system. Previous setup files will have problems whenever the L-Band is needed, otherwise they're ok.
04	05/08/2019	Minor revision

# Document presentation

This document illustrates the structure and syntax of schedules for pulsar observation at the Sardinia Radio Telescope. A tool is also described for helping the user to build the so called setup file, whose concept and structure will be detailed in a dedicated section.

Before reading this document, the reader is strongly encouraged to have already been introduced to the Sardinia Radio Telescope instrumentation, with particular attention to all devices involved in pulsar observations, as well as to the related control softwares. All these concepts are considered already known by the reader and are not illustrated in this document.

## Current version presentation

This is the first major release of this document, obtained through a deep revision and reorganization of the previous one.

# Index

- 1 - Settings concepts
- 2 - Files creation and editing
- 3 - Schedule files structure
- 4 - Setup files structure
- 5 - Setup files templates
- 6 - Setup files editor
- 7 - Settings analytic list

Appendix A - Calibration source acquisition schedule line

# 1 - Settings concepts

## ***Settings***

Settings are statements of the form

```
[keyword] = [value(s)]
```

where `keyword` is a string that identifies a feature, and `parameter(s)` is a string containing the value, a number or a word, that describe how that feature has to be tuned. Examples:

```
SamplingTime = 125
ActiveSurface = PARABOLIC
```

Most features are completely set by specifying a single value, but some of them require values for more than one parameter. In this case, `[value(s)]` is a sequence of comma separated single values:

```
Receiver = P-BAND,LINEAR,WIDE
```

In such settings, the meaning and syntax of the first parameter is always the same. The meaning of the next ones may vary, but it's always related to the value of the first (or a previous one). Let's consider the following example:

```
Receiver = P-BAND,LINEAR,WIDE
Receiver = C-BAND,5950.0,730.0
```

The first row sets the P-BAND receiver, whose tunable parameters are the polarization type (LINEAR) and the frequency band (WIDE, see appendix Y for its meaning). The second row sets the C-BAND receiver, whose tunable parameters are the width of the frequency band to be acquired (730.0MHz) and the local oscillator frequency (5950.0MHz).

The number of parameters may also vary for a given setting:

```
Source = B0329+54
Source = J1910-5959A,J2000,19:11:42.75562,-59:58:26.9029
```

## ***Same syntax in schedules and setup files***

The syntax for all settings is exactly the same in both setup and schedule files.

## ***Settings groups***

Settings can be divided in groups, each of them related to a specific aspect of the observations. These groups are:

- 1) `project` settings, i.e. informations that identify and describe the scientific project and the observers
- 2) `observation` settings, i.e. settings related to the execution of the single observation

- 3) antenna settings, i.e. parameters for setting up and pointing the antenna
- 4) backend settings, i.e. parameters for setting up the data acquisition.

Settings in the last group need to be further divided in sub-groups. The first of them, generic backend settings, includes settings whose meaning is (nearly) the same for all backends; the others are backend specific settings, i.e. settings related to the hardware and/or the software of each data acquisition device. Because of each backend's peculiarities, a setting belonging to the generic backend sub-group may or may not directly/explicitly be set, or even not settable since a backend may not have a given functionality.

The global group of settings required by a specific backend contains those generic backend settings that can directly/explicitly be set, and the backend's specific settings.

Here below are enumerated all settings, accordingly to the group they belong and introduced by the keyword that identifies them.

#### Project settings:

- 1) `ObserverName`: name(s) of the observer(s)
- 2) `ProjectCode`: code assigned by the telescope TAC to the scientific project
- 3) `ProjectName`: name/title/short description of the scientific project

#### Observation settings:

- 1) `ObsLength`: duration of the observation
- 2) `ObsStartHour`: UTC start time of the observation
- 3) `ObsStopHour`: UTC stop time of the observation
- 4) `Setup`: file containing all settings
- 5) `WaitBeforeStart`: time delay before the start of the data acquisition

#### Antenna settings:

- 1) `ActiveSurface`: shape and adaptive behaviour of the primary reflector
- 2) `AzSector`: azimuth sector for pointing the antenna
- 3) `CalSource`: switches ON/OFF the calibration signal source
- 4) `Receiver`: receiver, and related settings
- 5) `Source`: celestial object to be pointed

#### Backend settings: generic backend

- 1) `Bandwidth`: width in MHz of the backend's frequency band
- 2) `BitsPerSample`: number of bits to represent each data sample
- 3) `DedispersionMode`: coherent or incoherent signal dedispersion
- 4) `DispersionMeasure`: dispersion measure value for coherent dedispersion
- 5) `Frequency`: sky frequency that falls at the center of the backend's frequency band
- 6) `Mode`: data acquisition mode
- 7) `NumberOfChannels`: number of frequency channels
- 8) `NumberOfPols`: number of polarizations to be acquired
- 9) `ProfileBins`: number of bins to represent the pulsar profile
- 10) `SamplingTime`: signal's sampling time

11) SubintTime: pulsar folding mode subintegration time

Backend settings: Pulsar Digital Filterbank (DFB) custom settings

- 1) ChannelRange: channel range to be acquired
- 2) ConfigFile: DFB configuration file name
- 3) CyclePeriod: DFB cycle period
- 4) MaxFileLength: search mode maximum file length
- 5) SamplesSubint: number of samples in search mode data blocks
- 6) TimeConstant: time to calculate the average bandpass
- 7) WriteFile: data written/not written on files

Backend settings: ROACH backend custom settings

- 1) AdvancedOptions: dspsr (folding) or digifil (search) not standard/common options

### ***Settings' device indication***

For each antenna and backend settings, the device to which they are related must also be indicated. This is done by prepending to the setting the device name, followed by the ">" character:

```
[device name] > [setting]
```

Example:

```
DFB > ConfigFile = pdfb4_1024_512_2048
```

Device names are ANTENNA, for the antenna, DFB for the Pulsar Digital Filterbank, ROACH for the ROACH backend.

### ***Device enabling***

The backends fleet needed by different observations may differ, in number and/or elements. This information is coded by the following statements:

```
[device name] > ENABLE  
[device name] > DISABLE
```

These statements respectively enable and disable the data acquisition by a given backend. Because seadas is structured for piggy back data acquisitions (a not yet available functionality) it's required to explicitly enable the use of the antenna with the statement:

```
ANTENNA > ENABLE
```

## 2 - Files creation and editing

Both schedule and setup files are plain ASCII files: they can be created, written and edited by using common plain text editors (vi, nano, emacs, etc.).

They do not need any special hidden character, e.g. tabs, for giving them the requested format.

Comments are also allowed. The character to be used is the hash '#'. In any line, whatever is placed at the right of this character is considered a comment.

Both schedules and setup files must be placed in a specific directory, namely:

`/home/corr/scheds/[Project code]`

or any subfolder of it. `[Project code]` is the code assigned to the project.



### 3 - Schedule files structure

A schedule is organised in rows, each of them containing all necessary settings to execute the observation of a single object. Therefore, it appears as follows:

```
[Settings to observe object #1]
[Settings to observe object #2]
...
...
[Settings to observe object #N]
```

Settings can be also put in another file, in this document referred to as *setup* file, with indication in the schedule line of the name and path of such file. The setting `WaitBeforeStart` is the only one that cannot be put in a setup file, since it is related to the execution of the schedule. The presence of setting `Setup` in a setup file will be discussed in section 4.

If a given setting is expressed in both the setup file and schedule line, the value indicated in the schedule line always overrides the one in the setup file. Such a policy has a practical impact in both the preparation and the management of the observing session. The observer can prepare only one setup file containing the most common value for each setting in the session, while in the schedule line those settings only appear for which a custom value is required for a given observation. The most common and obvious example of a setting that changes from one observation to another is the name of the source (and/or its coordinates). In such a case, a schedule has the following appearance:

```
[name/coords of object #1];[common setup file];[custom settings for obj #1]
[name/coords of object #2];[common setup file];[custom settings for obj #2]
...
[name/coords of object #N];[common setup file];[custom settings for obj #N]
```

In the example above, the bold face words indicate the common setting to all observation, namely the same setup file.

Last example also introduces the semicolon as field separator, i.e. the character that separates two different settings. Each schedule line appears therefore as follows:

```
[setting #1] ; [setting #2] ;...; [setting #N];
```

## 4 - Setup files structure

Setup files are organised in rows, each of them containing a single setting. Consequently, they appear as follows:

```
[setting #1]
[setting #2]
...
...
...
[setting #N]
```

No termination line character is required.

All possible settings have been listed in section 1. If they are put in a single file, such a file would have a considerable number of lines, maybe too much to be easily managed with a common text editor and/or quickly read. In order to avoid too long files, setup files can be hierarchically organised: a *main* file containing the session and observations settings, and *device* setup files, containing settings for a specific device. An example may better clarify the concept. Consider the setup file here below:

```
ProjectCode = 22-19
ProjectName = My fantastic project
ObserverName = Me myself and I
ANTENNA > ENABLE
ANTENNA > Receiver = LP-DUAL,LINEAR,NARROW,LINEAR,WIDE,2316.000
ANTENNA > ActiveSurface = RECEIVER-DEFAULT
ANTENNA > CalSource = OFF
ROACH > ENABLED
ROACH > Mode = SEARCH
ROACH > Frequency = 336.000
ROACH > Bandwidth = 80.000
ROACH > NumberOfChannels = 1280
ROACH > NumberOfPols = 1
ROACH > BitsPerSample = 1
ROACH > SamplingTime = 125.000
ROACH > DedispersionMode = COHERENT
ROACH > DispersionMeasure = 37.456
ROACH > AdvancedOptions = none
DFB > ENABLED
DFB > Mode = SEARCH
DFB > Frequency = 1548.000
DFB > NumberOfPols = 1
DFB > BitsPerSample = 1
DFB > SamplingTime = 125.000
DFB > WriteFile = NO
DFB > SamplesSubint = 4096
DFB > TimeConstant = 1
DFB > ChannelRange = all
DFB > MaxFileLength = 3600
DFB > ConfigFile = srch_1024_2048
DFB > CyclePeriod = 10.000
```

If splitted, its contents become:

```
ProjectCode = 22-19
ProjectName = My fantastic project
ObserverName = Me myself and I
ANTENNA > ENABLE
```

```

ANTENNA > Setup = 22-19/antenna-example.stp
ROACH > ENABLED
ROACH > Setup = 22-19/roach-example.stp
DFB > ENABLED
DFB > Setup = 22-19/dfb-example.stp

```

while ANTENNA, ROACH and DFB settings are moved to files `antenna-example.stp`, `roach-example.stp` and `dfb-example.stp` respectively. We recall that setup files must be placed in the same directory of the schedule file, i.e. `/home/corr/scheds/[project code]`, where `[project code]` is 22-19 in this example, or any subfolder of it. Their contents are reported here below.

file `antenna-example.stp`:

```

Receiver = LP-DUAL,LINEAR,NARROW,LINEAR,NARROW,2316.000
ActiveSurface = RECEIVER-DEFAULT
CalSource = OFF

```

file `roach-example.stp`:

```

Mode = SEARCH
Frequency = 336.000
Bandwidth = 80.000
NumberOfChannels = 1280
NumberOfPols = 1
BitsPerSample = 1
SamplingTime = 125.000
DedispersionMode = COHERENT
DispersionMeasure = 37.456
AdvancedOptions = none

```

file `dfb-example.stp`:

```

Mode = SEARCH
Frequency = 1548.000
NumberOfPols = 1
BitsPerSample = 1
SamplingTime = 125.000
WriteFile = NO
SamplesSubint = 4096
TimeConstant = 1
ChannelRange = all
MaxFileLength = 3600
ConfigFile = srch_1024_2048
CyclePeriod = 10.000

```

These examples also show that devices' settings do not need the `[device] > preamble`, if they are declared in devices setup files. The following declarations are both correct:

```

[keyword] = [value(s)]
[device name] > [keyword] = [value(s)]

```

The user is totally free to choose either organisation for the setup file(s) of his/her observations. If unsure, the user should use the form:

```

[device name] > [keyword] = [value(s)]

```

a form that is always legal in any setup file.

## 5 - Setup file templates

In this section templates for setup files are provided. In order to cover all possible receiver/backend(s) combinations, separate templates are provided for the main and devices setup files. All statements will have the [device name] > [setting] syntax in all cases for which this form is allowed, so that they can be copied and pasted in both a single global file or in separated devices' dedicated files.

### ***Main setup file templates***

#### 1) ROACH backend enabled, DFB backend disabled

```
ProjectCode = 22-19
ProjectName = My fantastic project
ObserverName = Me myself and I
ANTENNA > ENABLE
ANTENNA > Setup = 22-19/antenna-example.stp
ROACH > ENABLED
ROACH > Setup = 22-19/roach-example.stp
DFB > DISABLED
```

#### 2) ROACH backend disabled, DFB backend enabled

```
ProjectCode = 22-19
ProjectName = My fantastic project
ObserverName = Me myself and I
ANTENNA > ENABLE
ANTENNA > Setup = 22-19/antenna-example.stp
ROACH > DISABLED
DFB > ENABLED
DFB > Setup = 22-19/dfb-example.stp
```

#### 3) ROACH backend enabled, DFB backend enabled

```
ProjectCode = 22-19
ProjectName = My fantastic project
ObserverName = Me myself and I
ANTENNA > ENABLE
ANTENNA > Setup = 22-19/antenna-example.stp
ROACH > ENABLED
ROACH > Setup = 22-19/roach-example.stp
DFB > ENABLED
DFB > Setup = 22-19/dfb-example.stp
```

### ***ANTENNA setup file templates***

Note. Settings for keywords Source and AzSector are not included in the following templates, because it's strongly recommended to use them in only in schedules. Despite being settings for the ANTENNA device, they can be declared in schedules without the "ANTENNA >" preamble.

### 1) P-BAND receiver

```
Receiver = P-BAND,LINEAR,NARROW  
ActiveSurface = PARABOLIC  
CalSource = OFF
```

### 2) L-BAND receiver

```
Receiver = L-BAND,LINEAR,WIDE,2316.000  
ActiveSurface = PARABOLIC  
CalSource = OFF
```

### 3) LP-DUAL receiver

```
Receiver = LP-DUAL,LINEAR,NARROW,LINEAR,NARROW,2316.000  
ActiveSurface = RECEIVER-DEFAULT  
CalSource = OFF
```

### 4) C-BAND receiver

```
Receiver = C-BAND,5750.0,730.000  
ActiveSurface = SHAPED  
CalSource = OFF
```

### 5) K-BAND receiver

```
Receiver = K-BAND,18000.0,730.000  
ActiveSurface = SHAPED  
CalSource = OFF
```

## ***DFB setup file templates***

### Notes

- 1) In this backend the bandwidth (keyword `Bandwidth`), the number of channels (keyword `NumberOfChannels`) and number of profile bins (keyword `ProfileBins`) are not directly set, since these informations are in the DFB configuration file, hence they're through the keyword `ConfigFile`.
- 2) The DFB cannot perform coherent dedispersions. Therefore, keywords `DedispersionMode` and `DispersionMeasure` are not available for this backend.

### 1) FOLD mode

```
DFB > Mode = FOLD  
DFB > Frequency = 256.000  
DFB > SubintTime = 10  
DFB > WriteFile = YES  
DFB > ChannelRange = all  
DFB > ConfigFile = pdfb4_1024_512_1024  
DFB > CyclePeriod = 10.000
```

### 2) PSRCAL mode

```
DFB > Mode = PSRCAL
```

```
DFB > Frequency = 1548.000
DFB > SubintTime = 10
DFB > WriteFile = YES
DFB > ChannelRange = all
DFB > ConfigFile = pdfb4_1024_512_2048
DFB > CyclePeriod = 10.000
```

### 3) SEARCH mode

```
DFB > Mode = SEARCH
DFB > Frequency = 256.000
DFB > NumberOfPols = 1
DFB > BitsPerSample = 2
DFB > SamplingTime = 125.000
DFB > WriteFile = YES
DFB > SamplesSubint = 4096
DFB > TimeConstant = 1
DFB > ChannelRange = all
DFB > MaxFileLength = 0
DFB > ConfigFile = srch_512_1024
DFB > CyclePeriod = 10.000
```

### 4) SEARCHSET mode

```
DFB > Mode = SEARCHSET
DFB > Frequency = 1548.000
DFB > NumberOfPols = 1
DFB > BitsPerSample = 2
DFB > SamplingTime = 125.000
DFB > SamplesSubint = 4096
DFB > TimeConstant = 1
DFB > ChannelRange = all
DFB > MaxFileLength = 0
DFB > ConfigFile = srch_512_1024
DFB > CyclePeriod = 10.000
```

## ***ROACH setup file templates***

### Notes

- 1) Coherent dedispersion is available in FOLD and SEARCH mode only; therefore, keyword `DedispersionMode` is ignored in BASEBAND and PSRCAL mode.
- 2) The value for dispersion measure value can be specified by the user in SEARCH mode only; therefore, keyword `DispersionMeasure` is available in this mode only.
- 3) In folding mode, the coherent dedispersion is computed for the value of the dispersion measure indicated in the pulsar's ephemeris; therefore, keyword `DispersionMeasure` is ignored in this mode. If a custom value is required, the user should produce custom ephemeris and put them in `psrcat`.

### 1) FOLD mode

```
ROACH > Mode = FOLD
ROACH > Frequency = 336.000
ROACH > Bandwidth = 80.000
ROACH > NumberOfChannels = 5120
ROACH > SubintTime = 10
ROACH > ProfileBins = 512
```

```
ROACH > DedispersionMode = INCOHERENT
ROACH > AdvancedOptions = none
```

## 2) PSRCAL mode

```
ROACH > Mode = PSRCAL
ROACH > Frequency = 336.000
ROACH > Bandwidth = 80.000
ROACH > NumberOfChannels = 5120
ROACH > SubintTime = 10
ROACH > ProfileBins = 512
```

## 3) SEARCH mode, INCOHERENT dedispersion

```
ROACH > Mode = SEARCH
ROACH > Frequency = 336.000
ROACH > Bandwidth = 80.000
ROACH > NumberOfChannels = 5120
ROACH > NumberOfPols = 4
ROACH > BitsPerSample = 8
ROACH > SamplingTime = 125.000
ROACH > DedispersionMode = INCOHERENT
ROACH > AdvancedOptions = none
```

## 4) SEARCH mode, COHERENT dedispersion

```
ROACH > Mode = SEARCH
ROACH > Frequency = 336.000
ROACH > Bandwidth = 80.000
ROACH > NumberOfChannels = 5120
ROACH > NumberOfPols = 4
ROACH > BitsPerSample = 8
ROACH > SamplingTime = 125.000
ROACH > DedispersionMode = COHERENT
ROACH > DispersionMeasure = 37.456
ROACH > AdvancedOptions = none
```

## 5) BASEBAND mode

```
ROACH > Mode = BASEBAND
ROACH > Frequency = 336.000
ROACH > Bandwidth = 80.000
```


## 6 - Setup files editor

There is a much easier way for creating a setup file. A tool named *seadas-setup-editor* allows to create a setup file from scratch, and modify an already existing one. In the same computer where seadas runs (currently viewer01), open a terminal and type at prompt the command *seadas-setup-editor*. The following window pops up:



The screenshot shows the 'seadas-setup-editor' window. It has a title bar with standard window controls. Below the title bar is a toolbar with four buttons: 'Load setup', 'Reload setup', 'Save setup', and 'Save setup as...'. The main area of the window is divided into two sections. The top section contains two input fields: 'Project code' and 'Setup file name'. The 'Project code' field is currently empty, and the 'Setup file name' field is also empty. The bottom section is a large, empty orange-colored area.


The only active field is the *Project code* one. Type there your code, then press return. Fields appear for entering the project and observer names, and the combo box for enabling the antenna and entering the related parameters:

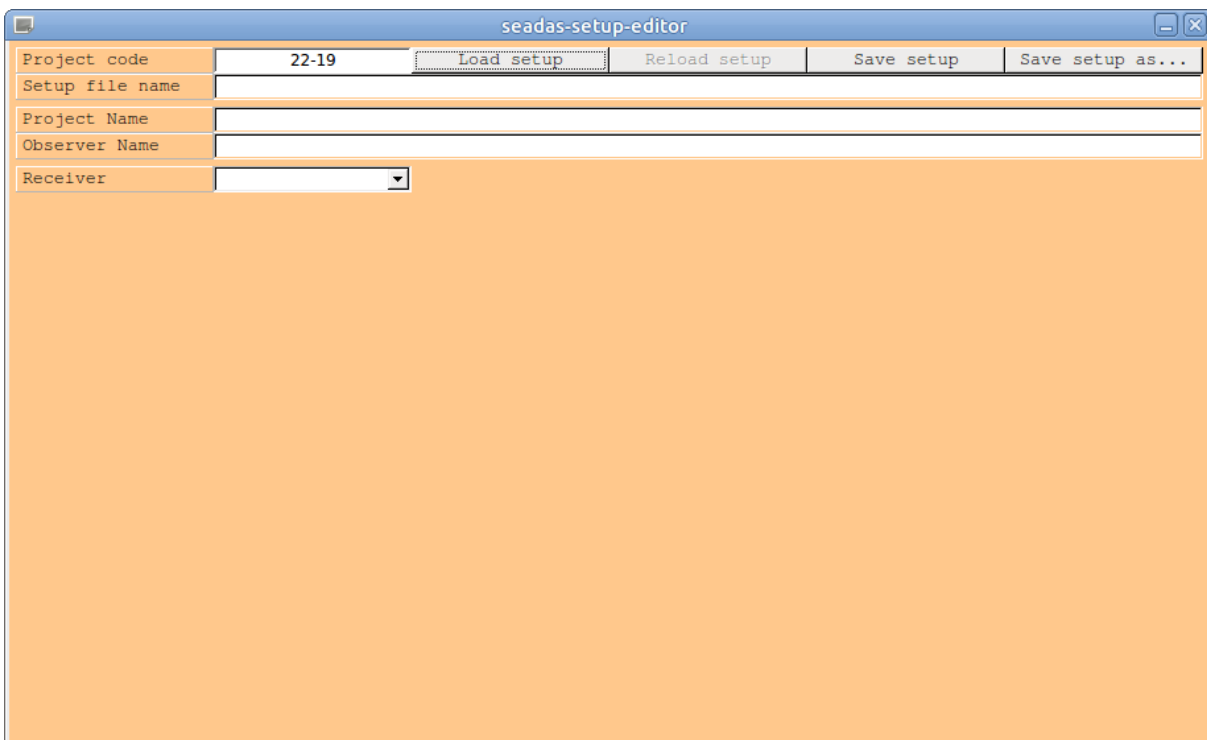

The screenshot shows the 'seadas-setup-editor' window after the 'Project code' field has been filled with '22-19'. The 'Load setup' button is now highlighted. Below the 'Setup file name' field, three new input fields have appeared: 'Project Name', 'Observer Name', and 'Receiver'. The 'Receiver' field is a dropdown menu. The main orange-colored area remains empty.




Fill the Project and Observer name fields:

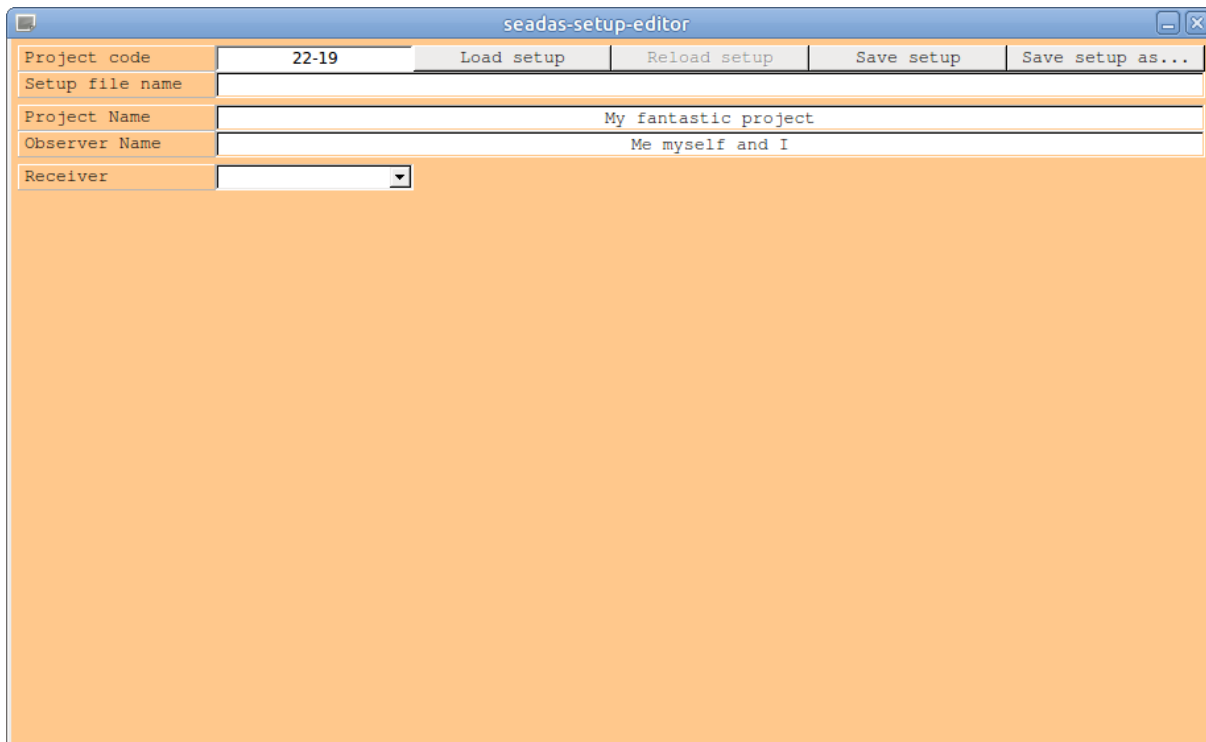

The screenshot shows the 'seadas-setup-editor' window. It has a title bar with standard window controls. Below the title bar is a toolbar with buttons: 'Load setup', 'Reload setup', 'Save setup', and 'Save setup as...'. The main area contains several input fields: 'Project code' with the value '22-19', 'Setup file name' (empty), 'Project Name' with the value 'My fantastic project', 'Observer Name' with the value 'Me myself and I', and 'Receiver' with a dropdown arrow. The background of the main area is orange.

Project code	22-19	Load setup	Reload setup	Save setup	Save setup as...
Setup file name					
Project Name	My fantastic project				
Observer Name	Me myself and I				
Receiver					

Now select the requested receiver through the *Receiver* combo box:

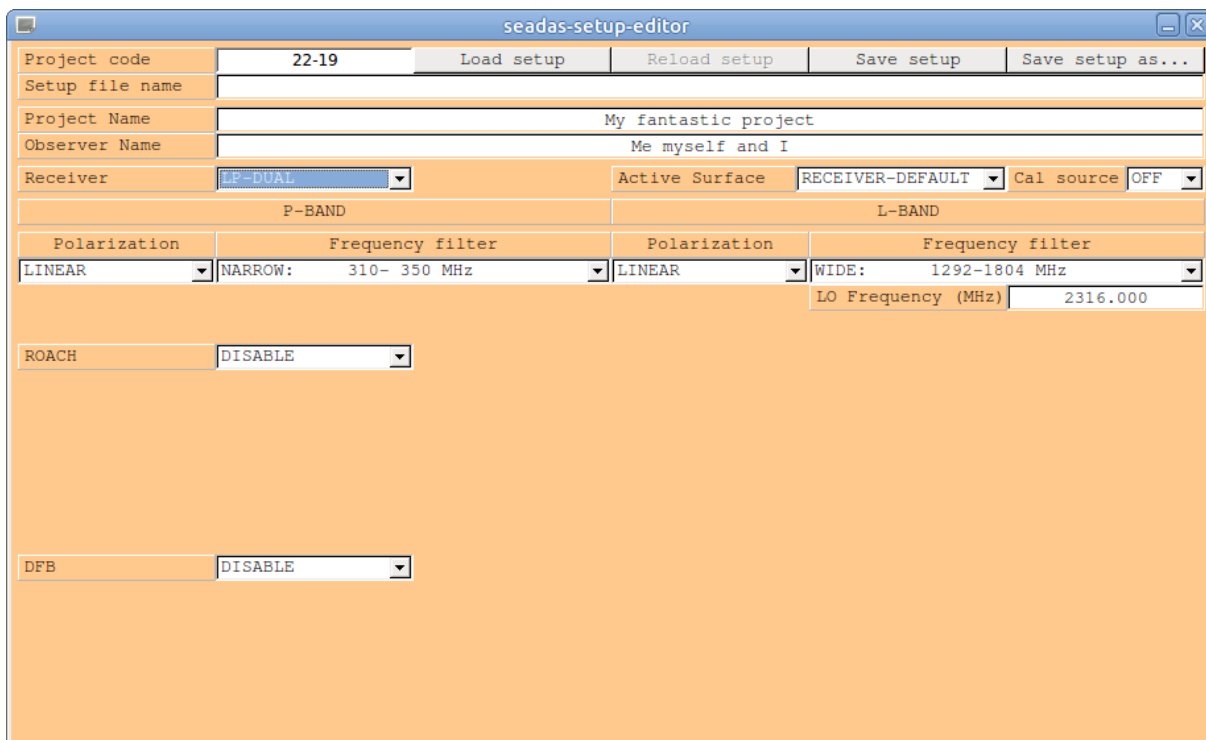

The screenshot shows the 'seadas-setup-editor' window with more configuration options. The 'Receiver' dropdown is now set to 'P-DUAL'. Below it, there are sections for 'P-BAND' and 'L-BAND' configurations. The 'P-BAND' section has 'Polarization' set to 'LINEAR' and 'Frequency filter' set to 'NARROW: 310- 350 MHz'. The 'L-BAND' section has 'Polarization' set to 'LINEAR', 'Frequency filter' set to 'WIDE: 1292-1804 MHz', and 'LO Frequency (MHz)' set to '2316.000'. There are also 'Active Surface' and 'Cal source' dropdowns. At the bottom, there are 'ROACH' and 'DFB' dropdowns, both set to 'DISABLE'. The background of the main area is orange.

Project code	22-19	Load setup	Reload setup	Save setup	Save setup as...
Setup file name					
Project Name	My fantastic project				
Observer Name	Me myself and I				
Receiver	P-DUAL				
Active Surface	RECEIVER-DEFAULT				
Cal source	OFF				
P-BAND			L-BAND		
Polarization	Frequency filter		Polarization	Frequency filter	
LINEAR	NARROW: 310- 350 MHz		LINEAR	WIDE: 1292-1804 MHz	
			LO Frequency (MHz) 2316.000		
ROACH	DISABLE				
DFB	DISABLE				

Now select the requested settings for the selected receiver:

seadas-setup-editor			
Project code	22-19		
Setup file name			
Project Name	My fantastic project		
Observer Name	Me myself and I		
Receiver	LP-DUAL	Active Surface	RECEIVER-DEFAULT
		Cal source	OFF
P-BAND		L-BAND	
Polarization	Frequency filter	Polarization	Frequency filter
LINEAR	NARROW: 310- 350 MHz	LINEAR	NARROW: 1320-1780 MHz
		LO Frequency (MHz)	2060.000
ROACH	DISABLE		
DFB	DISABLE		

Enable the requested backends by selecting the item *ENABLE* in the combo box indicated by their names:

seadas-setup-editor			
Project code	22-19		
Setup file name			
Project Name	My fantastic project		
Observer Name	Me myself and I		
Receiver	LP-DUAL	Active Surface	RECEIVER-DEFAULT
		Cal source	OFF
P-BAND		L-BAND	
Polarization	Frequency filter	Polarization	Frequency filter
LINEAR	NARROW: 310- 350 MHz	LINEAR	NARROW: 1320-1780 MHz
		LO Frequency (MHz)	2060.000
ROACH	ENABLE		
Band	P-BAND	Mode	BASEBAND
Frequency (MHz)	328.000		
Bandwidth (MHz)	128.000		
Inverted freqs	NO		
DFB	ENABLE		
Band	P-BAND	Mode	FOLD
Frequency (MHz)	320.000	Subint time (s)	10
Bandwidth (MHz)	128.000	Profile bins	512
Inverted freqs	NO	Cfg file	pdfb4_512_128_512
Num of channels	512	Cycle period (s)	10.000
Channel range	all	Write file	YES

Now select the various setting for each backend:

seadas-setup-editor					
Project code	22-19		Load setup	Reload setup	Save setup
Setup file name					
Project Name	My fantastic project				
Observer Name	Me myself and I				
Receiver	LP-DUAL	Active Surface	RECEIVER-DEFAULT	Cal source	OFF
P-BAND			L-BAND		
Polarization	Frequency filter		Polarization	Frequency filter	
LINEAR	NARROW: 310- 350 MHz		LINEAR	NARROW: 1320-1780 MHz	
			LO Frequency (MHz)	2060.000	
ROACH	ENABLE				
Band	P-BAND	Mode	BASEBAND		
Frequency (MHz)	336.000				
Bandwidth (MHz)	80.000				
Inverted freqs	NO				
DFB	ENABLE				
Band	L-BAND	Mode	FOLD	Cfg file	pdfb4_1024_1024_2048
Frequency (MHz)	1548.000	Subint time (s)	10	Cycle period (s)	10.000
Bandwidth (MHz)	1024	Profile bins	1024	Write file	YES
Inverted freqs	YES				
Num of channels	2048				
Channel range	all				

Once done, click on the button *Save setup* and your setup file is saved in the directory */home/corr/setup/[project code]* (22-19 in this example). The chosen name for the setup file is displayed in the *Setup file name* field:

seadas-setup-editor					
Project code	22-19		Load setup	Reload setup	Save setup
Setup file name	/home/pulsar/scheds/22-19/my-setup-file.stp				
Project Name	My fantastic project				
Observer Name	Me myself and I				
Receiver	LP-DUAL	Active Surface	RECEIVER-DEFAULT	Cal source	OFF
P-BAND			L-BAND		
Polarization	Frequency filter		Polarization	Frequency filter	
LINEAR	NARROW: 310- 350 MHz		LINEAR	NARROW: 1320-1780 MHz	
			LO Frequency (MHz)	2060.000	
ROACH	ENABLE				
Band	P-BAND	Mode	BASEBAND		
Frequency (MHz)	320.000				
Bandwidth (MHz)	80.000				
Inverted freqs	NO				
DFB	ENABLE				
Band	P-BAND	Mode	FOLD	Cfg file	pdfb4_1024_1024_2048
Frequency (MHz)	512.000	Subint time (s)	10	Cycle period (s)	10.000
Bandwidth (MHz)	1024	Profile bins	1024	Write file	YES
Inverted freqs	NO				
Num of channels	2048				
Channel range	all				

and the resulting setup file is this:

```
#####  
# Setup file created for project 22-19 on 2019 ago 05 at UTC 15:14:00 #  
#####  
ProjectCode = 22-19  
ProjectName = My fantastic project  
ObserverName = Me myself and I  
ANTENNA > ENABLE  
ANTENNA > Receiver = LP-DUAL,LINEAR,NARROW,LINEAR,NARROW,2060.000  
ANTENNA > ActiveSurface = RECEIVER-DEFAULT  
ANTENNA > CalSource = OFF  
ROACH > ENABLE  
ROACH > Mode = BASEBAND  
ROACH > Frequency = 336.000  
ROACH > Bandwidth = 80.000  
ROACH > InvertedFreqs = NO  
DFB > ENABLE  
DFB > Mode = FOLD  
DFB > Frequency = 1548.000  
DFB > InvertedFreqs = YES  
DFB > SubintTime = 10  
DFB > ChannelRange = all  
DFB > ConfigFile = pdfb4_1024_1024_2048  
DFB > CyclePeriod = 10.000  
DFB > WriteFile = YES  
#####  
#                                     end of setup file                                     #  
#####
```

## 7 - Settings analytic list

This section presents the syntax for each setting, identified by the related keyword.

### ***Project settings***

ObserverName: name(s) of the observer(s)

Syntax:

1) ObserverName = [observer name(s)]  
[observer name(s)]: a string with the name(s) of the observer(s)

ProjectCode: code assigned by the telescope TAC to the scientific project

Syntax:

1) ProjectCode = [project code]  
[project code]: the project code assigned by the TAC

ProjectName: name/title/short description of the scientific project

Syntax:

1) ProjectName = [project name]  
[project name]: a string with the name of the project

### ***Observation settings***

ObsLength: duration of the observation

Syntax:

1) ObsLength = [obs. length]  
[obs. length]: the duration of the observation in seconds (integer). Value zero means parameter unset.

ObsStartHour: UTC start time of the observation

Syntax:

1) ObsStartHour = [obs. start hour]  
[obs. start hour]: the UTC start time of the observation (format hh:mm:ss). Value zero means parameter unset.

ObsStopHour: UTC stop time of the observation

Syntax:

1) ObsStopHour = [obs. stop hour]

[obs. stop hour]: the UTC stop time of the observation (format hh:mm:ss). Value zero means parameter unset.

Setup: name of the setup file

Syntax:

1) Setup = [projectcode]/[file name]

2) [device id] > Setup = [projectcode]/[file name]

[device id]: device for which the setup file contains settings. Values are ANTENNA, DFB and ROACH for indicating the homonymous device.

[projectcode]: the project code assigned by the TAC

[file name]: name of the setup file

WaitBeforeStart: time delay before the start of the data acquisition

Syntax:

1) WaitBeforeStart = [delay]

[delay]: the time delay in seconds between the beginning of the observation's setup procedures and the beginning of the data acquisition (integer).

## ***Antenna settings***

Keywords marked with the (\*) sign can be mentioned in the MAIN setup file without the ANTENNA > preamble.

ActiveSurface: shape and adaptive behaviour of the primary reflector

Syntax:

1) ActiveSurface = [Shape and adaptive behaviour]

[shape and adaptive behaviour]: the shape and the adaptive behaviour of the primary mirror.

Allowed values are:

- PARABOLIC : parabolic shape, continuously adapted
- PARABOLIC-FIXED : parabolic shape, fixed to 45 degrees elevation optimal shape
- SHAPED : shaped shape, continuously adapted
- SHAPED-FIXED : shaped shape, fixed to 45 degrees elevation optimal shape
- RECEIVER-DEFAULT : Parabolic for primary focus receivers, Shaped for all other receivers

AzSector: azimuth sector for pointing the antenna

Syntax:

1) AzSector = [azimuth sector]

[azimuth sector]: the azimuth sector for pointing the antenna. Values NEUTRAL, CW, CCW

CalSource: switches ON/OFF the calibration signal source

Syntax:

1) CalSource = ON

2) CalSource = OFF

ON : the cal source is activated

OFF : the cal source is deactivated

Receiver: receiver, and related settings

Syntax:

1) Receiver = P-BAND,[P-BAND pol],[P-BAND freq filter]

2) Receiver = L-BAND,[L-BAND pol],[L-BAND freq filter],[LO freq]

3) Receiver = LP-DUAL,[P-BAND pol],[P-BAND freq filter],[L-BAND pol],[L-BAND freq filter],[LO freq]

4) Receiver = C-BAND,[LO freq],[bandwidth]

5) Receiver = K-BAND,[LO freq],[bandwidth]

[P-BAND pol]: polarization to acquire from the P-BAND (LINEAR/CIRCULAR)

[P-BAND freq filter]: the frequency filter for the P-BAND. Values: OFF = all available band; NARROW = 310MHz-350MHz; WIDE = 305MHz-410MHz.

[L-BAND pol]: polarization to acquire from the L-BAND (LINEAR/CIRCULAR)

[L-BAND freq filter]: the frequency filter for the L-BAND. Values: OFF = all available band; NARROW = 1320MHz-1780MHz; WIDE = 1292MHz-1804MHz; VLBI-LOW = 1350MHz-1450MHz; VLBI-HIGH = 1625MHz-1715MHz

[LO freq]: frequency of the local oscillator (= to the acquired band lower frequency value)

[bandwidth]: TotalPower bandwidth in MHz (300,730,1250,2000).

Source: celestial object to be pointed

Syntax:

1) Source = [source name]

2) Source = [source name],[coordinate system],[longitude],[latitude]

[source name]: the name of the source

[coordinate system]: the frame for expressing the source coordinates: J2000, GALACTIC, AZ/EL

[Longitude]: right ascension (hh:mm:ss.ddd), galactic longitude or azimuth (ddd.dddd), accordingly to the selected frame

[latitude]: declination (+/-dd:mm:ss.zzz), galactic longitude or azimuth (+/-ddd.dddd), accordingly to the selected frame

Note. Syntax #1 can be used for catalogue (psrcat) pulsars only. J2000 catalogue

coordinates are used.

### ***Backend settings: generic backend***

**Bandwidth:** width in MHz of the backend's frequency band

**Syntax:**

1) `Bandwidth = [bw]`

`[bw]`: the width in MHz of the backend's frequency band (Float).

**BitsPerSample:** number of bits to represent each data sample

**Syntax:**

1) `BitsPerSample = [Nbits]`

`[nbits]`: the number of bits to represent each data sample (1,2,4,8)

**DedispersionMode:** coherent or incoherent signal dedispersion

**Syntax:**

1) `DedispersionMode = INCOHERENT`

2) `DedispersionMode = COHERENT`

`INCOHERENT` = incoherent dedispersion

`COHERENT` = coherent dedispersion

**DispersionMeasure:** dispersion measure value for coherent dedispersion

**Syntax:**

1) `DispersionMeasure = [dm]`

`[dm]`: dispersion measure value

**Frequency:** sky frequency that falls at the center of the backend's frequency band

**Syntax:**

1) `Frequency = [freq]`

`[freq]`: the value in MHz of the sky frequency that falls at the center of the backend's band (float).

**Mode:** data acquisition mode

**Syntax:**

1) `Mode = [mode]`

`[mode]`: the data acquisition mode.

Allowed values are:

- `BASEBAND` : baseband recording (ROACH)
- `FOLD` : pulsar folding mode (DFB,ROACH)



- PSRCAL : pulsar calibration source observation (DFB,ROACH)
- SEARCH : pulsar search mode (DFB,ROACH)
- SEARCHSET : internal level adjustment for pulsar search mode (DFB)

NumberOfChannels: number of frequency channels

Syntax:

- 1) NumberOfChannels = [nchan]  
[nchan]: number of frequency channels (int)

NumberOfPols: number of polarizations to be acquired

Syntax:

- 1) NumberOfPols = [npol]  
[npol]: the number of polarizations to be recorded. Values are 1 = total intensity, 2 = left and right intensity only, 4 = full Stokes

ProfileBins: number of bins to represent the pulsar profile

Syntax:

- 1) ProfileBins = [nbin]  
[nbin]: The number of phase bins in pulse profile (integer power of 2)

SamplingTime: signal's sampling time

Syntax:

- 1) SamplingTime = [tsamp]  
[tsamp]: the search mode sampling time in microseconds (int).

SubintTime: pulsar folding mode subintegration time

Syntax:

- 1) SubintTime = [tsub]  
[tsub]: the folding mode subintegration's time in seconds (int).

## ***Backend settings: Pulsar Digital Filterbank (DFB) custom settings***

ChannelRange: channel range to be acquired

Syntax:

- 1) ChannelRange = [ch1]-[ch2]
  - 2) ChannelRange = all
- [ch1]: the first frequency channel to be acquired  
[ch2]: the last frequency channel to be acquired  
0-0 : all frequency channels are acquired  
ALL : all frequency channels are acquired

ConfigFile: DFB configuration file name

Syntax:

- 1) ConfigFile = [cfg file]
- [cfg file]: the configuration file for the DFB (string).

Formats:

srch\_[bw]\_[nch] : search mode configuration  
pdfb4\_[nbin]\_[bw]\_[nch]: folding mode configuration

Fields description:

[nbin]: number of phase bins for representing the pulse profile  
[bw]: bandwidth in MHz  
[nch]: number of channels

Available configurations:

pdfb4\_1024\_1024\_1024  
pdfb4\_1024\_1024\_1024\_new  
pdfb4\_1024\_1024\_2048  
pdfb4\_1024\_1024\_256  
pdfb4\_1024\_1024\_512  
pdfb4\_1024\_128\_1024  
pdfb4\_1024\_128\_2048  
pdfb4\_1024\_128\_512  
pdfb4\_1024\_256\_1024  
pdfb4\_1024\_256\_2048  
pdfb4\_1024\_256\_256  
pdfb4\_1024\_256\_512  
pdfb4\_1024\_512\_1024  
pdfb4\_1024\_512\_2048  
pdfb4\_1024\_512\_512  
pdfb4\_1024\_64\_1024  
pdfb4\_1024\_64\_2048  
pdfb4\_1024\_64\_512  
pdfb4\_128\_64\_1024  
pdfb4\_128\_64\_512  
pdfb4\_2048\_1024\_1024  
pdfb4\_2048\_1024\_128  
pdfb4\_2048\_1024\_2048  
pdfb4\_2048\_1024\_256  
pdfb4\_2048\_1024\_512  
pdfb4\_2048\_256\_1024  
pdfb4\_2048\_256\_2048  
pdfb4\_2048\_256\_512  
pdfb4\_2048\_512\_1024

```

pdfb4_2048_512_2048
pdfb4_2048_512_512
pdfb4_256_1024_1024
pdfb4_256_1024_2048
pdfb4_256_1024_512
pdfb4_256_256_1024
pdfb4_256_256_2048
pdfb4_256_256_512
pdfb4_256_64_1024
pdfb4_256_64_512
pdfb4_512_1024_1024
pdfb4_512_1024_2048
pdfb4_512_1024_512
pdfb4_512_128_1024
pdfb4_512_128_2048
pdfb4_512_128_512
pdfb4_512_16_2048
pdfb4_512_256_1024
pdfb4_512_256_2048
pdfb4_512_256_512
pdfb4_512_32_2048
pdfb4_512_512_1024
pdfb4_512_512_2048
pdfb4_512_512_512
pdfb4_512_64_1024
pdfb4_512_64_2048
pdfb4_512_64_512
pdfb4_512_8_2048
srch_1024_1024
srch_1024_512
srch_256_1024
srch_256_512
srch_512_1024
srch_512_128
srch_512_256
srch_512_512

```

CyclePeriod: DFB cycle period

Syntax:

1) CyclePeriod = [cycle period]  
[cycle period]: the DFB cycle period in seconds (range [2,30]).

MaxFileLength: search mode maximum file length

Syntax:

1) MaxFileLength = [max length]  
[max length]: The maximum file length in seconds for search mode files produced by the DFB (int). Value 0 (zero digit) means unlimited length.

SamplesSubint: number of samples in search mode data blocks

Syntax:

1) SamplesSubint = [nsamp]  
[nsamp]: the number of samples for each DFB search mode data block (int power of 2)

TimeConstant: time to calculate the average bandpass

Syntax:

1) TimeConstant = [tconst]

[tconst]: the time to calculate the average bandpass in seconds (int >= 1).

WriteFile: data written/not written on files

Syntax:

1) WriteFile = YES

2) WriteFile = NO

YES : data are written on file

NO : no file is opened for writing data.

### ***Backend settings: ROACH backend custom settings***

AdvancedOptions: dspsr (folding) or digifil (search) not standard/common options

Syntax:

1) AdvancedOptions = [options]

[options]: a string containing all "ADVANCED" options for dspsr (fold mode) and digifil (search mode), as they would be specified in a dspsr/digifil shell command.

The attribute "BASIC" indicates dspsr and digifil options that can directly be set by any of the aforementioned backends' keywords, no matter if they are generic or custom ones. In FOLD mode they are:

```
-F <N>[:D]  create an N-channel filterbank [with coherent dedispersion]
-b nbin      number of phase bins in folded profile
-L seconds   create integrations of specified duration
```

while in search mode they are:

```
-b bits      number of bits per sample output to file
-F <N>:D]    create an N-channel filterbank (voltages only) [with coherent
dedispersion]
-D dm        set the dispersion measure
-t nsamp     decimate in time
-d npol      1=PP+QQ, 2=PP,QQ, 3=(PP+QQ)^2 4=PP,QQ,PQ,QP
```

The attribute "ADVANCED" indicates dspsr and digifil options that imply custom settings for executing the processing calculations or have an impact in the final data file. FOLD mode, i.e. dspsr routine, advanced options are:

Processor options:

```
-Z lib        choose the FFT library ('-Z help' for availability)
-dump op      dump time series before performing operation
-order        order data optimally when possible [default:true]
```

RFI removal options:

```
-2 code       unpacker options ("2-bit" excision)
-skz          apply spectral kurtosis filterbank RFI zapping
-noskz_too    also produce un-zapped version of output
```

-skzm samples      samples to integrate for spectral kurtosis statistics  
 -skzs stddevs      number of std deviations to use for spectral kurtosis  
 excisions  
 -skz\_start chan    first channel where signal is expected  
 -skz\_end chan      last channel where signal is expected  
 -skz\_no\_fscr       do not use SKDetector Fscrunch feature  
 -skz\_no\_tscr       do not use SKDetector Tscrunch feature  
 -skz\_no\_ft          do not use SKDetector despeckeler  
 -sk\_fold           fold the SKFilterbank output

#### Dispersion removal options:

-G nbin            create phase-locked filterbank  
 -cyclic N          form cyclic spectra with N channels (per input channel)  
 -cyclicoversample M use M times as many lags to improve cyclic channel  
 isolation (4 is recommended)  
 -D dm              over-ride dispersion measure  
 -K                  remove inter-channel dispersion delays  
 -x nfft|minX       over-ride optimal transform length  
 -R                  apply time-variable narrow-band RFI filter  
 -pac dbase        pac database for phase-coherent matrix convolution  
 -fft-bench        use benchmark data to choose optimal FFT length

#### Detection options:

-d npol            1=PP+QQ, 2=PP,QQ, 3=(PP+QQ)^2 4=PP,QQ,PQ,QP  
 -n ndim            [experimental] ndim of output when npol=4  
 -4                  compute fourth-order moments

#### Folding options:

-p phase          reference phase of rising edge of bin zero  
 -E file            pulsar ephemeris used to generate predictor  
 -P file            phase predictor used for folding  
 -w file            phase predictors used for folding.  
 -X name            additional pulsar to be folded

#### Time division options:

-s                  create single pulse sub-integrations  
 -turns N          create integrations of specified number of spin periods  
 -Lepoch MJD       start time of first sub-integration (when -L is used)  
 -Lmin seconds    minimum integration length output  
 -y                  output partially completed integrations

#### Output archive options:

-a archive        output archive class name  
 -e ext            output filename extension  
 -no\_dyn           disable dynamic extensions  
 -j job            psrsh command run before output  
 -J a.psh          psrsh script run before output

SEARCH mode, i.e. digifil routine, advanced options are:

#### Processor options:

-Z lib            choose the FFT library ('-Z help' for availability)  
 -dump op          dump time series before performing operation  
 -c                  keep offset and scale constant  
 -x nfft            backward FFT length in voltage filterbank  
 -K                  remove inter-channel dispersion delays  
 -d npol            1=PP+QQ, 2=PP,QQ, 3=(PP+QQ)^2 4=PP,QQ,PQ,QP  
 -P ipol            process only a single polarization of input  
 -I secs            rescale interval in seconds  
 -s fac            data scale factor to apply  
 -p                  revert to FFT order

If any of the mentioned FOLD/SEARCH options require further arguments not listed here, such arguments can also be indicated in the AdvancedOptions keyword string.

Any option not listed as basic nor as advanced will be ignored.

## Appendix A - Calibration source acquisition schedule line

The use of the noise source for calibration purposes requires a dedicated setup that is planned to be fully automated in SEADAS in the near future. Given the current lack of such automatization, the user has to follow one of the following procedures while preparing the schedule. The first one is addressed to the user who wishes to use the PDFB for the data acquisition; conversely, the second one must be followed by the user who is not interested in using the PDFB.

A.1. The user wants to acquire data with the PDFB, and maybe other backends.

The schedule line for the calibration observation is the same as for the on-source folding mode observation, but for the following changes:

```
Source = [source name]_R,J2000,[offset RA],[offset DEC]
```

Explanation: The source name must be followed by the `_R` suffix, the coordinates system must be always `J2000`, the telescope must be pointed at about one degree offset position with respect to the source position

```
DFB > Mode = PSRCAL
```

Explanation: The PDFB must be instructed to operate in PSRCAL mode, in order to command the fast switching of the calibration source.

```
ANTENNA > CalSource = ON
```

Explanation: The calibration source must be enabled in the antenna control procedures

Example (to be put in one single line in the schedule):

```
Source = B0329+54_R,J2000,03:33:00.000,+55:30:00.000 ; Setup = 22-19/mySetup.stp ,  
DFB > Mode = PSRCAL ; ANTENNA > CalSource = ON ; ObsLength = 120
```

If other backends are needed, they all must be instructed to acquire data in PSRCAL mode

A.2. The user is not interested to acquire data with the PDFB, but the ROACH system only.

The fast switching on and off of the calibration source is triggered by the PDFB. For this reason this backend should be enabled and some settings should be given to it. As in the previous case, the schedule line for the calibration observation is the same as for the on-source folding mode observation, but for the following changes:

```
Source = [source name]_R,J2000,[offset RA],[offset DEC]
```

Explanation: The source name must be followed by the `_R` suffix, the coordinates system must be always `J2000`, the telescope must be pointed at about one degree offset position with respect to the source position

```
ANTENNA > CalSource = ON
```

Explanation: The calibration source must be enabled in the antenna control procedures

```
ROACH > Mode = PSRCAL
```

Explanation: The ROACH system must be informed that the ongoing acquisition is

about the cal source.

DFB > ENABLED

Explanation: The PDFB must be enabled so that the noise source can be fast switched on and off

DFB > Setup = [project code]/PDFBCal.stp

Explanation: Settings for the PDFB are indicated in a text file called PDFBCal.stp, which must be placed in the directory /home/corr/setup/[**project code**]. The content of this file is the following:

```
Mode = PSRCAL
ConfigFile = pdfb4_512_512_512
Frequency = 1548.000
SubintTime = 10
ChannelRange = all
writeFile = NO
CyclePeriod = 10.000
```

N.B. Values for all keywords but Mode are dummy values in this particular case. The one for ConfigFile must anyway be any folding mode config file (i.e. any pfb4\_BB\_BW\_CH file).

Example (to be put in one single line in the schedule):

```
Source = B0329+54_R,J2000,03:33:00.000,+55:30:00.000 ; Setup = 22-19/mySetup.stp;
ANTENNA > CalSource = ON ; ROACH > Mode = PSRCAL ; ObsLength = 120; DFB > ENABLED ;
DFB > Setup = PDFBCal.txt
```

**N.B. The schedule line for the on-source observation MUST contain the statements:**

**DFB > DISABLED**

**ANTENNA > CalSource = OFF**

Example (to be put in one single line in the schedule):

```
Source = B0329+54 ; Setup = 22-19/mySetup.stp ; DFB > DISABLED ; ANTENNA >
CalSource = OFF ; ObsLength = 3600
```