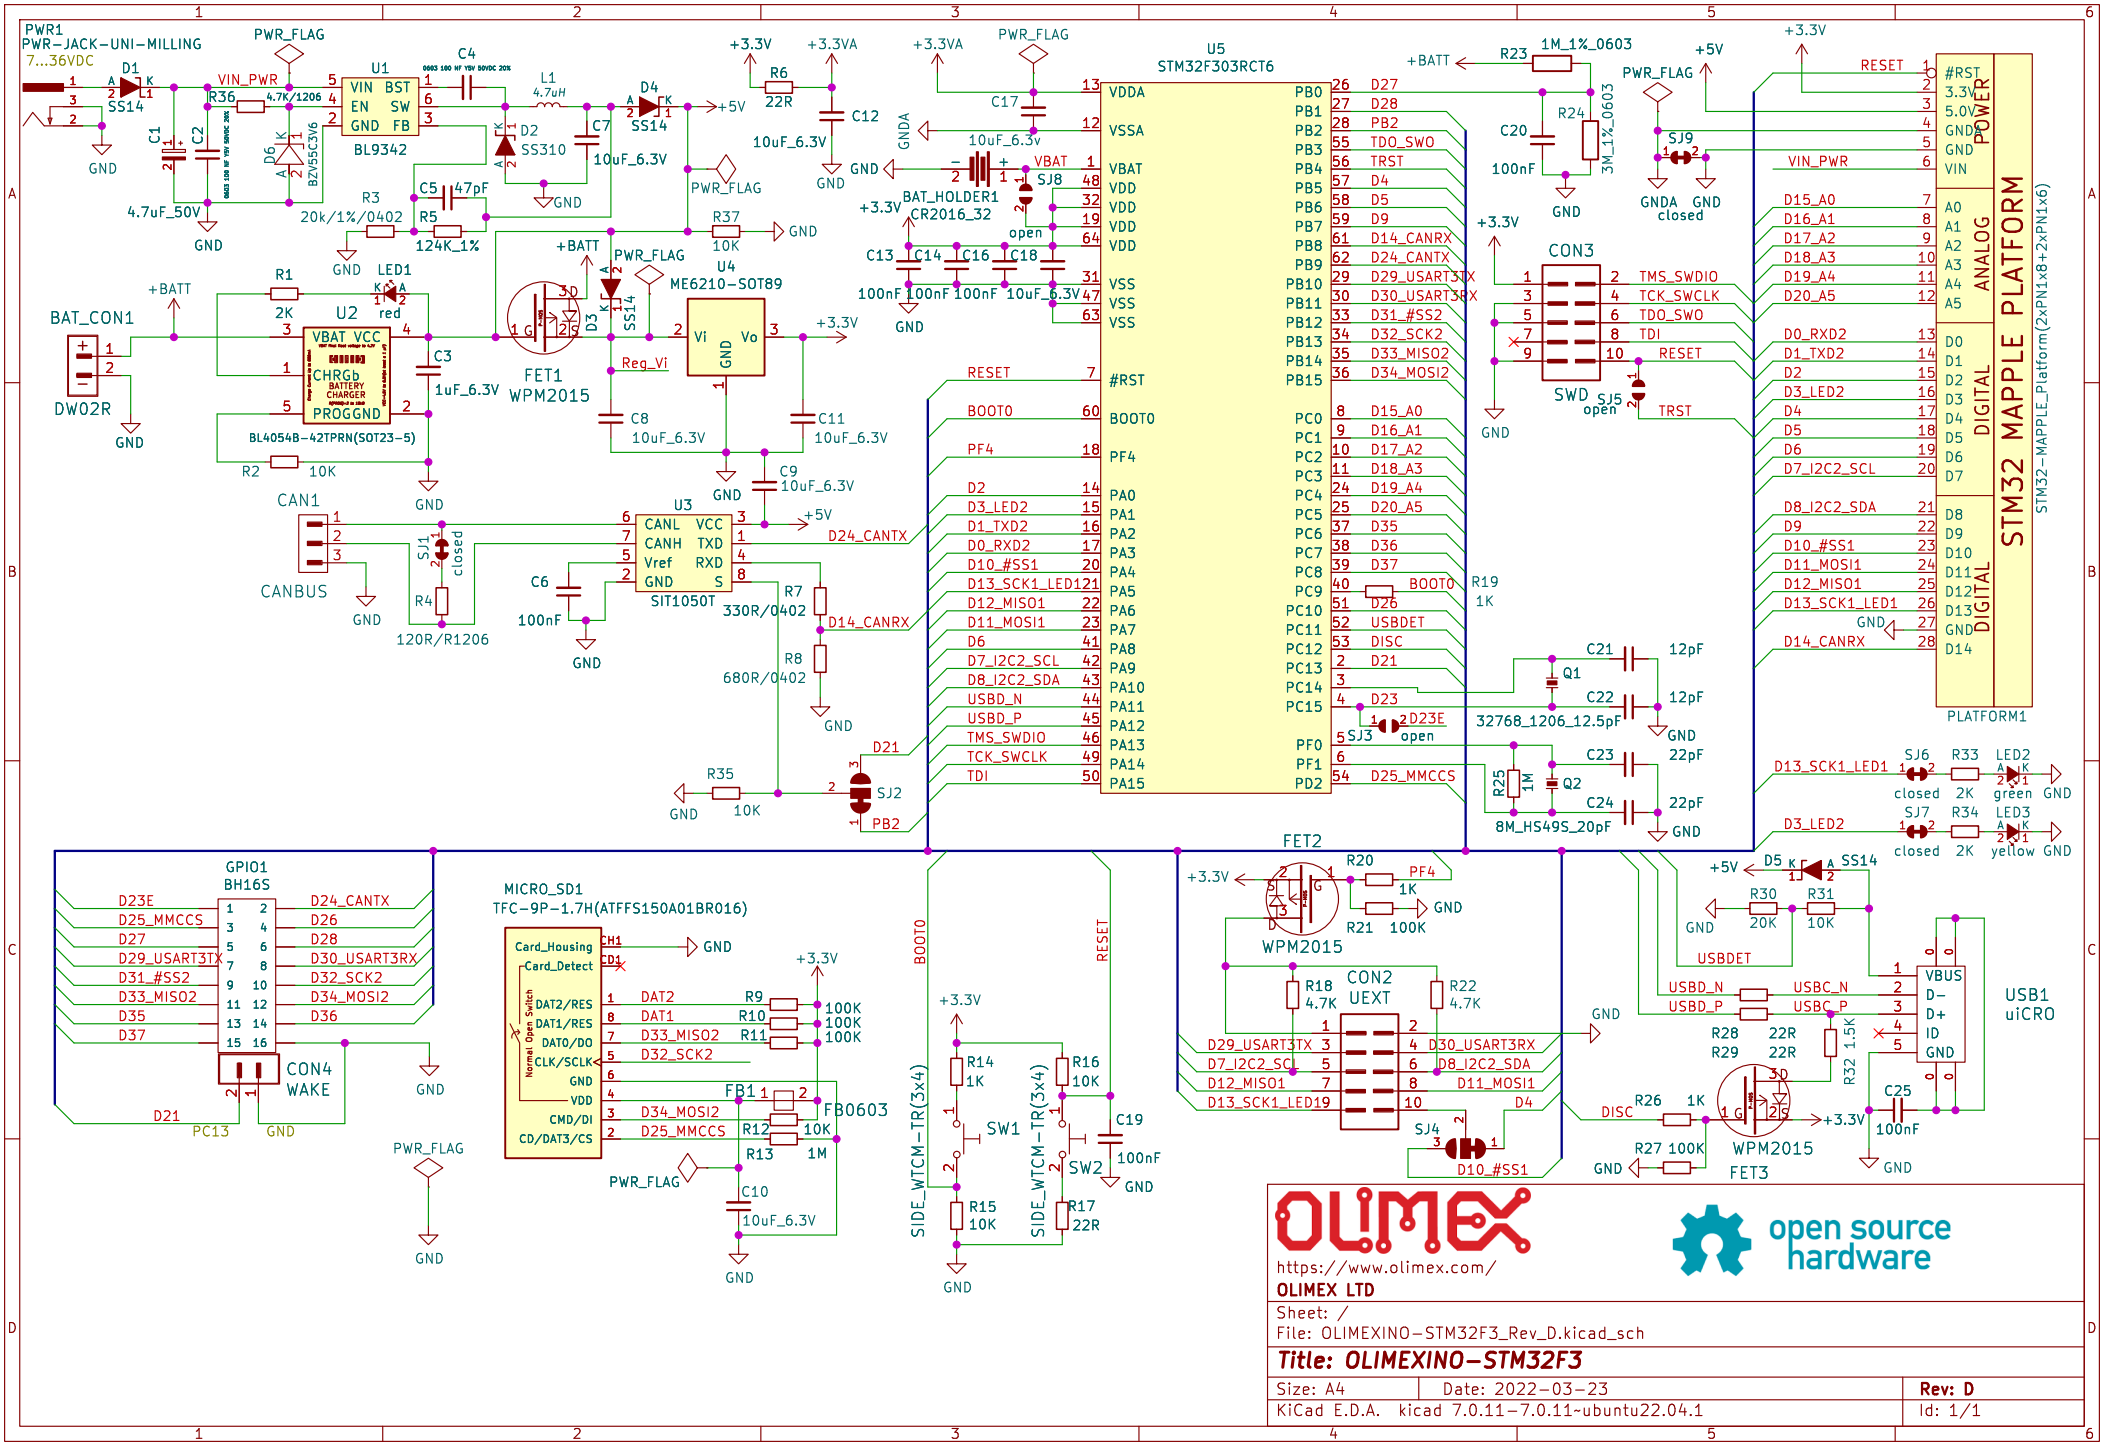

PWR1
PWR-JACK-UNI-MILLING
7...36VDC
PWR_FLAG
VIN_PWR
U1
VIN BST
EN SW
GND FB
BL9342
L1
4.7uH
D1
SS14
D2
SS310
D4
SS14
D6
BZV55C3V6
C1
4.7uF_50V
C2
C4
C5
47pF
C7
10uF_6.3V
C12
10uF_6.3V
R3
20k/1%/0402
R5
124K_1%
R6
22R
R36
4.7K/1206
R37
10K
+3.3V
+3.3VA
+5V
+BATT
GND
BAT_CON1
DW02R
R1
2K
R2
10K
U2
VBAT VCC
CHRGb
PROGGND
BL4054B-42TPRN(SOT23-5)
LED1
red
C3
1uF_6.3V
FET1
WPM2015
D3
SS14
U4
ME6210-SOT89
Vi
GND
Vo
C8
10uF_6.3V
C9
10uF_6.3V
C11
10uF_6.3V
Reg_Vi
CAN1
CANBUS
SJ1
closed
R4
120R/R1206
U3
CANL VCC
CANH TXD
Vref RXD
GND S
SIT1050T
C6
100nF
R7
330R/0402
R8
680R/0402
D24_CANTX
D14_CANRX
D21
R35
10K
SJ2
PB2
U5
STM32F303RCT6
VDDA
VSSA
VBAT
VDD
VSS
#RST
BOOT0
PF4
PA0
PA1
PA2
PA3
PA4
PA5
PA6
PA7
PA8
PA9
PA10
PA11
PA12
PA13
PA14
PA15
PB0
PB1
PB2
PB3
PB4
PB5
PB6
PB7
PB8
PB9
PB10
PB11
PB12
PB13
PB14
PB15
PC0
PC1
PC2
PC3
PC4
PC5
PC6
PC7
PC8
PC9
PC10
PC11
PC12
PC13
PC14
PC15
PF0
PF1
PD2
C17
C13
C14
C16
C18
100nF
BAT_HOLDER1
CR2016_32
SJ8
open
R19
1K
C21
12pF
C22
12pF
Q1
32768_1206_12.5pF
C23
22pF
C24
22pF
Q2
8M_HS49S_20pF
R25
1M
SJ3
D23E
open
R23
1M_1%_0603
R24
3M_1%_0603
C20
100nF
SJ9
GNDA GND
closed
CON3
SWD
SJ5
open
TMS_SWDIO
TCK_SWCLK
TDO_SWO
TDI
RESET
TRST
PLATFORM1
STM32_MAPPLE_Platform(2xPN1x8+2xPN1x6)
POWER
ANALOG
DIGITAL
SJ6
closed
R33
2K
LED2
green
SJ7
closed
R34
2K
LED3
yellow
GPIO1
BH16S
CON4
WAKE
MICRO_SD1
TFC-9P-1.7H(ATFFS150A01BR016)
Card_Housing
Card_Detect
DAT2/RES
DAT1/RES
DATO/DO
CLK/SCLK
GND
VDD
CMD/DI
CD/DAT3/CS
Normal Open Switch
R9
R10
R11
R12
R13
100K
10K
1M
FB1
FB0603
C10
10uF_6.3V
C19
100nF
SW1
SW2
SIDE_WTCM-TR(3x4)
R14
1K
R15
10K
R16
10K
R17
22R
BOOT0
RESET
FET2
WPM2015
R20
1K
R21
100K
R18
4.7K
R22
4.7K
CON2
UEXT
SJ4
D10_#SS1
D5
SS14
R30
20K
R31
10K
USBDET
USB1
uiCRO
VBUS
D-
D+
ID
GND
R28
22R
R29
22R
R32
1.5K
C25
100nF
R26
1K
DISC
R27
100K
FET3
WPM2015
OLIMEX
https://www.olimex.com/
OLIMEX LTD
open source hardware
Sheet: /
File: OLIMEXINO-STM32F3_Rev_D.kicad_sch
Title: OLIMEXINO-STM32F3
Size: A4
Date: 2022-03-23
Rev: D
KiCad E.D.A. kicad 7.0.11-7.0.11~ubuntu22.04.1
Id: 1/1