



ExaGO™ Users Manual

Version 2.1.0

Copyright (c) 2026, UT-Battelle.
All rights reserved.

This work uses code from the ExaGO v1.6.0:
Copyright (c) 2020-2025, Battelle Memorial Institute
All rights reserved.

ExaGO™ version 2

Open Source License:

Subject to the conditions of this License, UT-Battelle, LLC, hereby grants free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to use, copy, modify, merge, publish, distribute, and/or sublicense copies of the Software.

1. Redistributions of Software must retain the above open source license grant, copyright and license notices, this list of conditions, and the disclaimer listed below. Changes or modifications to, or derivative works of the Software must be noted with comments and the contributor and organization's name. If the Software is protected by a proprietary trademark owned by UT-Battelle, LLC or the Department of Energy, then derivative works of the Software may not be distributed using the trademark without the prior written approval of the trademark owner.

2. Neither the names of Licensor nor the Department of Energy may be used to endorse or promote products derived from this Software without their specific prior written permission.

3. The Software, with or without modification, must include the following acknowledgment: "This product includes software produced by UT-Battelle, LLC under Contract No. DE-AC05-00OR22725 with the Department of Energy."

DISCLAIMER:

UT-BATTELLE, LLC, AND THE GOVERNMENT MAKE NO REPRESENTATIONS AND DISCLAIM ALL WARRANTIES, BOTH EXPRESSED AND IMPLIED. THERE ARE NO EXPRESS OR IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR THAT THE USE OF THE SOFTWARE WILL NOT INFRINGE ANY PATENT, COPYRIGHT, TRADEMARK, OR OTHER PROPRIETARY RIGHTS, OR THAT THE SOFTWARE WILL ACCOMPLISH THE INTENDED RESULTS OR THAT THE SOFTWARE OR ITS USE WILL NOT RESULT IN INJURY OR DAMAGE. THE USER ASSUMES RESPONSIBILITY FOR ALL LIABILITIES, PENALTIES, FINES, CLAIMS, CAUSES OF ACTION, AND COSTS AND EXPENSES, CAUSED BY, RESULTING FROM OR ARISING OUT OF, IN WHOLE OR IN PART THE USE, STORAGE OR DISPOSAL OF THE SOFTWARE.

Contents

License	2
1 Introduction	5
2 Getting Started	7
2.1 System requirements	7
2.2 Prerequisites	7
2.3 Dependencies	7
2.3.1 Notes on environment modules	8
2.3.2 Additional Notes on GPU Accelerators	8
2.3.3 Additional Notes on Umpire	8
2.4 Building and installation	8
2.4.1 Default Build	8
2.4.2 Additional Options	8
2.5 Usage	9
3 Optimal power flow (OPFLOW)	12
3.1 Formulation	12
3.1.1 Variables and bounds	12
3.1.2 Objective Function	12
3.1.3 Equality constraints	14
3.1.4 Inequality constraints	15
3.2 Solvers	16
3.3 Models	16
3.3.1 Power balance polar	16
3.3.2 Power balance with HiOp on CPU	17
3.3.3 Power balance with HiOp on GPU	17
3.4 Input and Output	17
3.5 Usage	17
3.6 Options	17
3.7 Examples	19
4 Multi-period optimal power flow (TCOPFLOW)	25
4.1 Formulation	25
4.2 Solvers	26
4.3 Input and Output	26
4.4 Usage	26
4.5 TCOPFLOW Options	28

5	Security-constrained optimal power flow (SCOPFLOW)	29
5.1	Formulation	29
5.1.1	Single-period	29
5.1.2	Multiperiod	30
5.2	Solvers	31
5.3	Input and Output	31
5.4	Usage	32
5.5	Options	32
5.6	Examples	33
6	Stochastic optimal power flow (SOPFLOW)	39
6.1	Formulation	39
6.2	Solvers	40
6.3	Input and Output	41
6.4	Usage	41
6.5	Options	42
6.6	Examples	42
7	Python Bindings	47
7.1	Code Comparison	47
7.2	Building with MPI	48
7.3	Bindings Tables	48
7.3.1	ExaGO	48
7.3.2	PFLOW	48
7.3.3	OPFLOW	49
7.3.4	SCOPFLOW	50
7.3.5	SOPFLOW	51
7.4	Enums	52
7.4.1	Code Examples	53
7.5	History	53
	Appendices	54
A	Symbol reference	55

Chapter 1

Introduction

The Exascale Grid Optimization (ExaGO™) toolkit is an open source package for solving large-scale power grid optimization problems on parallel and distributed architectures, particularly targeted for exascale machines with heterogeneous architectures (GPU). ExaGO™ is written in C/C++ and makes heavy use of the functionality provided by the PETSc[1] library. It uses RAJA [3] and Umpire [4] libraries for execution on the GPU and can make use of several optimization solvers - Ipopt [7], HiOp [6, 5]- for solving the optimization problems.

All ExaGO™ applications use a nonlinear formulation based on full AC optimal power flow. The different applications available with ExaGO are listed in Table 1.1

Table 1.1: ExaGO applications

Application	Description	Notes
OPFLOW	AC optimal power flow	
SCOPFLOW	Security-constrained AC optimal power flow	Uses TCOPFLOW for multi-period contingencies
TCOPFLOW	Multi-period AC optimal power flow	
SOPFLOW	Stochastic AC optimal power flow	Uses SCOPFLOW for multi-contingency scenarios

While ExaGO is targeted for making use of distributed computing environments and GPUs, its full support is still under development. Table 1.2 lists the architecture support for ExaGO applications.

Table 1.2: ExaGO application execution on different hardware

Application	CPU (serial)	CPU (parallel)	GPU
OPFLOW	Y	N	Y
SCOPFLOW	Y	Y	Y
SOPFLOW	Y	Y	Y
TCOPFLOW	Y	N	N

Together, these applications cater to problems spanning the dimensions of security (contingencies), stochasticity, and time as shown in Figure 1.1.

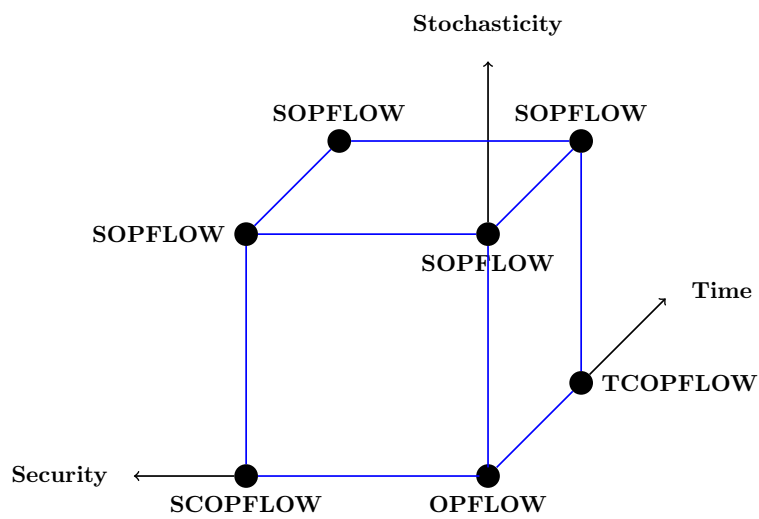


Figure 1.1: ExaGO provides applications along the dimensions of security (contingencies), time, and stochasticity. The label vertices denote different ExaGO applications available.

Chapter 2

Getting Started

2.1 System requirements

ExaGO is currently only built on MacOSX and Linux operating systems and requires C++17 compliant compiler. We build ExaGO on x86_64, Arm, and IBM Power9 architectures.

2.2 Prerequisites

This section assumes that you already have the ExaGO source code, and that the environment variable EXAGODIR is the directory of the ExaGO source code. ExaGO may be acquired via the ORNL GitHub [repository](#):

```
1 > git clone https://github.com/ORNL/exago.git exago
2 > export EXAGODIR=$PWD/exago
```

Paths to installations of third party software in examples are abbreviated with placeholder paths. For example, /path/to/cuda is a placeholder for a path to a valid CUDA Toolkit installation.

2.3 Dependencies

ExaGO at version 2.1.0 has the dependencies listed in table 2.1. The versions of dependencies listed are those we have tested with, though newer version may also be compatible.

Table 2.1: Dependency Table

Dependency	Version Constraints	Mandatory	Notes
PETSc [1]	≥ 3.25	✓	Core dependency
CMake	≥ 3.18	✓	Only a build dependency
MPI	≥ 4.1		Only tested with openmpi and spectrummpi
Ipopt [7]	≥ 3.14		
HiOp [6, 5]	≥ 1.0		Prefer dynamically linked
RAJA [3]	≥ 0.14		
Umpire [2]	≥ 6.0		Only when RAJA is enabled
MAGMA	$\geq 2.6.2$		Only when GPU acceleration is enabled
CUDA Toolkit	≥ 11.4		Only when NVIDIA support is enabled
ROCm	≥ 6.4		Only when AMD accelerators support is enabled

These may all be toggled via CMake, which will be discussed in the section [Building and installation](#).

2.3.1 Notes on environment modules

Many of the dependencies are available via environment modules on institutional clusters. To get additional information on your institution's clusters, please ask your institution's system administrators. Some end-to-end examples in this document will use system-specific modules and are not expected to run on other clusters.

For example, the modules needed to build and run ExaGO on Newell, an IBM Power9 PNNL cluster, are as follows:

```
1 > module load gcc/8.5.0
2 > module load openmpi/4.1.4
3 > module load cuda/11.4
4 > module load python/miniconda3.8
5 > module load cmake/3.19.6
```

2.3.2 Additional Notes on GPU Accelerators

CUDA is currently the only GPU accelerator platform ExaGO fully supports.

2.3.3 Additional Notes on Umpire

Umpire is an implicit dependency of RAJA. If a user enables RAJA, they must also provide a valid installation of Umpire. Additionally, if a user would like to run ExaGO with RAJA and without CUDA, they must provide a CPU-only build of Umpire since an Umpire build with CUDA enabled will link against CUDA.

2.4 Building and installation

2.4.1 Default Build

ExaGO may be built with a standard CMake workflow:

```
1 > cd $EXAGODIR
2 > export BUILDDIR=$PWD/build INSTALLDIR=$PWD/install
3 > mkdir $BUILDDIR $INSTALLDIR
4 > cd $BUILDDIR
5 > cmake .. -DCMAKE_INSTALL_PREFIX=$INSTALLDIR
6 > make install
```

Listing 2.1: Example CMake workflow

The following sections will assume the user is following the basic workflow outlined above.

Note: For changes to the CMake configuration to take effect, the code will have to be reconfigured using `cmake` and rebuilt using `make`.

2.4.2 Additional Options

To enable additional options, CMake variables may be defined via CMake command line arguments, `ccmake`, or `cmake-gui`. CMake options specific to ExaGO have an `EXAGO_` prefix. For example, the following shell commands will build ExaGO with MPI:

```
1 > cmake .. -DCMAKE_INSTALL_PREFIX=$INSTALLDIR -DEXAGO_ENABLE_MPI=ON
```

ExaGO's CMake configuration will search the usual system locations for an MPI installation.

For dependencies not installed to a system-wide location, users may also directly specify the location of a dependency. For example, this will build ExaGO with IPOPT enabled and installed to a user directory:

```
1 > cmake .. \
2   -DCMAKE_INSTALL_PREFIX=$INSTALLDIR \
3   -DEXAGO_ENABLE_IPOPT=ON \
4   -DIPOPT_DIR=/path/to/ipopt
```

Notice that the CMake variable IPOPT_DIR does not have an EXAGO_ prefix. This is because the variables specifying locations often belong to external CMake modules. CMake variables indicating installation directories do not have an EXAGO_ prefix.

Some CMake options effect others. This is especially common when the user enables ExaGO's GPU options. For example, if the user enables EXAGO_ENABLE_GPU and EXAGO_ENABLE_RAJA, the user must provide a GPU-enabled RAJA installation. Umpire is also an implicit dependency of RAJA, so if the user enables EXAGO_ENABLE_GPU they must **also** provide a GPU-enabled Umpire installation.

Below is a complete shell session on PNNL's cluster Newell in which a more complicated ExaGO configuration is built, where each dependency installation is explicitly passed to CMake. Environment modules specific to Newell are provided to make the example thorough, even though they are not likely to work on another machine. However, similar modules (with different version numbers) are likely to be available on other platforms.

```
1 > module load gcc/8.5.0
2 > module load openmpi/4.1.4
3 > module load cuda/11.4
4 > module load python/miniconda3.8
5 > module load cmake/3.19.6
6 > git clone https://github.com/ORNL/exago.git exago
7 > export EXAGODIR=$PWD/exago
8 > cd $EXAGODIR
9 > export BUILDDIR=$PWD/build INSTALLDIR=$PWD/install
10 > mkdir $BUILDDIR $INSTALLDIR
11 > cd $BUILDDIR
12 > cmake .. \
13   -DCMAKE_INSTALL_PREFIX=$INSTALLDIR \
14   -DCMAKE_BUILD_TYPE=Debug \
15   -DEXAGO_ENABLE_GPU=ON \
16   -DEXAGO_ENABLE_HIOP=ON \
17   -DEXAGO_ENABLE_IPOPT=ON \
18   -DEXAGO_ENABLE_MPI=ON \
19   -DEXAGO_ENABLE_PETSC=ON \
20   -DEXAGO_RUN_TESTS=ON \
21   -DEXAGO_ENABLE_RAJA=ON \
22   -DEXAGO_ENABLE_IPOPT=ON \
23   -DIPOPT_DIR=/path/to/ipopt \
24   -DRAJA_DIR=/path/to/raja \
25   -Dumpire_DIR=/path/to/umpire \
26   -DHIOP_DIR=/path/to/hiop \
27   -DMAGMA_DIR=/path/to/magma \
28   -DPETSC_DIR=/path/to/petsc
29 > make -j 8 install
30 > # For the following commands, a job scheduler command may be needed.
31 > # Run test suite
32 > make test
33 > # Run an ExaGO application:
34 > $INSTALLDIR/bin/opflow
```

Listing 2.2: ExaGO build with all options enabled

2.5 Usage

Each ExaGO application has the following format for execution

```
1 ./app <app_options>
```

For OPFLOW for example:

```
1 ./opflow -help
2 ExaGO 1.4.1 built on Jan 14 2022
3
4 Arguments for opflow:
5 -help
6   Print help message (type: flag)
```

```

7
8 -version
9     Print version information (type: flag)
10
11 -config
12     Print configuration options used to build ExaGO (type: flag)
13
14 -options_file /path/to/options_file
15     Path to options file used to load additional ExaGO configuration options (type: string)
16
17 -opflow_model (POWER_BALANCE_POLAR|POWER_BALANCE_HIOP|PBPOLRAJAHIOP)
18     OPFLOW model name (type: string)
19
20 -opflow_solver (IPOPT|HIOP|HIOPSPARSE)
21     OPFLOW solver type (type: string)
22
23 -opflow_initialization (OPFLOWINIT_MIDPOINT|OPFLOWINIT_FROMFILE|OPFLOWINIT_ACPF|
24     OPFLOWINIT_FLATSTART)
25     Type of OPFLOW initialization (type: string)
26
27 -opflow_objective (MIN_GEN_COST|MIN_GENSETPOINT_DEVIATION|NO_OBJ)
28     Type of OPFLOW objective (type: string)
29
30 -opflow_genbusvoltage (VARIABLE_WITHIN_BOUNDS|FIXED_WITHIN_QBOUNDS|FIXED_AT_SETPOINT)
31     Type of OPFLOW gen bus voltage control (type: string)
32
33 -opflow_has_gensetpoint 0
34     Use set-points for generator real power (type: bool)
35
36 -opflow_use_agc 0
37     Use automatic generation control (AGC) (type: bool)
38
39 -opflow_tolerance 1e-06
40     Optimization tolerance (type: real)
41
42 -opflow_ignore_lineflow_constraints 0
43     Ignore line flow constraints? (type: bool)
44
45 -opflow_include_loadloss_variables 0
46     Ignore line flow constraints? (type: bool)
47
48 -opflow_loadloss_penalty 1000
49     Penalty for load loss (type: real)
50
51 -opflow_include_powerimbalance_variables 0
52     Allow power imbalance? (type: bool)
53
54 -opflow_powerimbalance_penalty 10000
55     Power imbalance penalty (type: real)
56
57 -hiop_compute_mode (auto|cpu|hybrid|gpu)
58     Set compute mode for HiOp solver (type: string)
59
60 -hiop_verbosity_level 0
61     Set verbosity level for HiOp solver, between 0 and 12 (type: int)
62
63 -hiop_ipopt_debug 0
64     Flag enabling debugging HIOP code with IPOPT (type: bool)

```

ExaGO applications also have an option to print many options ExaGO was configured with, which aid in reproducing build environments that a given ExaGO source tree was built with.

```

1 ./opflow -config
2 ExaGO version 1.3.0 built on Jan 14 2022
3 Built with the following command:
4 $ cmake -B /Users/manc568/workspace/exago/build -S /Users/manc568/workspace/exago \
5   -DEXAGO_ENABLE_RAJA:BOOL=OFF \
6   -DEXAGO_ENABLE_PYTHON:BOOL=ON \

```

```

7  -DEXAGO_ENABLE_HIP:BOOL=OFF \
8  -DEXAGO_ENABLE_GPU:BOOL=OFF \
9  -DEXAGO_ENABLE_HIOP_SPARSE:BOOL=ON \
10 -DEXAGO_ENABLE_HIOP:BOOL=ON \
11 -DEXAGO_ENABLE_IPOPT:BOOL=ON \
12 -DEXAGO_ENABLE_MPI:BOOL=ON \
13 -DEXAGO_BUILD_STATIC:BOOL=OFF \
14 -DEXAGO_ENABLE_CUDA:BOOL=OFF \
15 -DEXAGO_ENABLE_PETSC:BOOL=ON \
16 -DEXAGO_BUILD_SHARED:BOOL=OFF \
17 -DIPOPT_INCLUDES:STRING="" \
18 -DIPOPT_ROOT_DIR:STRING="" \
19 -DHiOp_DIR:STRING="/some/path" \
20 -DPETSC_DIR:STRING="/some/path" \
21 -DCMAKE_CXX_COMPILER:STRING="/usr/local/bin/g++-11" \
22 -DIPOPT_LIBRARIES:STRING="" \
23 -DCMAKE_BUILD_TYPE:STRING="Debug" \
24 -DPETSC_INCLUDES:STRING="" \
25 -DCMAKE_C_COMPILER:STRING="/usr/local/bin/gcc-11" \
26 -DCMAKE_INSTALL_PREFIX:STRING="/Users/manc568/workspace/exago/install" \
27 -DPETSC_LIBRARIES:STRING="" \
28 -DEXAGO_OPTIONS_DIR:STRING="/Users/manc568/workspace/exago/install/share/exago/options"

```

Here, `app_options` are the command line options for the application. Each application has many options through which the input files and the control options can be set for the application. All application options have the form `-app_option_name` followed by the `app_option_value`. For instance,

```

1  ./opflow -netfile case9mod.m -opflow_model POWER_BALANCE_POLAR \
2  -opflow_solver IPOPT

```

will execute the **OPFLOW** application using `case9mod.m` input file with the model `POWER_BALANCE_POLAR` and **Ipo**pt [7] solver.

Options can also be passed to each application through an options file `-optionsfile <optionfilename>`, or via command line or through a combination of the command line and options file. The option specified via command line supersedes that given in the options file. For example, if `-options_file opflowoptions` specified `-netfile case9mod.m` within its settings:

```

1  ./opflow -options_file opflowoptions # Uses case9mod.m
2  ./opflow -netfile case118.m -options_file opflowoptions # Uses case118.m

```

Chapter 3

Optimal power flow (OPFLOW)

OPFLOW solves the full AC optimal power flow problem and provides various flexible features that can be toggled via run-time options. It has interfaces to different optimization solvers that can be executed on CPUs or on GPUs.

3.1 Formulation

Optimal power flow is a general nonlinear programming problem with the following form

$$\min. f(x) \tag{3.1}$$

s.t.

$$g(x) = 0 \tag{3.2}$$

$$h(x) \leq 0 \tag{3.3}$$

$$x^{\min} \leq x \leq x^{\max} \tag{3.4}$$

Here, x are the decision variables with lower and upper bounds $x^{\min}$ and $x^{\max}$, respectively, $f(x)$ is the objective function, $g(x)$ and $h(x)$ are the equality and inequality constraints, respectively. In the following sections we describe what constitutes these different terms as used by OPFLOW.

3.1.1 Variables and bounds

The different variables used in **OPFLOW** formulation are described in Table 3.1.

Power imbalance variables are non-physical (slack) variables that measure the violation of power balance at buses. Having these variables (may) help in making the optimization problem easier to solve since they always ensure feasibility of the bus power balance constraints.

3.1.2 Objective Function

The objective function for OPFLOW is given in (3.5)

$$\min. C_{gen}(p^g) + C_{dev}(\Delta p^g) + C_{loss}(\Delta p^l, \Delta q^l) + C_{imb}(\Delta p^+, \Delta p^-, \Delta q^+, \Delta q^-) + C_{lineviol}(\Delta s_{od}, \Delta s_{do}) \tag{3.5}$$

Total generation cost $C_{gen}(p^g)$

Needs option `-opflow-objective MIN_GEN_COST`

$$C_{gen}(p^g) = \sum_{j \in J^{gen}} C_j^g(p_j^g) \tag{3.6}$$

Here, C_j^g is a quadratic function of the form $C_j^g = a_j^g p_j^{g^2} + b_j^g p_j^g + c_j^g$.

Table 3.1: Optimal power flow (OPFLOW) variables

Symbol	Variable	Bounds	Notes
p_j^g	Generator real power dispatch	$p_j^{\text{gmin}} \leq p_j^g \leq p_j^{\text{gmax}}$	
q_j^g	Generator reactive power dispatch	$q_j^{\text{gmin}} \leq q_j^g \leq q_j^{\text{gmax}}$	
Δp_j^g	Generator real power deviation	$-p_j^r \leq \Delta p_j^g \leq p_j^r$	• Only used when <code>-opflow_has_gensetpoint</code> or <code>-opflow_use_agc</code> option is active • Δp_j^g is the deviation from real power generation set-point p_j^{gset}.
p_j^{gset}	Generator real power set-point	$p_j^{\text{gmin}} \leq p_j^{\text{gset}} \leq p_j^{\text{gmax}}$	• Only used when <code>-opflow_has_gensetpoint</code> or <code>-opflow_use_agc</code> option is active.
ΔP	System power excess/deficit	Unbounded	Only used when <code>-opflow_use_agc</code> is active
θ_i	Bus voltage angle	$-\pi \leq \theta_i \leq \pi$	• Used with power balance polar model (<code>-opflow_model POWER_BALANCE_POLAR</code>) • θ_i is unbounded, except reference bus angle θ_i^{ref} which is fixed to 0
v_i	Bus voltage magnitude	$v_i^{\text{min}} \leq v_i \leq v_i^{\text{max}}$	• Used with power balance polar model (<code>-opflow_model POWER_BALANCE_POLAR</code>) • $v_i^{\text{min}} = v_i^{\text{max}} = v_i^{\text{set}}$ if fixed generator set point voltage option is active (<code>-opflow_has_gensetpoint</code>)
$\Delta p_i^+, \Delta p_i^-$	Bus real power mismatch variables	$0 \leq \Delta p_i^+, \Delta p_i^- \leq \infty$	Used when power mismatch variable option is active (<code>-opflow_include_powerimbalance_variables</code>)
$\Delta q_i^+, \Delta q_i^-$	Bus reactive power mismatch variables	$0 \leq \Delta q_i^+, \Delta q_i^- \leq \infty$	Used when power mismatch variable option is active (<code>-opflow_include_powerimbalance_variables</code>)
Δp_j^l	Real power load loss	$0 \leq \Delta p_j^l \leq p_j^l$	Used when load loss variable option is active (<code>-opflow_include_loadloss_variables</code>)
Δq_j^l	Reactive power load loss	$0 \leq \Delta q_j^l \leq q_j^l$	Used when load loss variable option is active (<code>-opflow_include_loadloss_variables</code>)
$\Delta s_{od}, \Delta s_{do}$	Line flow limit violations	$0 \leq \Delta s_{od}, \Delta s_{do}$	Used when line flow limit violation option is active (<code>-opflow_allow_lineflow_violation</code>)

Total generation setpoint deviation $C(\Delta p^g)$

Needs option `-opflow_objective MIN_GENSETPOINT_DEVIATION`

$$C_{dev}(\Delta p^g) = \sum_{j \in J^{gen}} (\Delta p_j^g)^2 \quad (3.7)$$

This feature is only supported with Ipopt solver.

Load loss $C(\Delta p^l, \Delta q^l)$

This term gets added to the objective when `-opflow_include_loadloss_variables` option is active.

$$C_{loss}(\Delta p^l, \Delta q^l) = \sum_{j \in J^{ld}} \sigma_j^l (\Delta p_j^l + \Delta q_j^l) \quad (3.8)$$

The load loss penalty σ_j^l can be set via the option `-opflow_loadloss_penalty`. The default is \$1000/MW for all loads.

Power imbalance $C_{imb}(\Delta p^+, \Delta p^-, \Delta q^+, \Delta q^-)$

This term gets added to the objective when `-opflow_include_powerimbalance_variables` option is active.

$$C_{imb}(\Delta p^+, \Delta p^-, \Delta q^+, \Delta q^-) = \sum_{i \in J^{bus}} \sigma_i (\Delta p^+ + \Delta p^- + \Delta q^+ + \Delta q^-) \quad (3.9)$$

The power imbalance cost σ_i can be set via the option `-opflow_powerimbalance_penalty`. The default is \$10,000/MW² for all buses. Though the power imbalance variables $\Delta p^+, \Delta p^-, \Delta q^+, \Delta q^-$ are slack or non-physical, they can help in solving infeasible cases having no power flow solution, and thus provide a measure of the infeasibility.

Line flow limit violation $C_{lineviol}(\Delta s_{od}, \Delta s_{do})$

This term gets added to the objective when `-opflow_allow_lineflow_violation` option is active.

$$C_{lineviol}((\Delta s_{od}, \Delta s_{do})) = \sum_{j \in J^{br}} \sigma_j (\Delta s_{od} + \Delta s_{do}) \quad (3.10)$$

The line flow limit violation cost σ_j can be set via the option `opflow_lineflowviolation_penalty`. The default is \$100/MVA² for all lines.

3.1.3 Equality constraints

Nodal power balance

The nodal power balance equations for each bus i are given by

$$\sum_{\substack{j \in J^{gen} \\ A_{ij}^g \neq 0}} p_j^g = p_i^{sh} + \Delta p_i^+ - \Delta p_i^- + \sum_{\substack{j \in J^{ld} \\ A_{ij}^l \neq 0}} (p_j^l - \Delta p_j^l) + \sum_{\substack{j \in J^{br} \\ A_{oi}^{br} \neq 0}} p_{jod}^{br} + \sum_{\substack{j \in J^{br} \\ A_{id}^{br} \neq 0}} p_{jdo}^{br} \quad (3.11)$$

$$\sum_{\substack{j \in J^{gen} \\ A_{ij}^g \neq 0}} q_j^g = q_i^{sh} + \Delta q_i^+ - \Delta q_i^- + \sum_{\substack{j \in J^{ld} \\ A_{ij}^l \neq 0}} (q_j^l - \Delta q_j^l) + \sum_{\substack{j \in J^{br} \\ A_{oi}^{br} \neq 0}} q_{jod}^{br} + \sum_{\substack{j \in J^{br} \\ A_{id}^{br} \neq 0}} q_{jdo}^{br} \quad (3.12)$$

$$(3.13)$$

where, the real and reactive power shunt consumption is given by (3.14) and (3.15)

The real and reactive power flow $p_{jod}^{br}, q_{jod}^{br}$ for line j from the origin bus o to destination bus d is given by (3.20) – (3.21) and from destination bus d to origin bus o is given by (3.22) – (3.23)

Shunt power

$$p_i^{\text{sh}} = g_i^{\text{sh}} v_i^2 \quad (3.14)$$

$$q_i^{\text{sh}} = -b_i^{\text{sh}} v_i^2 \quad (3.15)$$

Generator real power output

When using `-opflow_has_gensetpoint`, two extra variables p_j^{gset} and Δp_j^{g} are added for each generator. The generator real power output p_j^{g} is related to the power deviation Δp_j^{g} by the following relations

$$p_j^{\text{gset}} + \Delta p_j^{\text{g}} - p_j^{\text{g}} = 0 \quad (3.16)$$

$$p_j^{\text{gset}} - p_j^{\text{g}^*} = 0 \quad (3.17)$$

The second equation sets the generator set-point p_j^{gset} to a fixed value $p_j^{\text{g}^*}$. Here, $p_j^{\text{g}^*}$ is the set-point for the generator real power output, which can be thought of as an operator set or contractual agreement set-point.

3.1.4 Inequality constraints

MVA flow on branches

MVA flow limits at origin and destination buses for each line.

$$p_{j_{od}}^{\text{br}^2} + q_{j_{od}}^{\text{br}^2} \leq s_j^{\text{rateA}^2} + \Delta s_{od}, \quad j \in J^{\text{br}} \quad (3.18)$$

$$p_{j_{do}}^{\text{br}^2} + q_{j_{do}}^{\text{br}^2} \leq s_j^{\text{rateA}^2} + \Delta s_{do}, \quad j \in J^{\text{br}} \quad (3.19)$$

To reduce the number of inequality constraints, only lines that are in service and having MVA A rating s_j^{rateA} less than 10000 MVA are considered.

Branch flows

In polar coordinates, the real and reactive power flow $p_{j_{od}}^{\text{br}}, q_{j_{od}}^{\text{br}}$ from bus o to bus d on line j is given by (3.20) – (3.21)

$$p_{j_{od}}^{\text{br}} = g_{oo} v_o^2 + v_o v_d (g_{od} \cos(\theta_o - \theta_d) + b_{od} \sin(\theta_o - \theta_d)) \quad (3.20)$$

$$q_{j_{od}}^{\text{br}} = -b_{oo} v_o^2 + v_o v_d (-b_{od} \cos(\theta_o - \theta_d) + g_{od} \sin(\theta_o - \theta_d)) \quad (3.21)$$

and from bus d to bus o is given by (3.22) – (3.23)

$$p_{j_{do}}^{\text{br}} = g_{dd} v_d^2 + v_d v_o (g_{do} \cos(\theta_d - \theta_o) + b_{do} \sin(\theta_d - \theta_o)) \quad (3.22)$$

$$q_{j_{do}}^{\text{br}} = -b_{dd} v_d^2 + v_d v_o (-b_{do} \cos(\theta_d - \theta_o) + g_{do} \sin(\theta_d - \theta_o)) \quad (3.23)$$

Automatic generation control (AGC)

With `-opflow_use_agc`, two additional constraints are added for each participating generator to enforce the proportional generator redispatch participation as done in automatic generation control (AGC). These two equations are

$$\begin{aligned} (\alpha_j^{\text{g}} \Delta P - \Delta p_j^{\text{g}}) (p_j^{\text{g}} - p_j^{\text{gmax}}) &\geq 0 \\ (\Delta p_j^{\text{g}} - \alpha_j^{\text{g}} \Delta P) (p_j^{\text{gmin}} - p_j^{\text{g}}) &\geq 0 \end{aligned} \quad (3.24)$$

Eq. 3.24 forces the generator set-point deviation to be equal to the generation participation when the generator has head-room available $p_j^{\text{gmin}} \leq p_j^{\text{g}} \leq p_j^{\text{gmax}}$. Here, α_j^{g} is the generator participation factor which is the proportion of the power deficit/excess ΔP that the generator provides.

Generator bus voltage control

When the option `-opflow_genbusvoltage FIXED_WITHIN_QBOUNDS` is used, the generator bus voltage is fixed when the total reactive power generation available at the bus is within bounds. When it reaches its bounds, the voltage varies with the generator reactive power fixed at its bound. To implement this behavior, two inequality constraints are added for each generator bus

$$\begin{aligned} (v_i^{\text{set}} - v_i)(q_i - q^{\text{max}_i}) &\geq 0 \\ (v_i - v_i^{\text{set}})(q^{\text{min}_i} - q_i) &\geq 0 \end{aligned} \quad (3.25)$$

Here, q_i , q^{max_i} , and q^{min_i} are the generated, maximum, and minimum reactive power at the bus, respectively.

3.2 Solvers

OPFLOW can be used with a few different solvers. All the solvers solve the optimization problem via a nonlinear interior-point algorithm.

1. **Ipopt** [7] is a popular open-source package for solving nonlinear optimization problems. It is the most robust of the solvers implemented for solving **OPFLOW**. However, it can be run only on a single process and does not have GPU support.
Option: `-opflow_solver IPOPT -opflow_model POWER_BALANCE_POLAR`
2. **HiOp** [6, 5] is a high-performance optimization library that implements an interior-point algorithm for solving nonlinear optimization problems. There are two solvers available from the **HiOp** [6, 5] library: Mixed sparse-dense formulation `-opflow_solver HIOP`, and sparse formulation `-opflow_solver HIOPSPARSE`. The library supports execution both on the CPU and the GPU. Options:
CPU: `-opflow_solver HIOP -opflow_model POWER_BALANCE_HIOP -hiop_compute_mode CPU`
GPU: `-opflow_solver HIOP -opflow_model PBPOLRAJAHIO -hiop_compute_mode GPU`

3.3 Models

A ‘model’ in ExaGO describes the representation of the underlying physics. All **OPFLOW** models use the power balance formulation in polar coordinates for the ACOPF equations. The difference between the different models arises from their specific implementation/interface. The different models available for **OPFLOW** are listed in Table 3.2. As discussed earlier, not every ‘model’ is compatible with every ‘solver’. Table 3.3 lists the solver compatibility for the different models.

Table 3.2: OPFLOW models

Model type	OPFLOW option (<code>-opflow_model</code>)	Compatible solvers	CPU-GPU
Power balance with polar coordinates	POWER_BALANCE_POLAR	IPOPT, HIOPSPARSE	CPU
Power balance with polar coordinates used with HIOP	POWER_BALANCE_HIOP	HiOp [6, 5]	CPU/GPU
Power balance with polar coordinates used with HIOP on GPU	PBPOLRAJAHIO	HiOp [6, 5]	GPU

3.3.1 Power balance polar

The power balance polar model (`-opflow_model POWER_BALANCE_POLAR`) uses the power balance formulation with polar representation for the network voltages. It runs on CPU only and is compatible with **Ipopt** [7] and sparse **HiOp** [6, 5] solvers.

Table 3.3: OPFLOW Model-solver compatibility

Model Name	Ipopt [7]	HiOp [6, 5]	HIOPSPARSE
POWER_BALANCE_POLAR	✓		✓
POWER_BALANCE_HIOP		✓	
PBPOLRAJAHOP		✓	

3.3.2 Power balance with HiOp on CPU

This model (-opflow_model POWER_BALANCE_HIOP) implements the power balance formulation with polar coordinates used with [HiOp \[6, 5\]](#) solver only. The model evaluation is done only on the CPU, but the [HiOp \[6, 5\]](#) solver can be executed either on the CPU (-hiop_compute_mode CPU) or GPU (-hiop_compute_mode HYBRID) by setting the -hiop_compute_mode option appropriately.

3.3.3 Power balance with HiOp on GPU

The PBPOLRAJAHOP model (-opflow_model PBPOLRAJAHOP) computes all the model and optimization calculations on the GPU. This model uses [RAJA \[3\]](#) and [Umpire \[4\]](#) libraries to run **OPFLOW** calculations (objective, constraints, etc.) on the GPU.

3.4 Input and Output

The current ExaGO version only supports reading network files in [MATPOWER](#) format and can (optionally) write the output back in [MATPOWER](#) data file format.

ExaGO can optionally recognize an extension to the [MATPOWER](#) format with which load loss parameters can be specified for individual bus loads. The extension adds a new array `mpc.loadcost` containing the maximum percentage loss allowed and the cost of the loss for each bus load. For example,

```

1 %% load cost data
2 % %maxallowedloadshed %loadshedcost
3 mpc.loadcost = [
4                 65 1000;
5                 75 100;
6                 100 10;
7 ];

```

Load loss information is used only if -opflow_include_loadloss_variables is used. If `mpc.loadcost` is not in the input, all loads are assigned a 100% loss fraction and the same cost (-opflow_loadloss_penalty).

3.5 Usage

```

1 ./opflow -netfile <netfilename> <opflowoptions>

```

3.6 Options

See table [3.4](#)

Table 3.4: OPFLOW options

Option	Meaning	Values (Default value)	Compatibility
-netfile	Network file name	string < 4096 characters (case9mod.m)	
-print_output	Print output to screen	0 or 1 (0)	All solvers
-save_output	Save output to file	base file name (no output)	All solvers
-opflow_output_format	Solution file format	See Table 3.5 (MATPOWER)	All solvers
-opflow_model	Representation of network balance equations and bus voltages	See Table 3.3 (POWER_BALANCE_POLAR)	
-opflow_solver	Optimization solver	See section 3.2	
-opflow_initialization	Type of initialization	See Table 3.6 (MIDPOINT)	All solvers
-opflow_has_gensetpoint	Uses generation set point and activates ramping variables	0 or 1 (0)	All models
-opflow_use_agc	Uses AGC formulation in OPF	0 or 1 (0)	POWER_BALANCE_POLAR only
-opflow_objective	type of objective function	See table 3.8 (MIN_GEN_COST)	All models
-opflow_genbusvoltage	Type of generator bus voltage control	See Table 3.7 (VARIABLE_WITHIN_BOUNDS)	POWER_BALANCE_POLAR only
-opflow_ignore_lineflow_constraints	Ignore line flow constraints	0 or 1 (0)	All models
-opflow_monitor_line_kvlevels	Monitor line flows at these KV levels	comma separated list	All models
-opflow_include_loadloss_variables	Include load loss	0 or 1 (0)	All models except PBPOLRAJHIOP
-opflow_include_powerimbalance_variables	Include power imbalance	0 or 1 (0)	All models
-opflow_loadloss_penalty	\$ penalty for load loss	real (1000)	All models
-opflow_powerimbalance_penalty	\$ penalty for power imbalance	real (10000)	All models
-opflow_tolerance	Optimization solver tolerance	real (1e-6)	All solvers

Table 3.5: OPFLOW solution output formats

Format name	Description
MATPOWER	Matlab format compatible with MATPOWER
CSV	Custom comma separated variable format
JSON	Javascript object notation, used for visualization
MINIMAL	Simple text file containing minimal information.

Table 3.6: OPFLOW initializations

Initialization type	Meaning
MIDPOINT	Use mid-point of bounds
FROMFILE	Use values from network file
ACPF	Run AC power flow
FLATSTART	Flat-start
DCOPF	Run DC optimal power flow

Table 3.7: OPFLOW generator bus voltage control modes

Voltage control type	Meaning	Compatibility
FIXED_WITHIN_QBOUNDS	Fixed within reactive power bounds	POWER_BALANCE_POLAR only
VARIABLE_WITHIN_BOUNDS	Variable within voltage bounds	All models

Table 3.8: OPFLOW objective function types

Objective function	Meaning	Compatibility
MIN_GEN_COST	Minimize generation cost	All models
MIN_GENSETPOINT_DEVIATION	Minimize deviation (ramp up-down) from generator set-point	POWER_BALANCE_POLAR model only
NO_OBJ	No objective function (only feasibility)	All models

3.7 Examples

Some **OPFLOW** example runs are provided with some sample output. Options values are the default values in table 3.4 unless otherwise specified. `-print_output` is only used in the first example to save space. Sample output is generated by running examples from the installation directory.

Example using the **Ipopt** [7] solver:

```

1 ./bin/opflow -opflow_solver IPOPT -opflow_model POWER_BALANCE_POLAR -netfile $EXAGO_DIR/datafiles/
  case9/case9mod.m -print_output
2 [ExaGO] Creating OPFlow
3
4
5 *****
6 This program contains Ipopt, a library for large-scale nonlinear optimization.
7 Ipopt is released as open source code under the Eclipse Public License (EPL).
8 For more information visit http://projects.coin-or.org/Ipopt
9 *****
10
11 This is Ipopt version 3.12.10, running with linear solver ma27.
12
13 Number of nonzeros in equality constraint Jacobian...: 114
14 Number of nonzeros in inequality constraint Jacobian.: 72
15 Number of nonzeros in Lagrangian Hessian.....: 96
16
17 Total number of variables.....: 24
18     variables with only lower bounds: 0
19     variables with lower and upper bounds: 16
20     variables with only upper bounds: 0
21 Total number of equality constraints.....: 18

```

```

22 Total number of inequality constraints.....:      18
23     inequality constraints with only lower bounds:      0
24     inequality constraints with lower and upper bounds:    18
25     inequality constraints with only upper bounds:      0
26
27 iter    objective    inf_pr    inf_du lg(mu)  ||d|| lg(rg) alpha_du alpha_pr ls
28   0  1.0318125e+04  1.80e+00  1.00e+02  -1.0  0.00e+00  -  0.00e+00  0.00e+00  0
29   1  7.7157691e+03  1.17e+00  1.03e+02  -1.0  1.08e+00  -  6.27e-01  3.50e-01f  1
30   2  7.6608235e+03  1.15e+00  1.01e+02  -1.0  6.28e+00  -  1.20e-02  1.37e-02f  1
31   3  7.4466686e+03  1.09e+00  3.06e+02  -1.0  3.74e+00  -  4.15e-03  5.81e-02f  1
32   4  5.4292675e+03  3.92e-01  4.83e+03  -1.0  7.34e-01  -  3.34e-03  6.40e-01f  1
33   5  4.5792834e+03  2.24e-01  1.51e+03  -1.0  6.46e-01  2.0  8.77e-03  7.37e-01f  1
34   6  4.2907579e+03  1.20e-02  3.57e+02  -1.0  3.36e-01  -  5.37e-01  1.00e+00f  1
35   7  4.1690456e+03  4.40e-02  5.31e+01  -1.0  3.31e-01  -  9.22e-01  1.00e+00f  1
36   8  4.1687926e+03  4.88e-04  1.93e+00  -1.0  4.79e-02  1.5  1.00e+00  1.00e+00h  1
37   9  4.1497176e+03  1.19e-02  9.92e+00  -2.5  1.87e-01  -  8.38e-01  1.00e+00f  1
38 iter    objective    inf_pr    inf_du lg(mu)  ||d|| lg(rg) alpha_du alpha_pr ls
39  10  4.1463942e+03  1.09e-02  5.09e-01  -2.5  1.15e-01  -  8.71e-01  1.00e+00h  1
40  11  4.1449657e+03  1.47e-03  1.79e-02  -2.5  2.75e-02  -  1.00e+00  1.00e+00h  1
41  12  4.1445415e+03  6.63e-04  9.12e-02  -3.8  1.48e-02  -  1.00e+00  6.30e-01h  1
42  13  4.1444705e+03  3.43e-04  4.96e-02  -3.8  2.08e-02  -  1.00e+00  8.93e-01h  1
43  14  4.1444809e+03  4.48e-05  1.79e-04  -3.8  6.82e-03  -  1.00e+00  1.00e+00f  1
44  15  4.1444611e+03  1.96e-05  4.55e-03  -5.7  4.57e-03  -  1.00e+00  9.34e-01h  1
45  16  4.1444607e+03  6.49e-06  1.17e-05  -5.7  2.60e-03  -  1.00e+00  1.00e+00h  1
46  17  4.1444605e+03  1.19e-06  2.07e-06  -7.0  1.11e-03  -  1.00e+00  1.00e+00h  1
47  18  4.1444605e+03  1.58e-07  3.29e-07  -7.0  4.06e-04  -  1.00e+00  1.00e+00h  1
48
49 Number of Iterations.....: 18
50
51                                     (scaled)                                     (unscaled)
52 Objective.....:      9.2925122354655841e+01      4.1444604570176507e+03
53 Dual infeasibility.....:      3.2927387965389691e-07      1.4685615032563802e-05
54 Constraint violation....:      2.6639677713768961e-08      2.6639677713768961e-08
55 Complementarity.....:      4.7840038622596930e-07      2.1336657225678232e-05
56 Overall NLP error.....:      4.7840038622596930e-07      2.1336657225678232e-05
57
58
59 Number of objective function evaluations      = 19
60 Number of objective gradient evaluations      = 19
61 Number of equality constraint evaluations      = 19
62 Number of inequality constraint evaluations    = 19
63 Number of equality constraint Jacobian evaluations = 19
64 Number of inequality constraint Jacobian evaluations = 19
65 Number of Lagrangian Hessian evaluations      = 18
66 Total CPU secs in IPOPT (w/o function evaluations) =      0.025
67 Total CPU secs in NLP function evaluations      =      0.002
68
69 EXIT: Optimal Solution Found.
70 =====
71 Optimal Power Flow
72 =====
73 Model                                POWER_BALANCE_POLAR
74 Solver                                IPOPT
75 Objective                             MIN_GEN_COST
76 Initialization                        MIDPOINT
77 Gen. bus voltage mode                  VARIABLE_WITHIN_BOUNDS
78 Load loss allowed                     NO
79 Power imbalance allowed                NO
80 Ignore line flow constraints           NO
81
82 Number of variables                    24
83 Number of equality constraints          18
84 Number of inequality constraints        18
85
86 Convergence status                     CONVERGED
87 Objective value                        4144.46
88

```

```

89 -----
90 Bus      Pd      Qd      Vm      Va      mult_Pmis      mult_Qmis      Pslack      Qslack
91 -----
92 1          0.00    0.00    1.100    0.000    2102.91        0.00          0.00        0.00
93 2          0.00    0.00    1.095    3.928    2059.18        -0.00         0.00        0.00
94 3          0.00    0.00    1.087    2.120    2065.15        -0.00         0.00        0.00
95 4          0.00    0.00    1.097   -1.993    2103.16         0.08         0.00        0.00
96 5         75.00    50.00    1.079   -3.060    2113.45         7.29         0.00        0.00
97 6         90.00    30.00    1.087   -3.927    2129.85         1.62         0.00        0.00
98 7          0.00    0.00    1.100    0.535    2059.57        -0.04         0.00        0.00
99 8        100.00    35.00    1.089   -1.720    2079.34         2.99         0.00        0.00
100 9          0.00    0.00    1.100   -0.135    2065.43        -0.09         0.00        0.00

```

```

101 -----
102 -----
103 From      To      Status      Sft      Stf      Slim      mult_Sf      mult_St
104 -----
105 1          4          1       73.18    72.98    380.00      -0.00      -0.00
106 2          7          1      114.18   114.68   250.00      -0.00      -0.00
107 3          9          1       83.57    84.60   300.00      -0.00      -0.00
108 4          5          1       29.68    40.50   250.00      -0.00      -0.00
109 4          6          1       44.86    46.03   250.00      -0.00      -0.00
110 5          7          1       51.29    49.04   250.00      -0.00      -0.00
111 6          9          1       48.94    51.43   150.00      -0.00      -0.00
112 7          8          1       66.61    68.11   250.00      -0.00      -0.00
113 8          9          1       38.86    34.15   150.00      -0.00      -0.00

```

```

114 -----
115 -----
116 Gen      Status      Fuel      Pg      Qg      Pmin      Pmax      Qmin      Qmax
117 -----
118 1          1    UNDEFINED    72.86    6.79    10.00    350.00   -300.00    300.00
119 2          1    UNDEFINED   114.07   -5.13    10.00    300.00   -300.00    300.00
120 3          1    UNDEFINED    80.21   -23.47    10.00    270.00   -300.00    300.00
121 [ExaGO] Finalizing opflow application.

```

Example using the [HiOp \[6, 5\]](#) solver on the CPU with ACPF initialization:

```

1 ./bin/opflow -opflow_solver HIOP -opflow_model POWER_BALANCE_HIOP -netfile $EXAGO_DIR/datafiles/case9
  /case9mod.m -opflow_initialization ACPF -hiop_compute CPU -hiop_verbosity_level 3 -print_output
2 [ExaGO] Creating OPFlow
3
4 [Warning] Detected 1 fixed variables out of a total of 24.
5 =====
6 Hiop SOLVER
7 =====
8 Using 1 MPI ranks.
9 -----
10 Problem Summary
11 -----
12 Total number of variables: 24
13     lower/upper/lower_and_upper bounds: 16 / 16 / 16
14 Total number of equality constraints: 18
15 Total number of inequality constraints: 18
16     lower/upper/lower_and_upper bounds: 18 / 18 / 18
17 iter  objective      inf_pr      inf_du      lg(mu)      alpha_du      alpha_pr      linesrch
18 0  4.6670737e+03  3.714e-11  2.891e+03  -1.00  0.000e+00  0.000e+00  -(-)
19 1  4.6431205e+03  3.373e-04  2.791e+03  -1.00  3.013e-01  3.498e-02  1(f)
20 2  4.4461241e+03  6.595e-02  2.105e+03  -1.00  4.910e-01  2.467e-01  1(s)
21 3  4.1942969e+03  6.464e-02  5.808e+02  -1.00  5.986e-01  8.573e-01  1(s)
22 4  4.1615434e+03  8.234e-03  1.159e+02  -1.00  7.556e-01  1.000e+00  1(s)
23 5  4.1471588e+03  4.414e-03  1.291e+02  -1.00  1.000e+00  1.000e+00  1(s)
24 6  4.1441777e+03  2.959e-02  7.889e+01  -1.00  4.818e-01  4.030e-01  1(s)
25 7  4.1448270e+03  7.926e-03  4.949e+01  -1.00  1.000e+00  1.000e+00  1(s)
26 8  4.1448562e+03  1.506e-03  2.576e-01  -1.00  1.000e+00  1.000e+00  1(s)
27 9  4.1444966e+03  3.576e-04  2.859e+00  -3.82  9.631e-01  6.968e-01  1(s)
28 iter  objective      inf_pr      inf_du      lg(mu)      alpha_du      alpha_pr      linesrch
29 10  4.1444617e+03  1.671e-04  2.747e+00  -3.82  9.520e-01  7.537e-01  1(s)
30 11  4.1444597e+03  5.733e-05  1.190e-01  -3.82  9.716e-01  1.000e+00  1(s)
31 12  4.1444610e+03  6.929e-06  5.005e-04  -3.82  1.000e+00  1.000e+00  1(s)

```

```

32 13 4.1444605e+03 1.681e-06 1.400e-04 -5.73 1.000e+00 1.000e+00 1(h)
33 14 4.1444605e+03 2.574e-07 2.377e-05 -5.73 1.000e+00 1.000e+00 1(h)
34 15 4.1444604e+03 1.411e-08 1.319e-06 -5.73 1.000e+00 1.000e+00 1(h)
35 16 4.1444604e+03 2.396e-10 2.047e-08 -7.00 1.000e+00 1.000e+00 1(h)
36 Successfull termination.
37 Total time 0.933 sec
38 Hiop internal time:      total 0.932 sec      avg iter 0.058 sec
39      internal total std dev across ranks 0.000 percent
40 Fcn/deriv time:      total=0.001 sec ( obj=0.000 grad=0.000 cons=0.000 Jac=0.000 Hess=0.001)
41      Fcn/deriv total std dev across ranks 0.000 percent
42 Fcn/deriv #: obj 18 grad 18 eq cons 18 ineq cons 18 eq Jac 18 ineq Jac 18
43 Total KKT time 0.931 sec
44 update init 0.848sec      update linsys 0.000 sec      fact 0.071 sec
45 solve rhs-manip 0.000 sec      triangular solve 0.012 sec
46
47 =====
48 Optimal Power Flow
49 =====
50 Model                      POWER_BALANCE_HIOP
51 Solver                     HIOP
52 Objective                   MIN_GEN_COST
53 Initialization             ACPF
54 Gen. bus voltage mode      VARIABLE_WITHIN_BOUNDS
55 Load loss allowed          NO
56 Power imbalance allowed     NO
57 Ignore line flow constraints NO
58
59 Number of variables         24
60 Number of equality constraints 18
61 Number of inequality constraints 18
62
63 Convergence status          CONVERGED
64 Objective value             4144.46
65
66 -----
67 Bus      Pd      Qd      Vm      Va      mult_Pmis      mult_Qmis      Pslack      Qslack
68 -----
69 1          0.00      0.00      1.100    -0.000      2102.91          0.00          0.00          0.00
70 2          0.00      0.00      1.095      3.928      2059.18         -0.00          0.00          0.00
71 3          0.00      0.00      1.087      2.120      2065.15         -0.00          0.00          0.00
72 4          0.00      0.00      1.097    -1.993      2103.17          0.07          0.00          0.00
73 5         75.00     50.00      1.079    -3.060      2113.46          7.29          0.00          0.00
74 6         90.00     30.00      1.087    -3.927      2129.85          1.62          0.00          0.00
75 7          0.00      0.00      1.100      0.535      2059.57         -0.04          0.00          0.00
76 8        100.00     35.00      1.089    -1.720      2079.34          2.99          0.00          0.00
77 9          0.00      0.00      1.100    -0.135      2065.43         -0.09          0.00          0.00
78
79 -----
80 From      To      Status      Sft      Stf      Slim      mult_Sf      mult_St
81 -----
82 1          4          1       73.18      72.98      380.00        -0.00        -0.00
83 2          7          1      114.18     114.68     250.00        -0.00        -0.00
84 3          9          1       83.58      84.61     300.00        -0.00        -0.00
85 4          5          1       29.69      40.50     250.00        -0.00        -0.00
86 4          6          1       44.86      46.03     250.00        -0.00        -0.00
87 5          7          1       51.29      49.04     250.00        -0.00        -0.00
88 6          9          1       48.94      51.43     150.00        -0.00        -0.00
89 7          8          1       66.61      68.11     250.00        -0.00        -0.00
90 8          9          1       38.87      34.15     150.00        -0.00        -0.00
91
92 -----
93 Gen      Status      Fuel      Pg      Qg      Pmin      Pmax      Qmin      Qmax
94 -----
95 1          1      UNDEFINED      72.86      6.80      10.00     350.00    -300.00     300.00
96 2          1      UNDEFINED     114.07     -5.13      10.00     300.00    -300.00     300.00
97 3          1      UNDEFINED      80.21    -23.48      10.00     270.00    -300.00     300.00
98 [ExaGO] Finalizing opflow application.

```

Example with HiOp solver on GPU with load loss activated. In this example, the load at bus 5 is increased to 750 MW leading to an infeasible power flow. Activating the load loss causes shedding of load at bus 5 and as a result makes the optimization converge.

```

1 ./opflow -opflow_solver HIOP -opflow_model PBPOLRAJAHIOp -netfile $EXAGO_DIR/datafiles/case9/
  case9mod_loadloss.m -hiop_compute_mode GPU -hiop_verbosity_level 3 -print_output -
  opflow_include_loadloss_variables
2 [ExaGO] Creating OPFlow
3
4 [Warning] Detected 1 fixed variables out of a total of 30.
5 =====
6 Hiop SOLVER
7 =====
8 Using 1 MPI ranks.
9 -----
10 Problem Summary
11 -----
12 Total number of variables: 30
13     lower/upper/lower_and_upper bounds: 22 / 22 / 22
14 Total number of equality constraints: 18
15 Total number of inequality constraints: 18
16     lower/upper/lower_and_upper bounds: 18 / 18 / 18
17 iter    objective    inf_pr    inf_du    lg(mu)    alpha_du    alpha_pr    linesrch
18   0    1.4867531e+04    7.490e+00    1.000e+05    -1.00    0.000e+00    0.000e+00    -(-)
19   1    1.3403771e+04    7.490e+00    1.000e+05    -1.00    2.729e-04    1.702e-05    1(s)
20   2    1.1742043e+04    7.489e+00    9.993e+04    -1.00    5.655e-03    1.102e-04    1(s)
21   3    1.0453140e+04    7.484e+00    8.993e+04    -1.00    1.258e-01    6.948e-04    1(s)
22   4    1.0933710e+04    7.247e+00    8.722e+04    -1.00    3.011e-02    3.073e-02    1(s)
23   5    1.2262728e+04    6.691e+00    1.217e+05    -1.00    3.642e-04    7.537e-02    1(s)
24   6    1.2718100e+04    6.509e+00    1.303e+05    -1.00    2.837e-04    2.663e-02    1(s)
25   7    1.2721404e+04    6.508e+00    1.302e+05    -1.00    1.583e-02    1.930e-04    1(s)
26   8    1.6122803e+04    5.696e+00    7.620e+04    -1.00    1.954e-03    1.492e-01    1(S)
27   9    1.6366303e+04    5.692e+00    7.616e+04    -1.00    9.924e-02    8.075e-04    1(s)
28 iter    objective    inf_pr    inf_du    lg(mu)    alpha_du    alpha_pr    linesrch
29  10    1.7501119e+04    5.671e+00    7.587e+04    -1.00    3.082e-03    3.708e-03    1(s)
30  11    1.7624878e+04    5.668e+00    8.682e+04    -1.00    9.630e-02    3.944e-04    1(s)
31  12    2.2838548e+04    5.575e+00    8.354e+04    -1.00    1.071e-03    1.646e-02    1(s)
32  ...
33  ...
34  47    7.4002786e+05    5.392e-03    5.252e+05    -1.00    1.365e-04    4.401e-03    1(s)
35  48    7.4002761e+05    5.391e-03    5.332e+05    -1.00    2.888e-02    1.880e-03    1(s)
36  49    7.4003537e+05    3.310e-03    4.892e+05    -1.00    3.124e-03    1.000e+00    1(s)
37 iter    objective    inf_pr    inf_du    lg(mu)    alpha_du    alpha_pr    linesrch
38  50    7.4002879e+05    3.234e-03    3.147e+05    -1.00    1.000e+00    2.273e-02    1(s)
39  51    7.4003883e+05    1.340e-05    2.982e+03    -1.00    6.601e-01    1.000e+00    1(s)
40  52    7.4003471e+05    3.828e-04    1.015e+01    -1.00    1.000e+00    1.000e+00    1(f)
41  53    7.4003556e+05    2.461e-08    2.164e-01    -3.82    9.883e-01    1.000e+00    1(h)
42  54    7.4003556e+05    2.665e-14    5.489e-07    -5.73    1.000e+00    1.000e+00    1(f)
43 Successfull termination.
44 Total time 1.527 sec
45 Hiop internal time:    total 1.465 sec    avg iter 0.027 sec
46     internal total std dev across ranks 0.000 percent
47 Fcn/deriv time:    total=0.052 sec ( obj=0.009 grad=0.003 cons=0.012 Jac=0.011 Hess=0.018)
48     Fcn/deriv total std dev across ranks 0.000 percent
49 Fcn/deriv #: obj 97 grad 56 eq cons 97 ineq cons 97 eq Jac 56 ineq Jac 56
50 Total KKT time 1.249 sec
51 update init 0.773sec    update linsys 0.029 sec    fact 0.237 sec
52 solve rhs-manip 0.172 sec    triangular solve 0.038 sec
53
54 =====
55 Optimal Power Flow
56 =====
57 Model                PBPOLRAJAHIOp
58 Solver                HIOP
59 Objective            MIN_GEN_COST
60 Initialization        MIDPOINT
61 Gen. bus voltage mode VARIABLE_WITHIN_BOUNDS

```

```

62 Load loss allowed          YES
63 Load loss penalty ($)      1000.
64 Power imbalance allowed     NO
65 Ignore line flow constraints NO
66
67 Number of variables         30
68 Number of equality constraints 18
69 Number of inequality constraints 18
70
71 Convergence status          CONVERGED
72 Objective value              740035.56
73

```

```

74 -----
75 Bus      Pd      Qd      Vm      Va      mult_Pmis      mult_Qmis      Pslack      Qslack
76 -----
77 1         0.00    0.00    1.100   0.000    4182.05        0.00        0.00        0.00
78 2         0.00    0.00    1.100  12.398    4028.36        0.00        0.00        0.00
79 3         0.00    0.00    1.100  16.811    6041.35        0.00        0.00        0.00
80 4         0.00    0.00    1.021  -4.918    5930.37       19899.38    0.00        0.00
81 5        417.50  109.68    0.900 -15.480   100000.00     100000.00    0.00        0.00
82 6         90.00   30.00    1.018  -2.414    7827.64       16824.43    0.00        0.00
83 7         0.00    0.00    1.052   5.271    19366.68       29169.45    0.00        0.00
84 8        100.00   35.00    1.053   5.150    15594.67       21709.27    0.00        0.00
85 9         0.00    0.00    1.083   9.964     7193.17        9437.04    0.00        0.00
86

```

```

87 -----
88 From      To      Status      Sft      Stf      Slim      mult_Sf      mult_St
89 -----
90 1          4          1      230.52   213.89   380.00     -0.00     -0.00
91 2          7          1      250.00   239.12   250.00    2404.19     0.00
92 3          9          1      246.68   242.96   300.00     0.00     0.00
93 4          5          1      250.00   227.52   250.00   14113.38     0.00
94 4          6          1       47.20    50.98   250.00     -0.00    -0.00
95 5          7          1      210.17   239.03   250.00     0.00     0.00
96 6          9          1      137.83   144.52   150.00     0.00     0.00
97 7          8          1       10.10     7.53   250.00    -0.00    -0.00
98 8          9          1      100.92    98.82   150.00    -0.00    -0.00
99

```

```

100 -----
101 Gen      Status      Fuel      Pg      Qg      Pmin      Pmax      Qmin      Qmax
102 -----
103 1          1    UNDEFINED    167.37   158.52    10.00    350.00   -300.00    300.00
104 2          1    UNDEFINED    229.90    98.21    10.00    300.00   -300.00    300.00
105 3          1    UNDEFINED    242.50    45.19    10.00    270.00   -300.00    300.00
106 [ExaGO] Finalizing opflow application.

```

Chapter 4

Multi-period optimal power flow (TCOPFLOW)

TCOPFLOW solves a full AC multi-period optimal power flow problem with the objective of minimizing the total cost over the given time horizon while adhering to constraints for each period and between consecutive time-periods (ramping constraints).

4.1 Formulation

The multi-period optimal power flow problem is a series of optimal power flow problems coupled via temporal constraints. The generator real power deviation ($p_{jt}^g - p_{jt-\Delta t}^g$) constrained within the ramp limits form the temporal constraints. An illustration of the temporal constraints is shown in Fig. 4.1 with four time steps. Each time-step t is coupled with its preceding time $t - \Delta t$, where Δt is the time-step where the objective is to find a least cost dispatch for the given time horizon.




Figure 4.1: Multi-period optimal power flow example with four time-steps. The lines connecting the different time-periods denote the coupling between them.

In general form, the equations for multi-period optimal power flow are given by (4.1) – (4.5). TCOPFLOW solves to minimize the total generation cost $\sum_{t=0}^{N_t-1} f(x_t)$ over the time horizon, where N_t is the number of time-steps. At each time-step, the equality constraints ($g(x_t)$), inequality $h(x_t)$, and the lower/upper limit (x^-, x^+) constraints need to be satisfied. Equation (4.5) represents the coupling between the consecutive time-steps. It is the most common form of coupling that limits the deviation of the real power generation at time t from its preceding time-step $t - \Delta t$ to within its ramping capability Δx_t .

$$\min \sum_{t=0}^{N_t-1} f(x_t) \tag{4.1}$$

s.t.

$$g(x_t) = 0, \quad t \in [0, N_t - 1] \tag{4.2}$$

$$h(x_t) \leq 0, \quad t \in [0, N_t - 1] \tag{4.3}$$

$$x^- \leq x_t \leq x^+, \quad t \in [0, N_t - 1] \tag{4.4}$$

$$-\Delta x_t \leq x_t - x_{t-\Delta t} \leq \Delta x_t, \quad t \in [1, N_t - 1] \tag{4.5}$$

4.2 Solvers

Currently, ExaGO only supports solving **TCOPFLOW** using **Ipopt** [7] on on a single rank.

4.3 Input and Output

- **Network file:** The network file describing the network details. Only **MATPOWER** format files are currently supported.
- **Load data:** One file for load real power and one for reactive power. The files need to be in CSV format. An example of the format for the 9-bus case is [here](#).
- **Wind generation:** The wind generation time-series described in CSV format. See an example of the format [here](#).

If the load data and/or wind generation profiles are not set then a flat profile is assumed, i.e., the load and wind generation for all hours is constant.

The **TCOPFLOW** output is saved to a directory named `tcopflowout`. This directory contains N_t files, one for each time-step, in **MATPOWER** data file format.

4.4 Usage

```
1 ./bin/tcopflow -netfile $EXAGO_DIR/datafiles/case9/case9mod.m -tcopflow_ploadprofile $EXAGO_DIR/
  datafiles/case9/load_P.csv -tcopflow_qloadprofile $EXAGO_DIR/datafiles/case9/load_Q.csv -
  print_output -tcopflow_dT 5 -tcopflow_duration 0.5
2 [ExaGO] TCOPFLOW: Application created
3 [ExaGO] TCOPFLOW: Duration = 0.500000 hours, timestep = 5.000000 minutes, number of time-steps = 7
4 [ExaGO] TCOPFLOW: Using IPOPT solver
5 [ExaGO] TCOPFLOW: Setup completed
6
7 *****
8 This program contains Ipopt, a library for large-scale nonlinear optimization.
9 Ipopt is released as open source code under the Eclipse Public License (EPL).
10 For more information visit http://projects.coin-or.org/Ipopt
11 *****
12
13 This is Ipopt version 3.12.10, running with linear solver ma27.
14
15 Number of nonzeros in equality constraint Jacobian...:      798
16 Number of nonzeros in inequality constraint Jacobian.:      540
17 Number of nonzeros in Lagrangian Hessian.....:          672
18
19 Total number of variables.....:          168
20     variables with only lower bounds:              0
21     variables with lower and upper bounds:          112
22     variables with only upper bounds:               0
23 Total number of equality constraints.....:          126
24 Total number of inequality constraints.....:          144
25     inequality constraints with only lower bounds:    0
26     inequality constraints with lower and upper bounds: 144
27     inequality constraints with only upper bounds:    0
28
29 iter    objective    inf_pr    inf_du lg(mu)  ||d||  lg(rg) alpha_du alpha_pr ls
30   0   7.2226875e+04  1.80e+00  1.00e+02  -1.0  0.00e+00   -  0.00e+00  0.00e+00  0
31   1   5.1460539e+04  1.04e+00  1.60e+02  -1.0  1.08e+00   -  6.27e-01  4.21e-01f  1
32   2   4.8692257e+04  9.13e-01  1.60e+03  -1.0  1.42e+00   2.0  2.84e-03  1.29e-01f  1
33   3   4.1695179e+04  5.82e-01  8.63e+02  -1.0  1.09e+00   -  3.86e-03  3.78e-01f  1
34   4   3.8223523e+04  4.01e-01  5.86e+02  -1.7  7.91e-01   -  2.00e-01  3.10e-01f  1
35   5   3.1081047e+04  9.06e-02  1.98e+03  -1.7  5.58e-01   -  4.80e-01  1.00e+00f  1
36   6   3.0468392e+04  1.83e-01  1.34e+02  -1.7  5.84e-01   -  2.75e-01  1.00e+00f  1
37   7   3.0405940e+04  9.33e-02  4.47e+00  -1.7  3.04e-01   -  4.96e-01  1.00e+00f  1
```

```

38 8 3.0382232e+04 3.12e-02 7.07e-01 -2.5 1.76e-01 - 7.33e-01 1.00e+00h 1
39 9 3.0369124e+04 2.45e-03 4.69e-02 -2.5 4.46e-02 - 1.00e+00 1.00e+00h 1
40 iter objective inf_pr inf_du lg(mu) ||d|| lg(rg) alpha_du alpha_pr ls
41 10 3.0364520e+04 9.81e-04 7.50e-02 -3.8 2.34e-02 - 9.84e-01 6.75e-01h 1
42 11 3.0364301e+04 1.91e-04 1.14e-02 -3.8 1.67e-02 - 8.91e-01 9.19e-01h 1
43 12 3.0364426e+04 4.32e-05 9.33e-05 -3.8 6.82e-03 - 1.00e+00 1.00e+00f 1
44 13 3.0364326e+04 1.45e-05 4.77e-03 -5.7 3.90e-03 - 1.00e+00 9.44e-01h 1
45 14 3.0364329e+04 1.12e-06 2.32e-06 -5.7 1.10e-03 - 1.00e+00 1.00e+00h 1
46 15 3.0364328e+04 7.91e-09 3.33e-08 -7.0 9.28e-05 - 1.00e+00 1.00e+00h 1

```

```

47
48 Number of Iterations.....: 15
49

```

```

50                                     (scaled)                                     (unscaled)
51 Objective.....: 6.8081453631121144e+02 3.0364328319480031e+04
52 Dual infeasibility.....: 3.3330834427063850e-08 1.4865552154470478e-06
53 Constraint violation.....: 1.5610245006347778e-09 1.5610245006347778e-09
54 Complementarity.....: 1.0802025033126202e-07 4.8177031647742860e-06
55 Overall NLP error.....: 1.0802025033126202e-07 4.8177031647742860e-06

```

```

56
57
58 Number of objective function evaluations = 16
59 Number of objective gradient evaluations = 16
60 Number of equality constraint evaluations = 16
61 Number of inequality constraint evaluations = 16
62 Number of equality constraint Jacobian evaluations = 16
63 Number of inequality constraint Jacobian evaluations = 16
64 Number of Lagrangian Hessian evaluations = 15
65 Total CPU secs in IPOPT (w/o function evaluations) = 0.036
66 Total CPU secs in NLP function evaluations = 0.014

```

```

67
68 EXIT: Optimal Solution Found.

```

```

69 =====

```

```

70 Multi-Period Optimal Power Flow

```

```

71 =====

```

```

72 OPFLOW Model POWER_BALANCE_POLAR
73 Solver IPOPT
74 Duration (minutes) 30.00
75 Time-step (minutes) 5.00
76 Number of steps 7
77 Active power demand profile ExaGO/datafiles/case9/load_P.csv
78 Rective power demand profile ExaGO/datafiles/case9/load_Q.csv
79 Wind generation profile NOT SET
80 Load loss allowed NO
81 Power imbalance allowed NO
82 Ignore line flow constraints NO

```

```

83
84 Number of variables 168
85 Number of equality constraints 126
86 Number of inequality constraints 126
87 Number of coupling constraints 18
88
89 Convergence status CONVERGED
90 Objective value 30364.33

```

```

91
92 -----
93 Bus Pd Qd Vm Va mult_Pmis mult_Qmis Pslack Qslack
94 -----
95 1 0.00 0.00 1.089 0.000 2102.34 -0.00 0.00 0.00
96 2 0.00 0.00 1.092 3.904 2059.04 -0.00 0.00 0.00
97 3 0.00 0.00 1.087 2.077 2065.00 -0.00 0.00 0.00
98 4 0.00 0.00 1.095 -2.016 2102.60 -0.04 0.00 0.00
99 5 75.00 30.00 1.088 -3.150 2112.60 1.16 0.00 0.00
100 6 90.00 30.00 1.085 -3.962 2129.51 1.68 0.00 0.00
101 7 0.00 0.00 1.100 0.501 2059.43 -0.06 0.00 0.00
102 8 100.00 35.00 1.089 -1.757 2079.19 2.98 0.00 0.00
103 9 0.00 0.00 1.100 -0.176 2065.27 -0.09 0.00 0.00

```

```

104

```

```

105 -----
106 From      To      Status    Sft      Stf      Slim      mult_Sf  mult_St
107 -----
108 1          4          1        73.35    73.70    380.00    -0.00    -0.00
109 2          7          1       114.60   115.46   250.00    -0.00    -0.00
110 3          9          1        83.29    84.28   300.00    -0.00    -0.00
111 4          5          1        28.85    31.90   250.00    -0.00    -0.00
112 4          6          1        44.89    45.71   250.00    -0.00    -0.00
113 5          7          1        49.16    50.83   250.00    -0.00    -0.00
114 6          9          1        49.36    51.07   150.00    -0.00    -0.00
115 7          8          1        66.70    68.20   250.00    -0.00    -0.00
116 8          9          1        38.80    34.06   150.00    -0.00    -0.00
117 -----
118 -----
119 Gen      Status    Fuel      Pg      Qg      Pmin      Pmax      Qmin      Qmax
120 -----
121 1          1    UNDEFINED  72.83   -8.69    10.00    350.00   -300.00   300.00
122 2          1    UNDEFINED  114.06  -11.12   10.00    300.00   -300.00   300.00
123 3          1    UNDEFINED  80.20  -22.47   10.00    270.00   -300.00   300.00
124 [ExaGO] Finalizing tcopflow application.

```

4.5 TCOPFLOW Options

Table 4.1: TCOPFLOW options

Option	Description	Default / Notes
-netfile <path>	MATPOWER network file	case9mod.m
-tcopflow_ploadprofile <csv>	Active power demand profile	Flat profile if omitted
-tcopflow_qloadprofile <csv>	Reactive power demand profile	Flat profile if omitted
-tcopflow_windgenprofile <csv>	Wind generation profile	Flat profile (base dispatch) if omitted
-tcopflow_dT <minutes>	Time-step length in minutes	5.0
-tcopflow_duration <hours>	Simulation horizon in hours	0.5 (30 minutes)
-tcopflow_iscoupling <0/1>	Enable/disable inter-temporal coupling (generator ramping)	1 (enabled)
-tcopflow_tolerance <value>	Optimality tolerance passed to the solver	Inherits IPOPT default if not set
-tcopflow_model <name>	Temporal model	GENRAMP
-tcopflow_solver <name>	Nonlinear solver backend	IPOPT
-print_output	Dump solution summary to stdout	Disabled by default
-save_output	Write MATPOWER files for each step into tcopflowout/	Disabled by default
-opflow_ignore_lineflow_constraints <0/1>	Forwarded to each embedded OPFLOW instance to toggle thermal limits	0
-options_left no	PETSc utility flag to suppress unused-option warnings	Optional

Chapter 5

Security-constrained optimal power flow (SCOPFLOW)

SCOPFLOW solves a contingency-constrained optimal power flow problem. The problem is set up as a two-stage optimization problem where the first-stage (base-case) represents the normal operation of the grid and the second-stage comprises N_c contingency scenarios. Each contingency scenario can be single or multi-period.

5.1 Formulation

5.1.1 Single-period

The contingency-constrained optimal power flow (popularly termed as security-constrained optimal power flow (SCOPF) in power system parlance) attempts to find a least cost dispatch for the base case (or no contingency) while ensuring that if any of contingencies do occur then the system will be secure. This is illustrated in Fig. 5.1 for a SCOPF with a base-case c_0 and three contingencies.




Figure 5.1: Contingency constrained optimal power flow example with three contingencies. c_0 represents the base case (or no contingency case). c_1 , c_2 , c_3 are the three contingency cases. Each of the contingency states is coupled with the base-case through ramping constraints (denoted by red lines)

In general form, the equations for contingency-constrained optimal power flow are given by (5.1) – (5.5). This is a two-stage stochastic optimization problem where the first stage is the base case c_0 and each of the contingency states $c_i, i \in [1, N_c]$ are second-stage subproblems. SCOPFLOW aims to minimize the objective $\sum_{c=0}^{N_c} f(x_c)$, while adhering to the equality $g_c(x_c)$, inequality $h_c(x_c)$, and the lower/upper bound (x^-, x^+) constraints. Equation (5.5) represents the coupling between the base-case c_0 and each of the contingency states c_i . Equation (5.5) is the most typical form of coupling that limits the deviation of the contingency variables x_c from the base x_0 to within Δx_c . An example of this constraint could be the allowed real power output deviation for the generators constrained by their ramp limit, which is currently the only constraint SCOPFLOW supports.

$$\min \sum_{c=0}^{N_c} f_c(x_c) \quad (5.1)$$

s.t.

$$g_c(x_c) = 0, \quad c \in [0, N_c] \quad (5.2)$$

$$h_c(x_c) \leq 0, \quad c \in [0, N_c] \quad (5.3)$$

$$x^- \leq x_c \leq x^+, \quad c \in [0, N_c] \quad (5.4)$$

$$-\Delta x_c \leq x_c - x_0 \leq \Delta x_c, \quad c \in [1, N_c] \quad (5.5)$$

5.1.2 Multiperiod

In the multi-period version, each contingency is comprised of multiple time-periods. The multiple periods have variables and constraints as described in chapter 4. An example of multi-contingency multi-period optimal power flow is illustrated in Fig. 5.2 for multi-period SCOPFLOW with three contingencies c_1 , c_2 , and c_3 coupled to the base case c_0 . Each state is multi-period with two time-periods. Each time-step is coupled with its adjacent one through ramping constraints. We assume that the contingency is incident at the first time-step, i.e. at t_0 . This results in the coupling between the contingency cases $c_i, i \in [1, N_c]$ and the base-case c_0 only at time-step t_0 .

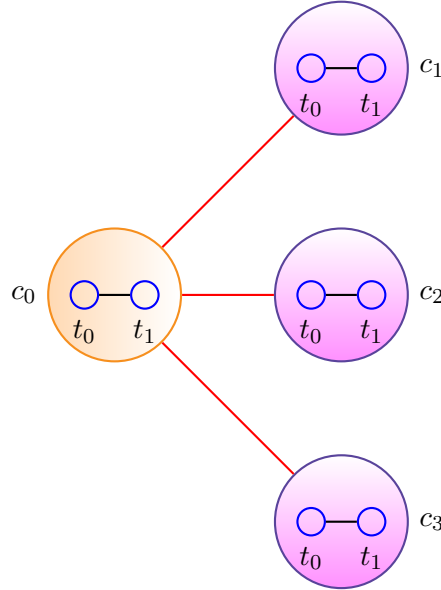


Figure 5.2: Multi-period contingency constrained optimal power flow example with two contingencies c_0 and c_1 , each with two time-periods t_0, t_1 . State c_0 represents the base case (no contingency) case. The contingency states c_1, c_2, c_3 are coupled with the no-contingency state c_0 . The red line denotes the coupling between the contingencies.

The overall objective of this contingency-constrained multi-period optimal power flow is to find a secure dispatch for base-case c_0 while adhering to contingency and temporal constraints. The general formulation of this problem is given in Eqs. (5.6) – (5.12).

$$\min \sum_{c=0}^{N_c} \sum_{t=0}^{N_t-1} f_{ct}(x_{c,t}) \quad (5.6)$$

s.t.

$$g_{ct}(x_{c,t}) = 0, \quad c \in [0, N_c], t \in [0, N_t - 1] \quad (5.7)$$

$$h_{ct}(x_{c,t}) \leq 0, \quad c \in [0, N_c], t \in [0, N_t - 1] \quad (5.8)$$

$$x^- \leq x_{c,t} \leq x^+, \quad c \in [0, N_c], t \in [0, N_t - 1] \quad (5.9)$$

$$-\Delta x_t \leq x_{c,t} - x_{c,t-\Delta t} \leq \Delta x_t, \quad c \in [0, N_c], t \in [1, N_t - 1] \quad (5.10)$$

$$-\Delta x_c \leq x_{c,0} - x_{0,0} \leq \Delta x_c, \quad c \in [1, N_c] \quad (5.11)$$

$$(5.12)$$

In this formulation, the objective is to reduce the cost for the base-case time horizon, where $f(x_{0,t})$ is the objective cost for contingency c_0 at time t . Equation (5.12) represents the coupling between the base case c_0 and each contingency c_i at time-step t_0 . We use a simple box constraint Δx_c to restrict the deviation of decision variables $x_{c,0}$ from the base-case $x_{0,0}$. The bound Δx_c could represent here, for example, the allowable reserve for each generator.

5.2 Solvers

SCOPFLOW supports solving the optimization problem via **Ipopt** [7], **HiOp** [6, 5], or **EMPAR**. **Ipopt** [7] can solve **SCOPFLOW** on single rank only. **HiOp** [6, 5] supports solving the problem in parallel using a primal-decomposition algorithm. With **HiOp**, one can solve the subproblem either on the CPU or GPU by selecting the appropriate subproblem model and solver (see options table below). However, note that *ExaGO needs to be built with Ipopt [7] even when using HiOp [6, 5] solver*. The **EMPAR** solver does not solve the security-constrained ACOPF problem, it only solves the base-case and the contingencies independently with **OPFLOW**. It distributes the contingencies to different processes when executed in parallel.

5.3 Input and Output

To execute **SCOPFLOW**, the following files are required:

- **Network file:** The network file describing the network details. Only **MATPOWER** format files are currently supported.
- **Contingency file:** The file describing the contingencies. Contingencies can be single or multiple outages. Two formats are excepted, with the format distinguished by file name extension. A contingency file in PTI format must have a `.cont` extension. A PSS/E format file must have a `.con` extension.

If the multi-period option is chosen, then additional files describing the load and wind generation can be (optionally) set.

- **Load data:** One file for load real power and one for reactive power. The files need to be in CSV format. An example of the format for the 9-bus case is [here](#).
- **Wind generation:** The wind generation time-series described in CSV format. See an example of the format [here](#).

The **SCOPFLOW** output is saved to a directory named `scopflowout`. This directory contains N_c files to save the solution for each contingency in MATPOWER datafile format. Each file has the name `cont_xx` where `xx` is the contingency number.

If the multi-period option is chosen then N_c subdirectories are created (one for each contingency), and each subdirectory contains N_t output files, one for each time-period. The subdirectories have the naming convention `cont_xx` and the output file are named as `t_yy` where `yy` is the time-step number.

5.4 Usage

```
1 ./scopflow -netfile <netfilename> -ctgcfile <ctgcfilename> \
2 <scopflowoptions> [-scopflow_enable_multiperiod 1]
```

5.5 Options

See table 5.1. In addition, all **OPFLOW** options in Table 3.4 and **TCOPFLOW** options in Table 4.1 can be used.

Table 5.1: SCOPFLOW options

Option	Meaning	Values (Default value)	Compatibility
-netfile	Network file name	string < 4096 characters (case9mod_gen3_wind.m)	
-ctgcfile	Contingency file name	string < 4096 characters (case9.cont)	
-print_output	Print output to screen	0 or 1 (0)	
-save_output	Save output to directory	0 or 1 (0)	Format determined by OPFLOW option.
-scopflow_output_directory	Output directory path	“scopflowout”	
-scopflow_model	SCOPFLOW model type	GENRAMP, GENRAMPT (GENRAMP)	
-scopflow_solver	Set solver for scopflow	IPOPT, HIOP, or EMPAR (IPOPT)	
-scopflow_subproblem_solver	Set solver for subproblem	IPOPT or HIOP (IPOPT)	Only when using HiOp solver for SCOPFLOW
-scopflow_subproblem_model	Set model for subproblem	See OPFLOW chapter	Only when using HiOp solver for SCOPFLOW
-scopflow_Nc	Number of contingencies	int (0. Passing -1 results in all contingencies in the file used)	
-scopflow_mode	Operation mode: Preventive or corrective	0 or 1 (0)	
-scopflow_enable_multiperiod	Multi-period SCOPFLOW	0 or 1 (0)	IPOPT solver only
-scopflow_ploadprofile	Real power load profile	string (load.P.csv)	
-scopflow_qloadprofile	Reactive power load profile	string (load.Q.csv)	
-scopflow_windgenprofile	Wind generation profile	string (case9/scenarios_9bus.csv)	
-scopflow_dT	Length of time-step (minutes)	double (5.0)	
-scopflow_duration	Total duration (hours)	double (0.5)	
-scopflow_tolerance	Optimization solver tolerance	double (1e-6)	

Depending on the value chosen for `-scopflow_mode`, SCOPFLOW can operate either in *preventive* (mode = 0) or *corrective* (mode = 1) mode. In the preventive mode, the PV and PQ generator real power is fixed to its corresponding base-case values. The generators at the reference bus pick up any make-up power required for the contingency. The corrective mode allows deviation of the PV and PQ generator real power from the base-case dispatch constrained by its 30-min. ramp rate capability. The optimization decides the optimal redispatch. One

can have AGC control instead of having the generators proportionally share the deficit/excess power by using the option (-opflow_use_agc).

The option -scopflow_enable_multiperiod 1 must be used in order to enable any of the options listed in table 5.1 for multiperiod analysis.

5.6 Examples

Some **SCOPFLOW** example runs are provided with some sample output. Options are the default options given in table 3.4, 4.1 and 5.1 unless otherwise specified. Sample output is generated by running examples in the installation directory.

Example using the **Ipopt** [7] solver:

```

1 ./bin/scopflow -netfile $EXAGO_DIR/datafiles/case9/case9mod.m -ctgcf $EXAGO_DIR/datafiles/case9/
  case9.cont -scopflow_Nc 4 -scopflow_solver IPOPT -print_output
2 [ExaGO] SCOPFLOW: Application created
3 [ExaGO] SCOPFLOW running with 5 subproblems (base case + 4 contingencies)
4 [ExaGO] SCOPFLOW: Using IPOPT solver
5 [ExaGO] SCOPFLOW: Setup completed
6
7 *****
8 This program contains Ipopt, a library for large-scale nonlinear optimization.
9 Ipopt is released as open source code under the Eclipse Public License (EPL).
10 For more information visit http://projects.coin-or.org/Ipopt
11 *****
12
13 This is Ipopt version 3.12.10, running with linear solver ma27.
14
15 Number of nonzeros in equality constraint Jacobian...:      598
16 Number of nonzeros in inequality constraint Jacobian.:      328
17 Number of nonzeros in Lagrangian Hessian.....:      660
18
19 Total number of variables.....:      144
20     variables with only lower bounds:      0
21     variables with lower and upper bounds:      104
22     variables with only upper bounds:      0
23 Total number of equality constraints.....:      114
24 Total number of inequality constraints.....:      82
25     inequality constraints with only lower bounds:      0
26     inequality constraints with lower and upper bounds:      82
27     inequality constraints with only upper bounds:      0
28
29 iter    objective    inf_pr    inf_du lg(mu)  ||d|| lg(rg) alpha_du alpha_pr ls
30   0  1.0318125e+04  1.80e+00  1.00e+02  -1.0  0.00e+00  -  0.00e+00  0.00e+00  0
31   1  9.2868867e+03  1.56e+00  8.62e+01  -1.0  1.08e+00  -  6.27e-01  1.31e-01f  1
32   2  9.0292788e+03  1.50e+00  3.50e+02  -1.0  2.60e+00  -  1.37e-03  4.28e-02f  1
33   3  6.8151659e+03  9.02e-01  3.07e+03  -1.0  1.03e+00  -  4.57e-02  4.09e-01f  1
34   4  5.6911245e+03  5.63e-01  2.09e+03  -1.0  7.85e-01  2.0  1.22e-01  3.87e-01f  1
35   5  5.6219674e+03  5.39e-01  2.00e+03  -1.0  8.34e-01  -  1.99e-01  4.29e-02f  1
36   6  4.7820782e+03  2.34e-01  7.42e+02  -1.0  7.27e-01  -  5.45e-01  5.75e-01f  1
37   7  4.1986838e+03  3.84e-02  2.59e+02  -1.7  4.11e-01  -  3.64e-01  1.00e+00f  1
38   8  4.1593634e+03  6.26e-02  1.52e+01  -1.7  3.77e-01  -  5.76e-01  1.00e+00f  1
39   9  4.1598457e+03  3.63e-04  1.53e+00  -2.5  4.57e-02  1.5  8.25e-01  1.00e+00h  1
40 iter    objective    inf_pr    inf_du lg(mu)  ||d|| lg(rg) alpha_du alpha_pr ls
41  10  4.1472241e+03  4.61e-02  5.44e+00  -3.8  1.15e-01  -  3.15e-01  1.00e+00f  1
42  11  4.1437514e+03  3.32e-02  3.50e+00  -3.8  1.95e-01  -  5.75e-01  3.47e-01h  1
43  12  4.1440398e+03  1.07e-02  1.64e+00  -3.8  7.68e-02  -  2.42e-01  6.18e-01h  1
44  13  4.1444455e+03  1.33e-03  4.38e-02  -3.8  3.29e-02  -  9.49e-01  1.00e+00h  1
45  14  4.1444954e+03  5.41e-06  2.57e-02  -3.8  2.31e-03  1.0  1.00e+00  1.00e+00h  1
46  15  4.1444778e+03  1.47e-05  1.41e-02  -3.8  3.80e-03  0.6  1.00e+00  1.00e+00h  1
47  16  4.1444804e+03  1.82e-05  4.42e-03  -3.8  3.58e-03  0.1  1.00e+00  1.00e+00h  1
48  17  4.1444799e+03  9.05e-05  3.06e-03  -3.8  7.43e-03  -0.4  1.00e+00  1.00e+00h  1
49  18  4.1444616e+03  1.08e-05  5.76e-03  -5.7  3.72e-03  -0.9  1.00e+00  9.26e-01h  1
50  19  4.1444608e+03  5.66e-06  1.11e-04  -5.7  2.43e-03  -1.3  1.00e+00  1.00e+00h  1
51 iter    objective    inf_pr    inf_du lg(mu)  ||d|| lg(rg) alpha_du alpha_pr ls

```

```

52 20 4.1444608e+03 2.21e-08 3.62e-05 -5.7 2.38e-03 -1.8 1.00e+00 1.00e+00h 1
53 21 4.1444608e+03 3.35e-07 2.93e-05 -5.7 5.76e-03 -2.3 1.00e+00 1.00e+00h 1
54 22 4.1444608e+03 2.25e-04 1.95e-05 -5.7 1.15e-02 -2.8 1.00e+00 1.00e+00h 1
55 23 4.1444608e+03 5.41e-04 1.11e-05 -5.7 1.96e-02 -3.2 1.00e+00 1.00e+00h 1
56 24 4.1444608e+03 2.03e-02 1.22e-04 -5.7 1.15e-01 -3.7 1.00e+00 1.00e+00h 1
57 25 4.1444608e+03 8.07e-04 2.02e-05 -5.7 2.32e-02 -3.3 1.00e+00 1.00e+00h 1
58 26 4.1444608e+03 6.02e-03 3.97e-05 -5.7 6.75e-02 -3.8 1.00e+00 1.00e+00h 1
59 27 4.1444608e+03 1.93e-02 1.75e-04 -5.7 1.17e-01 -4.3 1.00e+00 1.00e+00h 1
60 28 4.1444608e+03 4.88e-02 7.07e-05 -5.7 1.71e-01 -4.7 1.00e+00 1.00e+00h 1
61 29 4.1444608e+03 8.42e-04 6.07e-06 -5.7 3.53e-02 -4.3 1.00e+00 1.00e+00h 1
62 iter objective inf_pr inf_du lg(mu) ||d|| lg(rg) alpha_du alpha_pr ls
63 30 4.1444608e+03 1.16e-02 4.10e-06 -5.7 1.11e-01 -4.8 1.00e+00 1.00e+00h 1
64 31 4.1444608e+03 1.54e-03 1.71e-06 -5.7 3.87e-02 -4.4 1.00e+00 1.00e+00h 1
65 32 4.1444608e+03 2.12e-02 9.93e-06 -5.7 1.38e-01 -4.8 1.00e+00 1.00e+00h 1
66 33 4.1444608e+03 1.52e-01 8.57e-05 -5.7 5.25e-01 -5.3 1.00e+00 1.00e+00h 1
67 34 4.1444608e+03 5.89e-03 2.06e-05 -5.7 1.27e-01 -4.9 1.00e+00 1.00e+00h 1
68 35 4.1444608e+03 2.60e-01 1.06e-04 -5.7 1.23e+00 - 7.38e-01 1.00e+00h 1
69 36 4.1444608e+03 4.78e-02 3.16e-05 -5.7 3.18e-01 - 1.00e+00 1.00e+00h 1
70 37 4.1444608e+03 1.18e-03 3.22e-07 -5.7 7.50e-02 - 1.00e+00 1.00e+00h 1
71 38 4.1444608e+03 3.36e-05 2.96e-09 -5.7 1.62e-02 - 1.00e+00 1.00e+00h 1
72 39 4.1444608e+03 3.14e-10 5.68e-13 -5.7 5.87e-05 - 1.00e+00 1.00e+00h 1
73 iter objective inf_pr inf_du lg(mu) ||d|| lg(rg) alpha_du alpha_pr ls
74 40 4.1444605e+03 7.54e-08 1.83e-07 -7.0 2.81e-04 - 1.00e+00 1.00e+00h 1

```

75
76 Number of Iterations....: 40

```

77
78                                     (scaled)                                     (unscaled)
79 Objective.....: 9.2925124417578417e+01 4.1444605490239974e+03
80 Dual infeasibility.....: 1.8347495281748061e-07 8.1829828956596351e-06
81 Constraint violation....: 1.3290786859965209e-08 1.3290786859965209e-08
82 Complementarity.....: 2.6885276874539710e-07 1.1990833486044711e-05
83 Overall NLP error.....: 2.6885276874539710e-07 1.1990833486044711e-05

```

```

84
85
86 Number of objective function evaluations = 44
87 Number of objective gradient evaluations = 41
88 Number of equality constraint evaluations = 44
89 Number of inequality constraint evaluations = 44
90 Number of equality constraint Jacobian evaluations = 41
91 Number of inequality constraint Jacobian evaluations = 41
92 Number of Lagrangian Hessian evaluations = 40
93 Total CPU secs in IPOPT (w/o function evaluations) = 0.078
94 Total CPU secs in NLP function evaluations = 0.026

```

95
96 EXIT: Optimal Solution Found.

```

97 =====
98 Security-Constrained Optimal Power Flow
99 =====

```

```

100 Number of contingencies 4
101 Multi-period contingencies? NO
102 Solver IPOPT
103 Initialization MIDPOINT
104 Load loss allowed NO
105 Power imbalance allowed NO
106 Ignore line flow constraints NO
107
108
109 Convergence status CONVERGED
110 Objective value (base) 4144.46
111

```

```

112 -----
113 Bus      Pd      Qd      Vm      Va      mult_Pmis      mult_Qmis      Pslack      Qslack
114 -----
115 1          0.00    0.00    1.100    0.000    2102.91        0.00        0.00        0.00
116 2          0.00    0.00    1.095    3.928    2059.18       -0.00        0.00        0.00
117 3          0.00    0.00    1.087    2.120    2065.15       -0.00        0.00        0.00
118 4          0.00    0.00    1.097   -1.993    2103.17        0.08        0.00        0.00

```

119	5	75.00	50.00	1.079	-3.060	2113.46	7.29	0.00	0.00
120	6	90.00	30.00	1.087	-3.927	2129.85	1.62	0.00	0.00
121	7	0.00	0.00	1.100	0.535	2059.57	-0.04	0.00	0.00
122	8	100.00	35.00	1.089	-1.720	2079.34	2.99	0.00	0.00
123	9	0.00	0.00	1.100	-0.135	2065.43	-0.09	0.00	0.00

124

125 -----

126	From	To	Status	Sft	Stf	Slim	mult_Sf	mult_St
-----	------	----	--------	-----	-----	------	---------	---------

127 -----

128	1	4	1	73.18	72.98	380.00	-0.00	-0.00
-----	---	---	---	-------	-------	--------	-------	-------

129	2	7	1	114.18	114.68	250.00	-0.00	-0.00
-----	---	---	---	--------	--------	--------	-------	-------

130	3	9	1	83.58	84.61	300.00	-0.00	-0.00
-----	---	---	---	-------	-------	--------	-------	-------

131	4	5	1	29.69	40.50	250.00	-0.00	-0.00
-----	---	---	---	-------	-------	--------	-------	-------

132	4	6	1	44.86	46.03	250.00	-0.00	-0.00
-----	---	---	---	-------	-------	--------	-------	-------

133	5	7	1	51.29	49.04	250.00	-0.00	-0.00
-----	---	---	---	-------	-------	--------	-------	-------

134	6	9	1	48.94	51.43	150.00	-0.00	-0.00
-----	---	---	---	-------	-------	--------	-------	-------

135	7	8	1	66.61	68.11	250.00	-0.00	-0.00
-----	---	---	---	-------	-------	--------	-------	-------

136	8	9	1	38.87	34.15	150.00	-0.00	-0.00
-----	---	---	---	-------	-------	--------	-------	-------

137

138 -----

139	Gen	Status	Fuel	Pg	Qg	Pmin	Pmax	Qmin	Qmax
-----	-----	--------	------	----	----	------	------	------	------

140 -----

141	1	1	UNDEFINED	72.86	6.79	10.00	350.00	-300.00	300.00
-----	---	---	-----------	-------	------	-------	--------	---------	--------

142	2	1	UNDEFINED	114.07	-5.13	10.00	300.00	-300.00	300.00
-----	---	---	-----------	--------	-------	-------	--------	---------	--------

143	3	1	UNDEFINED	80.21	-23.48	10.00	270.00	-300.00	300.00
-----	---	---	-----------	-------	--------	-------	--------	---------	--------

144 [ExaGO] Finalizing scopflow application.

Example using HiOp solver with Ipopt as the subproblem solver.

```
1 bin/scopflow -netfile $EXAGO_DIR/datafiles/case9/case9mod.m -ctgcfile $EXAGO_DIR/datafiles/case9/
  case9.cont -scopflow_Nc 4 -scopflow_solver IPOPT -print_output -scopflow_solver HIOP -
  scopflow_subproblem_solver IPOPT -scopflow_subproblem_model POWER_BALANCE_POLAR
```

2 [ExaGO] SCOPFLOW: Application created

3 [ExaGO] SCOPFLOW running with 5 subproblems (base case + 4 contingencies)

4 [ExaGO] SCOPFLOW: Using HIOP solver

5 Failed to read option file 'hiop_pridec.options'. Hiop will use default options.

6 [ExaGO] SCOPFLOW: Setup completed

7 total number of recourse problems 4

8

9 *****

10 This program contains Ipopt, a library for large-scale nonlinear optimization.

11 Ipopt is released as open source code under the Eclipse Public License (EPL).

12 For more information visit <http://projects.coin-or.org/Ipopt>

13 *****

14

15 This is Ipopt version 3.12.10, running with linear solver ma27.

16

17 Number of nonzeros in equality constraint Jacobian...: 114

18 Number of nonzeros in inequality constraint Jacobian.: 72

19 Number of nonzeros in Lagrangian Hessian.....: 96

20

21 Total number of variables.....: 24

22 variables with only lower bounds: 0

23 variables with lower and upper bounds: 16

24 variables with only upper bounds: 0

25 Total number of equality constraints.....: 18

26 Total number of inequality constraints.....: 18

27 inequality constraints with only lower bounds: 0

28 inequality constraints with lower and upper bounds: 18

29 inequality constraints with only upper bounds: 0

30

31	iter	objective	inf_pr	inf_du	lg(mu)	d	lg(rg)	alpha_du	alpha_pr	ls
----	------	-----------	--------	--------	--------	---	--------	----------	----------	----

32	0	1.0318125e+04	1.80e+00	1.00e+02	-1.0	0.00e+00	-	0.00e+00	0.00e+00	0
----	---	---------------	----------	----------	------	----------	---	----------	----------	---

33	1	7.7157691e+03	1.17e+00	1.03e+02	-1.0	1.08e+00	-	6.27e-01	3.50e-01f	1
----	---	---------------	----------	----------	------	----------	---	----------	-----------	---

34	2	7.6608235e+03	1.15e+00	1.01e+02	-1.0	6.28e+00	-	1.20e-02	1.37e-02f	1
----	---	---------------	----------	----------	------	----------	---	----------	-----------	---

35	3	7.4466686e+03	1.09e+00	3.06e+02	-1.0	3.74e+00	-	4.15e-03	5.81e-02f	1
----	---	---------------	----------	----------	------	----------	---	----------	-----------	---

36	4	5.4292675e+03	3.92e-01	4.83e+03	-1.0	7.34e-01	-	3.34e-03	6.40e-01f	1
----	---	---------------	----------	----------	------	----------	---	----------	-----------	---

37	5	4.5792834e+03	2.24e-01	1.51e+03	-1.0	6.46e-01	2.0	8.77e-03	7.37e-01f	1
----	---	---------------	----------	----------	------	----------	-----	----------	-----------	---

```

38 6 4.2907579e+03 1.20e-02 3.57e+02 -1.0 3.36e-01 - 5.37e-01 1.00e+00f 1
39 7 4.1690456e+03 4.40e-02 5.31e+01 -1.0 3.31e-01 - 9.22e-01 1.00e+00f 1
40 8 4.1687926e+03 4.88e-04 1.93e+00 -1.0 4.79e-02 1.5 1.00e+00 1.00e+00h 1
41 9 4.1497176e+03 1.19e-02 9.92e+00 -2.5 1.87e-01 - 8.38e-01 1.00e+00f 1
42 iter objective inf_pr inf_du lg(mu) ||d|| lg(rg) alpha_du alpha_pr ls
43 10 4.1463942e+03 1.09e-02 5.09e-01 -2.5 1.15e-01 - 8.71e-01 1.00e+00h 1
44 11 4.1449657e+03 1.47e-03 1.79e-02 -2.5 2.75e-02 - 1.00e+00 1.00e+00h 1
45 12 4.1445415e+03 6.63e-04 9.12e-02 -3.8 1.48e-02 - 1.00e+00 6.30e-01h 1
46 13 4.1444705e+03 3.43e-04 4.96e-02 -3.8 2.08e-02 - 1.00e+00 8.93e-01h 1
47 14 4.1444809e+03 4.48e-05 1.79e-04 -3.8 6.82e-03 - 1.00e+00 1.00e+00f 1
48 15 4.1444611e+03 1.96e-05 4.55e-03 -5.7 4.57e-03 - 1.00e+00 9.34e-01h 1
49 16 4.1444607e+03 6.49e-06 1.17e-05 -5.7 2.60e-03 - 1.00e+00 1.00e+00h 1
50 17 4.1444605e+03 1.19e-06 2.07e-06 -7.0 1.11e-03 - 1.00e+00 1.00e+00h 1
51 18 4.1444605e+03 1.58e-07 3.29e-07 -7.0 4.06e-04 - 1.00e+00 1.00e+00h 1
52
53 Number of Iterations.....: 18
54
55                                     (scaled)                                     (unscaled)
56 Objective.....: 9.2925122354655841e+01 4.1444604570176507e+03
57 Dual infeasibility.....: 3.2927387965389691e-07 1.4685615032563802e-05
58 Constraint violation.....: 2.6639677713768961e-08 2.6639677713768961e-08
59 Complementarity.....: 4.7840038622596930e-07 2.1336657225678232e-05
60 Overall NLP error.....: 4.7840038622596930e-07 2.1336657225678232e-05
61
62
63 Number of objective function evaluations = 19
64 Number of objective gradient evaluations = 19
65 Number of equality constraint evaluations = 19
66 Number of inequality constraint evaluations = 19
67 Number of equality constraint Jacobian evaluations = 19
68 Number of inequality constraint Jacobian evaluations = 19
69 Number of Lagrangian Hessian evaluations = 18
70 Total CPU secs in IPOPT (w/o function evaluations) = 0.027
71 Total CPU secs in NLP function evaluations = 0.002
72
73 EXIT: Optimal Solution Found.
74 This is Ipopt version 3.12.10, running with linear solver ma27.
75
76 Number of nonzeros in equality constraint Jacobian...: 118
77 Number of nonzeros in inequality constraint Jacobian.: 64
78 Number of nonzeros in Lagrangian Hessian.....: 141
79
80 Total number of variables.....: 30
81     variables with only lower bounds: 0
82     variables with lower and upper bounds: 22
83     variables with only upper bounds: 0
84 Total number of equality constraints.....: 24
85 Total number of inequality constraints.....: 16
86     inequality constraints with only lower bounds: 0
87     inequality constraints with lower and upper bounds: 16
88     inequality constraints with only upper bounds: 0
89
90 iter objective inf_pr inf_du lg(mu) ||d|| lg(rg) alpha_du alpha_pr ls
91 0 0.0000000e+00 1.80e+00 0.00e+00 -1.0 0.00e+00 - 0.00e+00 0.00e+00 0
92 1 0.0000000e+00 1.41e+00 3.55e+01 -1.0 9.96e-01 - 6.48e-01 2.16e-01h 1
93 2 0.0000000e+00 1.36e+00 5.74e+01 -1.0 3.86e+00 - 3.79e-03 3.37e-02f 1
94 3 0.0000000e+00 1.12e+00 3.23e+02 -1.0 1.01e+00 - 1.98e-02 1.76e-01f 1
95 4 0.0000000e+00 4.03e-01 7.31e+02 -1.0 7.32e-01 - 2.71e-02 9.03e-01f 1
96 5 0.0000000e+00 8.41e-02 1.58e+02 -1.0 6.95e-01 - 4.70e-01 8.52e-01h 1
97 6 0.0000000e+00 4.93e-03 3.36e+01 -1.0 1.85e-01 - 1.00e+00 1.00e+00f 1
98 7 0.0000000e+00 2.20e-02 2.50e+01 -1.0 6.50e-01 - 4.45e-01 2.50e-01h 3
99 8 0.0000000e+00 1.07e-01 5.13e+00 -1.0 3.57e-01 0.0 1.00e+00 1.00e+00h 1
100 9 0.0000000e+00 1.07e-01 4.86e+00 -1.7 9.45e-01 - 3.30e-01 1.98e-01h 2
101 iter objective inf_pr inf_du lg(mu) ||d|| lg(rg) alpha_du alpha_pr ls
102 10 0.0000000e+00 9.21e-03 3.47e+00 -1.7 1.17e-01 -0.5 8.84e-01 1.00e+00h 1
103 11 0.0000000e+00 2.70e-02 9.88e-01 -1.7 1.67e-01 - 1.00e+00 1.00e+00h 1
104 12 0.0000000e+00 8.46e-03 1.62e-01 -1.7 1.58e-01 -1.0 1.00e+00 1.00e+00h 1

```

```

105 13 0.0000000e+00 7.11e-04 1.09e-01 -2.5 4.58e-02 -1.4 1.00e+00 1.00e+00h 1
106 14 0.0000000e+00 1.11e-01 9.70e-02 -2.5 1.43e+00 - 1.00e+00 1.00e+00h 1
107 15 0.0000000e+00 2.40e-02 5.99e-02 -2.5 2.27e-01 -1.9 1.00e+00 1.00e+00h 1
108 16 0.0000000e+00 3.45e-02 2.41e-01 -2.5 3.69e-01 - 5.82e-01 1.00e+00h 1
109 17 0.0000000e+00 1.85e-02 1.46e-01 -2.5 3.58e-01 - 1.00e+00 1.00e+00h 1
110 18 0.0000000e+00 8.37e-03 2.78e-02 -2.5 9.85e-02 - 1.00e+00 1.00e+00h 1
111 19 0.0000000e+00 6.33e-06 5.45e-04 -3.8 6.81e-03 - 1.00e+00 1.00e+00h 1
112 iter objective inf_pr inf_du lg(mu) ||d|| lg(rg) alpha_du alpha_pr ls
113 20 0.0000000e+00 1.42e-07 2.95e-06 -5.7 1.02e-03 - 1.00e+00 1.00e+00h 1
114 21 0.0000000e+00 1.44e-06 1.25e-07 -7.0 3.43e-03 - 1.00e+00 1.00e+00h 1

```

115
116 Number of Iterations.....: 21

```

117
118 (scaled) (unscaled)
119 Objective.....: 0.0000000000000000e+00 0.0000000000000000e+00
120 Dual infeasibility.....: 1.2466133995485293e-07 1.2466133995485293e-07
121 Constraint violation.....: 1.8383034489088956e-07 1.8383034489088956e-07
122 Complementarity.....: 1.0156847334169061e-07 1.0156847334169061e-07
123 Overall NLP error.....: 1.8383034489088956e-07 1.8383034489088956e-07

```

```

124
125
126 Number of objective function evaluations = 28
127 Number of objective gradient evaluations = 22
128 Number of equality constraint evaluations = 28
129 Number of inequality constraint evaluations = 28
130 Number of equality constraint Jacobian evaluations = 22
131 Number of inequality constraint Jacobian evaluations = 22
132 Number of Lagrangian Hessian evaluations = 21
133 Total CPU secs in IPOPT (w/o function evaluations) = 0.032
134 Total CPU secs in NLP function evaluations = 0.003

```

135
136 EXIT: Optimal Solution Found.

137
138 ...

139 ...

140
141 =====

142 Security-Constrained Optimal Power Flow

143 =====

```

144 Number of contingencies 4
145 Multi-period contingencies? NO
146 Solver HIOP
147 Initialization MIDPOINT
148 Load loss allowed NO
149 Power imbalance allowed NO
150 Ignore line flow constraints NO

```

151

152

153 Convergence status CONVERGED

154 Objective value (base) 4144.46

155

```

156 -----
157 Bus Pd Qd Vm Va mult_Pmis mult_Qmis Pslack Qslack
158 -----
159 1 0.00 0.00 1.100 0.000 2102.91 0.00 0.00 0.00
160 2 0.00 0.00 1.095 3.928 2059.18 -0.00 0.00 0.00
161 3 0.00 0.00 1.087 2.120 2065.15 -0.00 0.00 0.00
162 4 0.00 0.00 1.097 -1.993 2103.16 0.08 0.00 0.00
163 5 75.00 50.00 1.079 -3.060 2113.45 7.29 0.00 0.00
164 6 90.00 30.00 1.087 -3.927 2129.85 1.62 0.00 0.00
165 7 0.00 0.00 1.100 0.535 2059.57 -0.04 0.00 0.00
166 8 100.00 35.00 1.089 -1.720 2079.34 2.99 0.00 0.00
167 9 0.00 0.00 1.100 -0.135 2065.43 -0.09 0.00 0.00

```

168

169 -----

```

170 From To Status Sft Stf Slim mult_Sf mult_St

```

171 -----

```
172 1      4      1      73.18    72.98    380.00    -0.00    -0.00
173 2      7      1     114.18    114.68    250.00    -0.00    -0.00
174 3      9      1      83.57     84.60    300.00    -0.00    -0.00
175 4      5      1      29.68     40.50    250.00    -0.00    -0.00
176 4      6      1      44.86     46.03    250.00    -0.00    -0.00
177 5      7      1      51.29     49.04    250.00    -0.00    -0.00
178 6      9      1      48.94     51.43    150.00    -0.00    -0.00
179 7      8      1      66.61     68.11    250.00    -0.00    -0.00
180 8      9      1      38.86     34.15    150.00    -0.00    -0.00
```

```
181
```

```
182 -----
```

```
183 Gen      Status      Fuel      Pg      Qg      Pmin      Pmax      Qmin      Qmax
```

```
184 -----
```

```
185 1          1    UNDEFINED    72.86     6.79    10.00    350.00   -300.00    300.00
```

```
186 2          1    UNDEFINED   114.07    -5.13    10.00    300.00   -300.00    300.00
```

```
187 3          1    UNDEFINED    80.21   -23.47    10.00    270.00   -300.00    300.00
```

```
188 [ExaGO] Finalizing scopflow application.
```

Chapter 6

Stochastic optimal power flow (SOPFLOW)

SOPFLOW solves a stochastic security-constrained multi-period optimal power flow problem. The problem is set up as a two-stage optimization problem where the first-stage (base-case) represents the normal operation of the grid (or the most likely forecast) and the second-stage comprises N_s scenarios of forecast deviation. Each scenario can have multiple contingencies and each contingency can be multi-period.

6.1 Formulation

An illustration of **SOPFLOW** is shown in Fig. 6.1 for a case with two scenarios s_0 and s_1 with three contingencies each, and each scenario/contingency with two time-periods. We assume that any contingency is incident at the first time-step, i.e., at t_0 .

The full formulation for the stochastic security-constrained multi-period optimal power flow is given in (6.1) – (6.7). In this formulation, the objective is to reduce the expected cost, where $f(x_{s,c,t})$ is the cost for scenario s with contingency c at time t . π_s is the probability of scenario s .

$$\min \sum_{s=0}^{N_s-1} \pi_s \sum_{c=0}^{N_c-1} \sum_{t=0}^{N_t-1} f(x_{s,c,t}) \quad (6.1)$$

s.t.

$$g(x_{s,c,t}) = 0, \quad s \in [1, N_s - 1], c \in [0, N_c - 1], t \in [0, N_t - 1] \quad (6.2)$$

$$h(x_{s,c,t}) \leq 0, \quad s \in [1, N_s - 1], c \in [0, N_c - 1], t \in [0, N_t - 1] \quad (6.3)$$

$$x^- \leq x_{s,c,t} \leq x^+, \quad s \in [1, N_s - 1], c \in [0, N_c - 1], t \in [0, N_t - 1] \quad (6.4)$$

$$-\Delta x_t \leq x_{s,c,t} - x_{s,c,t-\Delta t} \leq \Delta x_t, \quad s \in [1, N_s - 1], c \in [0, N_c - 1], t \in [1, N_t - 1] \quad (6.5)$$

$$-\Delta x_c \leq x_{s,c,0} - x_{s,0,0} \leq \Delta x_c, \quad s \in [1, N_s - 1], c \in [1, N_c - 1] \quad (6.6)$$

$$-\Delta x_s \leq x_{s,0,0} - x_{0,0,0} \leq \Delta x_s, \quad s \in [1, N_s - 1] \quad (6.7)$$

The modeling details used for an optimal power flow problem are also used for a **SOPFLOW** problem, i.e., each of the circles shown in Fig. 6.1 has the modeling details of an optimal power flow problem (**OPFLOW**). Incorporating the probabilities π_s for each scenario is not implemented yet which leads to each scenario having an equal probability.

Depending on the options selected, SOPFLOW can be used to solve

- Single-period stochastic optimal power flow : No contingencies or time-periods
- Single-period contingency-constrained stochastic optimal power flow : No time-periods

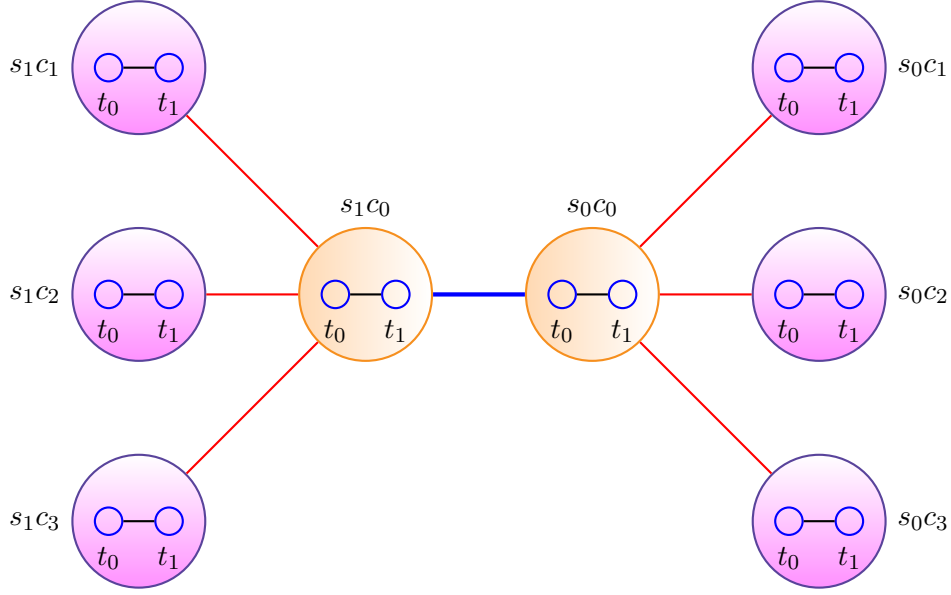


Figure 6.1: Stochastic multi-period contingency constrained structure with two scenarios s_0 and s_1 . Each scenario has three contingencies c_1, c_2 , and c_3 . s_0c_0 and s_1c_0 denote the base-cases for the two scenarios. Each scenario and contingency has two time-periods t_0 , and t_2, t_2 . The red line denotes the coupling between the contingencies and their respective base-case scenarios. The blue line denotes the coupling between the scenarios

- Multi-period security-constrained stochastic optimal power flow : Full formulation

Currently, **SOPFLOW** uses wind power generation as the stochastic variables and each scenario is a realization of the power output from wind generators. A zero fuel cost is used for wind power generation to ensure wind generation would be the dispatched to the given target level (upper limit).

For the contingency-constrained stochastic optimal power flow, **SOPFLOW** flattens out the contingencies and scenarios to a two-level formulation. In this formulation, all the scenarios (and their contingencies) are coupled to a base scenario problem.

For contingencies, **SOPFLOW** supports generation and/or transmission outages. A contingency can have multiple outages, but, it should not cause any islanding. The coupling between the no-contingency and the contingency case for each scenario is also the difference in real power output ($p_{jsct}^g - p_{js0t}^g, j \in J^{\text{gen}}$) that must be within the 30 minute generator ramp rate. Refer to 5 for details on the contingency modeling.

For multi time-period, we use ramping constraints on the generator real power output between successive time steps.

SOPFLOW can be run in two modes: preventive and corrective. In the preventive mode, generator real power output is fixed to the base-case values for generators at PV bus(es). In this mode, the generators at the reference bus provide/absorb any deficit/surplus power. The corrective mode allows deviation of the PV and PQ generator real power from the base-case dispatch constrained by its 30-min. ramp rate capability. Note that the preventive/corrective mode is only applied at the first step t_0 . In the successive time-steps, the generator dispatch is dictated by the previous step dispatch and the ramp limits.

6.2 Solvers

SOPFLOW supports solving the optimization problem via **Ipopt** [7], **HiOp** [6, 5], or **EMPAR**. **Ipopt** [7] can solve **SOPFLOW** on single rank only. **HiOp** [6, 5] supports solving the problem in parallel using a primal-decomposition algorithm. With **HiOp**, one can solve the subproblem either on the CPU or GPU by selecting the appropriate

subproblem model and solver (see options table below). However, note that *ExaGO* needs to be built with *Ipopt* [7] even when using *HiOp* [6, 5] solver. The *EMPAR* solver does not solve the stochastic ACOPF problem, but it only solves the base-case and the stochastic scenarios independently with **OPFLOW**. It distributes the scenarios and contingencies to different processes when executed in parallel. Table 6.1 lists the compatibility of the different solvers for different variations of **SOPFLOW**.

Table 6.1: **SOPFLOW** solver compatibility

Solver	Stochastic scenarios	Include contingencies	Include multi-period
IPOPT	Y	Y	Y
HIOP	Y	Y	N
EMPAR	Y	Y	Y

6.3 Input and Output

The following files are needed for executing SOPFLOW.

- **Network file:** The network file describing the network details. Only **MATPOWER** format files are currently supported.
- **Scenario file:** **SOPFLOW** only supports reading wind generation scenarios in a CSV format. An example of this format for the 9-bus case is [here](#).
- **Contingency file:** Contingencies can be specified via a PTI or PSS/E format file as described in chapter 5. The option `-sopflow_enable_multicontingency` should be set for multi-contingency problems.
- **Load data:** One file for load real power and one for reactive power. The files need to be in CSV format. An example of the format for the 9-bus case is [here](#).

The **SOPFLOW** output is saved to a directory named `sopflowout`. This directory contains N_s subdirectories to save the solution for each scenario. Each of these subdirectories contain N_c subdirectories, one for each contingency. Each contingency subdirectory has N_t **MATPOWER** format files to store the output for each time-period for the given contingency and scenario. The subdirectories have the directory name format `scen_x` where `x` is the scenario number, `cont_y` where `y` is the contingency number, and the output files have the file name format `t_z` where `z` is the time-step number.

6.4 Usage

```

1  ./sopflow -netfile <netfilename> -windgen <wind_scenario_filename> \
2  [-sopflow_enable_multicontingency 1] <sopflowoptions>

```

6.5 Options

Table 6.2: SOPFLOW options

Option	Meaning	Values (Default value)	Compatibility
-netfile	Network file name	string 4096 characters (case9mod_gen3_wind.m)	
-windgen	Scenario file name	string 4096 characters (case9/10scenarios_9bus.csv)	
-ctgcfle	Contingency file name	string (case9.cont)	
-save_output	Save output to directory	0 or 1 (0)	Format determined by OPFLOW option.
-sopflow_output_directory	Output directory path	"sopflowout"	
-sopflow_mode	Operation mode: Preventive or corrective	0 or 1 (0)	
-sopflow_model	Set model for SOPFLOW	GENRAMP, GENRAMPC (GENRAMP)	
-sopflow_solver	Set solver for SOPFLOW	IPOPT, HIOP, or EMPAR	
-sopflow_subproblem_solver	Set solver for subproblem	IPOPT or HIOP (IPOPT)	Only when using HiOp solver for SOPFLOW
-sopflow_subproblem_model	Set model for subproblem	See OPFLOW chapter	Only when using HiOp solver for SOPFLOW
-sopflow_enable_multicontingency	Multi-contingency SOPFLOW	0 or 1 (0)	
-sopflow_flatten_contingencies	Flatten contingencies for SOPFLOW	0 or 1 (1)	
-sopflow_Ns	Number of scenarios	int (Default 0. Use -1 to select all scenarios from the scenario file)	
-sopflow_Nc	Number of contingencies	int (0. Passing -1 results in all contingencies in the file used)	

6.6 Examples

Some **SOPFLOW** example runs are provided with some sample output. Options are the default options given in Tables 3.4, 4.1, 5.1 and 6.2 unless otherwise specified. Sample output is generated by running examples in the installation directory.

Example using the [Ipopt](#) [7] solver:

```

1 bin/sopflow -netfile $EXAGO_DIR/datafiles/case9/case9mod.m -windgen $EXAGO_DIR/datafiles/case9/10
  _scenarios_9bus.csv -sopflow_Ns 4 -sopflow_enable_multicontingency 0 -sopflow_solver IPOPT -
  print_output
2 [ExaGO] SOPFLOW: Application created
3 Rank[0],s = 0, scen_num = 0
4 Rank[0],s = 1, scen_num = 1
5 Rank[0],s = 2, scen_num = 2
6 Rank[0],s = 3, scen_num = 3
7 [ExaGO] SOPFLOW: Using IPOPT solver
8 [ExaGO] SOPFLOW: Setup completed
9
10 *****
11 This program contains Ipopt, a library for large-scale nonlinear optimization.
12 Ipopt is released as open source code under the Eclipse Public License (EPL).
13 For more information visit http://projects.coin-or.org/Ipopt
14 *****
15

```

```

16 This is Ipopt version 3.12.10, running with linear solver ma27.
17
18 Number of nonzeros in equality constraint Jacobian...: 513
19 Number of nonzeros in inequality constraint Jacobian.: 288
20 Number of nonzeros in Lagrangian Hessian.....: 564
21
22 Total number of variables.....: 120
23     variables with only lower bounds: 0
24     variables with lower and upper bounds: 88
25     variables with only upper bounds: 0
26 Total number of equality constraints.....: 96
27 Total number of inequality constraints.....: 72
28     inequality constraints with only lower bounds: 0
29     inequality constraints with lower and upper bounds: 72
30     inequality constraints with only upper bounds: 0
31
32 iter    objective    inf_pr    inf_du lg(mu)  ||d|| lg(rg) alpha_du alpha_pr ls
33   0   3.2548812e+04  1.80e+00  1.00e+02  -1.0  0.00e+00   -  0.00e+00  0.00e+00  0
34   1   2.6023632e+04  1.18e+00  1.21e+02  -1.0  1.07e+00   -  5.64e-02  3.40e-01f  1
35   2   2.0106844e+04  4.83e-01  2.57e+03  -1.0  6.99e-01   2.0  1.02e-02  6.07e-01f  1
36   3   2.0011119e+04  4.70e-01  2.50e+03  -1.0  5.84e-01   2.4  1.32e-01  2.67e-02f  1
37   4   1.9372689e+04  3.88e-01  1.99e+03  -1.0  7.94e-01   1.9  2.37e-01  1.97e-01f  1
38   ...
39  18   1.6587232e+04  4.15e-05  1.21e+03  -5.7  5.76e-03   -  1.00e+00  9.18e-01h  1
40  19   1.6587229e+04  8.62e-06  1.55e-05  -5.7  3.00e-03   -  1.00e+00  1.00e+00h  1
41 iter    objective    inf_pr    inf_du lg(mu)  ||d|| lg(rg) alpha_du alpha_pr ls
42  20   1.6587228e+04  1.50e-06  2.56e-06  -7.0  1.25e-03   -  1.00e+00  1.00e+00h  1
43  21   1.6587228e+04  2.18e-07  4.53e-07  -7.0  4.77e-04   -  1.00e+00  1.00e+00h  1
44
45 Number of Iterations.....: 21
46
47                                     (scaled)                                     (unscaled)
48 Objective.....: 3.7191094895317639e+02  1.6587228323311669e+04
49 Dual infeasibility.....: 4.5286779256921672e-07  2.0197903548587065e-05
50 Constraint violation.....: 3.6703967934426096e-08  3.6703967934426096e-08
51 Complementarity.....: 6.2406713469536533e-07  2.7833394207413294e-05
52 Overall NLP error.....: 6.2406713469536533e-07  2.7833394207413294e-05
53
54
55 Number of objective function evaluations = 22
56 Number of objective gradient evaluations = 22
57 Number of equality constraint evaluations = 22
58 Number of inequality constraint evaluations = 22
59 Number of equality constraint Jacobian evaluations = 22
60 Number of inequality constraint Jacobian evaluations = 22
61 Number of Lagrangian Hessian evaluations = 21
62 Total CPU secs in IPOPT (w/o function evaluations) = 0.043
63 Total CPU secs in NLP function evaluations = 0.013
64
65 EXIT: Optimal Solution Found.
66 =====
67 Stochastic Optimal Power Flow
68 =====
69 Number of scenarios 4
70 Multi-contingency scenarios? NO
71 Solver IPOPT
72 Initialization MIDPOINT
73 Load loss allowed NO
74 Power imbalance allowed NO
75 Ignore line flow constraints NO
76
77 Convergence status CONVERGED
78 Objective value (base) 4149.15
79
80 -----
81 Bus Pd Qd Vm Va mult_Pmis mult_Qmis Pslack Qslack
82 -----

```

83	1	0.00	0.00	1.100	0.000	2152.67	0.00	0.00	0.00
84	2	0.00	0.00	1.095	3.935	2108.81	-0.00	0.00	0.00
85	3	0.00	0.00	1.087	1.637	2117.68	-0.00	0.00	0.00
86	4	0.00	0.00	1.097	-2.054	2152.95	0.18	0.00	0.00
87	5	75.00	50.00	1.079	-3.127	2163.77	7.53	0.00	0.00
88	6	90.00	30.00	1.087	-4.084	2181.34	1.69	0.00	0.00
89	7	0.00	0.00	1.100	0.455	2109.21	-0.04	0.00	0.00
90	8	100.00	35.00	1.089	-1.907	2130.61	3.09	0.00	0.00
91	9	0.00	0.00	1.100	-0.471	2117.94	-0.09	0.00	0.00

From	To	Status	Sft	Stf	Slim	mult_Sf	mult_St	
96	1	4	1	75.41	75.22	380.00	-0.00	-0.00
97	2	7	1	117.10	117.61	250.00	-0.00	-0.00
98	3	9	1	78.55	79.51	300.00	-0.00	-0.00
99	4	5	1	29.85	40.63	250.00	-0.00	-0.00
100	4	6	1	46.99	47.91	250.00	-0.00	-0.00
101	5	7	1	51.14	48.90	250.00	-0.00	-0.00
102	6	9	1	47.20	49.41	150.00	-0.00	-0.00
103	7	8	1	69.69	70.99	250.00	-0.00	-0.00
104	8	9	1	36.50	31.07	150.00	-0.00	-0.00

Gen	Status	Fuel	Pg	Qg	Pmin	Pmax	Qmin	Qmax
109	1	UNDEFINED	75.12	6.61	10.00	350.00	-300.00	300.00
110	2	UNDEFINED	116.99	-5.04	10.00	300.00	-300.00	300.00
111	3	UNDEFINED	75.00	-23.36	10.00	85.00	-300.00	300.00

112 [ExaGO] Finalizing sopflow application.

Example using the *IPOPT* solver with multicontingency enabled:

```

1 bin/sopflow -netfile $EXAGO_DIR/datafiles/case9/case9mod.m -windgen $EXAGO_DIR/datafiles/case9/10
  _scenarios_9bus.csv -sopflow_Ns 4 -sopflow_enable_multicontingency 1 -sopflow_solver IPOPT -
  print_output -sopflow_Nc 4 -ctgcfile $EXAGO_DIR/datafiles/case9/case9.cont -sopflow_Nc 4
2 [ExaGO] SOPFLOW: Application created
3 Rank[0],s = 0, scen_num = 0, cont_num = 0
4 Rank[0],s = 1, scen_num = 0, cont_num = 1
5 Rank[0],s = 2, scen_num = 0, cont_num = 2
6 Rank[0],s = 3, scen_num = 0, cont_num = 3
7 Rank[0],s = 4, scen_num = 0, cont_num = 4
8 Rank[0],s = 5, scen_num = 1, cont_num = 0
9 Rank[0],s = 6, scen_num = 1, cont_num = 1
10 Rank[0],s = 7, scen_num = 1, cont_num = 2
11 Rank[0],s = 8, scen_num = 1, cont_num = 3
12 Rank[0],s = 9, scen_num = 1, cont_num = 4
13 Rank[0],s = 10, scen_num = 2, cont_num = 0
14 Rank[0],s = 11, scen_num = 2, cont_num = 1
15 Rank[0],s = 12, scen_num = 2, cont_num = 2
16 Rank[0],s = 13, scen_num = 2, cont_num = 3
17 Rank[0],s = 14, scen_num = 2, cont_num = 4
18 Rank[0],s = 15, scen_num = 3, cont_num = 0
19 Rank[0],s = 16, scen_num = 3, cont_num = 1
20 Rank[0],s = 17, scen_num = 3, cont_num = 2
21 Rank[0],s = 18, scen_num = 3, cont_num = 3
22 Rank[0],s = 19, scen_num = 3, cont_num = 4
23 [ExaGO] SOPFLOW: Using IPOPT solver
24 [ExaGO] SOPFLOW: Setup completed
25
26 *****
27 This program contains Ipopt, a library for large-scale nonlinear optimization.
28 Ipopt is released as open source code under the Eclipse Public License (EPL).
29 For more information visit http://projects.coin-or.org/Ipopt
30 *****
31
32 This is Ipopt version 3.12.10, running with linear solver ma27.
33

```

```

34 Number of nonzeros in equality constraint Jacobian...: 2449
35 Number of nonzeros in inequality constraint Jacobian.: 1312
36 Number of nonzeros in Lagrangian Hessian.....: 2820
37
38 Total number of variables.....: 600
39         variables with only lower bounds: 0
40         variables with lower and upper bounds: 440
41         variables with only upper bounds: 0
42 Total number of equality constraints.....: 480
43 Total number of inequality constraints.....: 328
44         inequality constraints with only lower bounds: 0
45         inequality constraints with lower and upper bounds: 328
46         inequality constraints with only upper bounds: 0
47
48 iter    objective    inf_pr    inf_du lg(mu)  ||d|| lg(rg) alpha_du alpha_pr ls
49   0  1.6274406e+05  1.80e+00  1.00e+02 -1.0  0.00e+00 -  0.00e+00  0.00e+00  0
50   1  1.4901965e+05  1.56e+00  8.69e+01 -1.0  1.07e+00 -  1.73e-01  1.31e-01f  1
51   2  1.4480394e+05  1.49e+00  1.32e+02 -1.0  1.80e+00 -  1.34e-03  4.72e-02f  1
52   3  1.3529809e+05  1.31e+00  1.15e+02 -1.0  1.22e+00 -  4.90e-02  1.18e-01f  1
53   4  1.1656024e+05  9.25e-01  9.13e+01 -1.0  8.50e-01 -  9.55e-02  2.99e-01f  1
54   5  1.0783333e+05  7.18e-01  9.48e+01 -1.7  7.97e-01 -  2.05e-01  2.24e-01f  1
55   6  9.9954510e+04  5.10e-01  9.64e+01 -1.7  7.94e-01 -  3.55e-01  2.89e-01f  1
56   7  9.3292251e+04  3.16e-01  9.31e+01 -1.7  7.35e-01 -  3.05e-01  3.78e-01f  1
57   8  9.2973069e+04  3.05e-01  9.00e+01 -1.7  4.70e-01  2.0  3.84e-02  3.33e-02f  1
58   ...
59  30  8.3618318e+04  1.07e-05  1.74e+03 -5.7  3.88e-03 -  1.00e+00  8.83e-01f  1
60  31  8.3618280e+04  5.27e-06  2.36e-04 -5.7  2.35e-03 -  1.00e+00  1.00e+00h  1
61  32  8.3618280e+04  6.40e-07  1.28e-06 -5.7  8.17e-04 -  1.00e+00  1.00e+00h  1
62  33  8.3618274e+04  1.95e-07  1.70e-06 -7.0  4.52e-04 -  1.00e+00  1.00e+00h  1
63  34  8.3618274e+04  8.21e-09  1.71e-08 -7.0  9.25e-05 -  1.00e+00  1.00e+00h  1
64
65 Number of Iterations....: 34
66
67                                     (scaled)                                     (unscaled)
68 Objective.....: 1.8748492036555979e+03  8.3618274483039670e+04
69 Dual infeasibility.....: 1.7101740512915904e-08  7.6273762687604936e-07
70 Constraint violation.....: 1.3811524007811826e-09  1.3811524007811826e-09
71 Complementarity.....: 1.1101524615042143e-07  4.9512799783087964e-06
72 Overall NLP error.....: 1.1101524615042143e-07  4.9512799783087964e-06
73
74
75 Number of objective function evaluations = 35
76 Number of objective gradient evaluations = 35
77 Number of equality constraint evaluations = 35
78 Number of inequality constraint evaluations = 35
79 Number of equality constraint Jacobian evaluations = 35
80 Number of inequality constraint Jacobian evaluations = 35
81 Number of Lagrangian Hessian evaluations = 34
82 Total CPU secs in IPOPT (w/o function evaluations) = 0.135
83 Total CPU secs in NLP function evaluations = 0.094
84
85 EXIT: Optimal Solution Found.
86 =====
87 Stochastic Optimal Power Flow
88 =====
89 Number of scenarios 4
90 Multi-contingency scenarios? YES
91 Contingencies per scenario 4
92 Solver IPOPT
93 Initialization MIDPOINT
94 Load loss allowed NO
95 Power imbalance allowed NO
96 Ignore line flow constraints NO
97
98 Convergence status CONVERGED
99 Objective value (base) 4149.15

```

```

101 -----
102 Bus      Pd      Qd      Vm      Va      mult_Pmis      mult_Qmis      Pslack      Qslack
103 -----
104 1          0.00    0.00    1.100    0.000    2152.67        0.00          0.00        0.00
105 2          0.00    0.00    1.095    3.935    2108.81        -0.00         0.00        0.00
106 3          0.00    0.00    1.087    1.637    2117.68        -0.00         0.00        0.00
107 4          0.00    0.00    1.097   -2.054    2152.95         0.18         0.00        0.00
108 5         75.00    50.00    1.079   -3.127    2163.77         7.53         0.00        0.00
109 6         90.00    30.00    1.087   -4.084    2181.34         1.69         0.00        0.00
110 7          0.00    0.00    1.100    0.455    2109.22        -0.04         0.00        0.00
111 8        100.00    35.00    1.089   -1.907    2130.61         3.09         0.00        0.00
112 9          0.00    0.00    1.100   -0.471    2117.94        -0.09         0.00        0.00
113
114 -----
115 From      To      Status      Sft      Stf      Slim      mult_Sf      mult_St
116 -----
117 1          4          1       75.41    75.22    380.00      -0.00      -0.00
118 2          7          1     117.10   117.61   250.00      -0.00      -0.00
119 3          9          1       78.55    79.51   300.00      -0.00      -0.00
120 4          5          1       29.85    40.63   250.00      -0.00      -0.00
121 4          6          1       46.99    47.91   250.00      -0.00      -0.00
122 5          7          1       51.14    48.90   250.00      -0.00      -0.00
123 6          9          1       47.20    49.41   150.00      -0.00      -0.00
124 7          8          1       69.69    70.99   250.00      -0.00      -0.00
125 8          9          1       36.50    31.07   150.00      -0.00      -0.00
126
127 -----
128 Gen      Status      Fuel      Pg      Qg      Pmin      Pmax      Qmin      Qmax
129 -----
130 1          1    UNDEFINED    75.12    6.61    10.00    350.00   -300.00    300.00
131 2          1    UNDEFINED   116.99   -5.04    10.00    300.00   -300.00    300.00
132 3          1    UNDEFINED    75.00  -23.36    10.00     85.00   -300.00    300.00
133 [ExaGO] Finalizing sopflow application.

```

Chapter 7

Python Bindings

The ExaGO Python bindings are a wrapper around the C++ API to provide an interface to ExaGO in Python. This interface aims to provide equivalent functionality between the ExaGO C++ API and the Python API.

The wrapper uses an object-oriented API slightly different from the C++ API. The C++ API uses the application type in uppercase as the prefix for its methods, where they are native methods in Python. ExaGO Python instances must be destroyed, using `del`, before calling `exago.finalize()`, like calling `*Destroy()` with the C++ API. Failure to do so will cause segmentation faults or other memory errors. In section 7.3, are tables that detail the mappings between functions and objects in the Python vs C++.

7.1 Code Comparison

Below is a comparison of what solving an OPF looks like through the C++ and Python APIs.

C++:

```
1 #include <opflow.h>
2 #include <exago_config.h>
3
4 static char help[] = "User example calling OPFLOW.\n";
5 static char appname[] = "opflow";
6
7 int main(int argc, char** argv) {
8
9     /* Initialize ExaGO application */
10    PetscErrorCode ierr;
11    OPFLOW opflow;
12    MPI.Comm comm = MPI.COMM_WORLD;
13    ierr = ExaGOInitialize(comm, &argc, &argv, appname, help);
14
15    /* Create OPFLOW object */
16    ierr = OPFLOWCreate(comm, &opflow);
17    ExaGOCheckError(ierr);
18
19    /* Read network data */
20    ierr = OPFLOWReadMatPowerData(opflow, "datafiles/case9/case9mod.m");
21    ExaGOCheckError(ierr);
22
23    /* Solve */
24    ierr = OPFLowsolve(opflow);
25    ExaGOCheckError(ierr);
26
27    /* Print solution */
28    ierr = OPFLOWPrintSolution(opflow);
29    ExaGOCheckError(ierr);
30
31    /* Destroy OPFLOW object */
32    ierr = OPFLOWDestroy(&opflow);
```

```

33 ExaGOCheckError(ierr);
34
35 /* Clean up resources */
36 ExaGOFinalize();
37
38 return 0;
39 }

```

Python:

```

1 import exago
2 exago.initialize("opflow")
3 opf = exago.OPFLOW()
4 opf.read_mat_power_data('datafiles/case9/case9mod.m')
5 opf.solve()
6 opf.print_solution()
7 del opf
8 exago.finalize()

```

7.2 Building with MPI

ExaGO depends on mpi4py when running through the Python interface. When running ExaGO, you may need to disable threading through mpi4py before importing exago:

```

1 import mpi4py.rc
2 mpi4py.rc.threads = False
3 from mpi4py import MPI
4 import exago
5 comm = MPI.COMM_WORLD
6 exago.initialize("app", comm)
7 # ...
8 exago.finalize()

```

Additionally linting tools may re-order your imports, and so you may need to add appropriate comments (`# noqa`) in order to avoid this:

```

1 import mpi4py.rc
2 mpi4py.rc.threads = False
3 from mpi4py import MPI # noqa
4 import exago # noqa

```

7.3 Bindings Tables

7.3.1 ExaGO

Table 7.1: ExaGO Python Bindings

C++ API	Python API	Notes
ExaGOInitialize	exago.initialize	
ExaGOFinalize	exago.finalize	
	exago.prefix	Returns the path to the installation directory of ExaGO (for finding mat power data files, etc)
OutputFormat enum	exago.OutputFormat enum	Output format type for functions like <code>save_solution_</code> . Possible values for this enum can be found in 7.4

7.3.2 PFLOW

The functions in the following table could be called by a pflow object (i.e. `pflow = exago.PFLOW(); pflow.solve();`).

Table 7.2: PFLOW Python Bindings

C++ API	Python API	Notes
PFLOW	exago.PFLOW class	
PFLOWReadMatPowerData	read_mat_power_data	
PFLWSolve	solve	

7.3.3 OPFLOW

The functions in the following table could be called by a opflow object (i.e. `opflow = exago.OPFLOW()`; `opflow.solve()`).

Table 7.3: OPFLOW Python Bindings

C++ API	Python API	Notes
OPFLOW	exago.OPFLOW class	
OPFLOWObjectiveType enum	exago.OPFLOWObjectiveType enum	More details and possible values for this enum can be found in 7.4
OPFLOWInitializationType enum	exago.OPFLOWInitializationType enum	More details and possible values for this enum can be found in 7.4
OPFLOWGenBusVoltageType enum	exago.OPFLOWGenBusVoltageType enum	More details and possible values for this enum can be found in 7.4
OPFLOWSetObjectiveType	set_objective_type	
OPFLOWSetInitializationType	set_initialization_type	
OPFLOWSetGenBusVoltageType	set_gen_bus_voltage_type	
OPFLOWSetModel	set_model	options are "PBPOLRAJAHIO", "POWER_BALANCE_HIO", and "POWER_BALANCE_POLAR"
OPFLOWSetSolver	set_solver	options are "IPOPT", "HIO", and "HIOPSPARSE"
OPFLOWHasGenSetPoint	set_has_gen_set_point	
OPFLOWSetHIOPComputeMode	set_hiop_compute_mode	options are "CPU" or "GPU"
OPFLOWSetHIOPMemSpace	set_hiop_mem_space	options are "DEFAULT", "HOST", "UM", and "DEVICE"
OPFLOWHasLoadLoss	set_has_load_loss	
OPFLOWIgnoreLineflowConstraints	set_ignore_lineflow_constraints	
OPFLOWHasBusPowerImbalance	set_has_bus_power_imbalance	
OPFLOWUseAGC	set_use_agc	
OPFLOWSetHIOPVerbosityLevel	set_hiop_verbosity_level	integer between 0 and 10
OPFLOWSetLoadLossPenalty	set_loadloss_penalty	
OPFLOWSetBusPowerImbalancePenalty	set_bus_power_imbalance_penalty	
OPFLOWSetTolerance	set_tolerance	
OPFLOWSetWeight	set_weight	
PSSetGenPowerLimits	ps_set_gen_power_limits	
OPFLOWGetTolerance	get_tolerance	
OPFLOWGetHIOPComputeMode	get_hiop_compute_mode	
OPFLOWGetHIOPMemSpace	get_hiop_mem_space	
OPFLOWGetModel	get_model	
OPFLOWGetSolver	get_solver	
OPFLOWGetConvergenceStatus	get_convergence_status	
OPFLOWGetObjectiveType	get_objective_type	
OPFLOWGetInitializationType	get_initialization_type	
OPFLOWGetGenBusVoltageType	get_gen_bus_voltage_type	
OPFLOWGetHasGenSetPoint	get_has_gen_set_point	
OPFLOWGetLoadlossPenalty	get_loadloss_penalty	
OPFLOWGetIgnoreLineflowConstraints	get_ignore_lineflow_constraints	

Table 7.3: OPFLOW Python Bindings (cont.)

C++ API	Python API	Notes
OPFLOWGetHasLoadloss	get_has_loadloss	
OPFLOWGetHasBusPowerImbalance	get_has_bus_power_imbalance	
OPFLOWGetUseAGC	get_use_agc	
OPFLOWGetHIOPVerbosityLevel	get_hiop_verbosity_level	
OPFLOWGetBusPowerImbalancePenalty	get_bus_power_imbalance_penalty	
PSGetGenDispatch	get_gen_dispatch	
OPFLOWGetObjectivesTypes	get_objective_types	
OPFLOWGetInitializationTypes	get_initialization_types	
OPFLOWGetGenBusVoltage	get_gen_bus_voltage	
OPFLOWGetObjective	get_objective	
OPFLOWSolve	solve	
OPFLOWPrintSolution	print_solution	
OPFLOWSaveSolution	save_solution	
OPFLOWReadMatPowerData	read_mat_power_data	
OPFLOWSolutionToPS	solution_to_ps	
OPFLOWSetUpPS	set_up_ps	
OPFLOWSkipOptions	skip_options	
OPFLOWSetLinesMonitored	set_lines_monitored	implemented as two different methods
	set_lines_monitored([...])	Specify a list of line kvlevels (type float) to monitor
	set_lines_monitored(n, "file")	Read n line kvlevels from a file (n=-1 for all)

7.3.4 SCOPFLOW

The functions in the following table could be called by a scopflow object (i.e. `scopflow = exago.SCOPFLOW(); scopflow.solve();`)

Table 7.4: SCOPFLOW Python Bindings

C++ API	Python API	Notes
SCOPFLOW	exago.SCOPFLOW class	
ContingencyFileInputFormat enum	exago.ContingencyFileInputFormat enum	More details and possible values for this enum can be found in the 7.4. Currently, this is only be used as a Python enum. A string representation is not available.
SCOPFLOWSetModel	set_model	
SCOPFLOWSetNetworkData	set_network_data	
SCOPFLOWSetLoadProfiles	set_load_profiles	
SCOPFLOWSetNumContingencies	set_num_contingencies	
SCOPFLOWSetContingencyData	set_contingency_data	
SCOPFLOWSetPLoadData	set_pload_data	
SCOPFLOWSetQLoadData	set_qload_data	
SCOPFLOWSetWindGenProfile	set_wind_gen_profile	
SCOPFLOWSetTimeStep	set_time_step	
SCOPFLOWSetDuration	set_duration	
SCOPFLOWSetTimeStepandDuration	set_time_step_and_duration	
SCOPFLOWSetTolerance	set_tolerance	
SCOPFLOWSetVerbosityLevel	set_verbosity_level	
SCOPFLOWSetComputeMode	set_compute_mode	

Table 7.4: SCOPFLOW Python Bindings (cont.)

C++ API	Python API	Notes
SCOPFLOWSetSolver	set_solver	
SCOPFLOWSetSubproblemModel	set_subproblem_model	
SCOPFLOWSetSubproblemSolver	set_subproblem_solver	
SCOPFLOWSetInitializationType	set_initialization_type	
SCOPFLOWSetGenBusVoltageType	set_gen_bus_voltage_type	
SCOPFLOWEnableMultiPeriod	enable_multi_period	
SCOPFLOWEnablePowerImbalanceVariables	enable_power_imbalance_variables	
SCOPFLOWIgnoreLineflowConstraints	ignore_lineflow_constraints	
SCOPFLOWGetTolerance	get_tolerance	
SCOPFLOWGetNumIterations	get_num_iterations	
SCOPFLOWGetConvergenceStatus	get_convergence_status	
SCOPFLOWGetTotalObjective	get_total_objective	
SCOPFLOWGetBaseObjective	get_base_objective	
SCOPFLOWSetUp	set_up	
SCOPFLOWSolve	solve	
SCOPFLOWPrintSolution	print_solution	
SCOPFLOWSaveSolution	save_solution	
SCOPFLOWSaveSolutionDefault	save_solution_default	
SCOPFLOWSaveSolutionAll	save_solution_all	
SCOPFLOWSaveSolutionAllDefault	save_solution_all_default	

7.3.5 SOPFLOW

The functions in the following table could be called by a sopflow object (i.e. `sopflow = exago.SOPFLOW()`;
`sopflow.solve()`);

Table 7.5: SOPFLOW Python Bindings

C++ API	Python API	Notes
SCOPFLOW	exago.SCOPFLOW class	
ScenarioFileInputFormat enum	ScenarioFileInputFormat enum	More details and possible values for this enum can be found in 7.4. Currently, this is only be used as a Python enum. A string representation is not available.
ScenarioUncertaintyType enum	ScenarioUncertaintyType enum	More details and possible values for this enum can be found in the 7.4. Currently, this is only be used as a Python enum. A string representation is not available.
SOPFLOWSetModel	set_model	
SOPFLOWSetNetworkData	set_network_data	
SOPFLOWSetContingencyData	set_contingency_data	
SOPFLOWSetNumContingencies	set_num_contingencies	
SOPFLOWSetScenarioData	set_scenario_data	
SOPFLOWSetNumScenarios	set_num_scenarios	
SOPFLOWSetWindGenProfile	set_wind_gen_profile	
SOPFLOWSetTimeStepandDuration	set_time_step_and_duration	
SOPFLOWSetTolerance	set_tolerance	
SOPFLOWSetSubproblemVerbosityLevel	set_subproblem_verbosity_level	
SOPFLOWSetSubproblemComputeMode	set_subproblem_compute_mode	
SOPFLOWSetSubproblemModel	set_subproblem_model	
SOPFLOWSetSubproblemSolver	set_subproblem_solver	

Table 7.5: SOPFLOW Python Bindings (cont.)

C++ API	Python API	Notes
SOPFLOWSetSolver	set_solver	
SOPFLOWSetInitializationType	set_initialization_type	
SOPFLOWSetGenBusVoltageType	set_gen_bus_voltage_type	
SOPFLOWSetLoadProfiles	set_load_profiles	
SOPFLOWSetLoadProfiles	set_ignore_lineflow_constraints	
SOPFLOWEnableMultiContingency	enable_multi_contingency	
SOPFLOWFlattenContingencies	flatten_contingencies	
SOPFLOWGetNumScenarios	get_num_scenarios	
SOPFLOWGetNumIterations	get_num_iterations	
SOPFLOWGetConvergenceStatus	get_convergence_status	
SOPFLOWGetTotalObjective	get_total_objective	
SOPFLOWGetConvergenceStatus	get_converged_status	
SOPFLOWGetTolerance	get_tolerance	
SOPFLOWSetUp	setup	
SOPFLOWSolve	solve	
SOPFLOWPrintSolution	print_solution	
SOPFLOWSaveSolution	save_solution	
SOPFLOWSaveSolutionAll	save_solution_all	

7.4 Enums

The enums in ExaGO serve as integer mapped values for certain settings within the application. Several type settings, OPFLOWObjectiveType, OPFLOWInitializationType, and OPFLOWGenBusVoltageType, are specific to OPFLOW.

Instances can be constructed directly through the ExaGO library (i.e. `exago.OutputFormat.CSV`). The possible values for the current enums are as follows:

Possible Values		
OPFLOWObjectiveType	OPFLOWInitializationType	OPFLOWGenBusVoltageType
- MIN_GEN_COST - MIN_GENSETPOINT_DEVIATION - NO_OBJ	- OPFLOWINIT_FROMFILE - OPFLOWINIT_MIDPOINT - OPFLOWINIT_ACPF - OPFLOW_FLATSTART	- VARIABLE_WITHIN_BOUNDS - FIXED_WITHIN_QBOUNDS - FIXED_AT_SETPOINT

Possible Values			
OutputFormat	ContingencyFileInputFormat	ScenarioFileInputFormat	ScenarioUncertaintyType
- CSV - MATPOWER - JSON - MINIMAL	- NATIVE - PSSE	- NATIVE_SINGLEPERIOD - NATIVE_MULTIPERIOD	- NONE - WIND - LOAD

Note: getters for the possible values of ContingencyFileInputFormat, ScenarioFileInputFormat, ScenarioUncertaintyType are not currently available.

Instances can be constructed directly through the exago library (i.e. `exago.OPFLOWObjectiveType.MIN_GEN_COST` or `exago.MIN_GEN_COST`)

Setter functions for these OPFLOW Type configurations can take an integer, an instance of the exago enum, or a string that describes the enum (i.e. 'MIN_GEN_COST'). The rest currently only accept an instance of the exago enum. The possible values for these OPFLOW Type enums can be retrieved through `opflow.get_xxx_types()` (i.e. `opflow.get_gen_bus_voltage_types()`). The `opflow.get_xxx_types` functions yield a list of the enum values.

The next section covers some code examples on how to get and use these values.

7.4.1 Code Examples

Set with a string

```
1 >>> opflow.set_initialization_type('OPFLOWINIT_FROMFILE')
2 >>> opflow.get_initialization_type()
3 OPFLOWInitializationType.OPFLOWINIT_FROMFILE
```

Set with an integer

```
1 >>> opflow.set_initialization_type(1)
2 >>> opflow.get_initialization_type()
3 OPFLOWInitializationType.OPFLOWINIT_FROMFILE
```

Set with an enum instance

```
1 >>> opflow.set_initialization_type(exago.OPFLOWInitializationType.OPFLOWINIT_FROMFILE)
2 >>> opflow.get_initialization_type()
3 OPFLOWInitializationType.OPFLOWINIT_FROMFILE
```

Set via getter function

```
1 >>> types = opflow.get_objective_types()
2 [<OPFLOWObjectiveType.MIN_GEN_COST: 0>, <OPFLOWObjectiveType.MIN_GENSETPOINT_DEVIATION: 1>, <
   OPFLOWObjectiveType.NO_OBJ: 2>]
3 >>> opflow.set_objective_type(types[0])
4 >>> opflow.get_objective_type()
5 OPFLOWObjectiveType.MIN_GEN_COST
```

7.5 History

ExaGO pre v1.1 had optional Python bindings, implemented with ctypes, that could be enabled. [HiOp \[6, 5\]](#), a critical dependency, updated to Umpire v6 when GPU and RAJA options were enabled. Because Umpire after v6 ships with CUDA device code, a final device link step was required for any other libraries or executables. This drastically complicated the ctypes Python bindings, which relied on calling out to the shared library directly.

ExaGO v1.2.1 was the first version to ship Python bindings that used Pybind11, which creates a shared library directly importable from Python, which simplified the user experience and made it possible to call ExaGO from Python when only static libraries are generated.

Appendices

Appendix A

Symbol reference

Units of measurement are given in Table (A.1), indices and index sets in Table (A.2), subsets in Table (A.3), special set elements in Table (A.4), and real-valued parameters in Table (A.5).

Table A.1: Units of measurement

Symbol	Description
1	dimensionless. Dimensionless real number quantities are indicated by a unit of 1.
USD	US dollar. Cost, penalty, and objective values are expressed in USD.
h	hour. Time is expressed in h.
pu	per unit. Voltage magnitude is expressed in a per unit system under given base values, and the unit is denoted by pu
rad	radian. Voltage angles are expressed in rad.
MW	megawatt. Real power is expressed in MW.
MVar	megavolt-ampere-reactive. Reactive power is expressed in MVar.
MVA	megavolt-ampere. Apparent power is expressed in MVA.
MW at 1 pu	megawatt at unit voltage. Conductance is expressed in MW at 1 pu, meaning the conductance is such as to yield a real power flow equal to the indicated amount when the voltage is equal to 1 pu
MVar at 1 pu	megavolt-ampere-reactive at unit voltage. Susceptance is expressed in MVar at 1 pu, meaning the susceptance is such as to yield a reactive power flow equal to the indicated amount when the voltage is equal to 1 pu

Table A.2: Index sets

Symbol	Description
$a \in A$	areas
$i \in I$	buses
$j \in J$	bus-connected grid components, i.e. loads, shunts, generators, stochastic resources, branches
$k \in K$	security contingencies, i.e. NERC $(n - 1)$ - or $(n - k)$ -style contingencies, different from the severe event we are modeling
$s \in S$	stochastic scenarios
$t \in T$	time periods

Table A.3: Subsets

Symbol	Description
$J^{\text{gen}} \subset J$	generators
$J^{\text{ld}} \subset J$	loads
$J^{\text{br}} \subset J$	branches, i.e. lines, transformers
$J^{\text{sh}} \subset J$	shunts
$J_i^{\text{o}} \subset J$	branches with origin bus at bus i
$J_i^{\text{d}} \subset J$	branches with destination bus at bus i

Table A.4: Special set elements

Symbol	Description
$a_i \in A$	area of bus i
$i_j^{\text{d}} \in I$	destination bus of branch $j \in J$
$i_j^{\text{o}} \in I$	origin bus of branch $j \in J^{\text{br}}$

Table A.5: Real-valued parameters

Symbol	Description
b_j^{max}	maximum susceptance for shunt $j \in J^{\text{sh}}$ (MVar at 1 pu)
b_j^{min}	minimum susceptance for shunt $j \in J^{\text{sh}}$ (MVar at 1 pu)
b_j^{ch}	charging susceptance for branch $j \in J^{\text{br}}$ (MVar at 1 pu)
b_j^{s}	series susceptance for branch $j \in J^{\text{br}}$ (MVar at 1 pu)
p_j^{gset}	real power set point of generator $j \in J^{\text{gen}}$ (MW)
p_j^{gmax}	maximum real power output for generator $j \in J^{\text{gen}}$ (MW)
p_j^{gmin}	minimum real power output for generator $j \in J^{\text{gen}}$ (MW)
p_j^{r}	maximum ramp rate for generator $j \in J^{\text{gen}}$ (MW/h)
q_j^{gmax}	maximum reactive power output for generator $j \in J^{\text{gen}}$ (MVar)
q_j^{gmin}	minimum reactive power output for generator $j \in J^{\text{gen}}$ (MVar)
v_i^{max}	maximum voltage magnitude for bus $i \in I$ (pu)
v_i^{min}	minimum voltage magnitude for bus $i \in I$ (pu)
π_s	probability of scenario s (1)

Bibliography

- [1] Satish Balay, Shrirang Abhyankar, Mark F. Adams, Jed Brown, Peter Brune, Kris Buschelman, Lisandro Dalcin, Alp Dener, Victor Eijkhout, William D. Gropp, Dmitry Karpeyev, Dinesh Kaushik, Matthew G. Knepley, Dave A. May, Lois Curfman McInnes, Richard Tran Mills, Todd Munson, Karl Rupp, Patrick Sanan, Barry F. Smith, Stefano Zampini, Hong Zhang, and Hong Zhang. PETSc users manual. Technical Report ANL-95/11 - Revision 3.12, Argonne National Laboratory, 2019.
- [2] D. Beckingsale, M. Mcfadden, J. Dahm, R. Pankajakshan, and R. Hornung. Umpire: Application-focused management and coordination of complex hierarchical memory. *IBM Journal of Research and Development*, 2019.
- [3] David A Beckingsale, Jason Burmark, Rich Hornung, Holger Jones, William Killian, Adam J Kunen, Olga Pearce, Peter Robinson, Brian S Ryujin, and Thomas RW Scogland. Raja: Portable performance for large-scale scientific applications. In *2019 IEEE/ACM International Workshop on Performance, Portability and Productivity in HPC (P3HPC)*, pages 71–81. IEEE, 2019.
- [4] David A Beckingsale, Marty J Mcfadden, Johann PS Dahm, Ramesh Pankajakshan, and Richard D Hornung. Umpire: Application-focused management and coordination of complex hierarchical memory. *IBM Journal of Research and Development*, 64(3/4):00–1, 2019.
- [5] C. G. Petra, I. Aravena Solis, N. Gawande, V. Amatya, A. Li, J. Li, S. Abhyankar, S. Peles, M. Schanen, K. Kim, A. Maldonado, M. Anitescu. ExaSGD - Optimization grid dynamics at Exascale, 2020.
- [6] Cosmin Petra. HiOP User Guide version 0.3, 2017.
- [7] Andreas Waechter and L. Biegler. On the implementation of an interior-point filter line-search algorithm for large scale nonlinear programming. *Mathematical Programming*, 106(1):25–57, 2006.