

## 1. Description


### 1.1. Project

Project Name	MAXREFDES117F1
Board Name	MAXREFDES117F1
Generated with:	STM32CubeMX 4.22.1
Date	10/18/2017

### 1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103C8Tx
MCU Package	LQFP48
MCU Pin number	48


## 2. Pinout Configuration

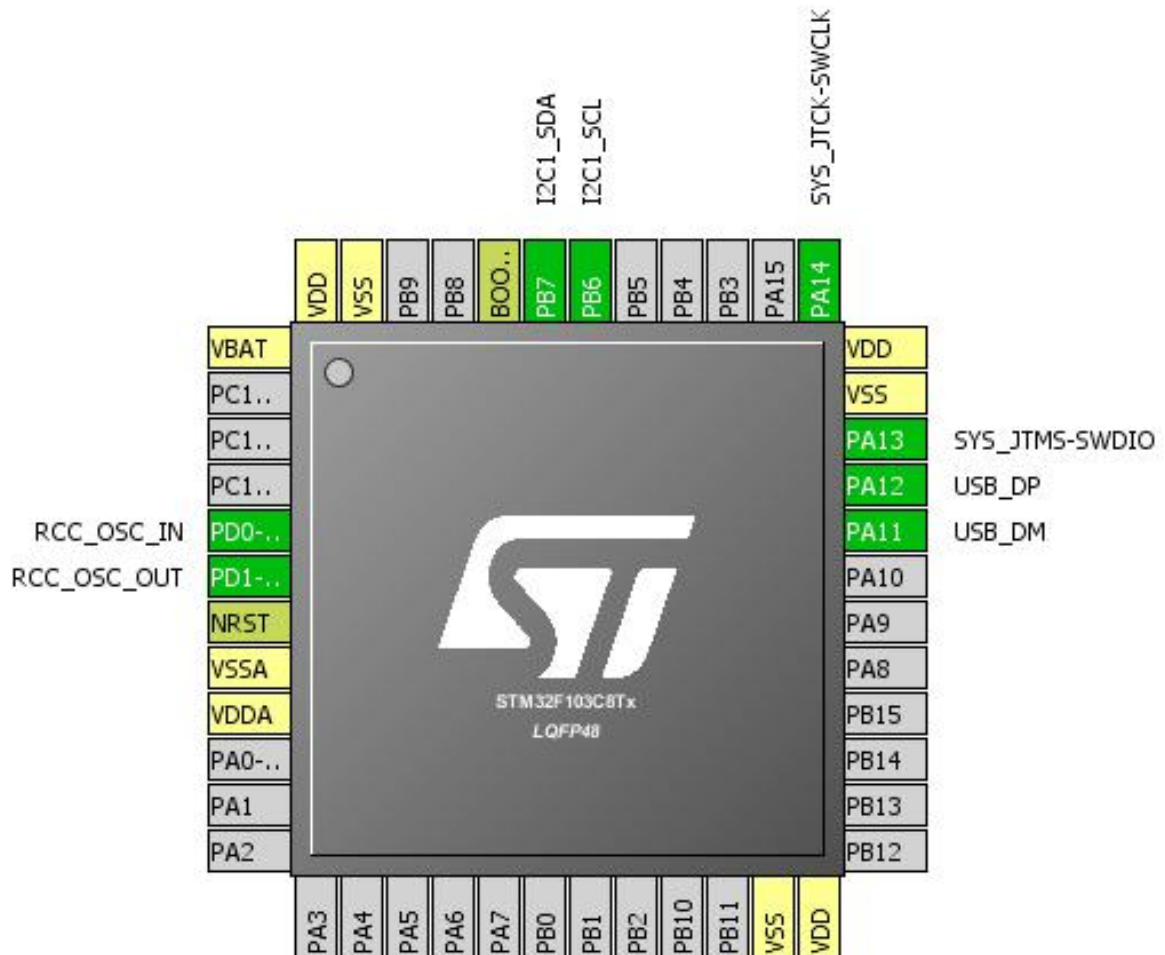

### 3. Pins Configuration

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	VSSA	Power		
9	VDDA	Power		
23	VSS	Power		
24	VDD	Power		
32	PA11	I/O	USB_DM	
33	PA12	I/O	USB_DP	
34	PA13	I/O	SYS_JTMS-SWDIO	
35	VSS	Power		
36	VDD	Power		
37	PA14	I/O	SYS_JTCK-SWCLK	
42	PB6	I/O	I2C1_SCL	
43	PB7	I/O	I2C1_SDA	
44	BOOT0	Boot		
47	VSS	Power		
48	VDD	Power		

## 4. Clock Tree Configuration

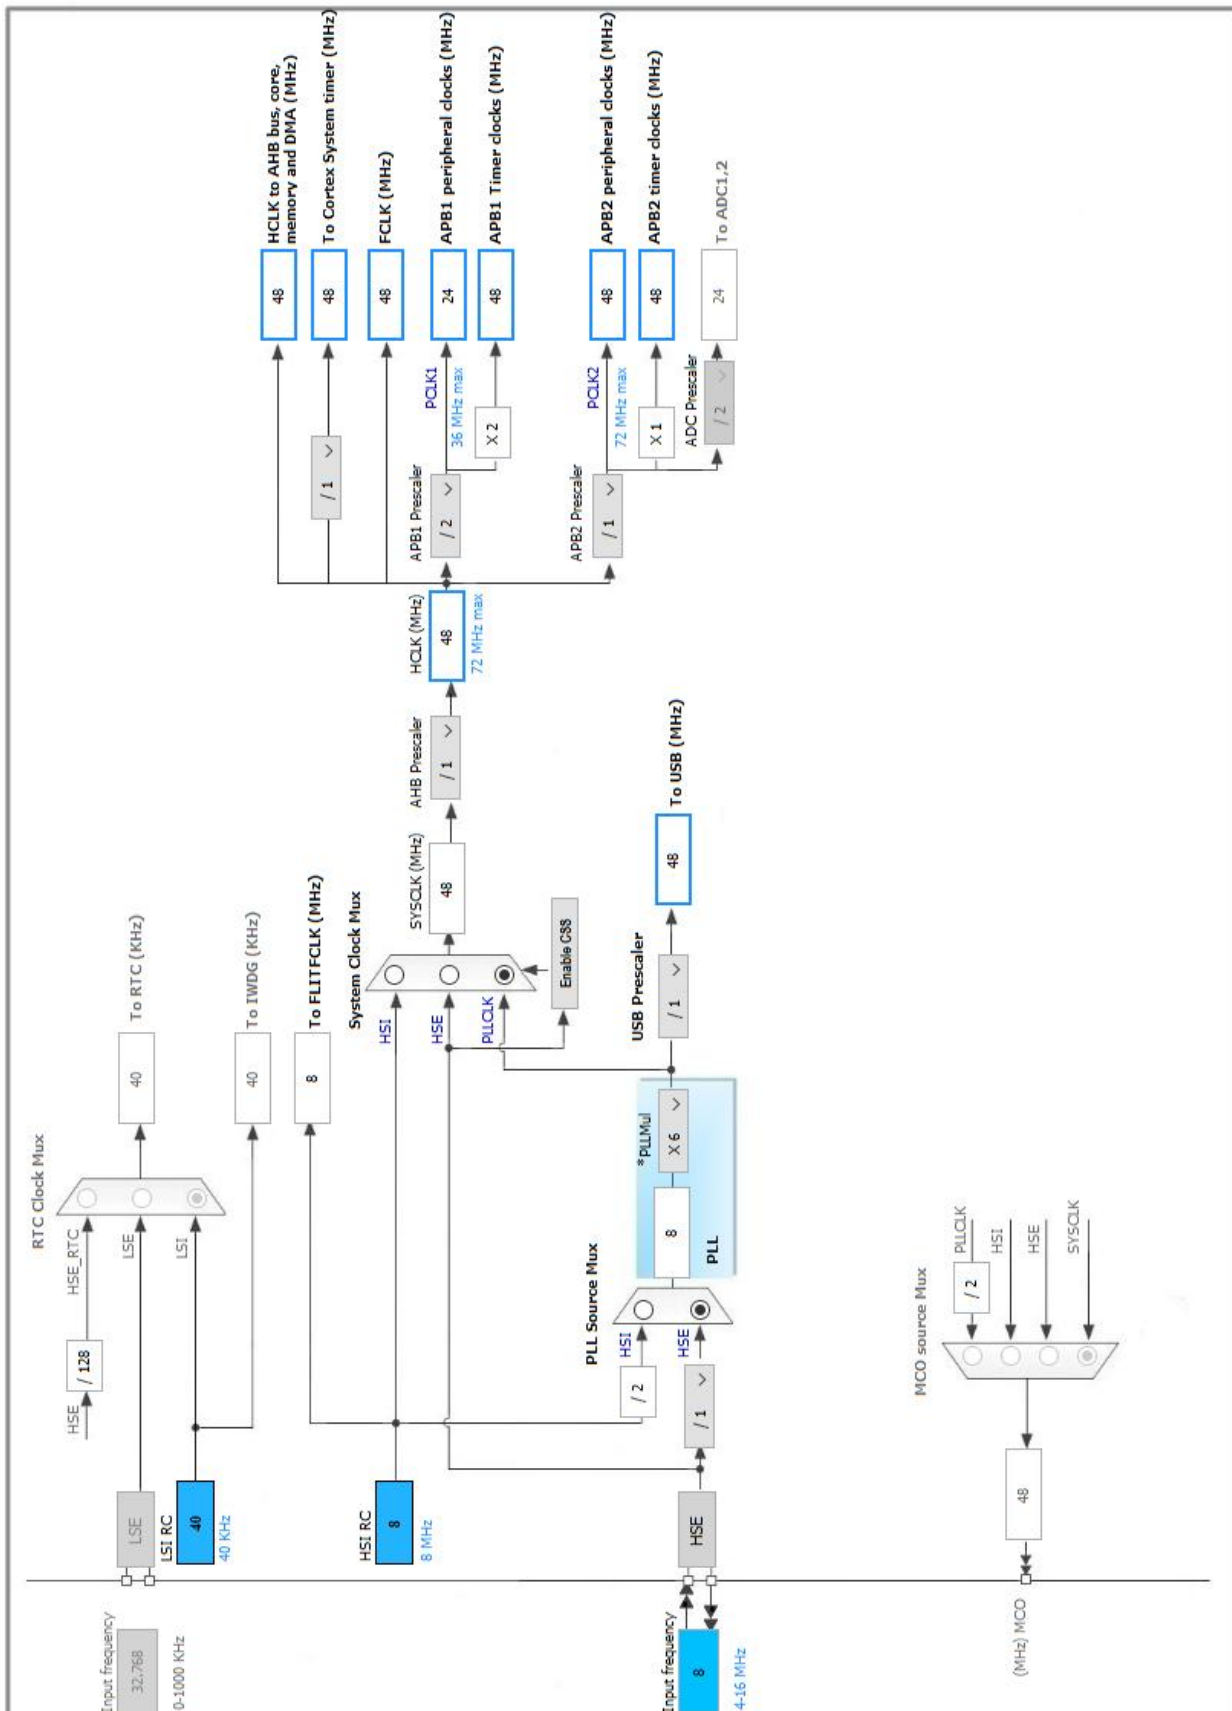

## 5. IPs and Middleware Configuration

### 5.1. I2C1

#### I2C: I2C

##### 5.1.1. Parameter Settings:

###### Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

###### Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

### 5.2. RCC

#### High Speed Clock (HSE): Crystal/Ceramic Resonator

##### 5.2.1. Parameter Settings:

###### System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	1 WS (2 CPU cycle)

###### RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

### 5.3. SYS

#### Debug: Serial Wire

Timebase Source: SysTick

## 5.4. USB

mode: Device (FS)

### 5.4.1. Parameter Settings:

#### Basic Parameters:

Speed	Full Speed 12MBit/s
Endpoint 0 Max Packet size	8 Bytes

#### Power Parameters:

Low Power	Disabled
Link Power Management	Disabled
Battery Charging	Disabled

## 5.5. USB\_DEVICE

Class For FS IP: Communication Device Class (Virtual Port Com)

### 5.5.1. Parameter Settings:

#### Basic Parameters:

USBD_MAX_NUM_INTERFACES (Maximum number of supported interfaces)	1
USBD_MAX_NUM_CONFIGURATION (Maximum number of supported configuration)	1
USBD_MAX_STR_DESC_SIZ (Maximum size for the string descriptors)	512
USBD_SUPPORT_USER_STRING (Enable user string descriptor)	Disabled
USBD_SELF_POWERED (Enabled self power)	Enabled
USBD_DEBUG_LEVEL (USBD Debug Level)	0: No debug message

#### Class Parameters:

USB CDC Rx Buffer Size	2048
USB CDC Tx Buffer Size	2048

### 5.5.2. Device Descriptor:

#### Device Descriptor:

VID (Vendor Identifier)	1155
LANGID_STRING (Language Identifier)	English(United States)
MANUFACTURER_STRING (Manufacturer Identifier)	STMicroelectronics

**Device Descriptor FS:**

PID (Product Identifier)	22336
PRODUCT_STRING (Product Identifier)	STM32 Virtual ComPort
SERIALNUMBER_STRING (Serial number)	00000000001A
CONFIGURATION_STRING (Configuration Identifier)	CDC Config
INTERFACE_STRING (Interface Identifier)	CDC Interface

**\* User modified value**

## 6. System Configuration

### 6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	n/a	<b>High *</b>	
	PB7	I2C1_SDA	Alternate Function Open Drain	n/a	<b>High *</b>	
RCC	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
USB	PA11	USB_DM	n/a	n/a	n/a	
	PA12	USB_DP	n/a	n/a	n/a	

### 6.2. DMA configuration

nothing configured in DMA service



### 6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
USB low priority or CAN RX0 interrupts	true	0	0
I2C1 event interrupt	true	0	0
I2C1 error interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
USB high priority or CAN TX interrupts	unused		

\* User modified value

## ***7. Power Consumption Calculator report***

### 7.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103C8Tx
Datasheet	13587_Rev17

### 7.2. Parameter Selection

Temperature	25
Vdd	3.3

## 8. Software Project

### 8.1. Project Settings

Name	Value
Project Name	MAXREFDES117F1
Project Folder	C:\Users\OTRIU\Dropbox\OTRIUM\Projects\MAXREFDES117#\CubeF1\MAXRE
Toolchain / IDE	EWARM
Firmware Package Name and Version	STM32Cube FW_F1 V1.6.0

### 8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No