2.Hardware Connection

Hardware List

Component	Description
ESP32S3 Module (×1)	Core microcontroller with integrated Wi-Fi/Bluetoot
400 Tie-Points Breadboard (×2)	Solderless platform for quick electronic component c
LAFVIN AI Chatbot Shield (×1)	Specialized expansion board that simplifies wiring, pr
LAFVIN Audio Codec Module and Speaker (×1)	High-quality audio codec for processing voice input c
2.0-inch TFT-SPI Display	High-definition color display interface for real-time c
Jumper Wires	Electrical connection wires between modules, ensuri
Buttons (x4)	Physical interaction for text page navigation
USB Data Cable	Provides stable power input and data communicatio

Connection Instructions

If you are using the expansion board for wiring, the connection method between the ESP32S3 module and other components is as follows:

latest

On-demand H100 SXM GPUs for $3.99/hr/GPU with Lambda 640 GB of vRAM in one 8x instance **Launch now**

Ads by EthicalAds

Close Ad



The completed connection with the expansion board should look like the image above

If you are using a breadboard for wiring, the connection method between the ESP32S3 module and other components is as follows:

LAFVIN Audio Codec Module Connection

- VCC - 5V
- GND - GND
- PA_EN - GPIO48
- DOUT - GPIO45
- DIN - GPIO12

latest

On-demand H100 SXM GPUs for $3.99/hr/GPU with Lambda 640 GB of vRAM in one 8x instance **Launch now**

Ads by EthicalAds

Close Ad


- MCLK - GPIO38
- SCL - GPIO2
- SDA - GPIO1

2.0-inch TFT-SPI Screen Connection

- GND - GND
- VCC - 3V3
- DC - 39
- CS - 47
- CLK - 41
- SDA - 40
- RES - RST
- BLK - 42

Button Connection

- Page Up - GPIO20
- Page Down - GPIO19

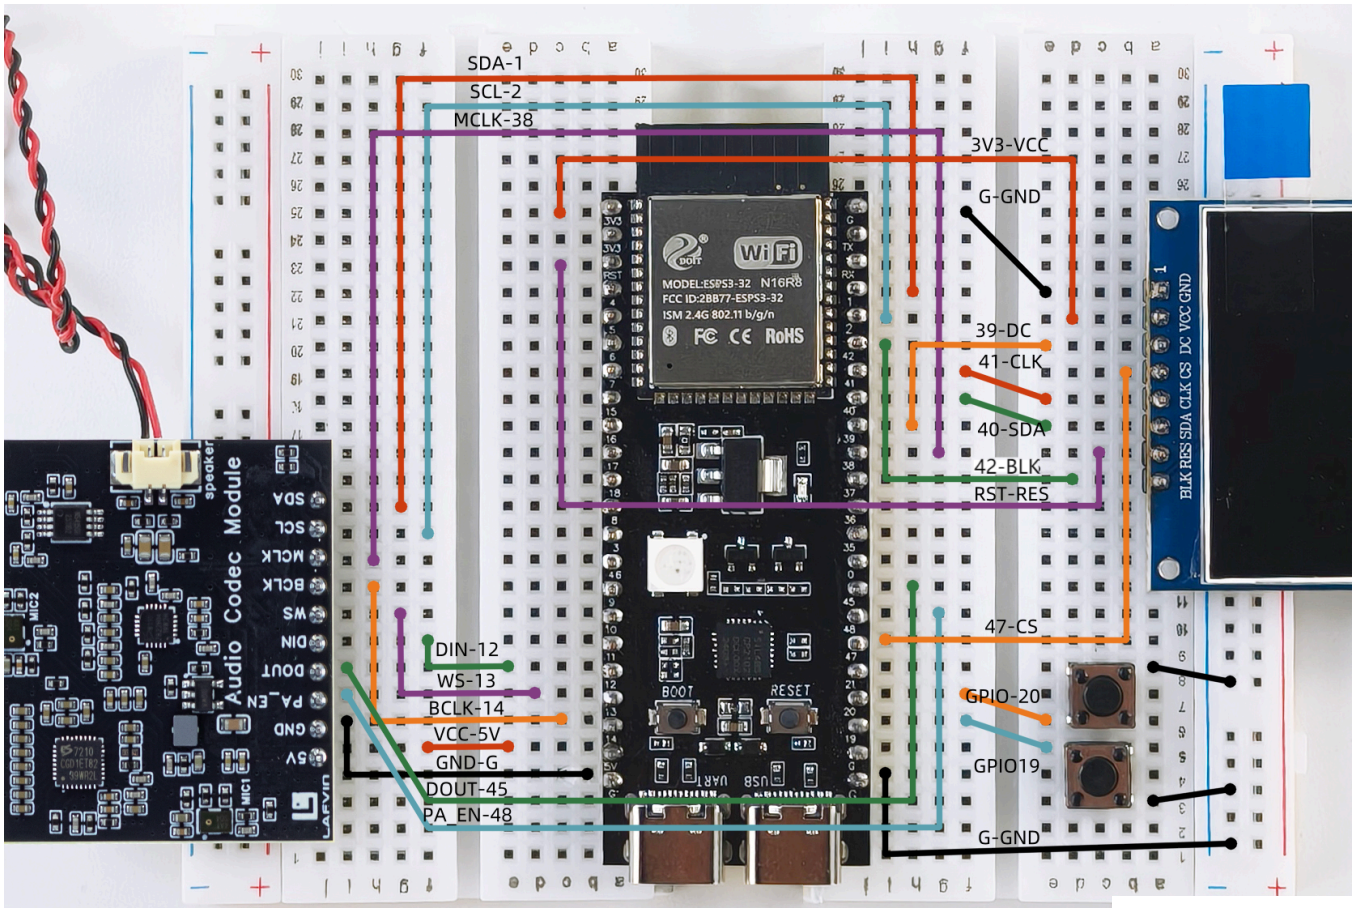

latest

On-demand H100 SXM GPUs for $3.99/hr/GPU with Lambda 640 GB of vRAM in one 8x instance **Launch now**

Ads by EthicalAds

Close Ad

Be sure to connect the modules according to the connection diagram above, otherwise the modules may be damaged.

Assembly Steps

1. Insert the modules into the corresponding interfaces on the expansion board
2. Install the corresponding modules according to the description on the expansion board
3. If using a breadboard, check that all connections are secure and avoid false connections

latest

On-demand H100 SXM GPUs for $3.99/hr/GPU with Lambda 640 GB of vRAM in one 8x instance **Launch now**

Ads by EthicalAds

Close Ad