


DIN MIDI IN 1–5 (6N138 on 5 V, open-collector output pulled up to 3.3 V)

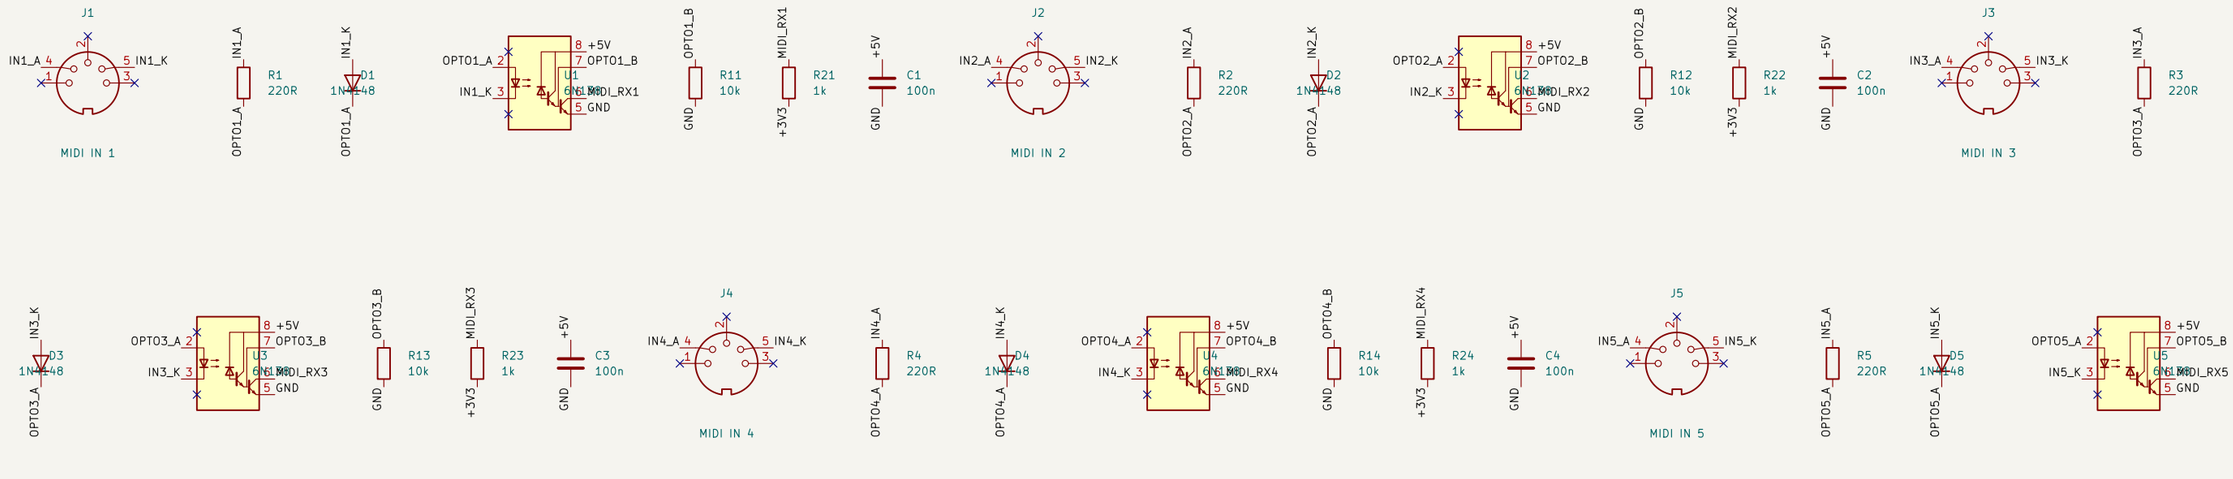


DIN MIDI OUT 1–3 (3.3 V spec: 33R from 3.3 V to pin 4, 10R from TX to pin 5). OUT 3 doubles as THRU in firmware

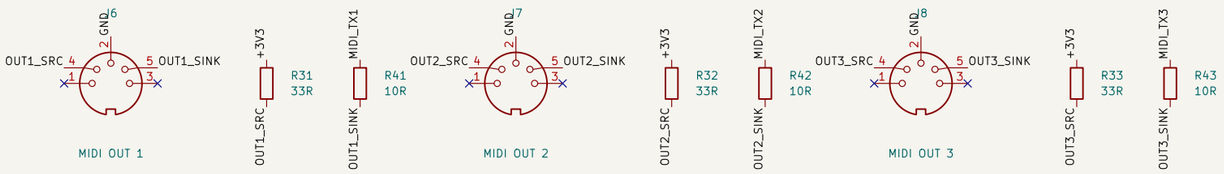

USB-A host port for a USB-MIDI keyboard (PIO-USB on GP16/GP17), 500 mA polyfuse

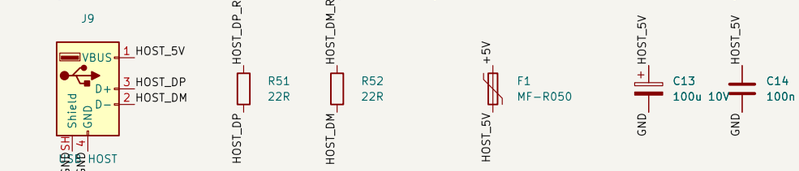

Raspberry Pi Pico (RP2040) in two 1x20 sockets; USB device to the PC through its own micro-USB (hub USB3)

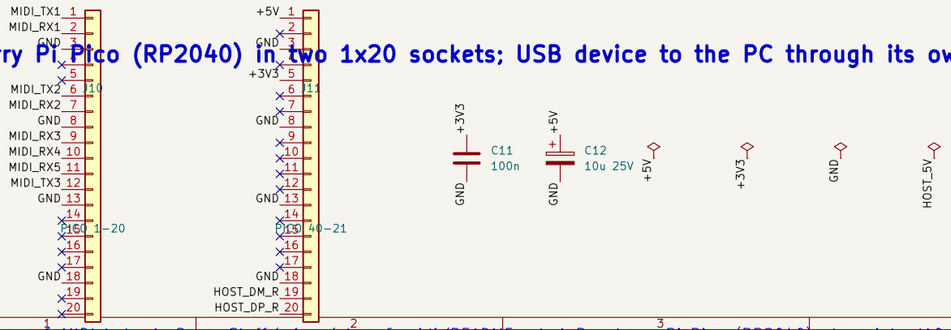

Sheet: /		
File: mixer_midi.kicad_sch		
Title: Mixer Phase 6 — MIDI hub (5 DIN IN, 3 DIN OUT, USB host)		
Size: A3	Date: 2026-10-27	**Rev: 1**
KiCad E.D.A. 10.0.7		Id: 1/1

Phase 6 MIDI hub v1. Spec: Stuff/mixer/phase6_midi/README.md. A Raspberry Pi Pico (RP2040) plugs into J10/J11 and enumerates on the digital board hub USB3 through its own micro-USB as a multi-port USB MIDI device. UART0/UART1 serve IN/OUT 1–2, PIO serves IN 3–5 a