

Hierarchical Active Fault Diagnosis for Stochastic Large Scale Systems with Coupled Faults

O. Straka, I. Punčochář

Dept. of Cybernetics, Univ. of West Bohemia

Univerzitní 8, 306 14 Pilsen, Czech Republic

E-mails: {straka30, ivop}@kky.zcu.cz

Abstract—The paper deals with the active fault diagnosis of large scale stochastic systems with faults modeled as mutually dependent Markov chains. The system is modeled in the multiple-model framework, where individual models represent fault-free and faulty behavior of the system. The aim of the active detector detector in addition to detecting the faults is to excite the system to improve the detection quality. The algorithm consists of two stages: the off-line design of the Bellman function providing the optimal excitation and the on-line estimation, which generates the decisions and selects the optimal excitation input. In particular, the paper focuses on the on-line estimation and proposes an algorithm in the hierarchical architecture. The local nodes estimate the continuous state, select the optimal input and send local likelihoods to the central node. The central node generates the decisions and submits the respective model probabilities to the local nodes. Performance of the proposed algorithm is validated using a simple numerical example.

Keywords: Fault diagnosis; large-scale systems; multiple-model; distributed estimation

I. INTRODUCTION

With increasing complexity and integration of systems, traditional identification, estimation, control and fault diagnosis (FD) methods become highly inefficient or even unusable. This is primarily caused by the limitations in *computational power* and *communication bandwidth*. Although they have advanced enormously since the first attempts to treat large scale systems (LSSs) in the 1970s, the need of specialized methods for LSSs is still urgent. To that end, in many engineering problems the LSS are assumed to consist of several interconnected subsystems of various degree of coupling and spatial distribution, which helps to reduce the computational and communication complexity of the developed methods.

The massive automation penetration into many areas entails increasing emphasis on safety critical aspects. Indeed, the FD algorithms are quite essential components in current automatic control systems [1]. They monitor the system behavior and detect anomalies, sensor or actuator faults, and other factors causing sudden changes in the system behavior. Ignorance of such changes often results in undesired maintenance or higher operating costs.

With respect to an interaction between the monitored system and the FD algorithms, passive and active approaches are recognized. The FD algorithms of the *passive*

approach simply monitor the system measurable quantities without any further interaction. They have been extensively studied over the past decades and are common in the industrial system monitoring [2], [3]. In the last decade, the *active* approach has attracted attention [4], [5]. The FD algorithms of the active approach, in addition to system quantities monitoring, generate an input signal to excite the monitored system. As a consequence of suitable excitation, more information is obtained, which can help to detect faults that may be challenging to detect using the passive FD.

In [6], a new AFD framework for stochastic LSSs was introduced with three *architectures* – centralized, decentralized, and distributed. The paper assumed perfect measurements of continuous states of all subsystems to be available to the corresponding AFD nodes. Unavailability of such perfect measurements was addressed in [7], where only noisy indirect measurements were known to individual AFD nodes. The proposed AFD algorithms consisted of two stages, i) the off-line stage, i.e., design of the excitation input and decision generators, and ii) the on-line stage, i.e., state estimation and utilization of the designed generators. To achieve reasonable computational costs of the AFD algorithm, the off-line design in [6], [7] rested on the decentralized architecture ignoring the coupling among the LSS subsystems. A generalization of the algorithms was proposed in [8], which allowed lagged influence of the faults, i.e. occurrence of a fault in the present may affect occurrences of the faults in other subsystems in the future. Formally, the generalization admitted conditionally dependent faults. However, this generalization may be insufficient in some cases as the faults in different subsystems tend to appear simultaneously or even system-wide faults may emerge. This behavior can be formally described as dependent faults. The goal of the paper is to design an AFD algorithm for LSSs with dependent faults.

The paper is structured as follows: Section II provides a formulation of the AFD problem; its intractable solution by an AFD algorithm with centralized architecture is given in Section III. The hierarchical AFD algorithm for LSS with dependent faults is designed in Section IV. Its performance is illustrated in Section V and Section VI concludes the

paper.

II. AFD PROBLEM FORMULATION

This section provides the LSS specification together with its decomposition to subsystems and problem formulation for the AFD.

A. System specification

Consider an LSS Σ described at a time instant $k \in \mathcal{T} \triangleq \{0, 1, 2, \dots\}$ by the following discrete-time stochastic state-space model

$$\Sigma : \quad \mathbf{x}_{k+1} = \mathbf{f}(\mathbf{x}_k, \boldsymbol{\mu}_k, \mathbf{u}_k) + \mathbf{F}(\boldsymbol{\mu}_k) \mathbf{w}_k, \quad (1a)$$

$$\mathbf{y}_k = \mathbf{h}(\mathbf{x}_k, \boldsymbol{\mu}_k) + \mathbf{H}(\boldsymbol{\mu}_k) \mathbf{v}_k, \quad (1b)$$

where $\mathbf{s}_k \triangleq [\mathbf{x}_k^T, \boldsymbol{\mu}_k^T]^T \in \mathcal{S} \triangleq \mathbb{R}^{D_x} \times \mathcal{M}$ is the state of the LSS, $\mathbf{x}_k \in \mathbb{R}^{D_x}$ is its continuous part, $\boldsymbol{\mu}_k \in \mathcal{M}$ is its discrete part, $\mathbf{u}_k \in \mathcal{U} \in \mathbb{R}^{D_u}$ is the input, $\mathbf{w}_k \in \mathbb{R}^{D_x}$ is the state noise described by the known probability density function (PDF) $p_{\mathbf{w}_k}$, $\mathbf{y}_k \in \mathbb{R}^{D_y}$ is the output, and \mathbf{v}_k is the measurement noise described by the known PDF $p_{\mathbf{v}_k}$. The functions $\mathbf{f} : \mathbb{R}^{D_x} \times \mathcal{M} \times \mathcal{U} \mapsto \mathbb{R}^{D_x}$, $\mathbf{h} : \mathbb{R}^{D_x} \times \mathcal{M} \mapsto \mathbb{R}^{D_y}$, $\mathbf{F} : \mathcal{M} \mapsto \mathbb{R}^{D_x \times D_x}$, and $\mathbf{H} : \mathcal{M} \mapsto \mathbb{R}^{D_y \times D_y}$ are known. Each element of the discrete set \mathcal{M} represents an index into a set of M possible models that can describe behavior of the LSS Σ in the *fault-free* and *faulty* conditions during a sampling period. The faulty conditions are expressed by models with changed parameters or structure. The evolution of $\boldsymbol{\mu}_k$ is assumed to follow a Markov chain with the known transition probabilities

$$\Pr(\boldsymbol{\mu}_{k+1} | \boldsymbol{\mu}_k). \quad (2)$$

The initial condition \mathbf{s}_0 is described by the known PDF¹ $p(\mathbf{s}_0)$. The state and measurement noises are white, mutually independent, and independent of the initial condition \mathbf{s}_0 . Thus, for any $k \in \mathcal{T}$, it holds that²

$$p(\mathbf{s}_0, \mathbf{w}_0^k, \mathbf{v}_0^k) = p(\mathbf{s}_0) \prod_{i=0}^k p_{\mathbf{w}_i}(\mathbf{w}_i) p_{\mathbf{v}_i}(\mathbf{v}_i). \quad (3)$$

Since a centralized architecture of an active fault detector for the LSS Σ is not computationally tractable, the decentralized or distributed architectures based on a decomposition Σ were considered in [6], [7]. This decomposition is illustrated in Fig. 1. The LSS Σ consists of N subsystems ${}^n\Sigma$, $n \in \mathcal{N} \triangleq \{1, 2, \dots, N\}$ that are coupled through the state but have separate inputs and outputs³. Each subsystem

¹With a slight abuse of terminology, the function $p(\mathbf{s}_k) = p(\mathbf{x}_k, \boldsymbol{\mu}_k)$ is called PDF although $\boldsymbol{\mu}_k$ is a discrete random variable. A more formal notation would require use of a cumulative distribution function or the Dirac delta function.

²A variable or a function with the right subscript i and superscript j stands for the whole sequence of variables or functions from the time instant i to j (e.g., $\mathbf{x}_i^j \triangleq [\mathbf{x}_i^T, \mathbf{x}_{i+1}^T, \dots, \mathbf{x}_j^T]^T$).

³A symbol with the left superscript pertains to the corresponding subsystem (e.g., ${}^n\Sigma$), whereas a symbol without the left superscript relates to the whole LSS (e.g., Σ).

${}^n\Sigma$ has its own set of possible fault-free and faulty models and it can be described by the following representation

$${}^n\Sigma : \quad {}^n\mathbf{x}_{k+1} = {}^n\mathbf{f}(\mathbf{x}_k, {}^n\boldsymbol{\mu}_k, {}^n\mathbf{u}_k) + {}^n\mathbf{F}({}^n\boldsymbol{\mu}_k) {}^n\mathbf{w}_k, \quad (4a)$$

$${}^n\mathbf{y}_k = {}^n\mathbf{h}({}^n\mathbf{x}_k, {}^n\boldsymbol{\mu}_k) + {}^n\mathbf{H}({}^n\boldsymbol{\mu}_k) {}^n\mathbf{v}_k, \quad (4b)$$

where ${}^n\mathbf{s}_k \triangleq [{}^n\mathbf{x}_k^T, {}^n\boldsymbol{\mu}_k^T]^T \in {}^n\mathcal{S} \triangleq \mathbb{R}({}^nD_x) \times {}^n\mathcal{M}$ is the *local* state⁴ of the subsystem ${}^n\Sigma$, ${}^n\mathbf{x}_k \in \mathbb{R}({}^nD_x)$ is its continuous part, ${}^n\boldsymbol{\mu}_k \in {}^n\mathcal{M} \triangleq \{1, 2, \dots, {}^nM\}$ is its discrete part that represents an index into the set of fault-free and faulty models, ${}^n\mathbf{u}_k \in {}^n\mathcal{U} \in \mathbb{R}({}^nD_u)$ is the local input, ${}^n\mathbf{w}_k \in \mathbb{R}({}^nD_x)$ is the local state noise described by $p_{{}^n\mathbf{w}_k}$, ${}^n\mathbf{y}_k \in \mathbb{R}({}^nD_y)$ is the local output, ${}^n\mathbf{v}_k \in \mathbb{R}({}^nD_y)$ is the local measurement noise described by $p_{{}^n\mathbf{v}_k}$. The functions ${}^n\mathbf{f} : \mathbb{R}({}^nD_x) \times {}^n\mathcal{M} \times {}^n\mathcal{U} \mapsto \mathbb{R}({}^nD_x)$, ${}^n\mathbf{h} : \mathbb{R}({}^nD_x) \times {}^n\mathcal{M} \mapsto \mathbb{R}({}^nD_y)$, ${}^n\mathbf{F} : {}^n\mathcal{M} \mapsto \mathbb{R}({}^nD_x \times {}^nD_x)$, and ${}^n\mathbf{H} : {}^n\mathcal{M} \mapsto \mathbb{R}({}^nD_y \times {}^nD_y)$ are known. The set of models ${}^n\mathcal{M}$ includes one model representing the behavior of subsystem ${}^n\Sigma$ in *fault-free* condition, ${}^n\mu_k = 1$, and ${}^nM - 1$ models that represent the behavior of subsystem in *faulty* conditions, ${}^n\mu_k \in \{2, \dots, {}^nM\}$. The subsystems are coupled through \mathbf{x}_k that appears in dynamics (4a) of all subsystems and through the multi-model index $\boldsymbol{\mu}_k$ governed by (2).

The assumption of complete or conditional independence for $\boldsymbol{\mu}_k$ among subsystems was made in [6]–[8] to simplify non-centralized state estimation using a factorization of the initial condition $\Pr(\boldsymbol{\mu}_0) = \prod_{n=1}^N \Pr({}^n\mu_0)$ and factorization of the transition probabilities into a product of marginal probabilities

$$\Pr(\boldsymbol{\mu}_{k+1} | \boldsymbol{\mu}_k) = \begin{cases} \prod_{n=1}^N \Pr({}^n\mu_{k+1} | {}^n\mu_k) & \text{(in [6], [7])} \\ \text{or} \\ \prod_{n=1}^N \Pr({}^n\mu_{k+1} | \boldsymbol{\mu}_k) & \text{(in [8])}. \end{cases} \quad (5)$$

In order to consider a broader class of the LSS that includes systems whose transitions between models are correlated across different subsystems and tend to happen simultaneously, these independence assumptions are completely abandoned in this paper. Note that considering mutually dependent faults facilitates modeling system-wide faults.

The local state and measurement noises are assumed to be independent across the subsystems

$$p_{\mathbf{w}_k}(\mathbf{w}_k) = \prod_{n=1}^N p_{{}^n\mathbf{w}_k}({}^n\mathbf{w}_k), \quad p_{\mathbf{v}_k}(\mathbf{v}_k) = \prod_{n=1}^N p_{{}^n\mathbf{v}_k}({}^n\mathbf{v}_k). \quad (6)$$

The initial state \mathbf{s}_0 is assumed to satisfy

$$p(\mathbf{s}_0) = \left(\prod_{n=1}^N p_{{}^n\mathbf{x}_0}({}^n\mathbf{x}_0) \right) \Pr(\boldsymbol{\mu}_0), \quad (7)$$

where $p_{{}^n\mathbf{x}_0}$ is a known PDF of the initial continuous part of local state for subsystem ${}^n\Sigma$ and $\Pr(\boldsymbol{\mu}_0)$ is the initial distribution of the multi-model index $\boldsymbol{\mu}_0$. Note that similarly to the transition probabilities for $\boldsymbol{\mu}_k$, no factorization

⁴Note that ${}^n\mathbf{s}_k$ is called *local* state for convenience, even though it is not technically a state of the subsystem due to the coupling.

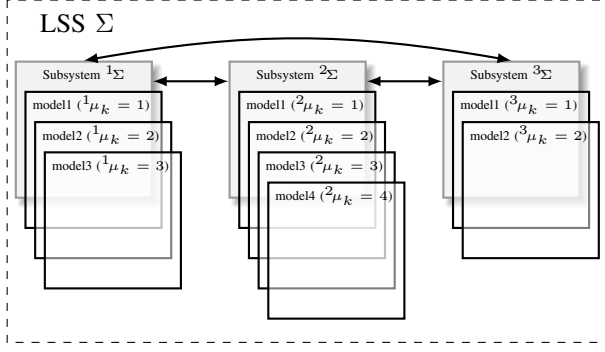


Figure 1. The decomposition of an LSS into subsystems.

is admitted by the initial distribution $\Pr(\mu_0)$. The only assumption is that the Markov chain (2) converges to its stationary distribution.

B. AFD Problem Formulation

The AFD aims to design a function to transform the complete available information to a decision about the faults (subsystem models) and to an input, which role is to excite the system to improve the detection quality. The active fault detector can be described at a time instant $k \in \mathcal{T}$ as

$$\Delta : \begin{bmatrix} \mathbf{d}_k \\ \mathbf{u}_k \end{bmatrix} = \rho_k(\mathbf{I}_0^k) = \begin{bmatrix} \sigma_k(\mathbf{I}_0^k) \\ \gamma_k(\mathbf{I}_0^k) \end{bmatrix}, \quad (8)$$

where $\mathbf{I}_0^k \triangleq [(\mathbf{y}_0^k)^T, (\mathbf{u}_0^{k-1})^T]^T \in \mathcal{I}^k$ denotes complete available information observed up to the time step $k \in \mathcal{T}$ with $\mathcal{I}^k \triangleq \mathbb{R}^{(k+1)D_y} \times \mathcal{U}^k$ and $\mathcal{U}^k \triangleq \mathcal{U} \times \dots \times \mathcal{U}$. The vector $\mathbf{d}_k \triangleq [d_k, d_k, \dots, d_k]^T \in \mathcal{M}$ consists of the decisions $d_k \in \mathcal{M}$ about the model indices n_{μ_k} , $\sigma_k : \mathcal{I}^k \mapsto \mathcal{M}$ represents the fault detector at the time step k , and $\gamma_k : \mathcal{I}^k \mapsto \mathcal{U}$ is a function describing the input signal generator.

The optimal active fault detector minimizes the following additive discounted criterion⁵

$$J = \lim_{F \rightarrow \infty} \mathbb{E} \left\{ \sum_{k=0}^F \eta^k L^d(\mu_k, \mathbf{d}_k) \right\}, \quad (9)$$

where $\eta \in (0, 1)$ is a chosen discount factor and $L^d : \mathcal{M} \times \mathcal{M} \mapsto \mathbb{R}^+$ is a detection cost function that allows different costs to be assigned for selecting the vector of decisions \mathbf{d}_k when the vector of model indices μ_k is actually effective. This paper assumes that the costs are not related across the subsystems, and thus the following additive detection cost function is used

$$L^d(\mu_k, \mathbf{d}_k) = \sum_{n=1}^N n L^d(n_{\mu_k}, n_{d_k}), \quad (10)$$

where $n L^d : \mathcal{M} \times \mathcal{M} \mapsto \mathbb{R}^+$ is a function that assigns costs to selecting decision n_{d_k} while the true model index is

⁵The operator $\mathbb{E}\{\cdot\}$ denotes the expectation over all involved random variables.

n_{μ_k} . The cost function can represent true economic costs of the missed detection, false alarm and, incorrect fault isolation. If these costs are not available in a particular problem, they can be regarded as tuning parameters that shape the behavior of the active fault detector [9].

III. CENTRALIZED AFD

A. Perfect state information model

Since the active fault detector has access only to inputs and outputs of the LSS but not to its state, the formulated problem belongs to the class of imperfect state information problems [10]. These problems are usually solved by reformulating them as perfect state information problems. The reformulation assumes that the active fault detector can be split into a given state estimator and an unknown mapping that transforms the state estimate to the input and decision. Then, the aim is to design only this mapping.

The optimal state estimate represented by the conditional PDF $p(\mathbf{s}_k | \mathbf{I}_0^k)$ [11] is usually approximated using a finite number of statistics that can be collected into an *information state* $\xi_k \in \mathcal{G}$. The time evolution of the information state is then described by the following perfect state information model

$$\xi_{k+1} = \phi(\xi_k, \mathbf{u}_k, \mathbf{y}_{k+1}), \quad (11)$$

where $\phi : \mathcal{G} \times \mathcal{U} \times \mathbb{R}^{D_y} \mapsto \mathcal{G}$ is a function that represents the composition of the state estimator calculating ξ_k and the LSS model Σ . The future output \mathbf{y}_{k+1} is regarded in this model as a random disturbance described by the conditional pdf $p(\mathbf{y}_{k+1} | \xi_k, \mathbf{u}_k)$.

B. AFD for perfect state information model

Given the information state ξ_k , it suffices to consider the active fault detector as a time invariant system that is described at a time step $k \in \mathcal{T}$ as

$$\Delta : \begin{bmatrix} \mathbf{d}_k \\ \mathbf{u}_k \end{bmatrix} = \begin{bmatrix} \bar{\sigma}(\xi_k) \\ \bar{\gamma}(\xi_k) \end{bmatrix}, \quad (12)$$

where $\bar{\sigma} : \mathcal{G} \mapsto \mathcal{M}$ and $\bar{\gamma} : \mathcal{G} \mapsto \mathcal{U}$ are unknown functions. The detection cost function for the perfect state information model equivalent to L^d in (9) can be shown [9] to satisfy

$$\bar{L}^d(\xi_k, \mathbf{d}_k) = \sum_{n=1}^N \sum_{n_{\mu_k}} n L^d(n_{\mu_k}, n_{d_k}) \Pr(n_{\mu_k} | \mathbf{I}_0^k). \quad (13)$$

Having the reformulated problem specification, the active fault detector is determined by finding a function $V : \mathcal{G} \mapsto \mathbb{R}$ that solves the Bellman functional equation [10], [12]

$$V(\xi_k) = \min_{\mathbf{d}' \in \mathcal{M}} \bar{L}^d(\xi_k, \mathbf{d}') + \eta \min_{\mathbf{u}' \in \mathcal{U}} \mathbb{E} \{ V(\xi_{k+1}) | \xi_k, \mathbf{u}_k = \mathbf{u}' \}. \quad (14)$$

The Bellman function V can be computed off-line using the a priori known PDF $p(\mathbf{x}_{k+1} | \mathbf{x}_k, \mu_k, \mathbf{u}_k)$, transition probabilities $\Pr(\mu_{k+1} | \mu_k)$, measurement PDF $p(\mathbf{y}_k | \mathbf{x}_k, \mu_k)$, cost function L^d , and discount factor η . Then, the decisions

and inputs can be determined on-line by solving much simpler optimization problems. Clearly, the Bellman function V does not need to be known to write the detector as

$$\mathbf{d}_k = \bar{\sigma}^*(\xi_k) = \arg \min_{\mathbf{d}' \in \mathcal{M}} \bar{L}^d(\xi_k, \mathbf{d}'). \quad (15)$$

Note that the detector is determined by the choice of the detection cost function (10). On the other hand, the input signal generator uses the Bellman function V to calculate the input \mathbf{u}_k as

$$\mathbf{u}_k = \bar{\gamma}^*(\xi_k) = \arg \min_{\mathbf{u}' \in \mathcal{U}} \mathbb{E} \{ V(\xi_{k+1}) | \xi_k, \mathbf{u}_k = \mathbf{u}' \}. \quad (16)$$

Thus, the optimal input generator works in a feedback manner to improve the detection quality.

IV. HIERARCHICAL AFD

The costs of the Bellman function V computation are extreme for LSSs as the dimension of the information state ξ_k can be high due to the dimension of the space \mathbb{R}^{D_x} of the continuous part of the state \mathbf{x}_k itself, the form of the sufficient statistics⁶, and the number of the models M . To reduce the computational costs of the off-line design, the AFD algorithms proposed in [6], [7] considered the decentralized architecture. While this may seem a highly approximate solution that neglects the coupling among the subsystems, it results in a computationally tractable calculations of the Bellman functions for each subsystem ${}^n\Sigma$. The Bellman functions are defined for information states ${}^n\xi_k$ of the subsystems with dimensions much smaller than the dimension of ξ_k . Additionally, the Bellman functions for the subsystems can be calculated in parallel as they are mutually independent. The approximations introduced by the off-line design, which is in fact performed separately for each subsystem, can be compensated by the on-line estimation. Its algorithm will be designed in a hierarchical structure, where the nodes relevant to the subsystems communicate with each other and also with a central node. Based on the estimates, the local nodes will select the optimal excitation input and the central node will generate a decision. Thus, the proposed hierarchical AFD for LSS with mutually dependent faults will pursue the following strategy: i) The off-line design will employ the computationally efficient decentralized architecture similarly to [6], [7]. ii) The on-line estimation will work in a hierarchical architecture that has the ability to take into account the faults dependency with individual nodes communicating with each other.

A. Off-line design

As has been mentioned above, the off-line design, i.e. the Bellman function calculation, utilizes the decentralized AFD architecture that is depicted in Fig. 2. Each subsystem

⁶Depending on the state estimation algorithm, the sufficient statistics may be represented by e.g., conditional mean and covariance matrix of \mathbf{x}_k in case of the Kalman filter or weighted particles in case of the particle filter.

${}^n\Sigma$ is monitored by an AFD node ${}^n\Delta$, which knows only the description of the subsystem ${}^n\Sigma$, can access only the local output ${}^n\mathbf{y}_k$, and should generate the local input ${}^n\mathbf{u}_k$ and decision ${}^n\mathbf{d}_k$. To achieve such isolation of the AFD nodes, approximate models of subsystems with neglected couplings are needed [6]. The coupling through \mathbf{x}_k is neglected by using the following approximate model to describe the subsystem ${}^n\Sigma$

$${}^n\hat{\Sigma} : {}^n\mathbf{x}_{k+1} = {}^n\hat{\mathbf{f}}({}^n\mathbf{x}_k, {}^n\mu_k, {}^n\mathbf{u}_k) + {}^n\mathbf{F}({}^n\mu_k) {}^n\mathbf{w}_k, \quad (17a)$$

$${}^n\mathbf{y}_k = {}^n\mathbf{h}({}^n\mathbf{x}_k, {}^n\mu_k) + {}^n\mathbf{H}({}^n\mu_k) {}^n\mathbf{v}_k, \quad (17b)$$

where ${}^n\hat{\mathbf{f}} : \mathbb{R}^{D_x} \times {}^n\mathcal{M} \times {}^n\mathcal{U} \mapsto \mathbb{R}^{D_x}$ is an approximation of ${}^n\mathbf{f}$ obtained by setting ${}^{\bar{n}}\mathbf{x}_k = \mathbf{0}$ for $\bar{n} \in \bar{\mathcal{N}} \triangleq \mathcal{N} \setminus \{n\}$. The coupling through the discrete part of the state μ_k is neglected in the following way. The transition probabilities for the subsystem ${}^n\Sigma$ can be written as

$$\Pr({}^n\mu_{k+1} | {}^n\mu_k) = \sum_{\bar{n} \in \bar{\mathcal{N}}} \sum_{\bar{n} \in \bar{\mathcal{N}}} \Pr(\mu_{k+1} | \mu_k) \frac{\Pr(\mu_k)}{\Pr({}^n\mu_k)}, \quad (18)$$

where all involved probabilities can be computed using the transition probabilities $\Pr(\mu_{k+1} | \mu_k)$ and initial probabilities $\Pr(\mu_0)$. However, the exact transition probabilities $\Pr({}^n\mu_{k+1} | {}^n\mu_k)$ are not suitable for designing the AFD node ${}^n\Delta$ because they are time-varying due to the fraction on the right hand side of (18). Since the infinite horizon is considered, it seems reasonable to approximate the fraction as

$$\frac{\Pr(\mu_k)}{\Pr({}^n\mu_k)} \approx \lim_{k \rightarrow \infty} \frac{\Pr(\mu_k)}{\Pr({}^n\mu_k)} \quad (19)$$

provided that the limit exists. The design criterion is naturally decomposed by the additive structure of the detection cost function (10) and thus the design criterion for the subsystem ${}^n\Sigma$ is

$${}^nJ = \lim_{F \rightarrow \infty} \mathbb{E} \left\{ \sum_{k=0}^F \eta^k {}^nL^d({}^n\mu_k, {}^n\mathbf{d}_k) \right\}. \quad (20)$$

The centralized architecture described in Section II for

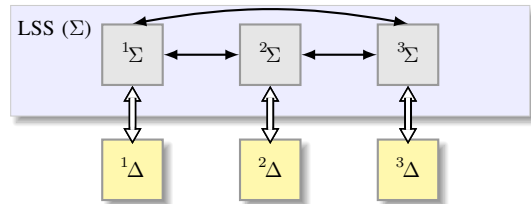


Figure 2. Decentralized AFD system architecture used in off-line design

the whole LSS can be applied to the individual subsystems separately. For each subsystem ${}^n\Sigma$, the perfect state information model ${}^n\phi : {}^n\mathcal{G} \times {}^n\mathcal{U} \times \mathbb{R}^{D_y} \mapsto {}^n\mathcal{G}$ with an information state ${}^n\xi_k \in {}^n\mathcal{G}$ is built using its approximate model and the Bellman function nV is computed. The numerical computation of the Bellman functions for all

subsystems is less demanding because it can be performed in parallel and the information states ${}^n\xi_k$ have smaller dimensions compared to ξ_k . The AFD node ${}^n\Delta$ is then defined as

$${}^n\Delta : \begin{bmatrix} {}^nd_k \\ {}^n\mathbf{u}_k \end{bmatrix} = \begin{bmatrix} {}^{n\bar{\sigma}^*}({}^n\xi_k) \\ {}^{n\bar{\gamma}^*}({}^n\xi_k) \end{bmatrix}, \quad (21)$$

where ${}^{n\bar{\sigma}^*} : {}^n\mathcal{G} \mapsto {}^n\mathcal{M}$ and ${}^{n\bar{\gamma}^*} : {}^n\mathcal{G} \mapsto {}^n\mathcal{U}$ are given by relations similar to (15) and (16), respectively. The input signal generator ${}^{n\bar{\gamma}^*}$ is kept at each AFD node to generate the input ${}^n\mathbf{u}_k$ based on the information state ${}^n\xi_k$. The decision generator ${}^{n\bar{\sigma}^*}$ will be moved to the central node of the hierarchical architecture and will use an information state of a better quality. If the hierarchical architecture is used for the off-line design, the computational demands will become intractable similarly to the centralized architecture. Note that the input generator ${}^{n\bar{\gamma}^*}$ is thus an approximation in the sense: approximate model of the subsystem, numerical computation of the Bellman function, and hierarchical architecture for decision generation instead of the decentralized one.

B. On-line estimation

The on-line estimation must deal with two couplings present in the LSS Σ : i) the coupling in the continuous state \mathbf{x}_k and ii) the coupling in the multi-model index μ_k . While the coupling in \mathbf{x}_k will be dealt with by the communication among the local nodes ${}^n\Delta$, $n = 1, \dots, N$ similarly to the distributed architecture [7], the coupling in μ_k will be resolved by the communication of the local nodes with a central node denoted as ${}^0\Delta$.

1) *Local nodes*: The part of the on-line estimation performed at the local nodes consists of the information exchange with the central node, measurement update, merging, information exchange with other local nodes, information fusion, selection of the optimal excitation input signal, and time update steps. Their brief description for the n -th node ${}^n\Delta$ follows.

Assume: The prediction PDFs of the local continuous state $p({}^n\mathbf{x}_k | {}^{n\mathbf{I}_0^{k-1}}, {}^n\mathbf{u}_{k-1}, {}^n\mu_{k-1})$ are given for each model ${}^n\mu_{k-1} \in {}^n\mathcal{M}$, where ${}^{n\mathbf{I}_0^k} \triangleq [({}^n\mathbf{y}_0^k)^T, ({}^n\mathbf{u}_0^{k-1})^T]^T \in {}^n\mathcal{I}^k$ denotes local data observed up to time step $k \in \mathcal{T}$ by the n -th AFD node with ${}^n\mathcal{I}^k \triangleq \mathbb{R}^{(k+1)({}^nD_y)} \times {}^n\mathcal{U}^k$, ${}^n\mathcal{U}^k \triangleq {}^n\mathcal{U} \times \dots \times {}^n\mathcal{U}$.

Communication with ${}^0\Delta$: The likelihoods for each combination of models ${}^n\mu_{k-1}$ and ${}^n\mu_k$ are calculated as⁷

$$p({}^n\mathbf{y}_k | {}^{n\mathbf{I}_0^{k-1}}, {}^n\mathbf{u}_{k-1}, {}^n\mu_k, {}^n\mu_{k-1}) = \int p({}^n\mathbf{y}_k | {}^n\mathbf{x}_k, {}^n\mu_k) p({}^n\mathbf{x}_k | {}^{n\mathbf{I}_0^{k-1}}, {}^n\mathbf{u}_{k-1}, {}^n\mu_{k-1}) d{}^n\mathbf{x}_k,$$

sent to the central node ${}^0\Delta$ and processed there. Then, the probabilities⁸ $\Pr({}^n\mu_k, {}^n\mu_{k-1} | {}^0\mathbf{I}_0^k)$ are received from ${}^0\Delta$.

⁷Note that the PDF $p({}^n\mathbf{y}_k | {}^n\mathbf{x}_k, {}^n\mu_k)$ is obtained from (4b) and the measurement noise PDF $p^{n\mathbf{v}_k}$.

⁸Note that the probabilities are conditioned by the full information ${}^0\mathbf{I}_0^k$ as the central node computes them using likelihoods from all local nodes.

Measurement update: The posterior PDF of the local state $p({}^n\mathbf{s}_k | {}^n\mathbf{I}_0^k)$ factorized as

$$p({}^n\mathbf{s}_k | {}^n\mathbf{I}_0^k) = \sum_{{}^n\mu_{k-1}} p({}^n\mathbf{x}_k, {}^n\mu_k, {}^n\mu_{k-1} | {}^n\mathbf{I}_0^k) = \sum_{{}^n\mu_{k-1}} p({}^n\mathbf{x}_k | {}^n\mathbf{I}_0^k, {}^n\mu_k, {}^n\mu_{k-1}) \Pr({}^n\mu_k, {}^n\mu_{k-1} | {}^0\mathbf{I}_0^k), \quad (22)$$

is obtained by combining the probabilities $\Pr({}^n\mu_k, {}^n\mu_{k-1} | {}^0\mathbf{I}_0^k)$ received from ${}^0\Delta$ and the PDFs of ${}^n\mathbf{x}_k$ inferred by the Bayes rule

$$p({}^n\mathbf{x}_k | {}^n\mathbf{I}_0^k, {}^n\mu_k, {}^n\mu_{k-1}) = \frac{p({}^n\mathbf{y}_k | {}^n\mathbf{x}_k, {}^n\mu_k) p({}^n\mathbf{x}_k | {}^{n\mathbf{I}_0^{k-1}}, {}^n\mathbf{u}_{k-1}, {}^n\mu_{k-1})}{p({}^n\mathbf{y}_k | {}^{n\mathbf{I}_0^{k-1}}, {}^n\mathbf{u}_{k-1}, {}^n\mu_k, {}^n\mu_{k-1})}.$$

Merging: The generalized pseudo-Bayesian method of the second order [13] is used to prevent the increase in the number of terms constituting the state estimate PDF⁹ $p({}^n\mathbf{s}_k | {}^n\mathbf{I}_0^k)$. Essentially, the sum in the posterior PDF (22) is merged to a single term for each ${}^n\mu_k$. Then, the posterior PDF is approximated by

$$p({}^n\mathbf{s}_k | {}^n\mathbf{I}_0^k) \approx p({}^n\mathbf{x}_k | {}^n\mathbf{I}_0^k, {}^n\mu_k) \Pr({}^n\mu_k | {}^n\mathbf{I}_0^k). \quad (23)$$

Communication with local nodes: The nM PDFs $p({}^n\mathbf{x}_k | {}^n\mathbf{I}_0^k, {}^n\mu_k)$ weighted by $\Pr({}^n\mu_k | {}^n\mathbf{I}_0^k)$ are merged to a single PDF denoted as $p({}^n\mathbf{x}_k | {}^n\mathbf{I}_0^k)$ and sent to other local nodes. Reciprocally, ${}^n\Delta$ receives the estimates $p({}^{\bar{n}}\mathbf{x}_k | {}^{\bar{n}}\mathbf{I}_0^k)$, $\bar{n} \in \bar{\mathcal{N}}$ from other local nodes ${}^{\bar{n}}\Delta$, $\bar{n} \in \bar{\mathcal{N}}$.

Fusion: The estimates $p({}^{\bar{n}}\mathbf{x}_k | {}^{\bar{n}}\mathbf{I}_0^k)$ are fused with $p({}^n\mathbf{x}_k | {}^n\mathbf{I}_0^k, {}^n\mu_k)$ to obtain $p(\mathbf{x}_k | {}^0\mathbf{I}_0^k, {}^n\mu_k)$. The fusion must respect the fact, that the estimates of the local states are dependent but the degree of dependence is unknown. For example, if the estimates are represented by the means and covariance matrices, the unknown dependency issue can be solved by the covariance intersection technique [14]. If the estimate is represented by weighted particles, the techniques proposed in e.g. [15] or [16] can be used.

Input generation: The excitation input is computed as ${}^n\mathbf{u}_k = {}^{n\bar{\gamma}}({}^n\xi_k)$, where ${}^{n\bar{\gamma}}$ was designed in the off-line design, and the information state ${}^n\xi_k$ is constructed from the estimate (23).

Time update: The prediction PDFs $p({}^n\mathbf{x}_{k+1} | {}^0\mathbf{I}_0^k, {}^n\mathbf{u}_k, {}^n\mu_k)$ are calculated¹⁰ from

$$p({}^n\mathbf{x}_{k+1} | {}^0\mathbf{I}_0^k, {}^n\mathbf{u}_k, {}^n\mu_k) = \int p({}^n\mathbf{x}_{k+1} | \mathbf{x}_k, {}^n\mu_k, {}^n\mathbf{u}_k) p(\mathbf{x}_k | {}^0\mathbf{I}_0^k, {}^n\mu_k) d\mathbf{x}_k.$$

2) *Central node*: The goal of the on-line estimation performed at the central node is to infer the probabilities of multi-model index μ_k and subsequently the decisions nd_k from the likelihoods sent by the local nodes. Then, the relevant model probabilities are sent back to the local

⁹Note that at the first time step, the measurement update step is simpler and the merging step is unnecessary.

¹⁰Note that the PDF $p({}^n\mathbf{x}_{k+1} | \mathbf{x}_k, {}^n\mu_k, {}^n\mathbf{u}_k)$ is obtained from (17a) and the state noise PDF $p^{n\mathbf{w}_k}$.

nodes. Individual steps of the central node are briefly introduced below.

Assume: The prediction probabilities $\Pr(\mu_k, \mu_{k-1} | \mathbf{I}_0^{k-1})$ are given.

Measurement update: Once the likelihoods $p(\mathbf{y}_k | \mathbf{I}_0^{k-1}, \mathbf{u}_{k-1}, \mu_k, \mu_{k-1})$, $n \in \mathcal{N}$ from the local nodes are received, the posterior probability of the multi-model indices μ_k and μ_{k-1} are given by

$$\Pr(\mu_k, \mu_{k-1} | \mathbf{I}_0^k) \propto \Pr(\mu_k, \mu_{k-1} | \mathbf{I}_0^{k-1}) p(\mathbf{y}_k | \mathbf{I}_0^{k-1}, \mathbf{u}_{k-1}, \mu_k, \mu_{k-1}), \quad (24)$$

where the likelihood is given as

$$p(\mathbf{y}_k | \mathbf{I}_0^{k-1}, \mathbf{u}_{k-1}, \mu_k, \mu_{k-1}) = \int p(\mathbf{y}_k | \mathbf{x}_k, \mu_k) p(\mathbf{x}_k | \mathbf{I}_0^{k-1}, \mathbf{u}_{k-1}, \mu_{k-1}) d\mathbf{x}_k. \quad (25)$$

Due to the assumption of independent measurement noises (6), it is possible to write the conditional PDF $p(\mathbf{y}_k | \mathbf{x}_k, \mu_k)$ as

$$p(\mathbf{y}_k | \mathbf{x}_k, \mu_k) = \prod_{n=1}^N p(\mathbf{y}_k^n | \mathbf{x}_k, \mu_k). \quad (26)$$

The conditional PDF $p(\mathbf{x}_k | \mathbf{I}_0^{k-1}, \mathbf{u}_{k-1}, \mu_{k-1})$ is approximated by assuming conditional independence as

$$p(\mathbf{x}_k | \mathbf{I}_0^{k-1}, \mathbf{u}_{k-1}, \mu_{k-1}) \approx \prod_{n=1}^N p(\mathbf{x}_k^n | \mathbf{I}_0^{k-1}, \mathbf{u}_{k-1}, \mu_{k-1}). \quad (27)$$

Thus, the likelihood in (24) is approximated as

$$p(\mathbf{y}_k | \mathbf{I}_0^{k-1}, \mathbf{u}_{k-1}, \mu_k, \mu_{k-1}) \approx \prod_{n=1}^N \int p(\mathbf{y}_k^n | \mathbf{x}_k, \mu_k) p(\mathbf{x}_k^n | \mathbf{I}_0^{k-1}, \mathbf{u}_{k-1}, \mu_{k-1}) d\mathbf{x}_k = \prod_{n=1}^N p(\mathbf{y}_k^n | \mathbf{I}_0^{k-1}, \mathbf{u}_{k-1}, \mu_k, \mu_{k-1}). \quad (28)$$

Decision generation: After marginalizing (24), the conditional probabilities of model index μ_k are used to generate decisions $^n d_k$.

Communication with local nodes: The marginal probabilities $\Pr(\mu_k, \mu_{k-1} | \mathbf{I}_0^k)$ are sent to the local AFD nodes.

Time update: The predictive probability of the multi-model indices μ_{k+1} and μ_k is calculated as

$$\Pr(\mu_{k+1}, \mu_k | \mathbf{I}_0^k) = \Pr(\mu_{k+1} | \mu_k) \sum_{\mu_{k-1}} \Pr(\mu_k, \mu_{k-1} | \mathbf{I}_0^k).$$

C. Estimation and Communication Scheme

The proposed AFD with hierarchical architecture consists of two communication layers: i) the communication among the local nodes, where the nodes exchange the PDFs $p(\mathbf{x}_k^n | \mathbf{I}_0^k)$ and ii) the communication with the central node, where the local nodes submit the likelihoods

$p(\mathbf{y}_k^n | \mathbf{I}_0^{k-1}, \mathbf{u}_{k-1}, \mu_k, \mu_{k-1})$ and receive the probabilities $\Pr(\mu_k, \mu_{k-1} | \mathbf{I}_0^k)$. The optimal decisions $^n d_k$ are generated by the central node $^0 \Delta$ while the excitation input signals $^n \mathbf{u}_k = ^n \gamma(^n \xi_k)$ are generated by the local nodes $^n \Delta$. The scheme of the hierarchical architecture used for on-line estimation is depicted in Fig. 3.

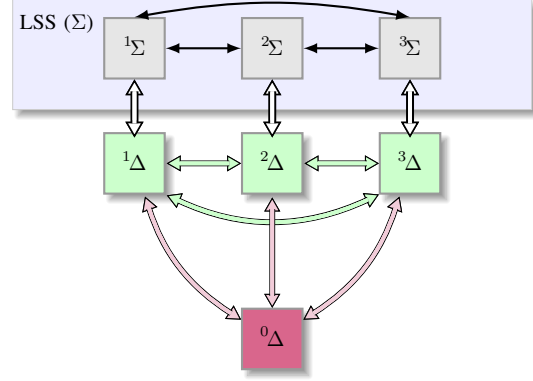


Figure 3. Hierarchical AFD system architecture used for on-line estimation: local nodes are in green and the central node is in purple.

V. NUMERICAL ILLUSTRATIONS

For brevity reasons, the performance of the proposed algorithms is analyzed by means of a simple numerical example only. The analysis compares performance of three active fault detectors:

- the decentralized AFD algorithm that generates the decision locally and completely ignores the coupling among the LSS subsystems [7] (decAFD),
- the distributed AFD algorithm that generates the decision locally and ignores the coupling in μ_k (faults) among the LSS subsystems [7] (disAFD),
- the proposed hierarchical AFD algorithm (hiAFD).

A. System specification

Let us consider a system Σ that consists of two weakly coupled multiple-model linear subsystems

$$\begin{aligned} 1\Sigma : \quad & \mathbf{x}_{k+1} = \mathbf{A}(^1\mu_k)\mathbf{x}_k + \mathbf{B}(^1\mu_k)^1u_k + \mathbf{F}(^1\mu_k)^1w_k, \\ & y_k = \mathbf{C}(^1\mu_k)^1\mathbf{x}_k + \mathbf{H}(^1\mu_k)^1v_k, \\ 2\Sigma : \quad & \mathbf{x}_{k+1} = \mathbf{A}(^2\mu_k)\mathbf{x}_k + \mathbf{B}(^2\mu_k)^2u_k + \mathbf{F}(^2\mu_k)^2w_k, \\ & y_k = \mathbf{C}(^2\mu_k)^2\mathbf{x}_k + \mathbf{H}(^2\mu_k)^2v_k, \end{aligned}$$

where both subsystems have two models with

$$\begin{aligned} 1\mathbf{A}(1) &= [0.76 \ 0.05], & 1\mathbf{B}(1) &= 0.12, & 1\mathbf{F}(1) &= \sqrt{0.003}, \\ & & 1\mathbf{C}(1) &= 0.9, & 1\mathbf{H}(1) &= 0.01, \\ 1\mathbf{A}(2) &= [0.86 \ 0.15], & 1\mathbf{B}(2) &= 0.14, & 1\mathbf{F}(2) &= \sqrt{0.003}, \\ & & 1\mathbf{C}(2) &= 1, & 1\mathbf{H}(2) &= 0.01, \\ 2\mathbf{A}(1) &= [0.10 \ 0.87], & 2\mathbf{B}(1) &= 0.13, & 2\mathbf{F}(1) &= \sqrt{0.002}, \\ & & 2\mathbf{C}(1) &= 0.9, & 2\mathbf{H}(1) &= 0.01, \\ 2\mathbf{A}(2) &= [0.05 \ 0.775], & 2\mathbf{B}(2) &= 0.15, & 2\mathbf{F}(2) &= \sqrt{0.002}, \\ & & 2\mathbf{C}(2) &= 1, & 2\mathbf{H}(2) &= 0.01. \end{aligned}$$

The transition probabilities between the models for each subsystem are given in Table I, where ${}^n\mu_k = 1$ represents the fault-free behavior of the subsystem and ${}^n\mu_k = 2$ represents the faulty behavior. The state noises ${}^1w_k, {}^2w_k$

Table I
TRANSITION PROBABILITIES OF THE MODES.

$({}^1\mu_{k+1}, {}^2\mu_{k+1})$	$({}^1\mu_k, {}^2\mu_k)$			
	(1,1)	(1,2)	(2,1)	(2,2)
(1,1)	0.95	0.04	0.04	0.01
(1,2)	0.02	0.80	0.01	0.02
(2,1)	0.02	0.01	0.80	0.02
(2,2)	0.01	0.15	0.15	0.95

and measurement noises ${}^1v_k, {}^2v_k$ have all standard Gaussian PDF $p_{{}^1w_k} = p_{{}^2w_k} = p_{{}^1v_k} = p_{{}^2v_k} = \mathcal{N}\{0, 1\}$. The initial condition \mathbf{x}_0 has Gaussian PDF $\mathcal{N}\{\mathbf{0}, 0.01 \cdot \mathbf{I}\}$ and initial $\boldsymbol{\mu}_0$ has probability $\Pr(\boldsymbol{\mu}_0 = [1 \ 0 \ 0 \ 0]^T) = 1$, which means that each subsystem is fault-free in the beginning. The admissible inputs of subsystems are ${}^1\mathcal{U} = {}^2\mathcal{U} = \{-1, 0, 1\}$. The detection cost function ${}^nL^d$ is the zero-one function ${}^nL^d({}^n\mu_k, {}^nd_k) = 1 - \delta_{{}^n\mu_k, {}^nd_k}$ where $\delta_{i,j}$ is the Kronecker delta. The discount factor is $\eta = 0.9$.

B. AFD algorithm specification

Since the individual models are Gaussian and linear, the estimation algorithms employ the Kalman filter to compute estimate of the continuous part of the state ${}^n\mathbf{x}_k$ during the time update and measurement update steps. Therefore, the information state ${}^n\boldsymbol{\xi}_k$ includes the conditional mean and covariance matrix as relevant statistics.

The approximate Bellman function was designed using the value iteration algorithm, that was performed over the grids given as $[-1.5 : 0.1 : 1.5] \times [-1.5 : 0.1 : 1.5] \times [1.9 \cdot 10^{-4} : 5 \cdot 10^{-6} : 2 \cdot 10^{-4}] \times [1.9 \cdot 10^{-4} : 5 \cdot 10^{-6} : 2 \cdot 10^{-4}] \times [0 : 0.02 : 1]$ with 441 099 discrete states.

C. Comparison

The performance of the AFD algorithms was evaluated using the 10^5 Monte Carlo (MC) simulations where each MC simulation was run over the finite time horizon $F = 400$. The estimate \hat{J} of the criterion obtained by the MC simulations and time requirements of a single run of the algorithm (i.e. the on-line decision generation)¹¹ denoted as $T_{\text{on-line}}$ are given in Table II. The table indicates that the best performance is achieved by the proposed hiAFD algorithm, which involves both communication layers. The disAFD algorithm resting only on the communication among the local nodes performs slightly worse and the worst performance is exhibited by the decAFD algorithm where individual nodes do not communicate at all. The computational costs of the algorithms increase with each communication layer as individual nodes must process the communicated data.

¹¹All the numerical simulations were performed using the R2017b version of Matlab® software running on the PC equipped with Intel® CoreTM i7-4790 CPU (3.60 [GHz]).

Table II
PERFORMANCE OF THE AFD ALGORITHMS.

	\hat{J}	$T_{\text{on-line}}$
decAFD	2.876	0.150 s
disAFD	1.852	0.421 s
hiAFD	1.691	0.487 s

The costs of the hiAFD algorithm are the highest as they also cover the central node calculations. Note that the calculations of individual nodes were performed sequentially so no parallelization was involved.

VI. CONCLUDING REMARKS

The paper focused on the active fault diagnosis of a large scale stochastic system with coupled faults. Such coupling facilitates modeling system-wide faults. The system was modeled using the multiple-model framework, where the models describe the fault-free and faulty behavior. An active fault detector was proposed to detect the faults and simultaneously to excite the system to obtain more information about the faults from the observations. The algorithm consists of two stages: the off-line design involving computation of the Bellman function and on-line estimation, where the system state is estimated, the optimal excitation input signal is selected, and the decision is generated. While the off-line design was carried out in a decentralized architecture to achieve computational and storage tractability, the on-line estimation used a hierarchical architecture. In the hierarchical architecture, the local nodes communicate with each other to cope with the subsystem coupling due to the continuous state. Additionally, the local nodes send local measurement likelihoods to the central node and receive estimates of system model probabilities from it. The central node copes with the coupling due to the multi-model index. The numerical example demonstrated improved detection quality of the proposed hierarchical architecture.

REFERENCES

- [1] K. Sevenson, P. Chaiwatanodom, and R. D. Braatz, "Perspectives on Process Monitoring of Industrial Systems," *IFAC-papersOnLine*, vol. 48, no. 21, pp. 931–939, 2015.
- [2] S. Simani, C. Fantuzzi, and R. J. Patton, *Model-based Fault Diagnosis in Dynamic Systems Using Identification Techniques*. London, UK: Springer, 2003.
- [3] M. Blanke, M. Kinnaert, J. Lunze, and M. Staroswiecki, *Diagnosis and Fault-tolerant Control*, 3rd ed. Berlin, Germany: Springer-Verlag, 2016.
- [4] H. H. Niemann, "Fault Tolerant Control based on Active Fault Diagnosis," in *Proceedings of 2005 American Control Conference*, Portland, OR, USA, jun 2005, pp. 2224–2229.
- [5] D. M. Raimondo, F. Boem, A. Gallo, and T. Parisini, "A Decentralized Fault-Tolerant Control Scheme based on Active Fault Diagnosis," in *Proceedings of the 55th Conference on Decision and Control*, Las Vegas, NV, USA, dec 2016, pp. 2164–2169.
- [6] Punčochář and O. Straka, "Non-Centralized Active Fault Diagnosis for Stochastic Systems," in *2019 American Control Conference*, Philadelphia, USA, jul 2019.

- [7] O. Straka and Punčochář, “Decentralized and Distributed Active Fault Diagnosis for Stochastic Systems with Indirect Observations,” in *22nd International Conference on Information Fusion*, Ottawa, Canada, jul 2019.
- [8] O. Straka and I. Puncochar, “Distributed Active Faults Diagnosis for Systems with Conditionally Dependent Faults,” in *21st IFAC World Congress*, 2020, submitted to.
- [9] I. Punčochář and M. Šimandl, “On infinite horizon active fault diagnosis for a class of non-linear non-Gaussian systems,” *International Journal of Applied Mathematics and Computer Science*, vol. 24, no. 4, pp. 795–807, 2014.
- [10] D. P. Bertsekas, *Dynamic Programming and Optimal Control*, 4th ed. Belmont, Massachusetts: Athena Scientific, 2012.
- [11] Y. Bar-Shalom, X. R. Li, and T. Kirubarajan, *Estimation with Applications to Tracking and Navigation*. New York, NY, USA: John Wiley & Sons, Jun. 2001.
- [12] D. Vrabie, K. G. Vamvoudakis, and F. L. Lewis, *Optimal Adaptive Control and Differential Games by Reinforcement Learning Principles*, 1st ed. London, UK: The Institution of Engineering and Technology, 2013.
- [13] K. Watanabe and S. G. Tzafestas, “Generalized pseudo-Bayes estimation and detection for abruptly changing systems,” *Journal of Intelligent and Robotic Systems*, vol. 7, no. 1, pp. 95–112, 1993.
- [14] S. J. Julier and J. K. Uhlmann, “A non-divergent estimation algorithm in the presence of unknown correlations,” in *Proceedings of the 1997 American Control Conference (Cat. No.97CH36041)*, vol. 4, June 1997, pp. 2369–2373 vol.4.
- [15] O. Tslil, O. Aharon, and A. Carmi, “Distributed Estimation Using Particles Intersection,” in *Proceedings of the 21st International Conference on Information Fusion*, Cambridge, Great Britain, Jul. 2018.
- [16] J. Ajgl and M. Šimandl, “Particle Based Probability Density Fusion with Differential Shannon Entropy Criterion,” in *Proceedings of the 14th International Conference on Information Fusion*, Chicago, IL, USA, Jul. 2011.