

250mA Low Consumption Linear Regulator

DESCRIPTION


BL8060 series is a group of positive voltage output, low power consumption, low dropout voltage, three terminal regulator. It can provide 250mA output current when input / output voltage differential drops to 570mV ($V_{OUT}=2.8V$), and it also provides foldback short-circuit protection and output current limit function. The very low power consumption of BL8060($I_Q=1.0\mu A$) can greatly improve natural life of batteries.

BL8060 can provide output value in the range of 1.1V~5.5V in 0.1V steps. It also can customized on command.

BL8060 includes high accuracy voltage reference, error amplifier, current limit circuit and output driver module.

BL8060 has well load transient response and good temperature characteristic, And it uses trimming technique to guarantee output voltage accuracy within $\pm 2\%$.

TYPICAL APPLICATION

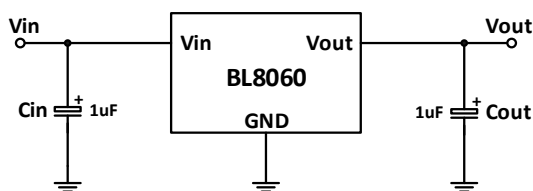

Note:

- 1) Input capacitor ($C_{IN}=1\mu F$) is recommended in all application circuit. Ceramic capacitor is recommended.
- 2) Output capacitor ($C_{OUT}=1\mu F$) is recommended in all application to assure the stability of circuit. Ceramic capacitor is recommended.


FEATURES

- Low power consumption: $1.0\mu A$ (Typ.)
- Maximum output current: 250mA
- Small dropout voltage
210mV@100mA ($V_{OUT}=2.8V$)
570mV@250mA ($V_{OUT}=2.8V$)
- Input voltage range: 1.5V~12V
- Output voltage range: 1.1V~5.5V (customized on command in 0.1V steps)
- Highly accurate: $\pm 2\%$ ($\pm 1\%$ customized)
- Output current limit
420mA@ $V_{OUT}=2.8V$
- Foldback short-circuit current
90mA@ $V_{OUT}=2.8V$

APPLICATIONS

- Battery powered equipment
- Power management of MP3、PDA、DSC、mouse、PS2 games
- Reference voltage source regulation after switching power

ELECTRICAL CHARACTERISTICS

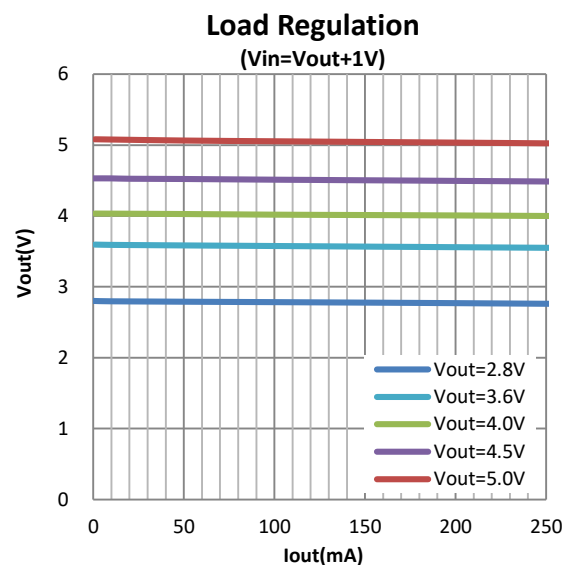

ORDERING INFORMATION

BL8060 12345

Code	Description
1	Temperature&Rohs: C: -40~85°C , Pb Free Rohs Std. H: -40~85°C, Halogen Free
2	Package type: B3:SOT-23-3 B5:SOT-23-5 C3:SOT-89-3 C3B:SOT-89-3(B) HA:TO-92 HB:TO-92
3	Packing type: TR:Tape&Reel (Standard) BG:Bag (TO-92) PT:Reel (TO-92)
4	Output voltage: e.g. 11=1.1V 15=1.5V 55=5.5V
5	Voltage accuracy: 1=±1% Blank(default)=±2%

MARKING DESCRIPTON

N: Product code

X: Output voltage

Output Voltage Code





VOUT	Code	VOUT	Code	VOUT	Code
1.2V	2	3.0V	0	4.4V	4
1.3V	3	3.1V	1	4.5V	5
1.5V	5	3.2V	2	4.6V	6
1.8V	8	3.3V	3	4.7V	7
2.0V	0	3.4V	4	4.8V	8
2.1V	1	3.5V	5	4.9V	9
2.2V	2	3.6V	6	5.0V	0
2.3V	3	3.7V	7	5.1V	1
2.4V	4	3.8V	8	5.2V	2
2.5V	5	3.9V	9	5.3V	3
2.6V	6	4.0V	0	5.4V	4
2.7V	7	4.1V	1	5.5V	5
2.8V	8	4.2V	2		
2.9V	9	4.3V	3		



Y: The Year of manufacturing, "1" stands for year 20X1, "2" stands for year 20X2, and "8" stands for year 20X8. (X=0,1,2,...,9)

W: The week of manufacturing. "A" stands for week 1, "Z" stands for week 26, "A" stands for week 27, "Z" stands for week 52.

The date code of the 53rd week is the same as that of the first week of the next year. For example, the date code of the 53rd week of 2017 is the same as that of the first week of 2018, which are 1801 and 8A.

PIN CONFIGURATION

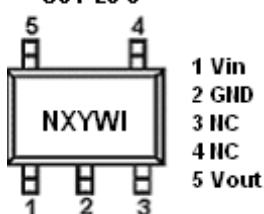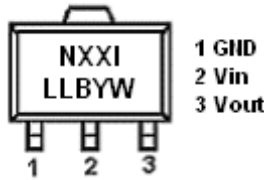Product classification		BL8060CB3TR□□□
Marking		SOT-23-3
NXYWI	N:Product code	
	X:Output voltage	
	YW: Date code	
Product classification		BL8060CB5TR□□□
Marking		SOT-23-5
NXYWI	N:Product code	
	X: Output voltage	
	YW: Date code	
Product classification		BL8060CC3TR□□□
Marking		SOT-89-3
NXXI LLBYW	N:Product code	
	XX:Output voltage	
	LL:LOT NO.	
	B:FAB code	
	YW:Date code	
Product classification		BL8060CC3BTR□□□
Marking		SOT-89-3
NXXIB LLBYW	N:Product code	
	XX:Output voltage	
	LL:LOT NO.	
	B:FAB code	
	YW:Date code	

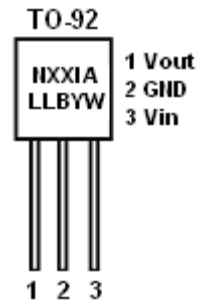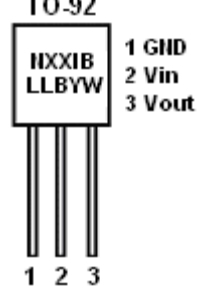Product classification		BL8060CHABG□□□ BL8060CHAPT□□□
Marking		T0-92
NXXIA LLBYW	N:Product code	
	XX:Output voltage	
	LL:LOT NO.	
	B:FAB code	
Product classification		BL8060CHBBG□□□ BL8060CHBPT□□□
Marking		T0-92
NXXIB LLBYW	N:Product code	
	XX:Output voltage	
	LL:LOT NO.	
	B:FAB code	
GND		Ground pin
Vin		Supply voltage input
Vout		Output voltage

ABSOLUTE MAXIMUM RATING

Parameter		Value
Max input voltage		14V
Operating junction temperature(T _J)		125°C
Ambient temperature(T _A)		-40°C -85°C
Power dissipation	SOT-23-3	250mW
	SOT-23-5	250mW
	SOT-89-3	500mW
	TO-92	500mW
Storage temperature(T _S)		-40°C -150°C
Lead temperature & time		260°C,10S

Note:

Exceed these limits to damage to the device.

Exposure to absolute maximum rating conditions may affect device reliability.

RECOMMENDED WORK CONDITIONS

Item	Min	Recommended	Max.	Unit
Input voltage range			12	V
Ambient temperature	-40		85	°C

ELECTRICAL CHARACTERISTICS

BL8060□□□TR□□

(Test Conditions: C_{IN}=1uF, C_{OUT}=1uF, T_A=25°C, Unless Otherwise Specified)

Symbol	Parameter	Conditions	Min	Type	Max	Units
V _{IN}	Input voltage				12	V
V _{OUT}	Output voltage		V _{OUT} x0.98		V _{OUT} x1.02	V
I _{OUT} (MAX.)	Maximum output current	V _{IN} -V _{OUT} =1V	250			mA
Dropout voltage	Input-output voltage differential	I _{OUT} =100mA	V _{OUT} ≤ 1.8V	600	1000	mV
			V _{OUT} ≥ 1.8V	300	600	
$\frac{\Delta V_{out}}{\Delta V_{in} \cdot V_{out}}$	Line regulation	I _{OUT} =10mA, 1.5V≤V _{IN} ≤8V		0.2	0.3	%/V
ΔV _{out}	Load regulation	V _{IN} =Set V _{OUT} +1V 1mA≤I _{OUT} ≤100mA		20	40	mV
I _q	Quiescent current	V _{IN} =Set V _{OUT} +1V		1.0	5.0	uA
$\frac{\Delta V_{out}}{\Delta T \cdot V_{out}}$	Output voltage temperature coefficient	I _{OUT} =10mA		100		ppm/°C


BL8060□□□TR36

(Test Conditions: C_{IN}=1uF, C_{OUT}=1uF, T_A=25°C, Unless Otherwise Specified)

Symbol	Parameter	Conditions	Min	Type	Max	Units
V _{IN}	Input voltage				12	V
V _{OUT}	Output voltage		3.528	3.6	3.672	V
I _{OUT} (MAX.)	Maximum output current	V _{IN} -V _{OUT} =1V	250			mA
Dropout voltage	Input-output voltage differential	I _{OUT} =100mA		210	600	mV

$\frac{\Delta V_{out}}{\Delta V_{in} \cdot V_{out}}$	Line regulation	$I_{OUT}=10mA, 4V \leq V_{IN} \leq 8V$		0.2	0.3	%/V
ΔV_{out}	Load regulation	$V_{IN} = \text{Set } V_{OUT} + 1V$ $1mA \leq I_{OUT} \leq 100mA$		20	40	mV
I_q	Quiescent current	$V_{IN} = \text{Set } V_{OUT} + 1V$		1.0	5.0	μA
$\frac{\Delta V_{out}}{\Delta T \cdot V_{out}}$	Output voltage temperature coefficient	$I_{OUT}=10mA$		100		ppm/ $^{\circ}C$

BLOCK DIAGRAM

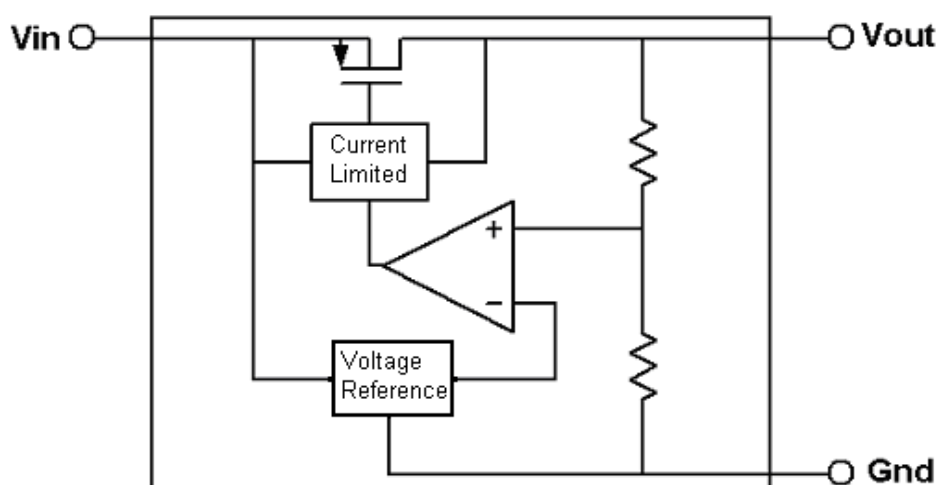







EXPLANATION

BL8060 is a series of low dropout voltage and low power consumption three pins regulator. Its application circuit is very simple, which only needs two outside capacitors. It is composed of these modules: high accuracy voltage reference, current limit circuit, error amplifier, output driver and power transistor.


Current Limit module can keep chip and power system away from danger when load current is more than 250mA.

BL8060 uses trimming technique to assure the accuracy of output value within $\pm 2\%$, at the same time, temperature compensation is elaborately considered in this chip, which makes BL8060's temperature coefficient within 100ppm/ $^{\circ}C$.


TYPICAL PERFORMANCE CHARACTERISTICS

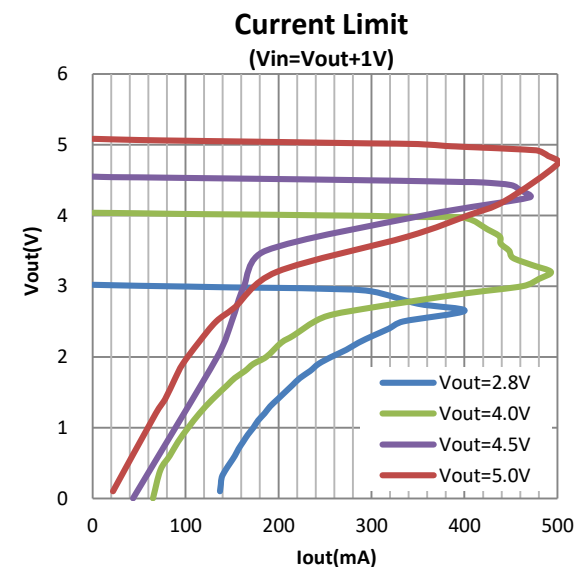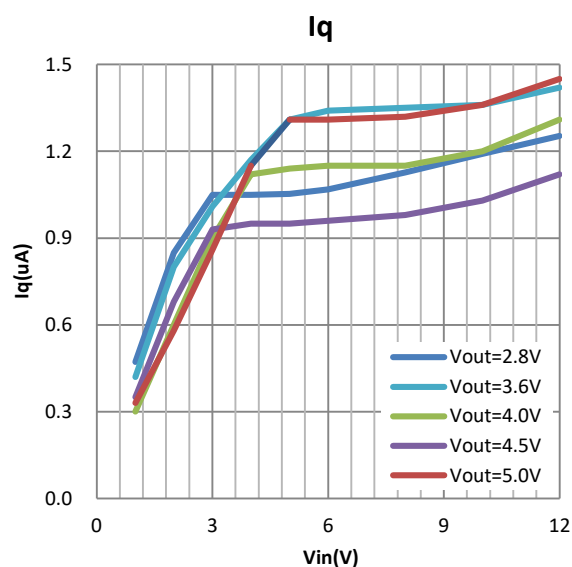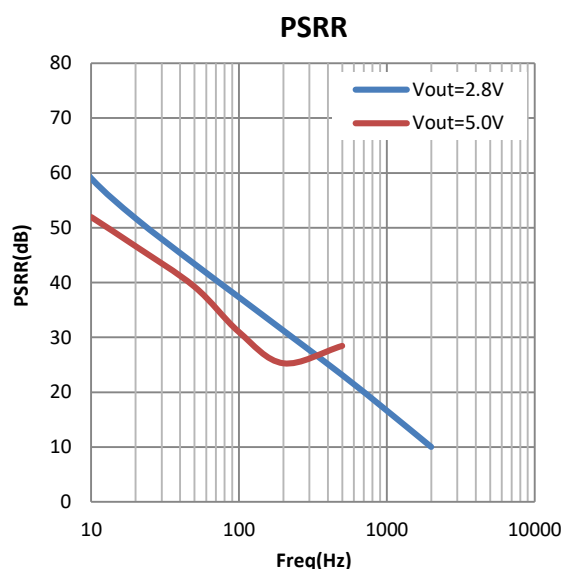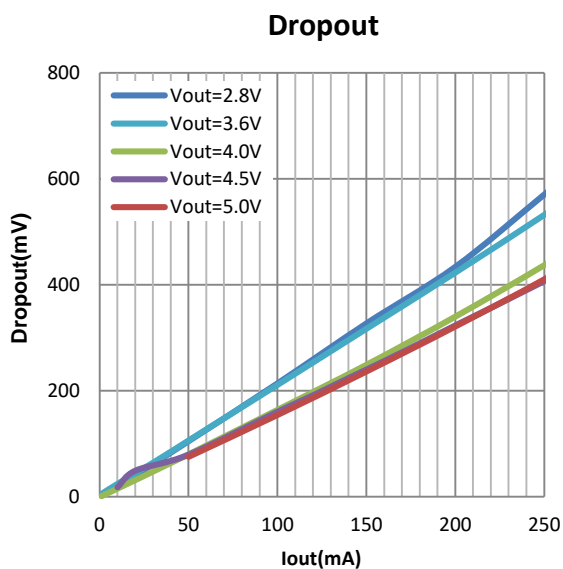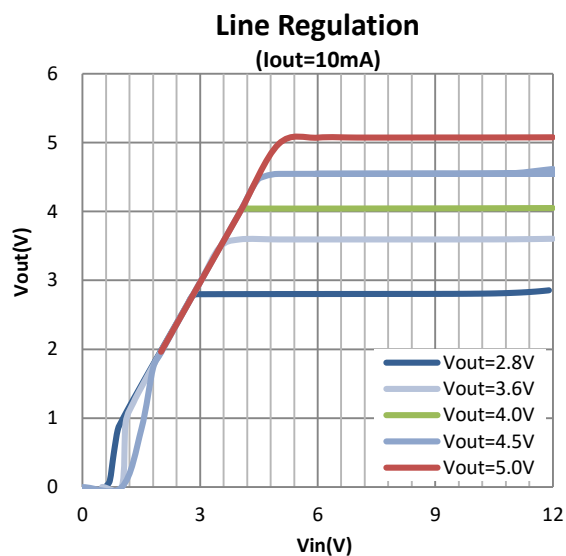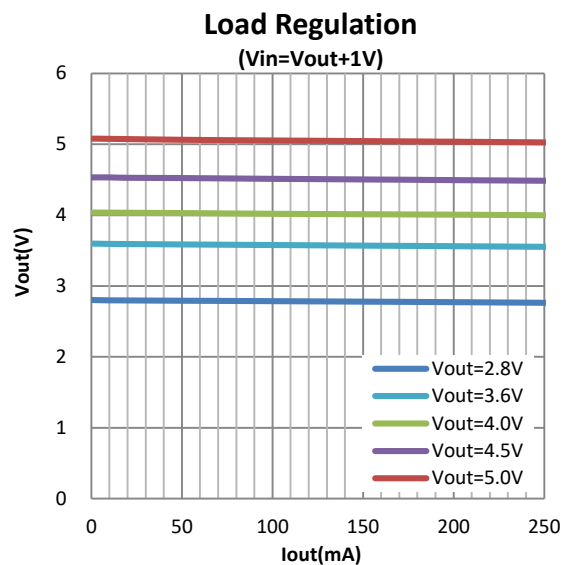


Line transient response

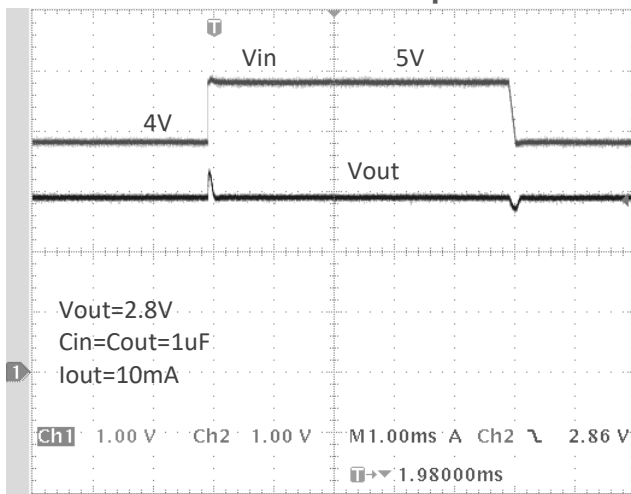

Load transient response

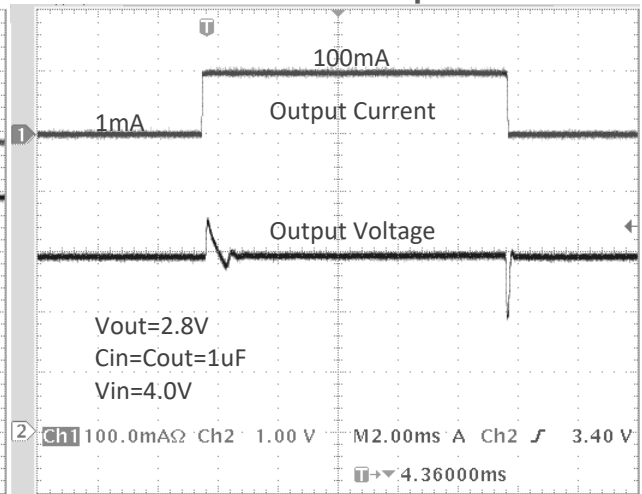


Start up

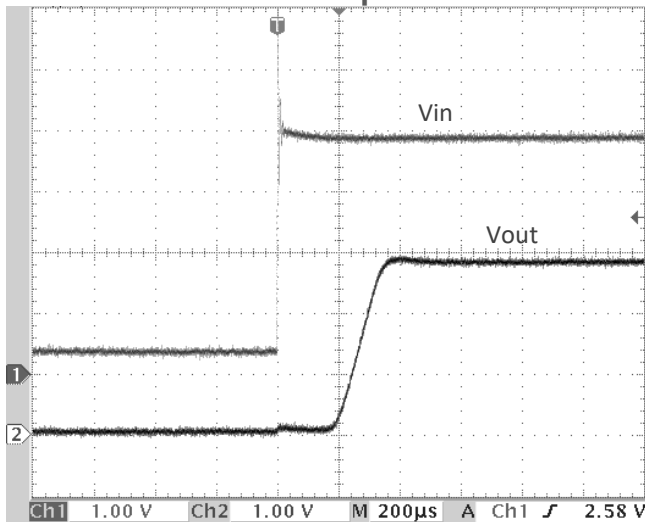

PACKAGE OUTLINE

Package	SOT23-3	Devices per reel	3000Pcs
---------	---------	------------------	---------


Package dimension:

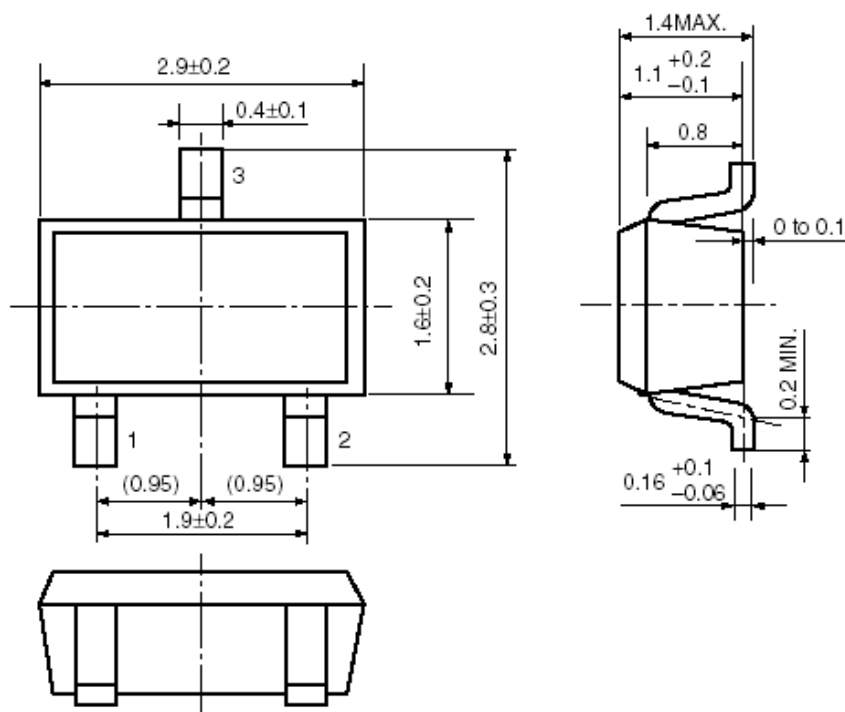


Unit: mm

Package	SOT23-5	Devices per reel	3000pcs
---------	---------	------------------	---------

Package dimension:

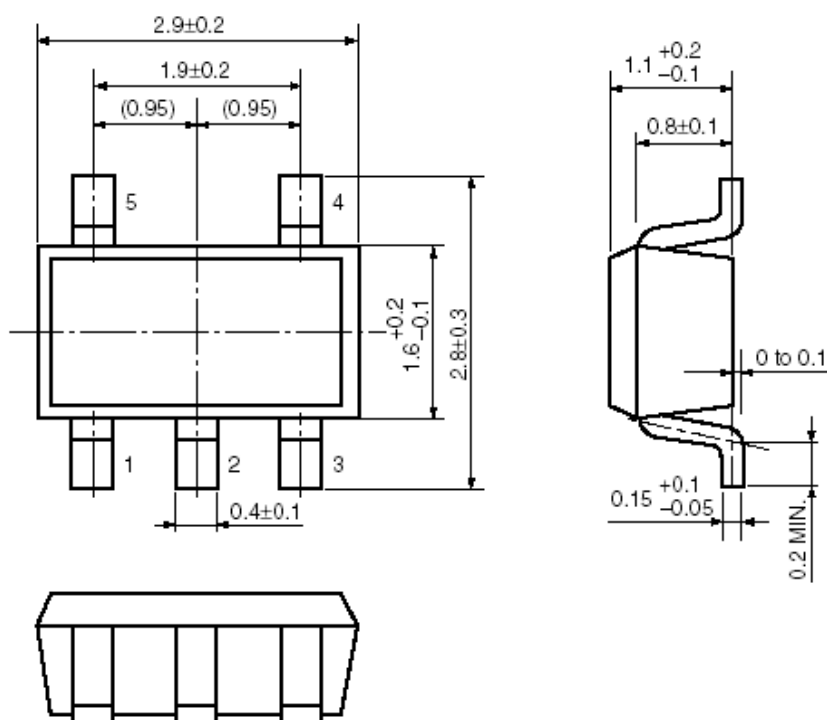


Unit: mm

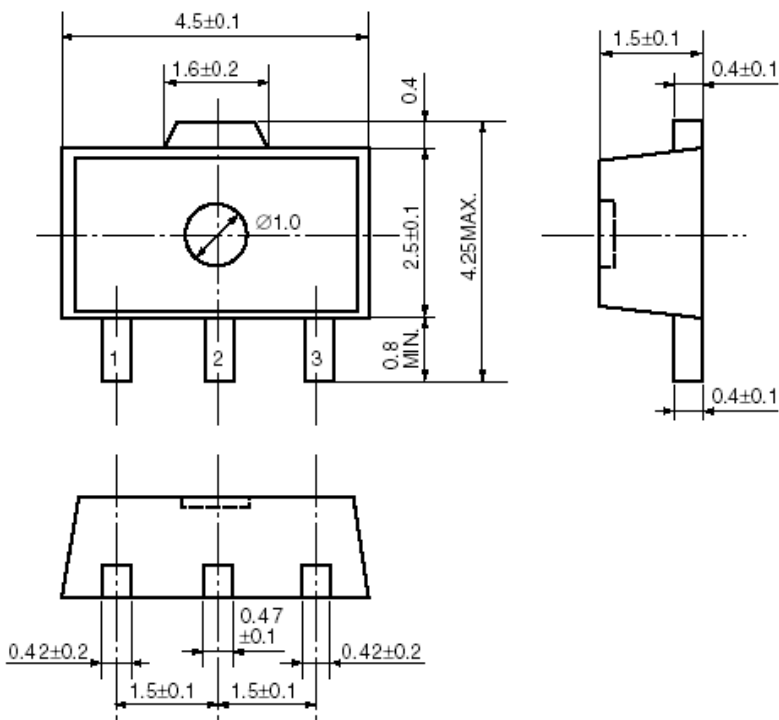Package	SOT89-3	Devices per reel	1000pcs
Package dimension:			
 <p>The drawing illustrates the mechanical specifications of the BL8060 SOT89-3 package. It includes three views: a top view, a side view, and a bottom view. The top view shows a rectangular body with a central circular feature of diameter $\varnothing 1.0$. The overall width is 4.5 ± 0.1 mm, and the width of the central feature is 1.6 ± 0.2 mm. The height of the package is 2.5 ± 0.1 mm, with a maximum height of 4.25 mm. The distance from the top of the package to the top of the leads is 0.4 mm. The leads are numbered 1, 2, and 3. The distance from the center of the package to the center of lead 1 is 0.42 ± 0.2 mm, and the distance between the centers of leads 1 and 2 is 1.5 ± 0.1 mm. The distance from the center of the package to the center of lead 3 is 0.42 ± 0.2 mm, and the distance between the centers of leads 2 and 3 is 1.5 ± 0.1 mm. The side view shows the profile of the package with a width of 1.5 ± 0.1 mm and a height of 0.4 ± 0.1 mm. The bottom view shows the underside of the package with a width of 1.5 ± 0.1 mm and a height of 0.47 ± 0.1 mm.</p>			
Unit: mm			

Package	TO-92	Devices per bag	1000Pcs
		Devices per reel	2000Pcs

Package dimension:

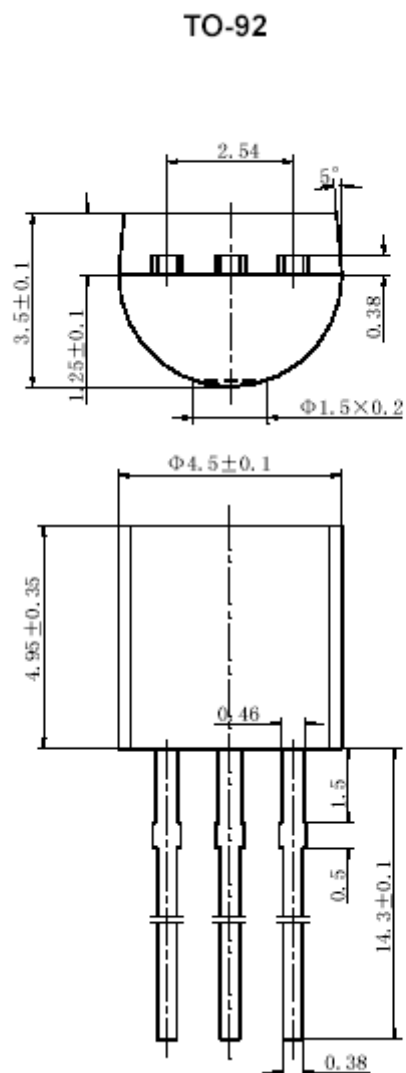

Unit: mm