


DoSA-3D User Manual

VCM Example

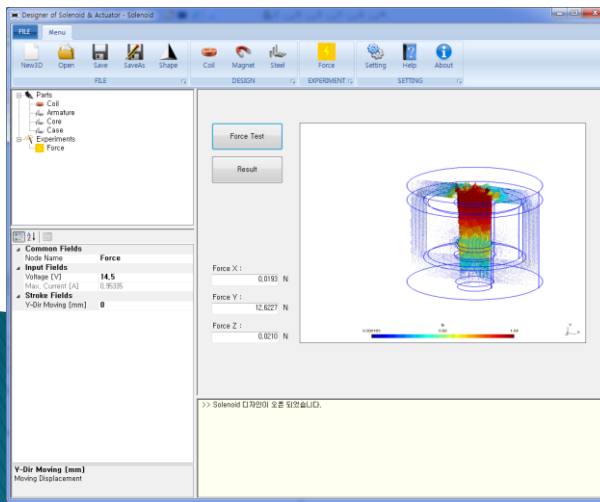

2022-03-19

GiTae Kweon (zgitae@gmail.com)


DoSA Structure

PC Requirement

- CPU : 4 Core and above
- RAM : 16GB and above



Program Structure

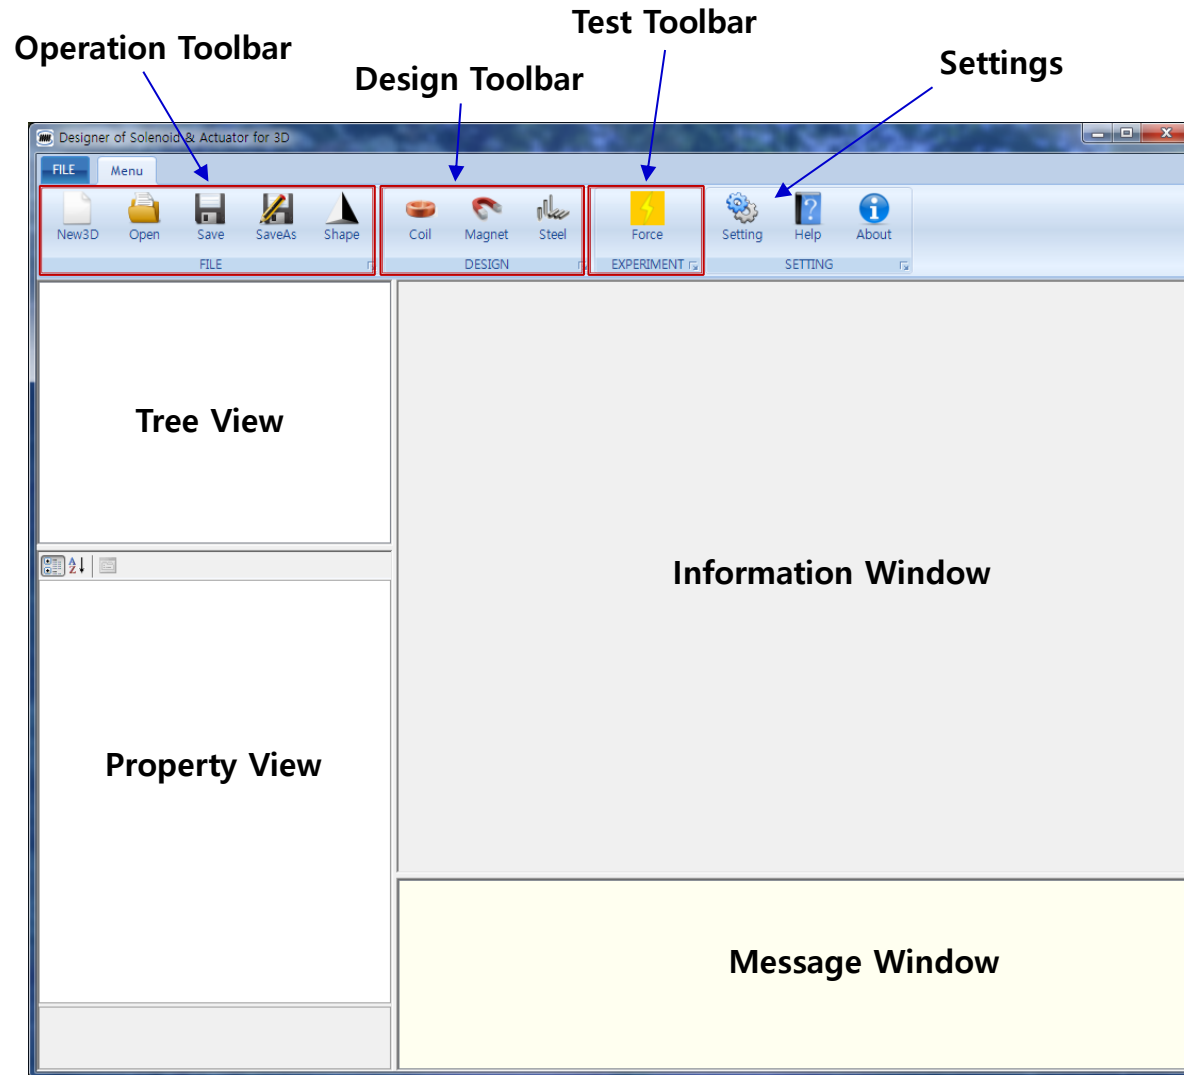

Toolbar


1. Operations

- ✓ New : Create a new design
- ✓ Open : Open previous design
- ✓ Save : Save the design
- ✓ SaveAs : Save in different name
- ✓ Shape : Check the 3D Shape



2. Design

- ✓ Coil : Add a coil and specification design
- ✓ Magnet : Add a magnet and determine specifications
- ✓ Steel : Add a steel and determine specifications

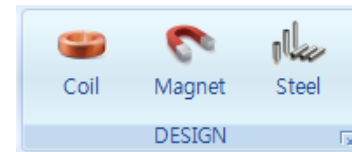

3. Virtual Test



- ✓ Force : Magnetic force estimation



Analysis Model

Analysis Model

1. Shape Model

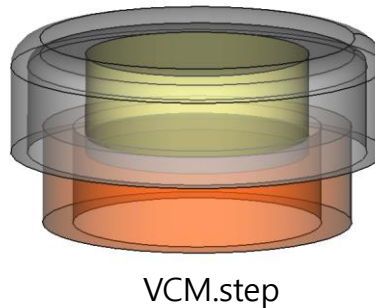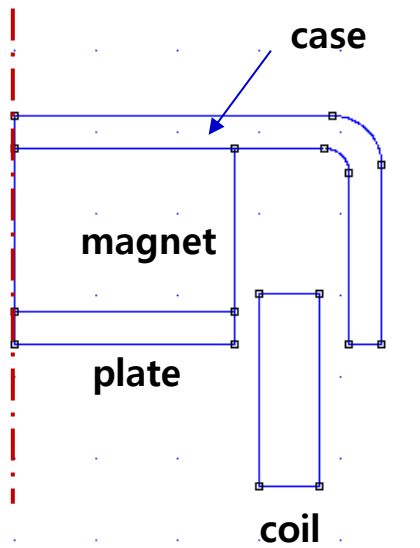

2. Product Specifications

A. Coil

- Coil Turns : 126 turns
- Coil Resistance : 15.75 Ohm

B. Magnet

- Material : NdFeB 40
- Magnetization Direction : 90 (UP)

C. Power

- Voltage : 2.5V

(Example Files : DoSA-3D Install Directory > Samples > VCM)

New design

1. Toolbar > Click New button
2. Design Name : "VCM"
3. Shape File (STEP) : Select VCM.step (provided with this tutorial document)



[Precautions for the Shape Model]


DoSA-3D still has the following functional limitations.

ㄱ. Limitation of Coil Shape

- Coil center axis should be Y axis direction.
- The current is applied like a cylindrical coil.
(Square coils can cause some differences)



ㄴ. Moving Part

- The moving part still supports only one component.

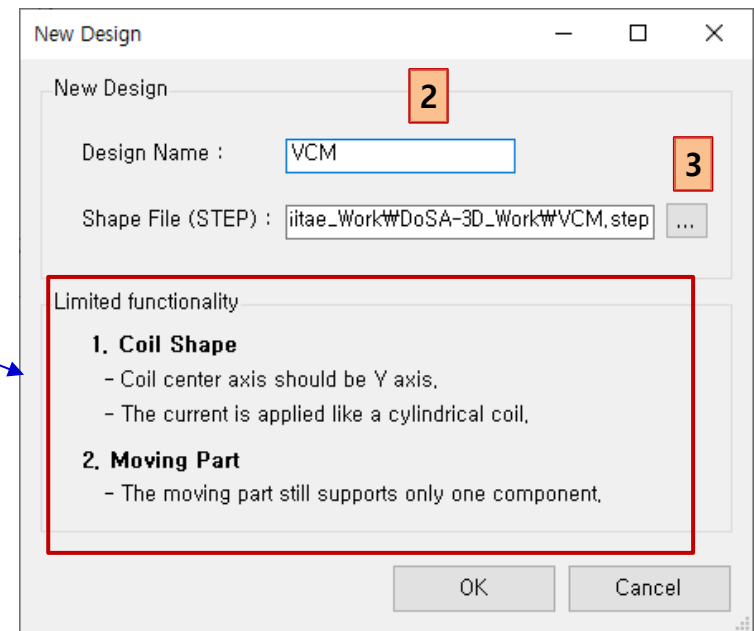


New design

4. Check the solenoid shape in Gmsh.
5. Exit the Gmsh.
6. Check the part names.
7. Click the OK button if there are no problem with the shape and part names.

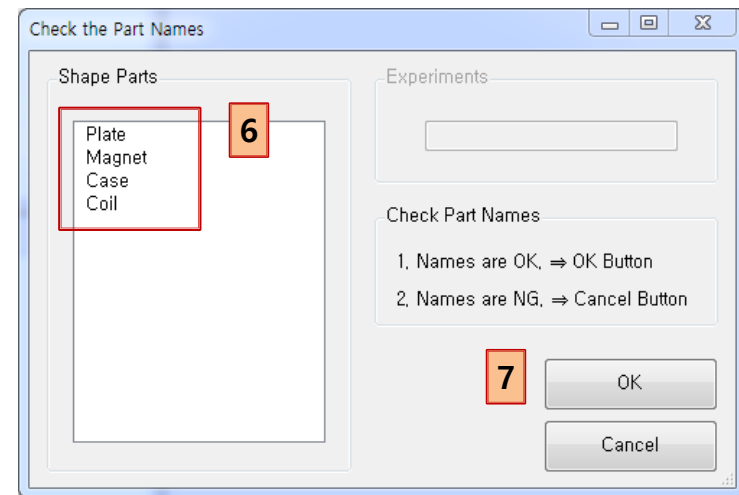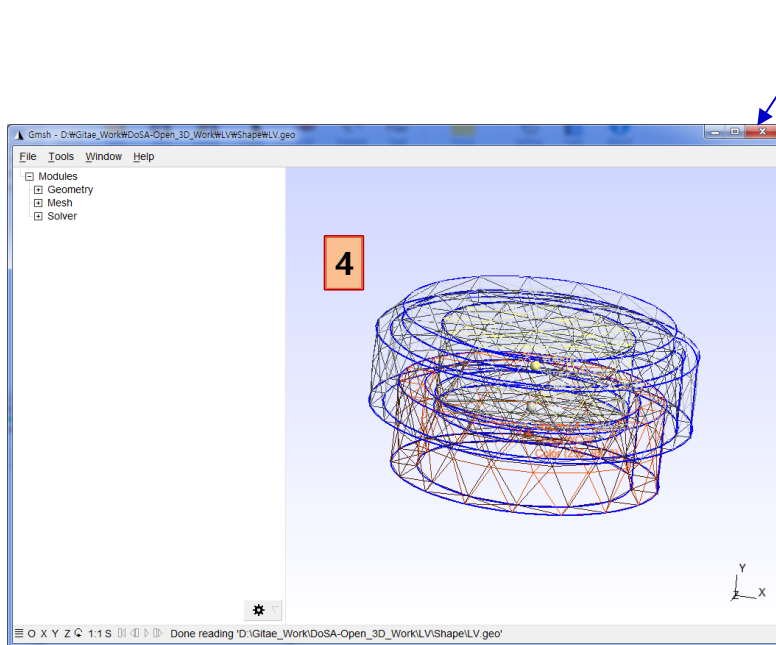

New design



8. Check the design creation.

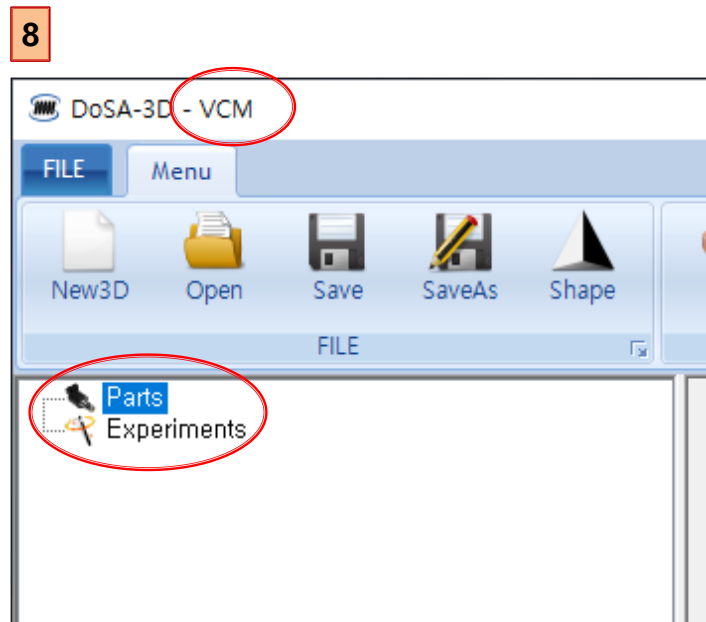

Parts Design

Add a coil

1. Toolbar > Click Coil button
2. Select "Coil" in the list box.
3. Click the OK button.

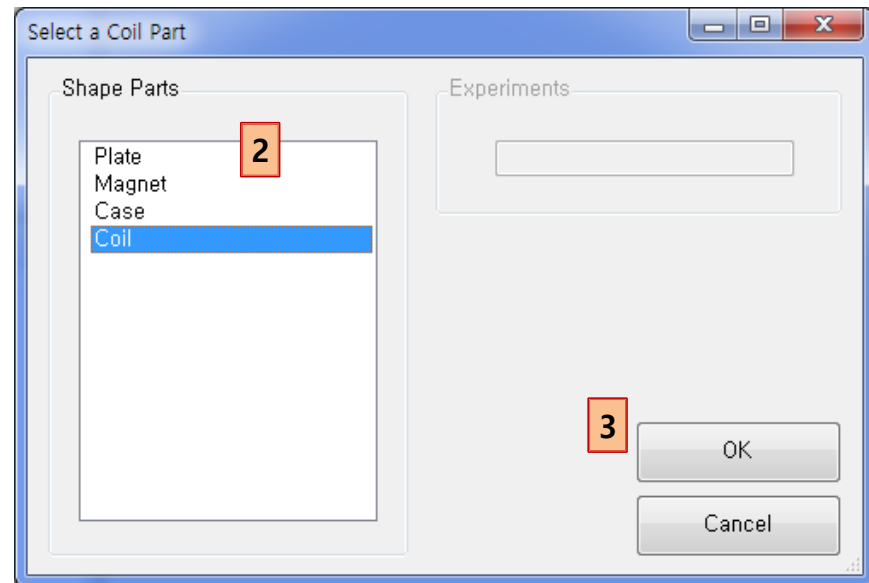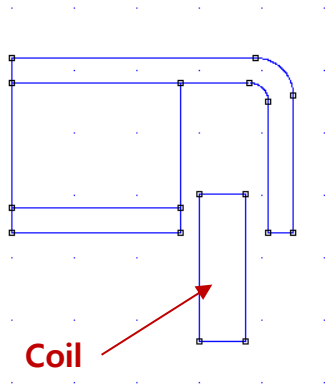


Coil design

1. Input the coil instrumental specifications
 - ✓ Moving Parts : **MOVING**
 - ✓ Coil Wire Grade : Bonded_IEC_Grade_1B
 - ✓ Inner Diameter : 3
 - ✓ Outer Diameter : 3.73
 - ✓ Coil Height : 1.18
 - ✓ Copper Diameter : 0.045
 - ✓ Horizontal Coefficient : 0.95 (Bonded Type)
 - ✓ Vertical Coefficient : 1.13 (Bonded Type)
 - ✓ Resistance Coefficient : 1.1 (Bonded Type)




Common Fields	
Node Name	Coil
Specification Fields	
Part Material	Copper
Curent Direction	IN
Moving Parts	MOVING
Calculated Fields	
Coil Turns	126
Coil Resistance [Ω]	15,74769
Coil Layers	6
Turns of One Layer	21
Design Fields (optional)	
Coil Wire Grade	Bonded_IEC_Grade_1B
Inner Diameter [mm]	3
Outer Diameter [mm]	3,73
Coil Height [mm]	1,18
Copper Diameter [mm]	0,045
Wire Diameter [mm]	0,04953
Coil Temperature [$^{\circ}\text{C}$]	20
Horizontal Coefficient	0,95
Vertical Coefficient	1,13
Resistance Coefficient	1,1

2. Calculate the coil specification
 - ✓ Click the "Coil Design" button
3. Check the coil specification

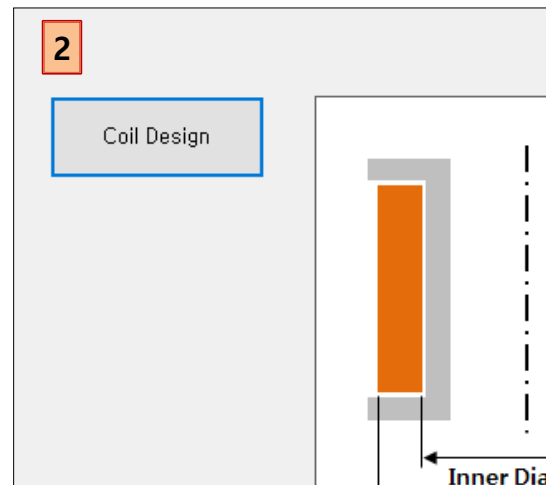

Add a magnet

1. Toolbar > Click Magnet button
2. Select "Magnet" in the list box.
3. Click the OK button.

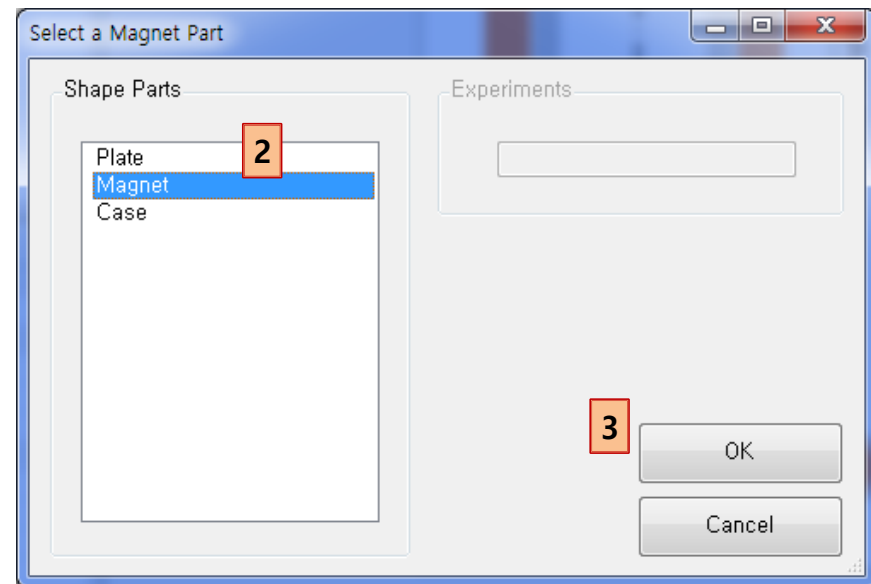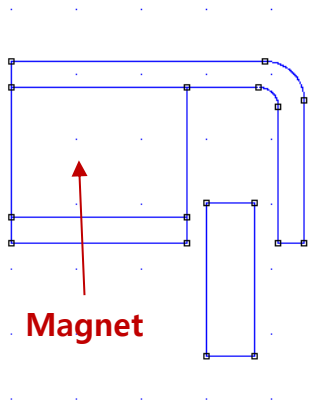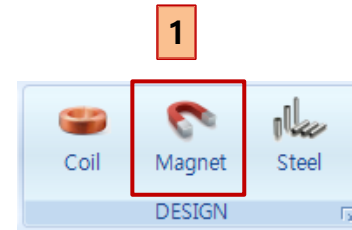


Magnet setting

1. Magnet Settings

- ✓ Use default values


1

Common Fields	
Node Name	Magnet
Specification Fields	
Part Material	NdFeB_40
Hc	969969
Br	1.26497
Moving Parts	FIXED
Magnetization Fields	
Magnet Plane	XY_Plane_Z
Magnet Angle	90

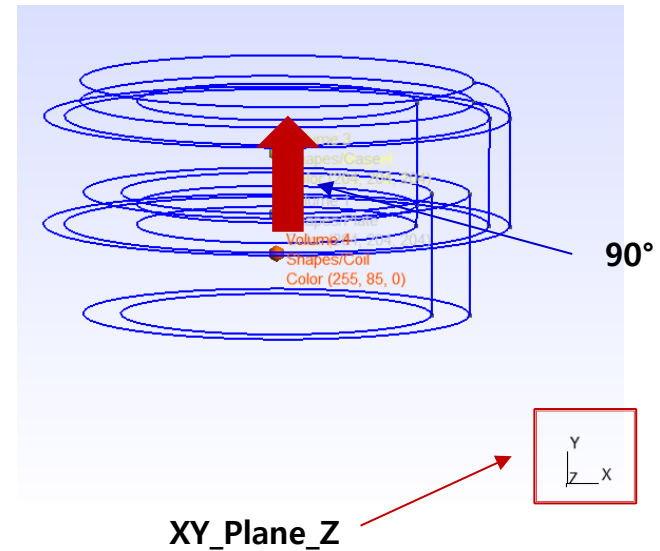


[Ref.] Magnetization Setting of Magnet

- ✓ Magnet Plane : XY_Plane_Z
- ✓ Magnet Angle : 90°

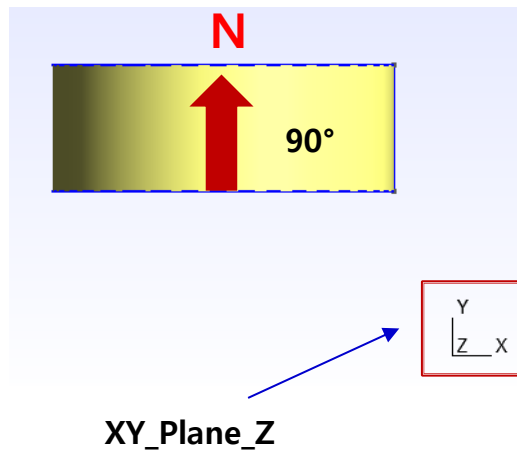

- ✓ Magnet Plane : ZX_Plane_Y
- ✓ Magnet Angle : 45° (135°, -45°, -135°)

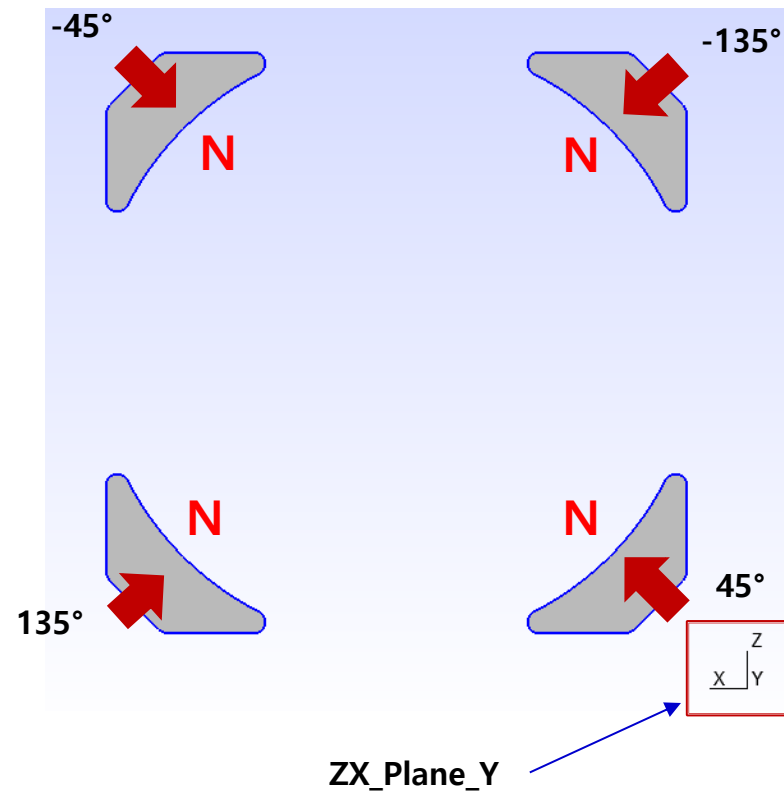

Add a plate

1. Toolbar > Click Steel button
2. Select "Plate" in the list box.
3. Click the OK button.




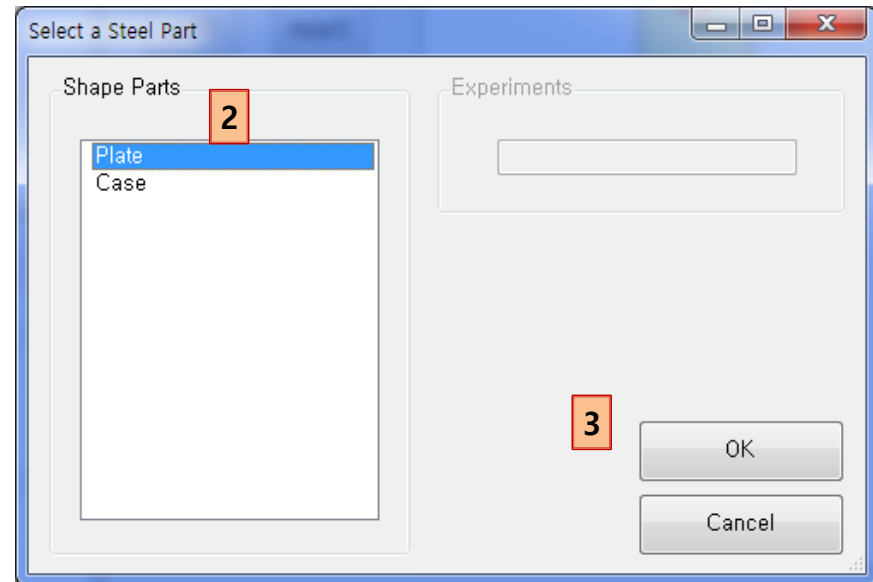


Plate setting

1. Plate settings

- ✓ Part Material : SUS_430

[BH Curve]

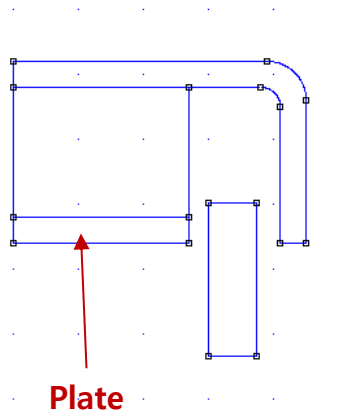
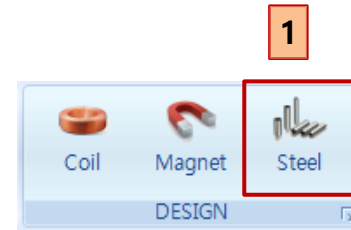
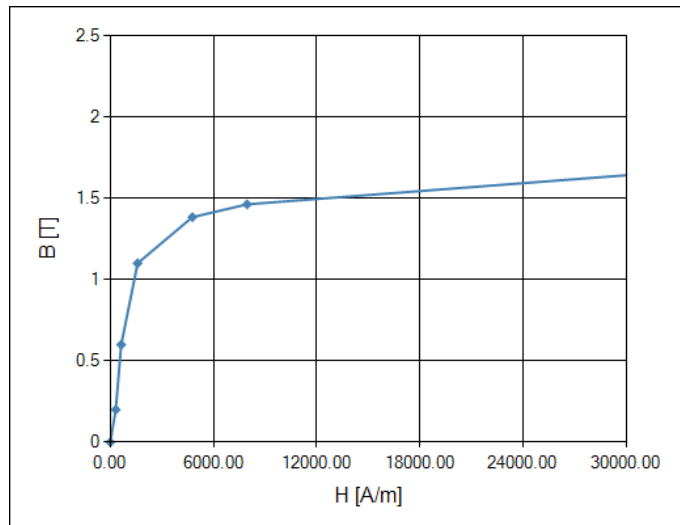


1

Common Fields	
Node Name	Plate
Specification Fields	
Part Material	SUS_430
Moving Parts	FIXED

Add a case

1. Toolbar > Click Steel button
2. Select "Case" in the list box.
3. Click the OK button.

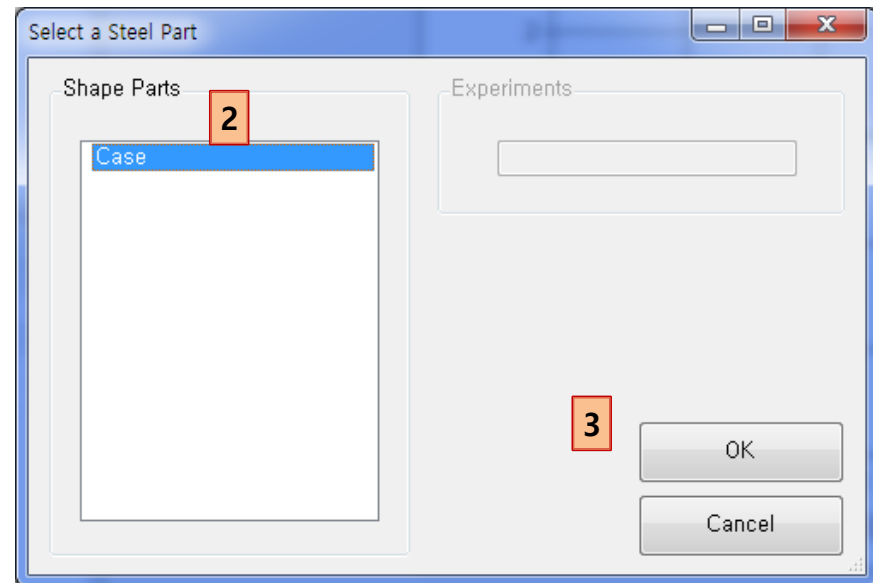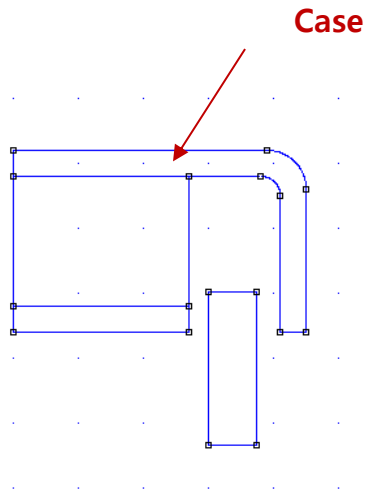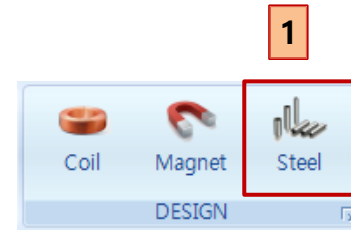


Case setting

1. Case Setting

✓ Part Material : SUS_430

[BH Curve]

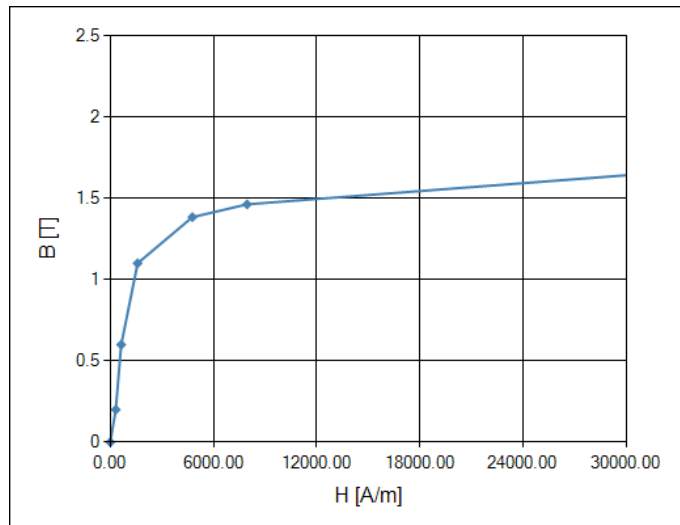


1

Common Fields	
Node Name	Case
Specification Fields	
Part Material	SUS_430
Moving Parts	FIXED


Virtual Test

Test of the magnetic force

1. Toolbar > Click Force Button
2. Force Test Name : "Force"
3. Click OK button
4. Setting of magnetic force test
 - ✓ Voltage : 2.5
5. Setting of analysis condition
 - ✓ Mesh Size Percent : 5
 - ✓ Actuator Type : **VCM**
6. Click "Force Test" Button


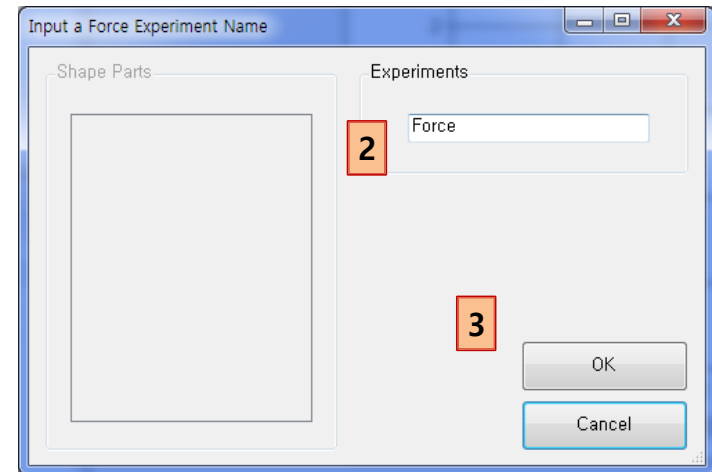


✓ Common Fields		
Node Name	Force	
✓ Input Fields		
Voltage [V]	2.5	4
Max. Current [A]	0,15875	
✓ Initial Position Fields		
Y Movement [mm]	0	
X Movement [mm]	0	
Z Movement [mm]	0	
✓ Condition Fields		
Mesh Size [%]	5	
Actuator Type	VCM	5

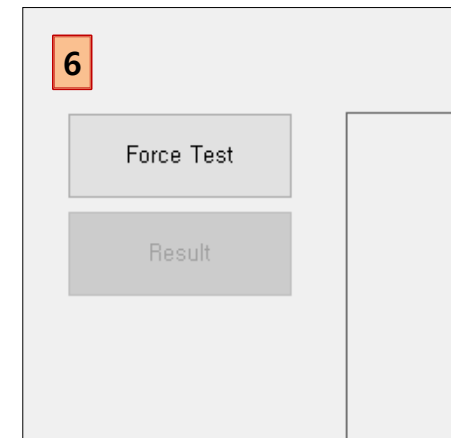



Run the virtual Test

7. Click the Run button after checking the shape.
8. If you want to see the analysis progress, click the status bar of the Gmsh.

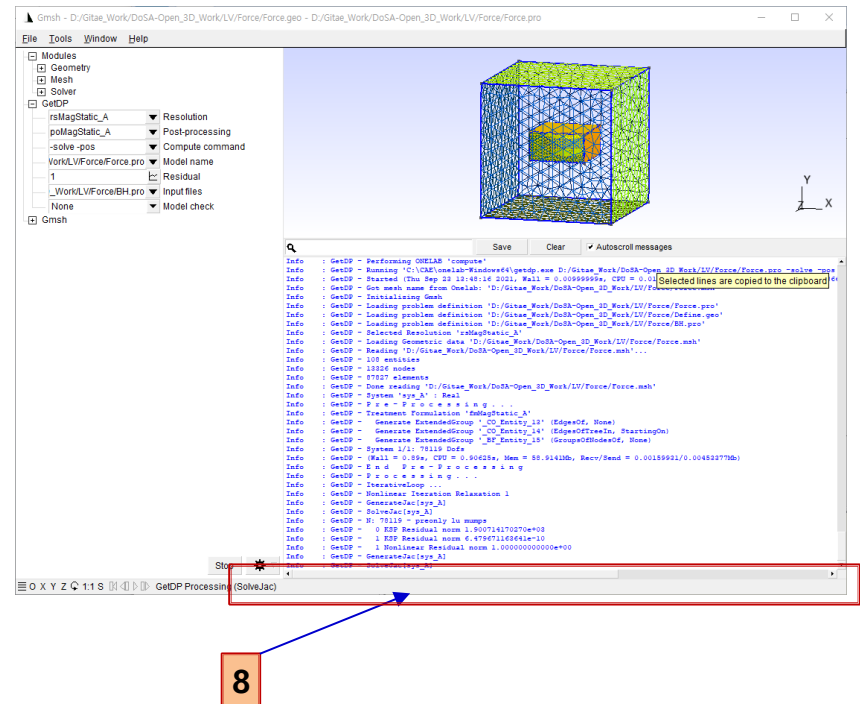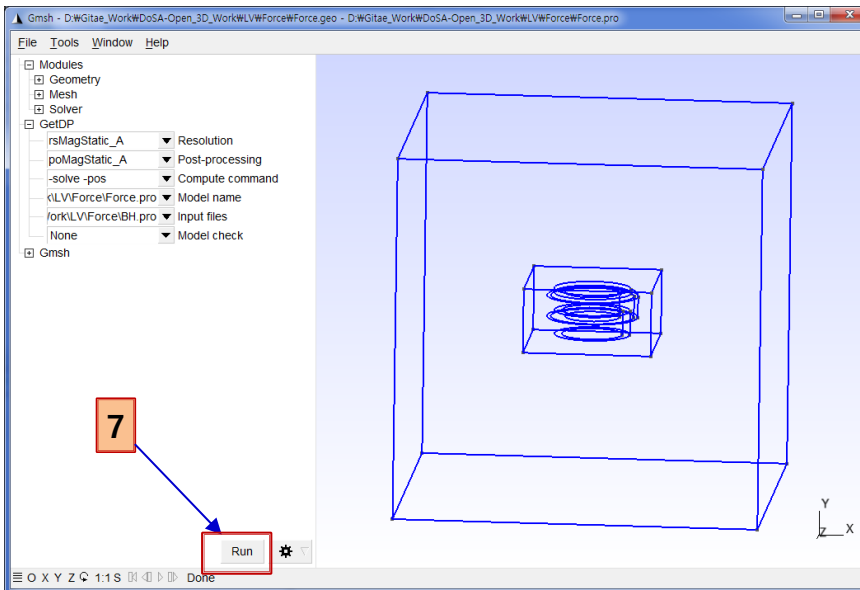



Run the virtual Test

9. Check the analysis results after solving. (The solving time is depend on you system specification)
10. **Quit the Gmsh.** (When finished, Gmsh is automatically restarted)
11. Click the run button again. (**VCM type actuators require twice analysis for accuracy**)

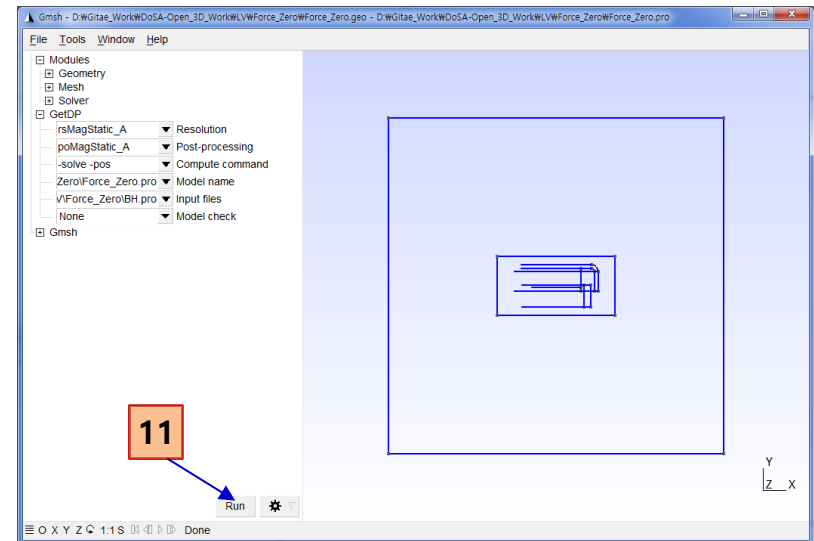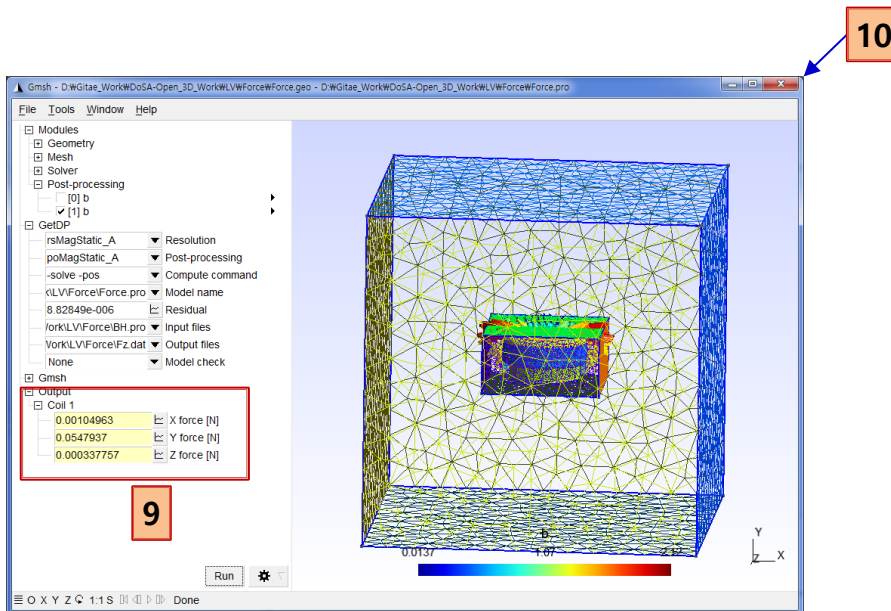

Results of the virtual Test




12. Quit the Gmsh after checking the analysis results.
13. Check the magnetic force of the VCM.

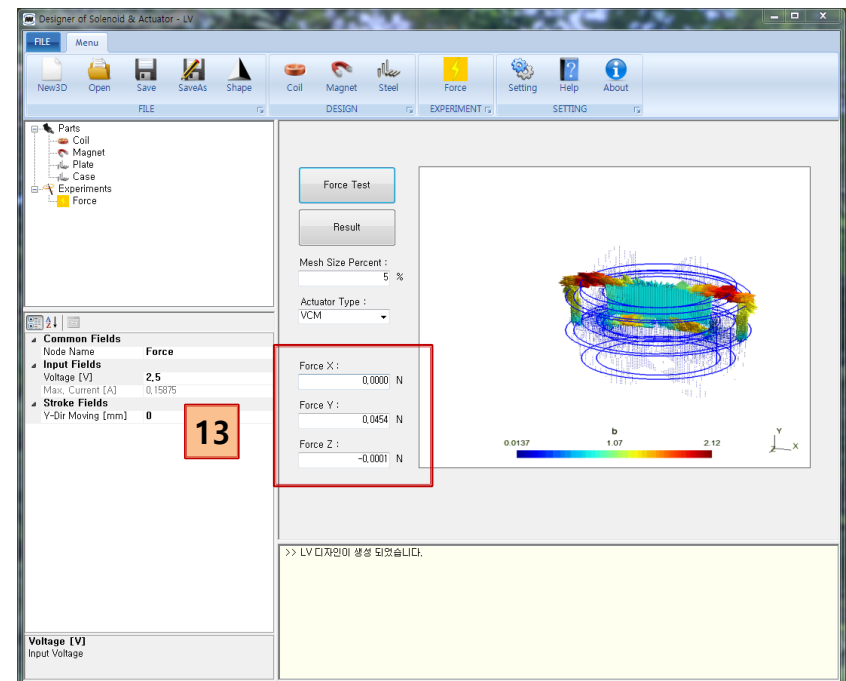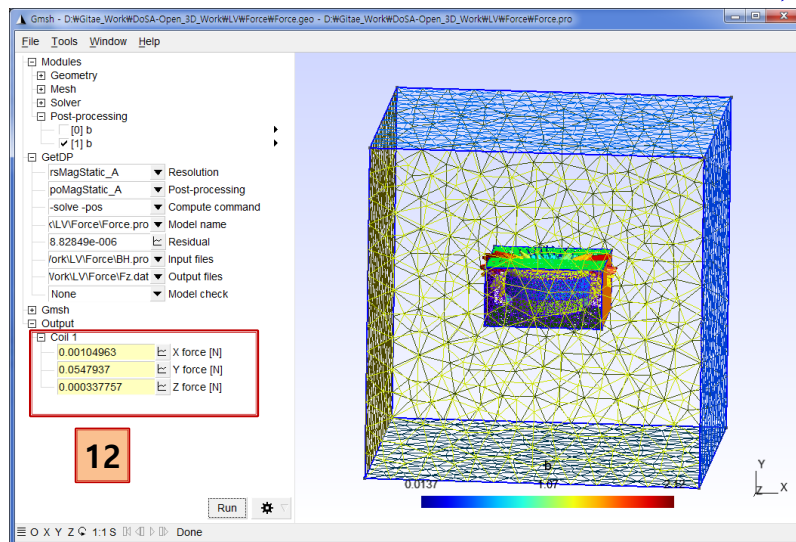

Tips

Open Design

1. Toolbar > Click Open Button
2. Double click the design directory.
3. Double click the design file.

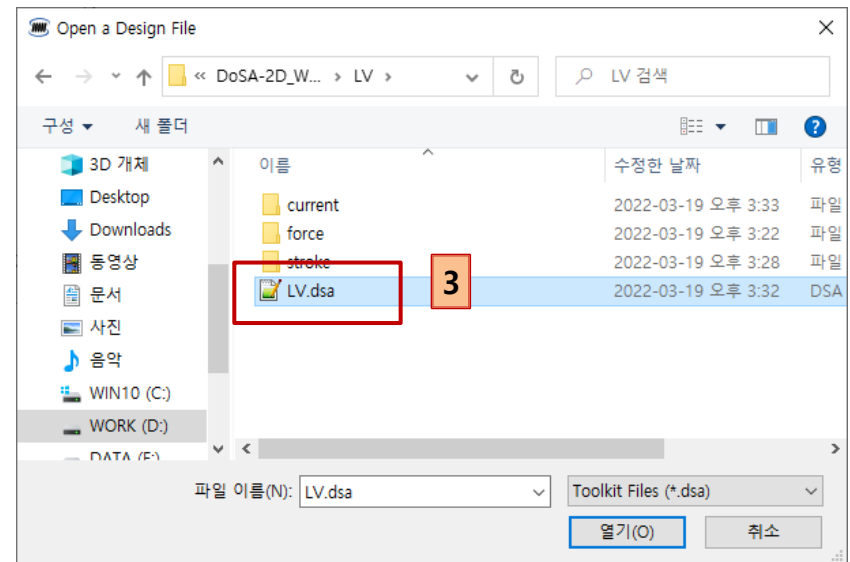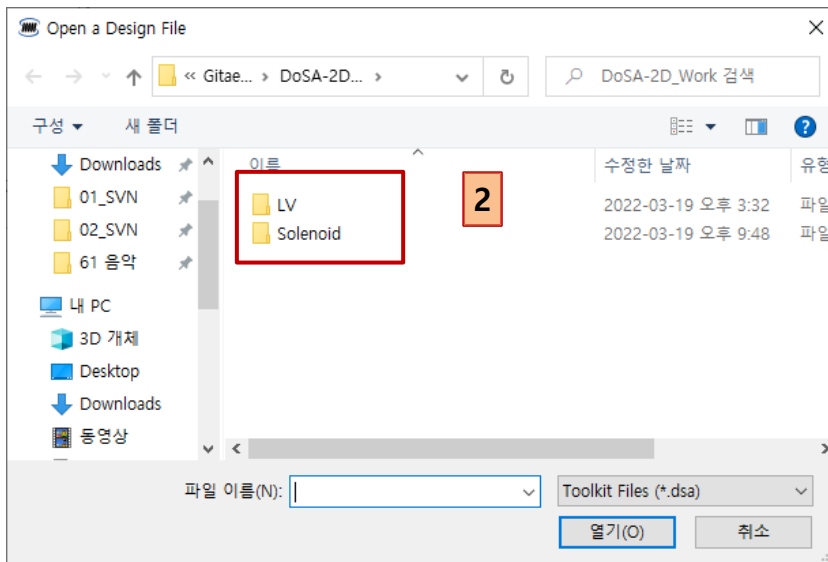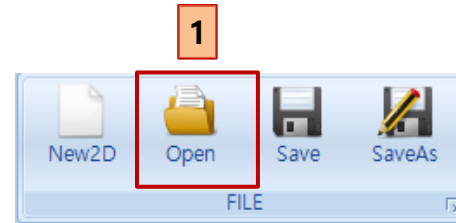

Thank You

Email : zgitae@gmail.com

Homepage : <http://openactuator.org>

