OPENSOURCESDRLAB DOCUMENTATION

PlutoSky R2 Schematic

Product	PlutoSky R2
Document	OSSDRLAB-PlutoSky-R2-SCH
Version	1.0
Date	2026-11-12


This document contains the circuit schematic of the OpenSourceSDRLab PlutoSky R2 (Xilinx Zynq XC7Z020-2CLG484I + Analog Devices AD9361/AD9363), exported from Altium Designer (A4). The 15 sheets follow this cover page.

Sheet	Content
1	USB-C power input and power path, JTAG and OTG USB-C ports
2–3	Zynq power (MP2145 bucks, TPS51200 DDR termination), power pins
4–6	DDR3 (MT41K256M16, 32-bit); Gigabit Ethernet on the PL (RTL8211F, RJ45); USB 2.0 OTG PHY (USB3320)
7–8	Zynq PL banks (AD936x and Ethernet interfaces); PS MIO (QSPI, SD, USB, UART)
9	USB JTAG and UART (FT2232H, DEBUG port)
10–12	AD936x supply, digital interface, power pins
13	AD936x RF front end and SMA ports
14	Clocking: 10 MHz reference input, ADF4001 PLL for the 40 MHz oscillator, clock switch
15	Expansion I/O header


Product page: https://opensourcesdrlab.com/products/plutosky-r2

Questions about the hardware: support@opensourcesdrlab.com


© 2026 OpenSourceSDRLab. All rights reserved. · www.opensourcesdrlab.com

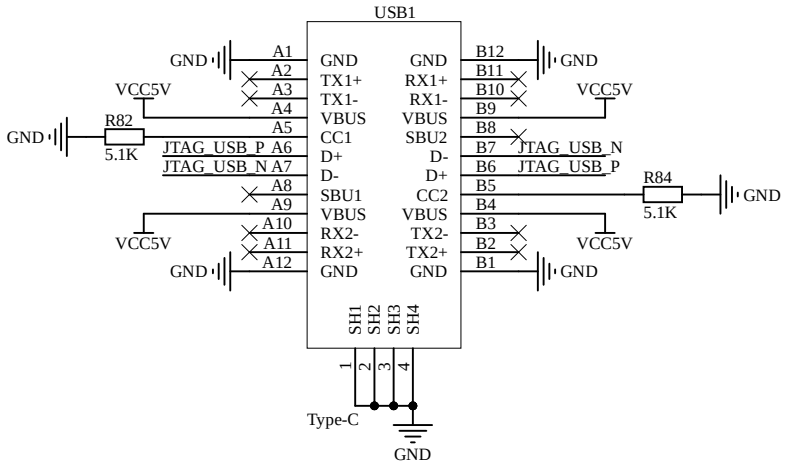

JTAG Type-C

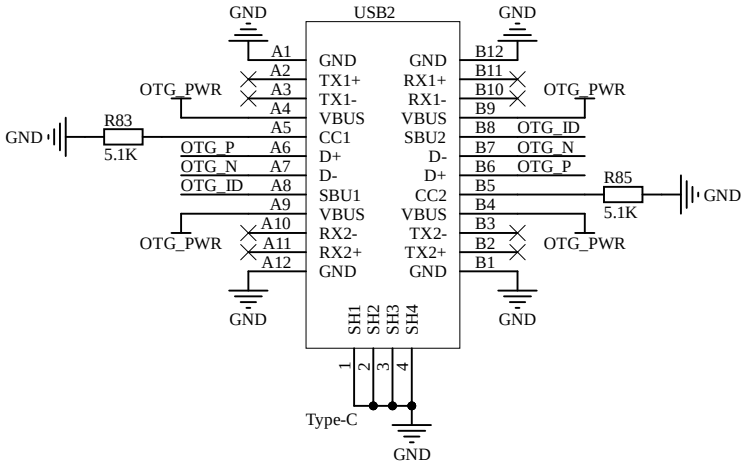


OTG Type-C

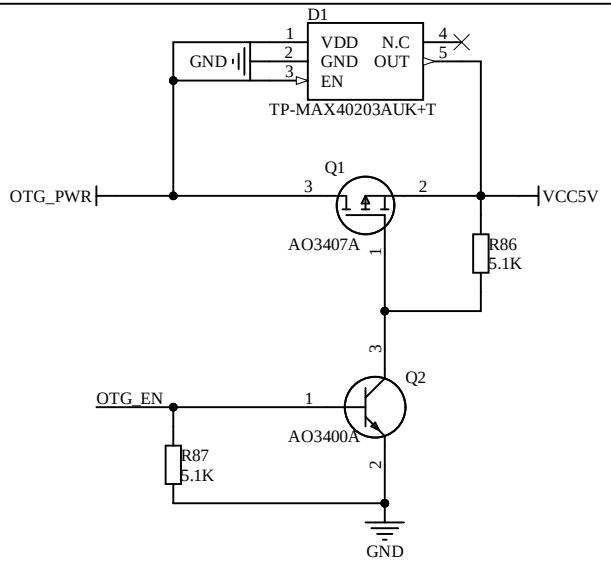


PWR Switch


Title		
Size: A4	Number	Revision
Date: 3/02/2026		Sheet of
File:		Drawn By:

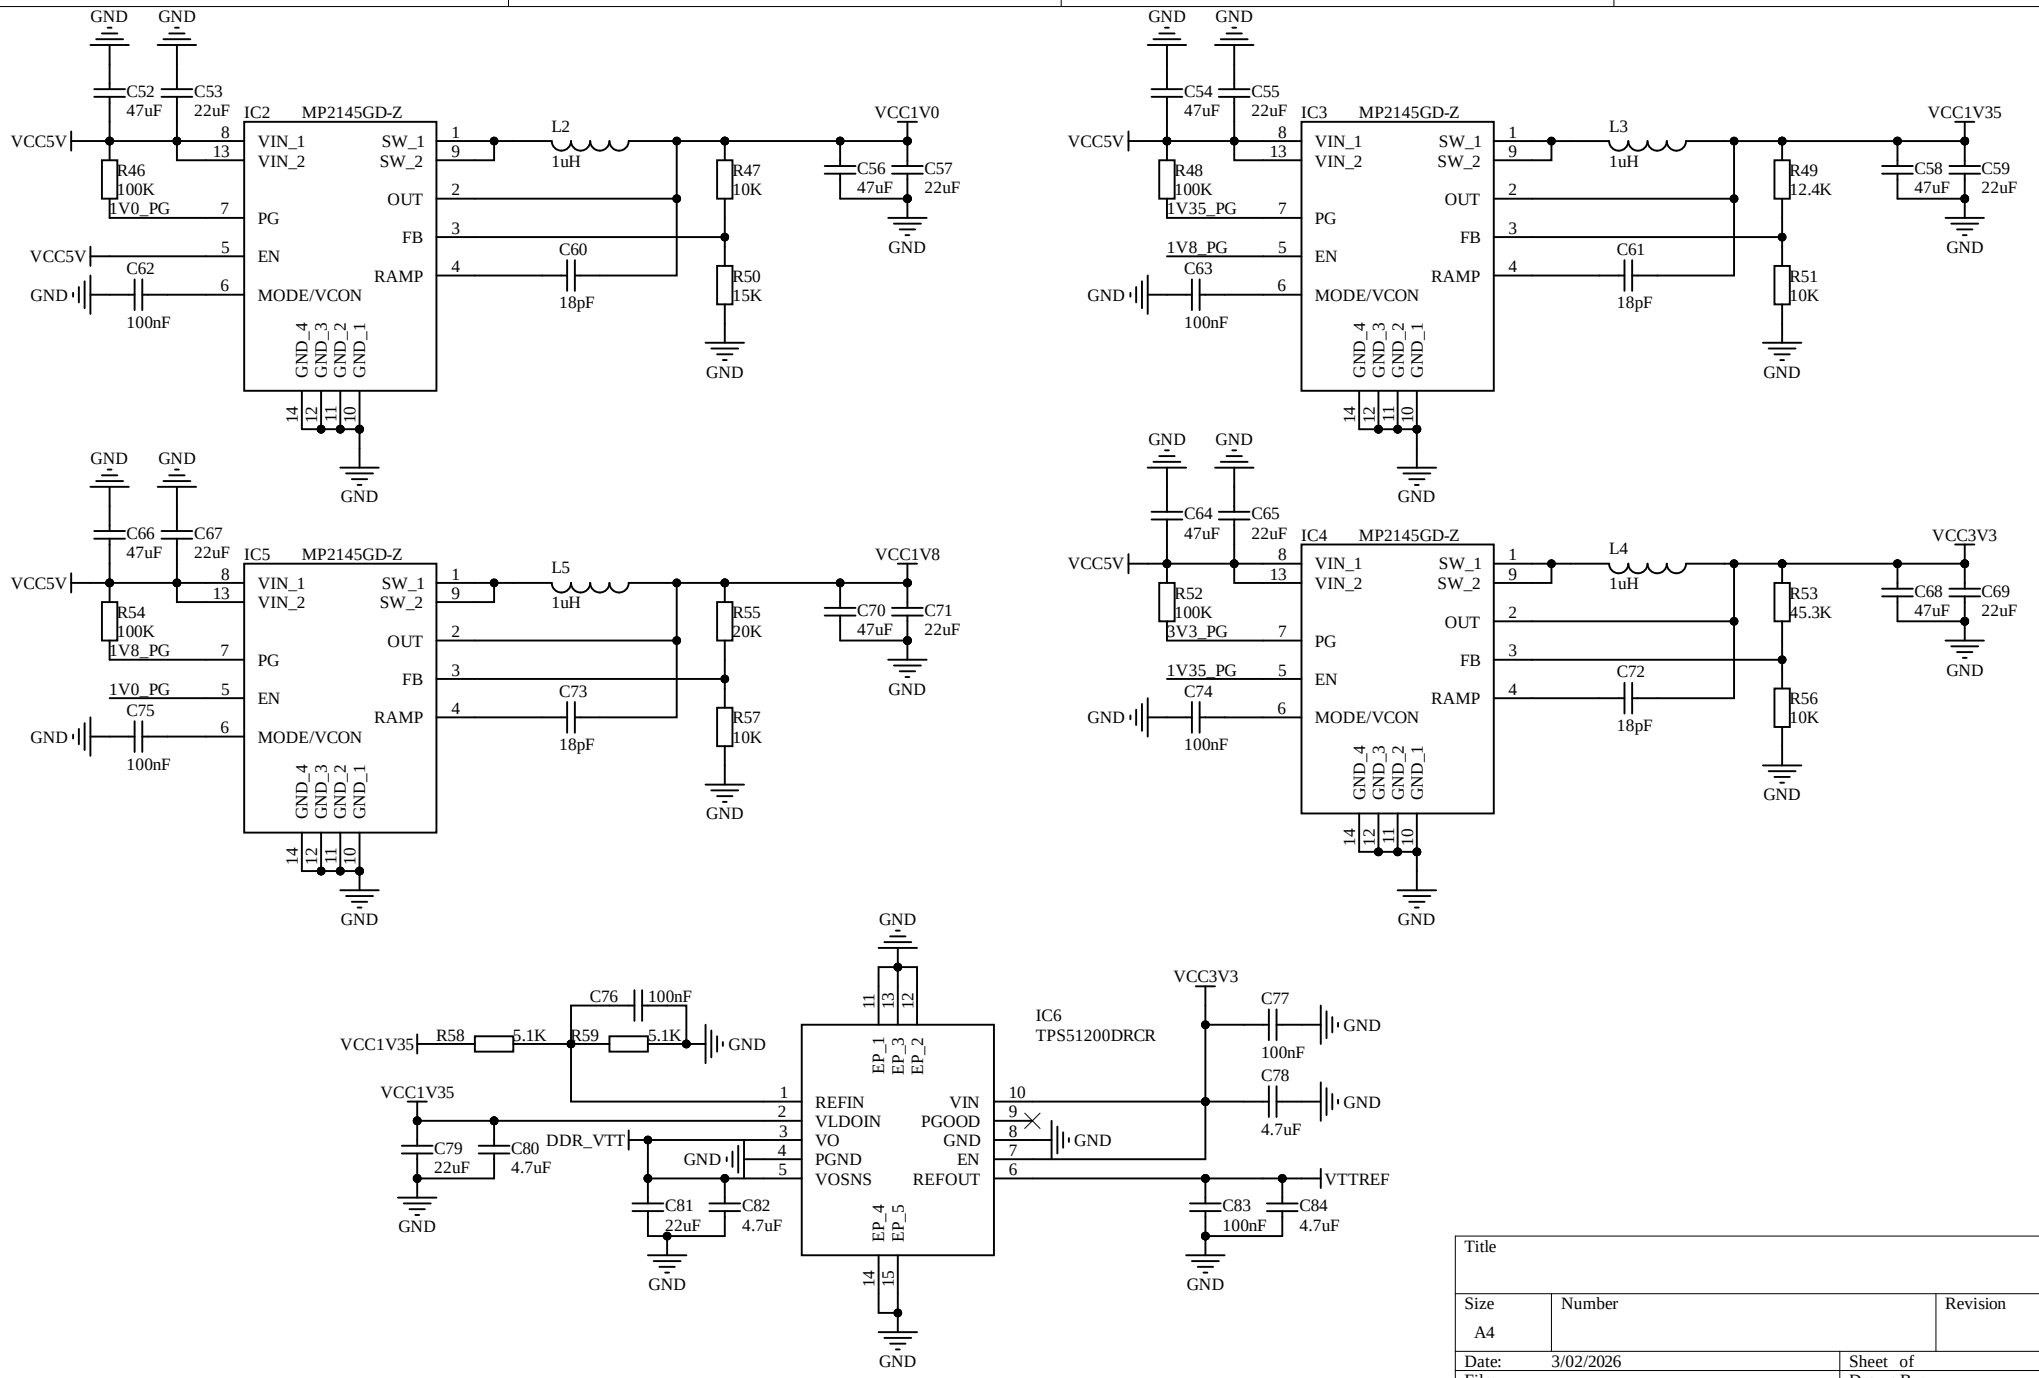


Title		
Size A4	Number	Revision
Date: 3/02/2026		Sheet of
File:		Drawn By:


U2J
A5 A15 B8 B18 C1 C11 C21 D4 D14 E7 E17 F10 F20 G3 H6 H8 H12 H14 H16 J9 J11 J13 J19 K2 K8 K10 K14 K22 L5 L9 L13 L15 M8
GND
M10 M14 M18 N1 N9 N13 N21 P4 P8 P10 P12 P14 R9 R11 R13 R17 T20 U3 U13 V6 V16 W9 W19 Y2 Y12 Y22 AA5 AA15 AB8 AB18
G10
RSVDGND
K12
GNDADC_0
XC7Z020-2CLG484I
U2I
VCC1V0
J12 J14 K13 L14 M13 N14 P13 R14
VCCINT
G8 H9 J8 L8 N8 R8
VCCPINT
VCCPLL
VCCBATT_0
VCCADC_0
VCCAUX
H10 G9 K11 L10 N10 P11 R10 K9 M9 P9 T9
VCC1V8
VCC1V35
VCCO_DDR_502
E2 F5 H1 J4 K7 M3 N6 R2 V1
VCC3V3
B3 C6 A10 B13 D9 E12
VCCO_MIO0_500
VCCO_MIO1_501
H11 J10
VCC1V0
VCCBRAM
XC7Z020-2CLG484I
U2H
VCC3V3
T7 T8 T10
RSVDVCC1
RSVDVCC2
RSVDVCC3
R12
VCCO_0
VCC1V8
T5 U8 V11 W4 Y7 AA10 AB3
VCCO_13
VCC3V3
U18 V21 W14 Y17 AA20 AB13
VCCO_33
VCCO_34
K17 L20 N16 P19 R22 T15 A20 C16 D19 E22 F15 G18 H21
VCCO_35
XC7Z020-2CLG484I
VCC3V3
C85 C86 C87 C88 C89 C90 C91 C92
100nF
GND
VCC1V8
C93 C94 C95 C96 C97 C98 C99 C100
C101 C102 C103 C104 C105 C106 C107 C108
VCC1V35
C109 C110 C111 C112 C113 C114 C115 C116
VCC1V0
C117 C118 C119 C120 C121 C122 C123 C124
C125 C126 C127 C128 C129 C130 C131 C132
C133 C134 C135 C136 C137 C138 C139 C140
C141 C142 C143 C144 C145 C146 C147 C148
C149 C150 C151 C152 C153 C154 C155 C156
Title
Size
A4
Number
Revision
Date: 3/02/2026
Sheet of
File:
Drawn By:

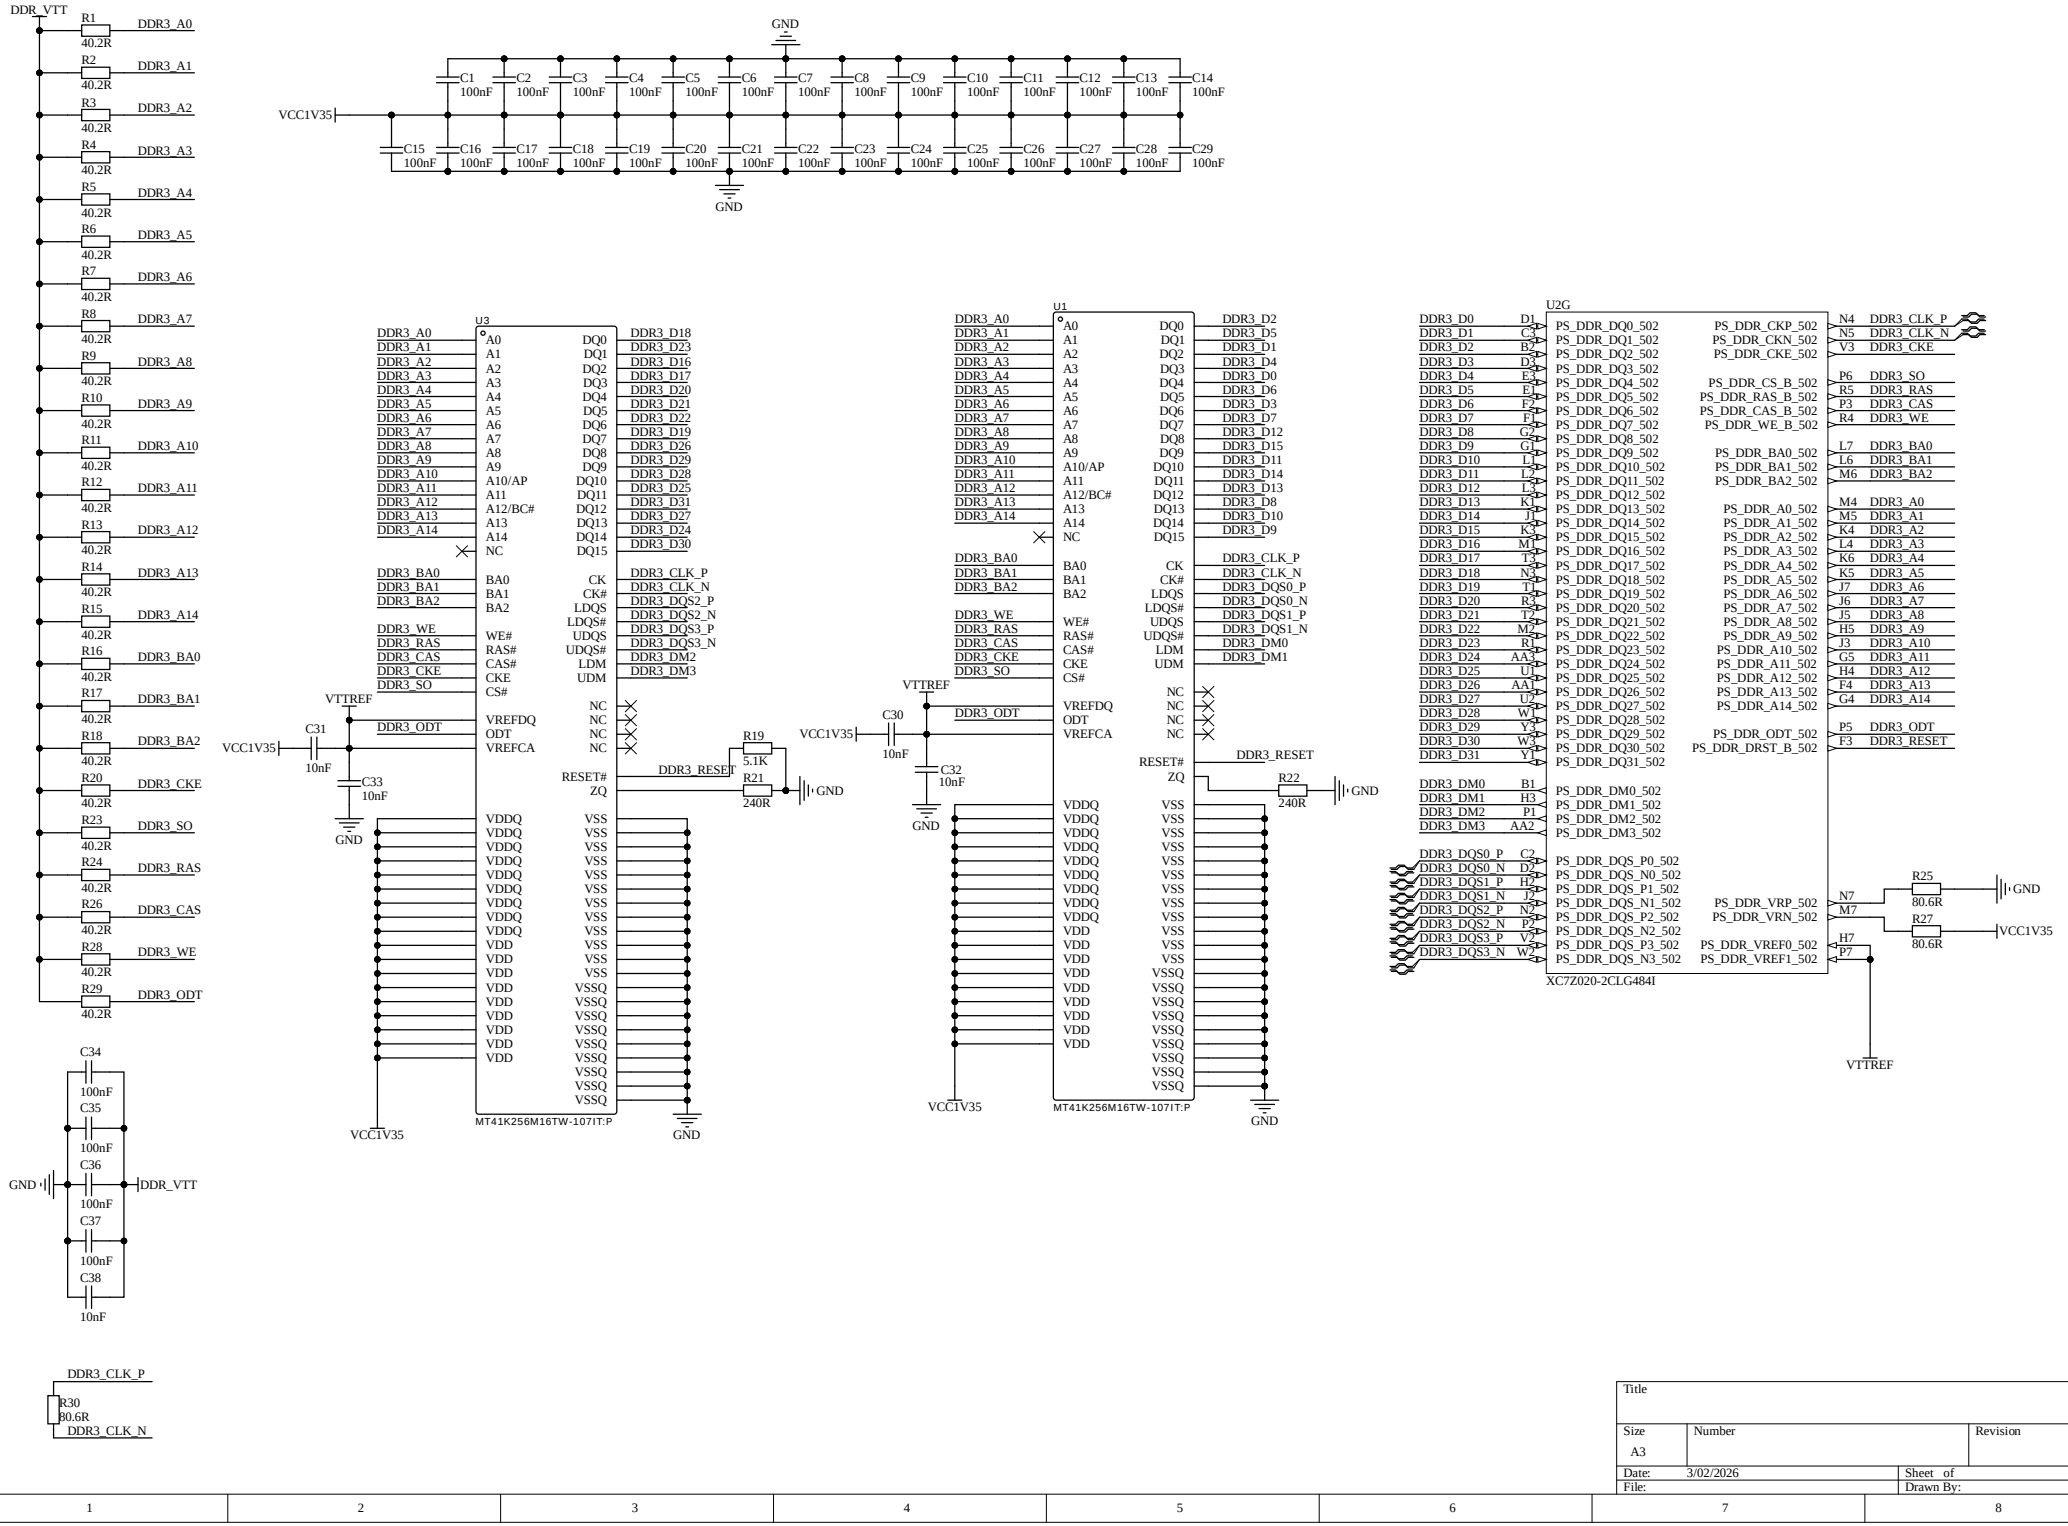

DDR_VTT
R1 40.2R DDR3_A0
R2 40.2R DDR3_A1
R3 40.2R DDR3_A2
R4 40.2R DDR3_A3
R5 40.2R DDR3_A4
R6 40.2R DDR3_A5
R7 40.2R DDR3_A6
R8 40.2R DDR3_A7
R9 40.2R DDR3_A8
R10 40.2R DDR3_A9
R11 40.2R DDR3_A10
R12 40.2R DDR3_A11
R13 40.2R DDR3_A12
R14 40.2R DDR3_A13
R15 40.2R DDR3_A14
R16 40.2R DDR3_BA0
R17 40.2R DDR3_BA1
R18 40.2R DDR3_BA2
R20 40.2R DDR3_CKE
R23 40.2R DDR3_SO
R24 40.2R DDR3_RAS
R26 40.2R DDR3_CAS
R28 40.2R DDR3_WE
R29 40.2R DDR3_ODT
C34 100nF
C35 100nF
C36 100nF
C37 100nF
C38 10nF
GND
DDR_VTT
DDR3_CLK_P
R30 80.6R
DDR3_CLK_N
GND
C1 100nF
C2 100nF
C3 100nF
C4 100nF
C5 100nF
C6 100nF
C7 100nF
C8 100nF
C9 100nF
C10 100nF
C11 100nF
C12 100nF
C13 100nF
C14 100nF
C15 100nF
C16 100nF
C17 100nF
C18 100nF
C19 100nF
C20 100nF
C21 100nF
C22 100nF
C23 100nF
C24 100nF
C25 100nF
C26 100nF
C27 100nF
C28 100nF
C29 100nF
VCC1V35
GND
U3
DDR3_A0 DDR3_A1 DDR3_A2 DDR3_A3 DDR3_A4 DDR3_A5 DDR3_A6 DDR3_A7 DDR3_A8 DDR3_A9 DDR3_A10 DDR3_A11 DDR3_A12 DDR3_A13 DDR3_A14
A0 A1 A2 A3 A4 A5 A6 A7 A8 A9 A10/AP A11 A12/BC# A13 A14 NC
DQ0 DQ1 DQ2 DQ3 DQ4 DQ5 DQ6 DQ7 DQ8 DQ9 DQ10 DQ11 DQ12 DQ13 DQ14 DQ15
DDR3_D18 DDR3_D23 DDR3_D16 DDR3_D17 DDR3_D20 DDR3_D21 DDR3_D22 DDR3_D19 DDR3_D26 DDR3_D29 DDR3_D28 DDR3_D25 DDR3_D31 DDR3_D27 DDR3_D24 DDR3_D30
DDR3_BA0 DDR3_BA1 DDR3_BA2
BA0 BA1 BA2
CK CK# LDQS LDQS# UDQS UDQS# LDM UDM
DDR3_CLK_P DDR3_CLK_N DDR3_DQS2_P DDR3_DQS2_N DDR3_DQS3_P DDR3_DQS3_N DDR3_DM2 DDR3_DM3
DDR3_WE DDR3_RAS DDR3_CAS DDR3_CKE DDR3_SO
WE# RAS# CAS# CKE CS#
NC NC NC NC
VREFDQ ODT VREFCA
RESET# ZQ
DDR3_RESET
VDDQ VDD VSS VSSQ
MT41K256M16TW-107IT:P
VTTREF
DDR3_ODT
C31 10nF
C33 10nF
R19 5.1K
R21 240R
U1
C30 10nF
C32 10nF
R22 240R
U2G
DDR3_D0 DDR3_D1 DDR3_D2 DDR3_D3 DDR3_D4 DDR3_D5 DDR3_D6 DDR3_D7 DDR3_D8 DDR3_D9 DDR3_D10 DDR3_D11 DDR3_D12 DDR3_D13 DDR3_D14 DDR3_D15 DDR3_D16 DDR3_D17 DDR3_D18 DDR3_D19 DDR3_D20 DDR3_D21 DDR3_D22 DDR3_D23 DDR3_D24 DDR3_D25 DDR3_D26 DDR3_D27 DDR3_D28 DDR3_D29 DDR3_D30 DDR3_D31
PS_DDR_DQ0_502 PS_DDR_DQ1_502 PS_DDR_DQ2_502 PS_DDR_DQ3_502 PS_DDR_DQ4_502 PS_DDR_DQ5_502 PS_DDR_DQ6_502 PS_DDR_DQ7_502 PS_DDR_DQ8_502 PS_DDR_DQ9_502 PS_DDR_DQ10_502 PS_DDR_DQ11_502 PS_DDR_DQ12_502 PS_DDR_DQ13_502 PS_DDR_DQ14_502 PS_DDR_DQ15_502 PS_DDR_DQ16_502 PS_DDR_DQ17_502 PS_DDR_DQ18_502 PS_DDR_DQ19_502 PS_DDR_DQ20_502 PS_DDR_DQ21_502 PS_DDR_DQ22_502 PS_DDR_DQ23_502 PS_DDR_DQ24_502 PS_DDR_DQ25_502 PS_DDR_DQ26_502 PS_DDR_DQ27_502 PS_DDR_DQ28_502 PS_DDR_DQ29_502 PS_DDR_DQ30_502 PS_DDR_DQ31_502
DDR3_DM0 DDR3_DM1 DDR3_DM2 DDR3_DM3
PS_DDR_DM0_502 PS_DDR_DM1_502 PS_DDR_DM2_502 PS_DDR_DM3_502
DDR3_DQS0_P DDR3_DQS0_N DDR3_DQS1_P DDR3_DQS1_N DDR3_DQS2_P DDR3_DQS2_N DDR3_DQS3_P DDR3_DQS3_N
PS_DDR_DQS_P0_502 PS_DDR_DQS_N0_502 PS_DDR_DQS_P1_502 PS_DDR_DQS_N1_502 PS_DDR_DQS_P2_502 PS_DDR_DQS_N2_502 PS_DDR_DQS_P3_502 PS_DDR_DQS_N3_502
PS_DDR_CKP_502 PS_DDR_CKN_502 PS_DDR_CKE_502 PS_DDR_CS_B_502 PS_DDR_RAS_B_502 PS_DDR_CAS_B_502 PS_DDR_WE_B_502 PS_DDR_BA0_502 PS_DDR_BA1_502 PS_DDR_BA2_502 PS_DDR_A0_502 PS_DDR_A1_502 PS_DDR_A2_502 PS_DDR_A3_502 PS_DDR_A4_502 PS_DDR_A5_502 PS_DDR_A6_502 PS_DDR_A7_502 PS_DDR_A8_502 PS_DDR_A9_502 PS_DDR_A10_502 PS_DDR_A11_502 PS_DDR_A12_502 PS_DDR_A13_502 PS_DDR_A14_502 PS_DDR_ODT_502 PS_DDR_DRST_B_502
PS_DDR_VRP_502 PS_DDR_VRN_502 PS_DDR_VREF0_502 PS_DDR_VREF1_502
DDR3_CLK_P DDR3_CLK_N DDR3_CKE DDR3_SO DDR3_RAS DDR3_CAS DDR3_WE DDR3_BA0 DDR3_BA1 DDR3_BA2 DDR3_A0 DDR3_A1 DDR3_A2 DDR3_A3 DDR3_A4 DDR3_A5 DDR3_A6 DDR3_A7 DDR3_A8 DDR3_A9 DDR3_A10 DDR3_A11 DDR3_A12 DDR3_A13 DDR3_A14 DDR3_ODT DDR3_RESET
XC7Z020-2CLG484I
R25 80.6R
R27 80.6R
VTTREF
Title
Size A3
Number
Revision
Date: 3/02/2026
Sheet of
File:
Drawn By:

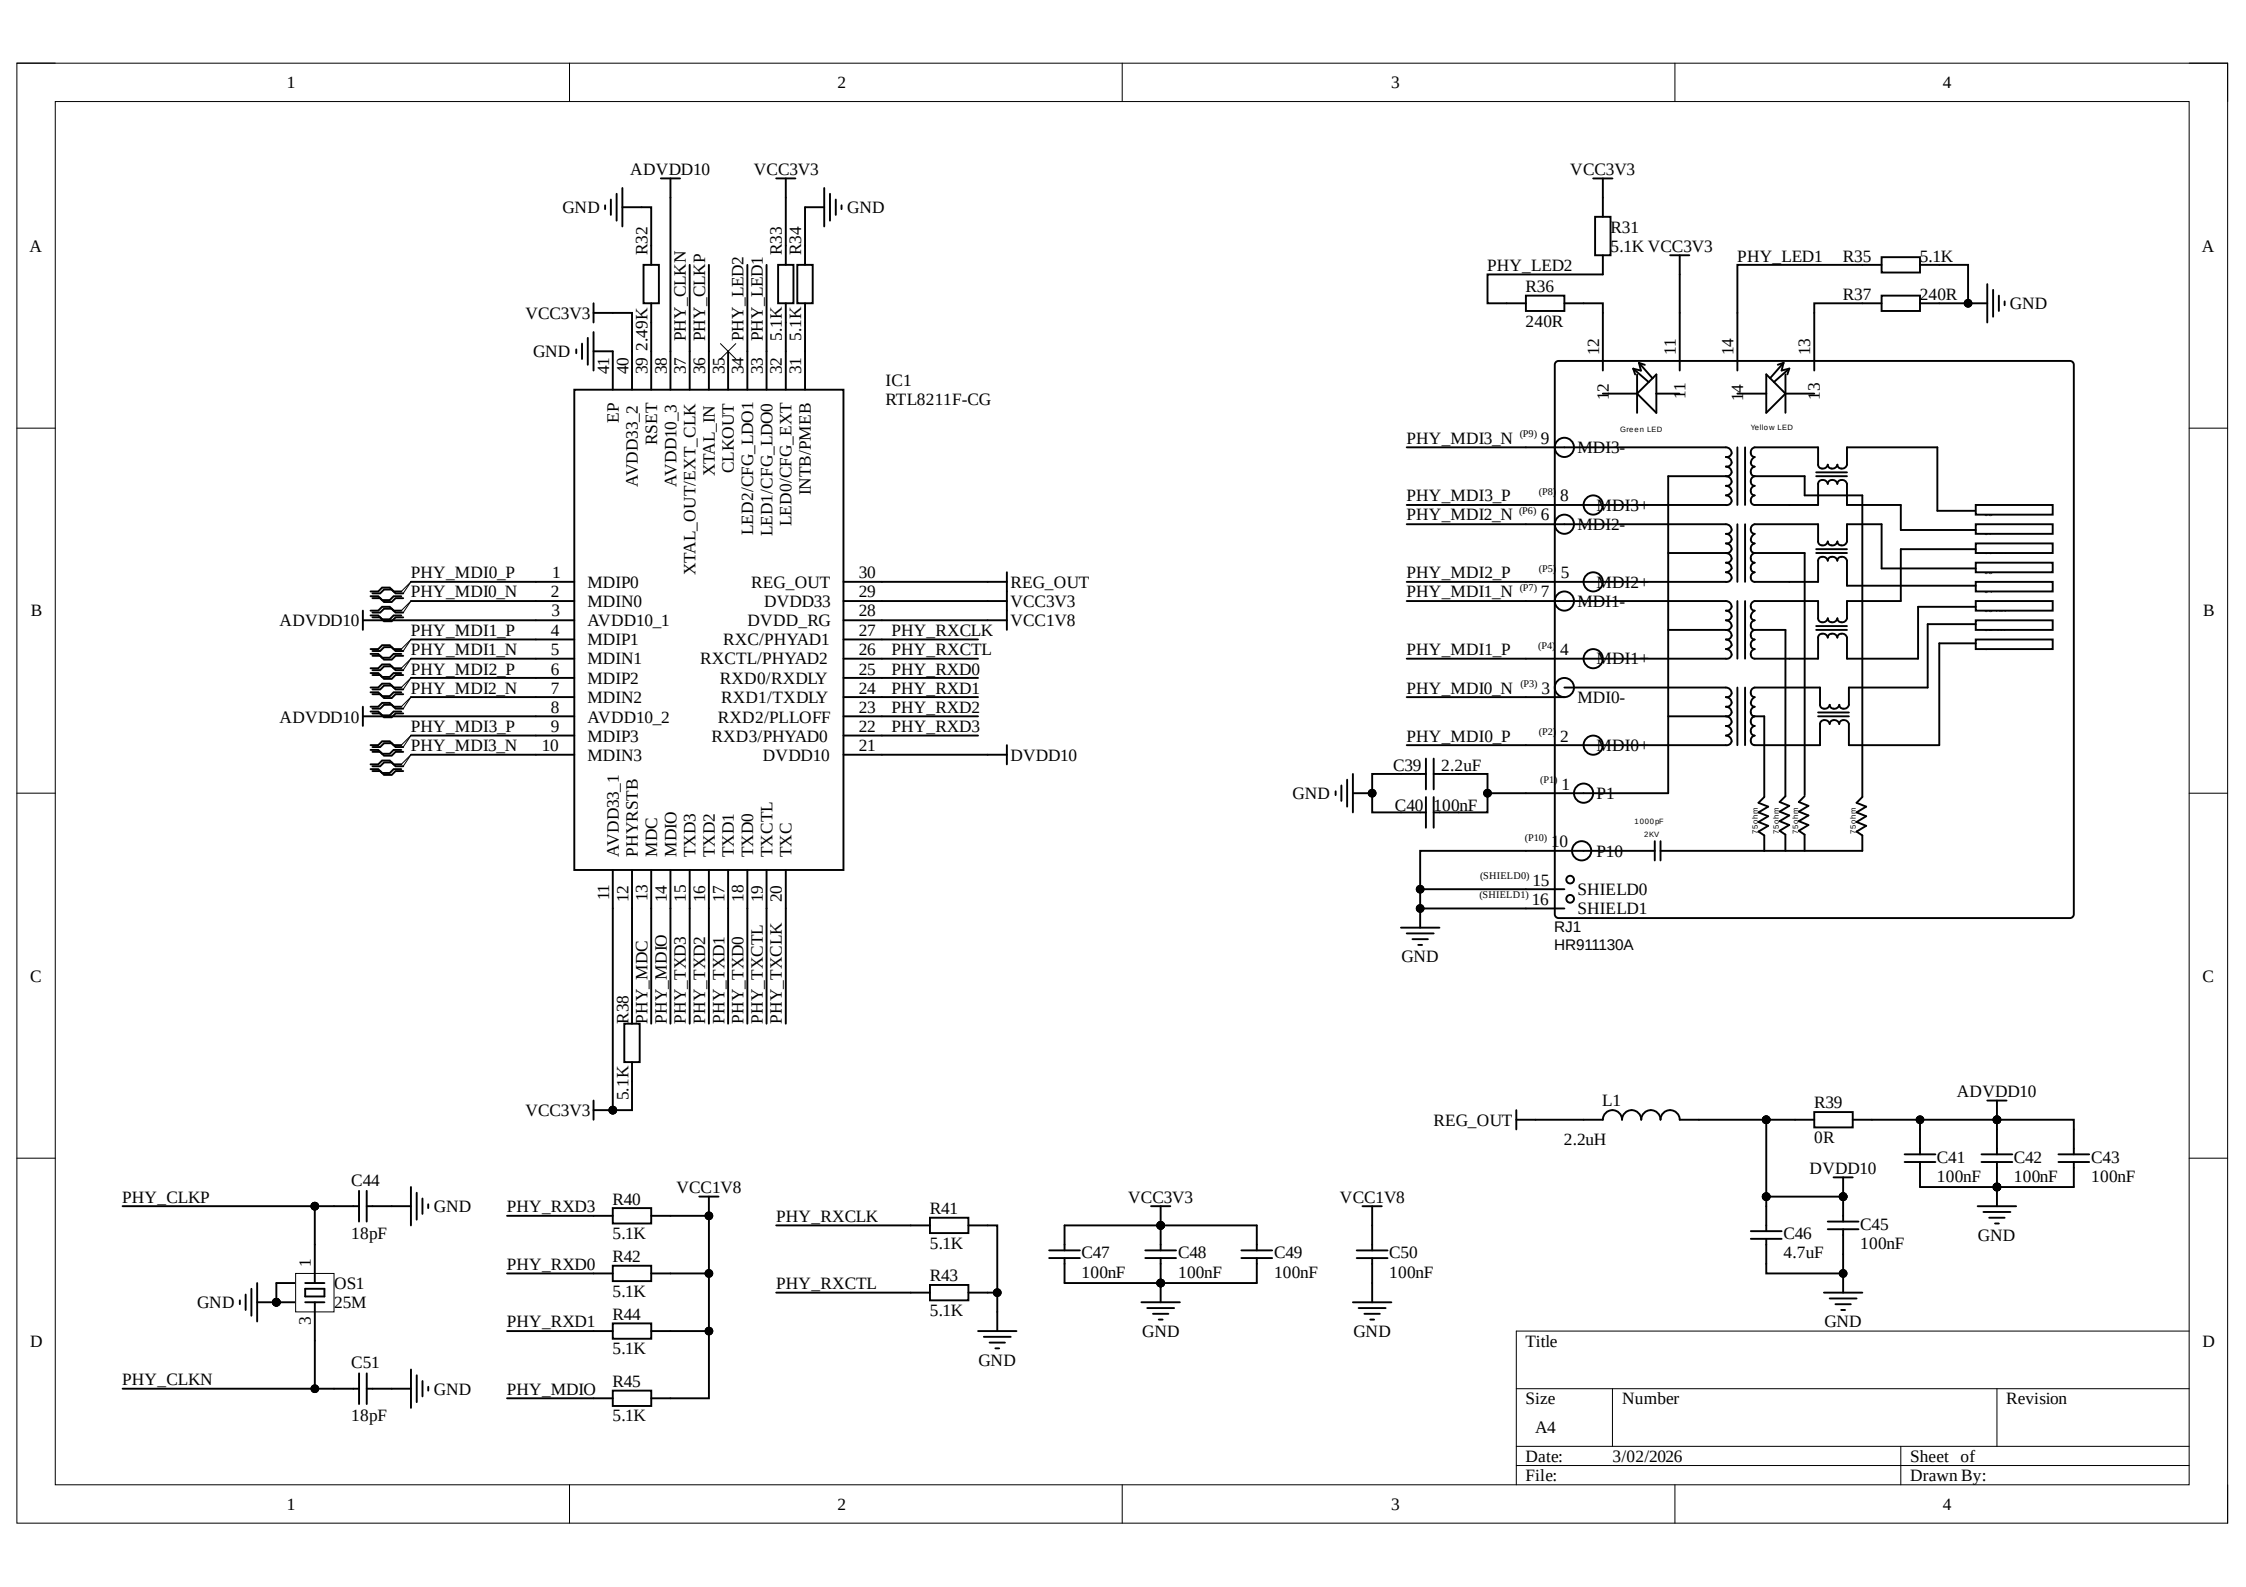



Title		
Size A4	Number	Revision
Date: 3/02/2026		Sheet of
File:		Drawn By:

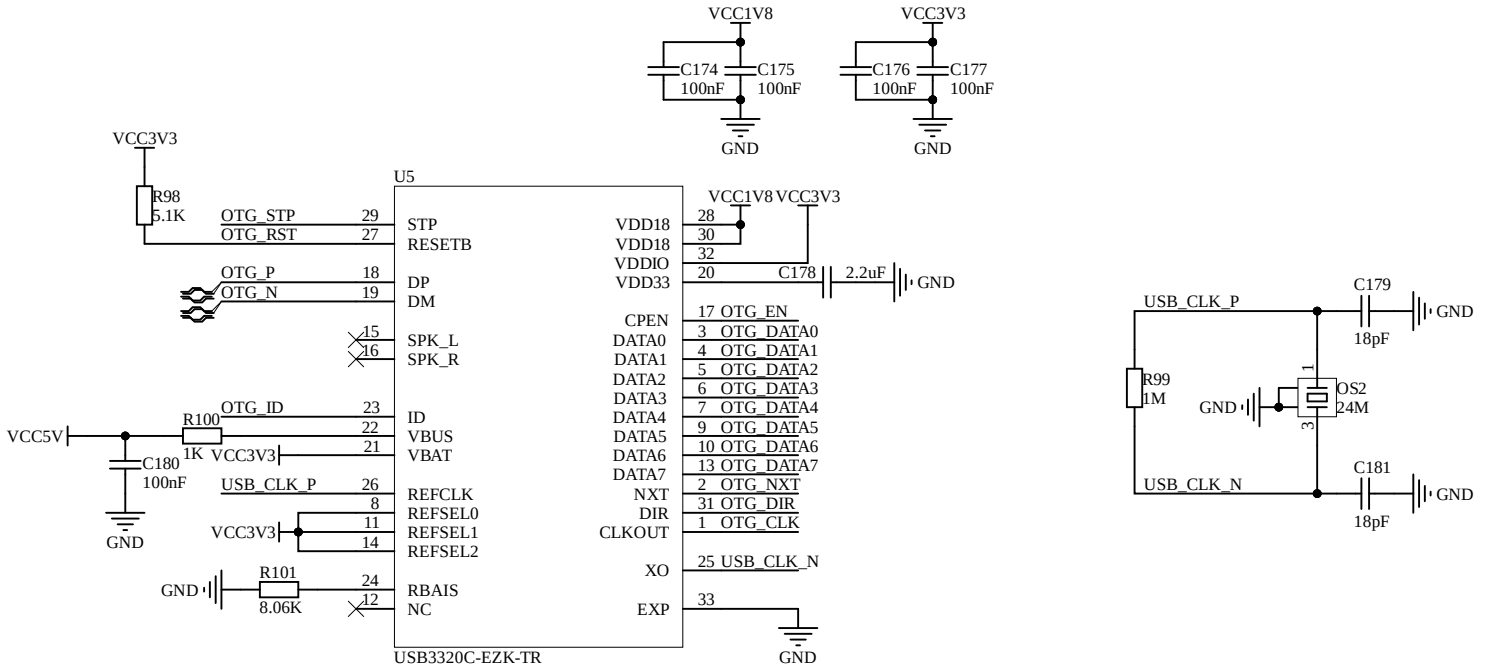


Title		
Size: A4	Number	Revision
Date: 3/02/2026		Sheet of
File:		Drawn By:

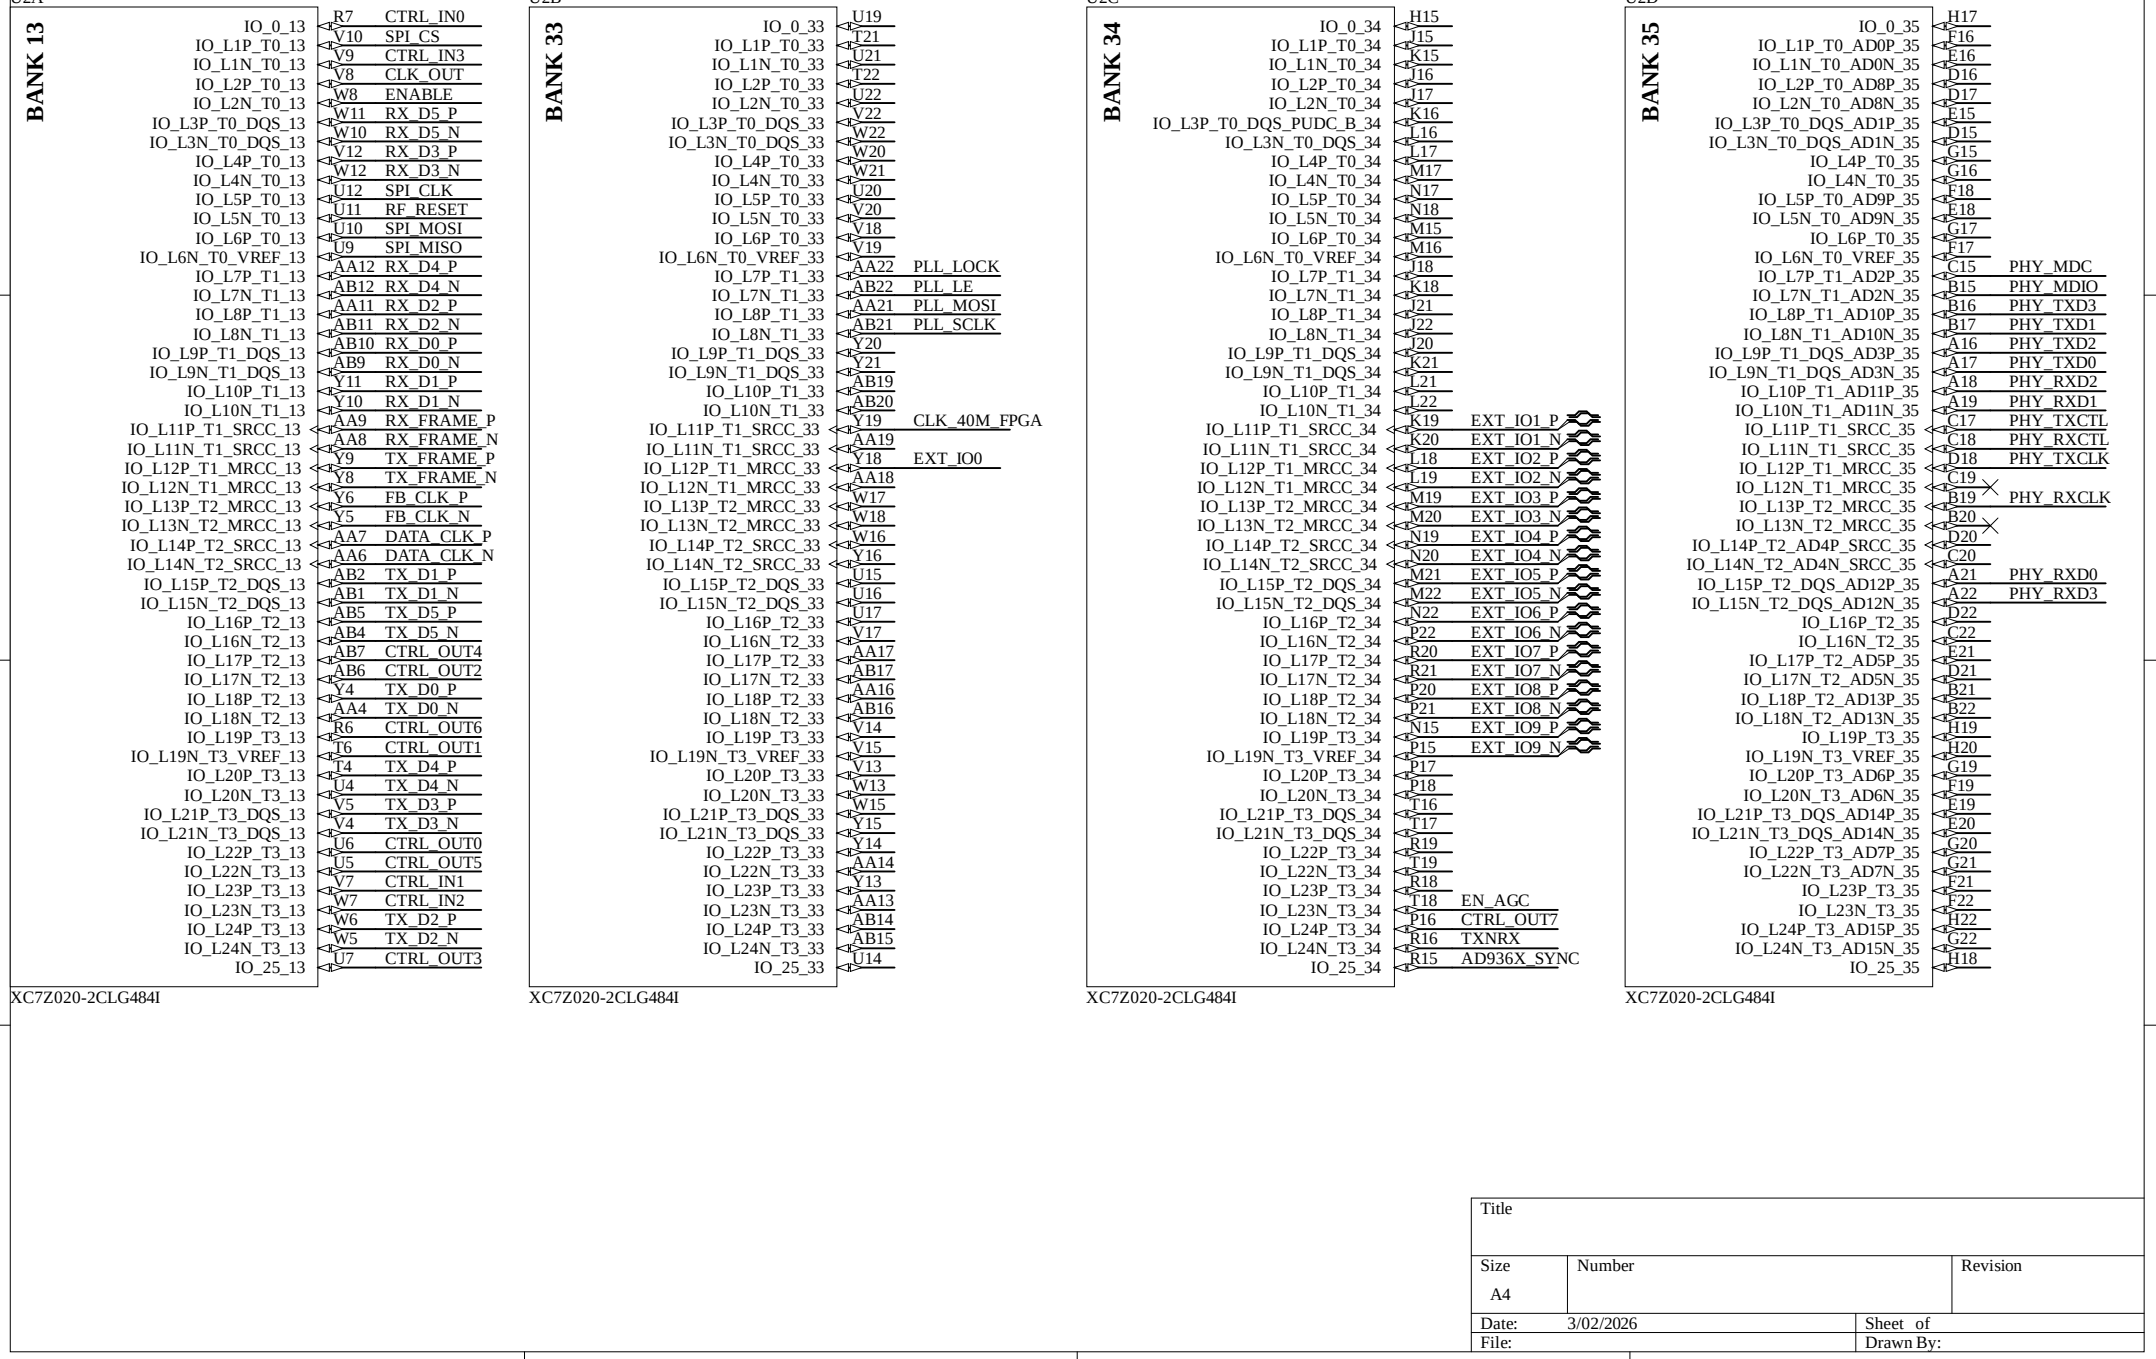

U2A
BANK 13
IO_0_13 R7 CTRL_IN0
IO_L1P_T0_13 V10 SPI_CS
IO_L1N_T0_13 V9 CTRL_IN3
IO_L2P_T0_13 V8 CLK_OUT
IO_L2N_T0_13 W8 ENABLE
IO_L3P_T0_DQS_13 W11 RX_D5_P
IO_L3N_T0_DQS_13 W10 RX_D5_N
IO_L4P_T0_13 V12 RX_D3_P
IO_L4N_T0_13 W12 RX_D3_N
IO_L5P_T0_13 U12 SPI_CLK
IO_L5N_T0_13 U11 RF_RESET
IO_L6P_T0_13 U10 SPI_MOSI
IO_L6N_T0_VREF_13 U9 SPI_MISO
IO_L7P_T1_13 AA12 RX_D4_P
IO_L7N_T1_13 AB12 RX_D4_N
IO_L8P_T1_13 AA11 RX_D2_P
IO_L8N_T1_13 AB11 RX_D2_N
IO_L9P_T1_DQS_13 AB10 RX_D0_P
IO_L9N_T1_DQS_13 AB9 RX_D0_N
IO_L10P_T1_13 Y11 RX_D1_P
IO_L10N_T1_13 Y10 RX_D1_N
IO_L11P_T1_SRCC_13 AA9 RX_FRAME_P
IO_L11N_T1_SRCC_13 AA8 RX_FRAME_N
IO_L12P_T1_MRCC_13 Y9 TX_FRAME_P
IO_L12N_T1_MRCC_13 Y8 TX_FRAME_N
IO_L13P_T2_MRCC_13 Y6 FB_CLK_P
IO_L13N_T2_MRCC_13 Y5 FB_CLK_N
IO_L14P_T2_SRCC_13 AA7 DATA_CLK_P
IO_L14N_T2_SRCC_13 AA6 DATA_CLK_N
IO_L15P_T2_DQS_13 AB2 TX_D1_P
IO_L15N_T2_DQS_13 AB1 TX_D1_N
IO_L16P_T2_13 AB5 TX_D5_P
IO_L16N_T2_13 AB4 TX_D5_N
IO_L17P_T2_13 AB7 CTRL_OUT4
IO_L17N_T2_13 AB6 CTRL_OUT2
IO_L18P_T2_13 Y4 TX_D0_P
IO_L18N_T2_13 AA4 TX_D0_N
IO_L19P_T3_13 R6 CTRL_OUT6
IO_L19N_T3_VREF_13 T6 CTRL_OUT1
IO_L20P_T3_13 T4 TX_D4_P
IO_L20N_T3_13 U4 TX_D4_N
IO_L21P_T3_DQS_13 V5 TX_D3_P
IO_L21N_T3_DQS_13 V4 TX_D3_N
IO_L22P_T3_13 U6 CTRL_OUT0
IO_L22N_T3_13 U5 CTRL_OUT5
IO_L23P_T3_13 V7 CTRL_IN1
IO_L23N_T3_13 W7 CTRL_IN2
IO_L24P_T3_13 W6 TX_D2_P
IO_L24N_T3_13 W5 TX_D2_N
IO_25_13 U7 CTRL_OUT3
XC7Z020-2CLG484I
U2B
BANK 33
IO_0_33 U19
IO_L1P_T0_33 T21
IO_L1N_T0_33 U21
IO_L2P_T0_33 T22
IO_L2N_T0_33 U22
IO_L3P_T0_DQS_33 V22
IO_L3N_T0_DQS_33 W22
IO_L4P_T0_33 W20
IO_L4N_T0_33 W21
IO_L5P_T0_33 U20
IO_L5N_T0_33 V20
IO_L6P_T0_33 V18
IO_L6N_T0_VREF_33 V19
IO_L7P_T1_33 AA22 PLL_LOCK
IO_L7N_T1_33 AB22 PLL_LE
IO_L8P_T1_33 AA21 PLL_MOSI
IO_L8N_T1_33 AB21 PLL_SCLK
IO_L9P_T1_DQS_33 Y20
IO_L9N_T1_DQS_33 Y21
IO_L10P_T1_33 AB19
IO_L10N_T1_33 AB20
IO_L11P_T1_SRCC_33 Y19 CLK_40M_FPGA
IO_L11N_T1_SRCC_33 AA19
IO_L12P_T1_MRCC_33 Y18 EXT_IO0
IO_L12N_T1_MRCC_33 AA18
IO_L13P_T2_MRCC_33 W17
IO_L13N_T2_MRCC_33 W18
IO_L14P_T2_SRCC_33 W16
IO_L14N_T2_SRCC_33 Y16
IO_L15P_T2_DQS_33 U15
IO_L15N_T2_DQS_33 U16
IO_L16P_T2_33 U17
IO_L16N_T2_33 V17
IO_L17P_T2_33 AA17
IO_L17N_T2_33 AB17
IO_L18P_T2_33 AA16
IO_L18N_T2_33 AB16
IO_L19P_T3_33 V14
IO_L19N_T3_VREF_33 V15
IO_L20P_T3_33 V13
IO_L20N_T3_33 W13
IO_L21P_T3_DQS_33 W15
IO_L21N_T3_DQS_33 Y15
IO_L22P_T3_33 Y14
IO_L22N_T3_33 AA14
IO_L23P_T3_33 Y13
IO_L23N_T3_33 AA13
IO_L24P_T3_33 AB14
IO_L24N_T3_33 AB15
IO_25_33 U14
XC7Z020-2CLG484I
U2C
BANK 34
IO_0_34 H15
IO_L1P_T0_34 J15
IO_L1N_T0_34 K15
IO_L2P_T0_34 J16
IO_L2N_T0_34 J17
IO_L3P_T0_DQS_PUDC_B_34 K16
IO_L3N_T0_DQS_34 L16
IO_L4P_T0_34 L17
IO_L4N_T0_34 M17
IO_L5P_T0_34 N17
IO_L5N_T0_34 N18
IO_L6P_T0_34 M15
IO_L6N_T0_VREF_34 M16
IO_L7P_T1_34 J18
IO_L7N_T1_34 K18
IO_L8P_T1_34 J21
IO_L8N_T1_34 J22
IO_L9P_T1_DQS_34 J20
IO_L9N_T1_DQS_34 K21
IO_L10P_T1_34 L21
IO_L10N_T1_34 L22
IO_L11P_T1_SRCC_34 K19 EXT_IO1_P
IO_L11N_T1_SRCC_34 K20 EXT_IO1_N
IO_L12P_T1_MRCC_34 L18 EXT_IO2_P
IO_L12N_T1_MRCC_34 L19 EXT_IO2_N
IO_L13P_T2_MRCC_34 M19 EXT_IO3_P
IO_L13N_T2_MRCC_34 M20 EXT_IO3_N
IO_L14P_T2_SRCC_34 N19 EXT_IO4_P
IO_L14N_T2_SRCC_34 N20 EXT_IO4_N
IO_L15P_T2_DQS_34 M21 EXT_IO5_P
IO_L15N_T2_DQS_34 M22 EXT_IO5_N
IO_L16P_T2_34 N22 EXT_IO6_P
IO_L16N_T2_34 P22 EXT_IO6_N
IO_L17P_T2_34 R20 EXT_IO7_P
IO_L17N_T2_34 R21 EXT_IO7_N
IO_L18P_T2_34 P20 EXT_IO8_P
IO_L18N_T2_34 P21 EXT_IO8_N
IO_L19P_T3_34 N15 EXT_IO9_P
IO_L19N_T3_VREF_34 P15 EXT_IO9_N
IO_L20P_T3_34 P17
IO_L20N_T3_34 P18
IO_L21P_T3_DQS_34 T16
IO_L21N_T3_DQS_34 T17
IO_L22P_T3_34 R19
IO_L22N_T3_34 T19
IO_L23P_T3_34 R18
IO_L23N_T3_34 T18 EN_AGC
IO_L24P_T3_34 P16 CTRL_OUT7
IO_L24N_T3_34 R16 TXNRX
IO_25_34 R15 AD936X_SYNC
XC7Z020-2CLG484I
U2D
BANK 35
IO_0_35 H17
IO_L1P_T0_AD0P_35 F16
IO_L1N_T0_AD0N_35 E16
IO_L2P_T0_AD8P_35 D16
IO_L2N_T0_AD8N_35 D17
IO_L3P_T0_DQS_AD1P_35 E15
IO_L3N_T0_DQS_AD1N_35 D15
IO_L4P_T0_35 G15
IO_L4N_T0_35 G16
IO_L5P_T0_AD9P_35 F18
IO_L5N_T0_AD9N_35 E18
IO_L6P_T0_35 G17
IO_L6N_T0_VREF_35 F17
IO_L7P_T1_AD2P_35 C15 PHY_MDC
IO_L7N_T1_AD2N_35 B15 PHY_MDIO
IO_L8P_T1_AD10P_35 B16 PHY_TXD3
IO_L8N_T1_AD10N_35 B17 PHY_TXD1
IO_L9P_T1_DQS_AD3P_35 A16 PHY_TXD2
IO_L9N_T1_DQS_AD3N_35 A17 PHY_TXD0
IO_L10P_T1_AD11P_35 A18 PHY_RXD2
IO_L10N_T1_AD11N_35 A19 PHY_RXD1
IO_L11P_T1_SRCC_35 C17 PHY_TXCTL
IO_L11N_T1_SRCC_35 C18 PHY_RXCTL
IO_L12P_T1_MRCC_35 D18 PHY_TXCLK
IO_L12N_T1_MRCC_35 C19
IO_L13P_T2_MRCC_35 B19 PHY_RXCLK
IO_L13N_T2_MRCC_35 B20
IO_L14P_T2_AD4P_SRCC_35 D20
IO_L14N_T2_AD4N_SRCC_35 C20
IO_L15P_T2_DQS_AD12P_35 A21 PHY_RXD0
IO_L15N_T2_DQS_AD12N_35 A22 PHY_RXD3
IO_L16P_T2_35 D22
IO_L16N_T2_35 C22
IO_L17P_T2_AD5P_35 E21
IO_L17N_T2_AD5N_35 D21
IO_L18P_T2_AD13P_35 B21
IO_L18N_T2_AD13N_35 B22
IO_L19P_T3_35 H19
IO_L19N_T3_VREF_35 H20
IO_L20P_T3_AD6P_35 G19
IO_L20N_T3_AD6N_35 F19
IO_L21P_T3_DQS_AD14P_35 E19
IO_L21N_T3_DQS_AD14N_35 E20
IO_L22P_T3_AD7P_35 G20
IO_L22N_T3_AD7N_35 G21
IO_L23P_T3_35 F21
IO_L23N_T3_35 F22
IO_L24P_T3_AD15P_35 H22
IO_L24N_T3_AD15N_35 G22
IO_25_35 H18
XC7Z020-2CLG484I
Title
Size A4
Number
Revision
Date: 3/02/2026
Sheet of
File:
Drawn By:

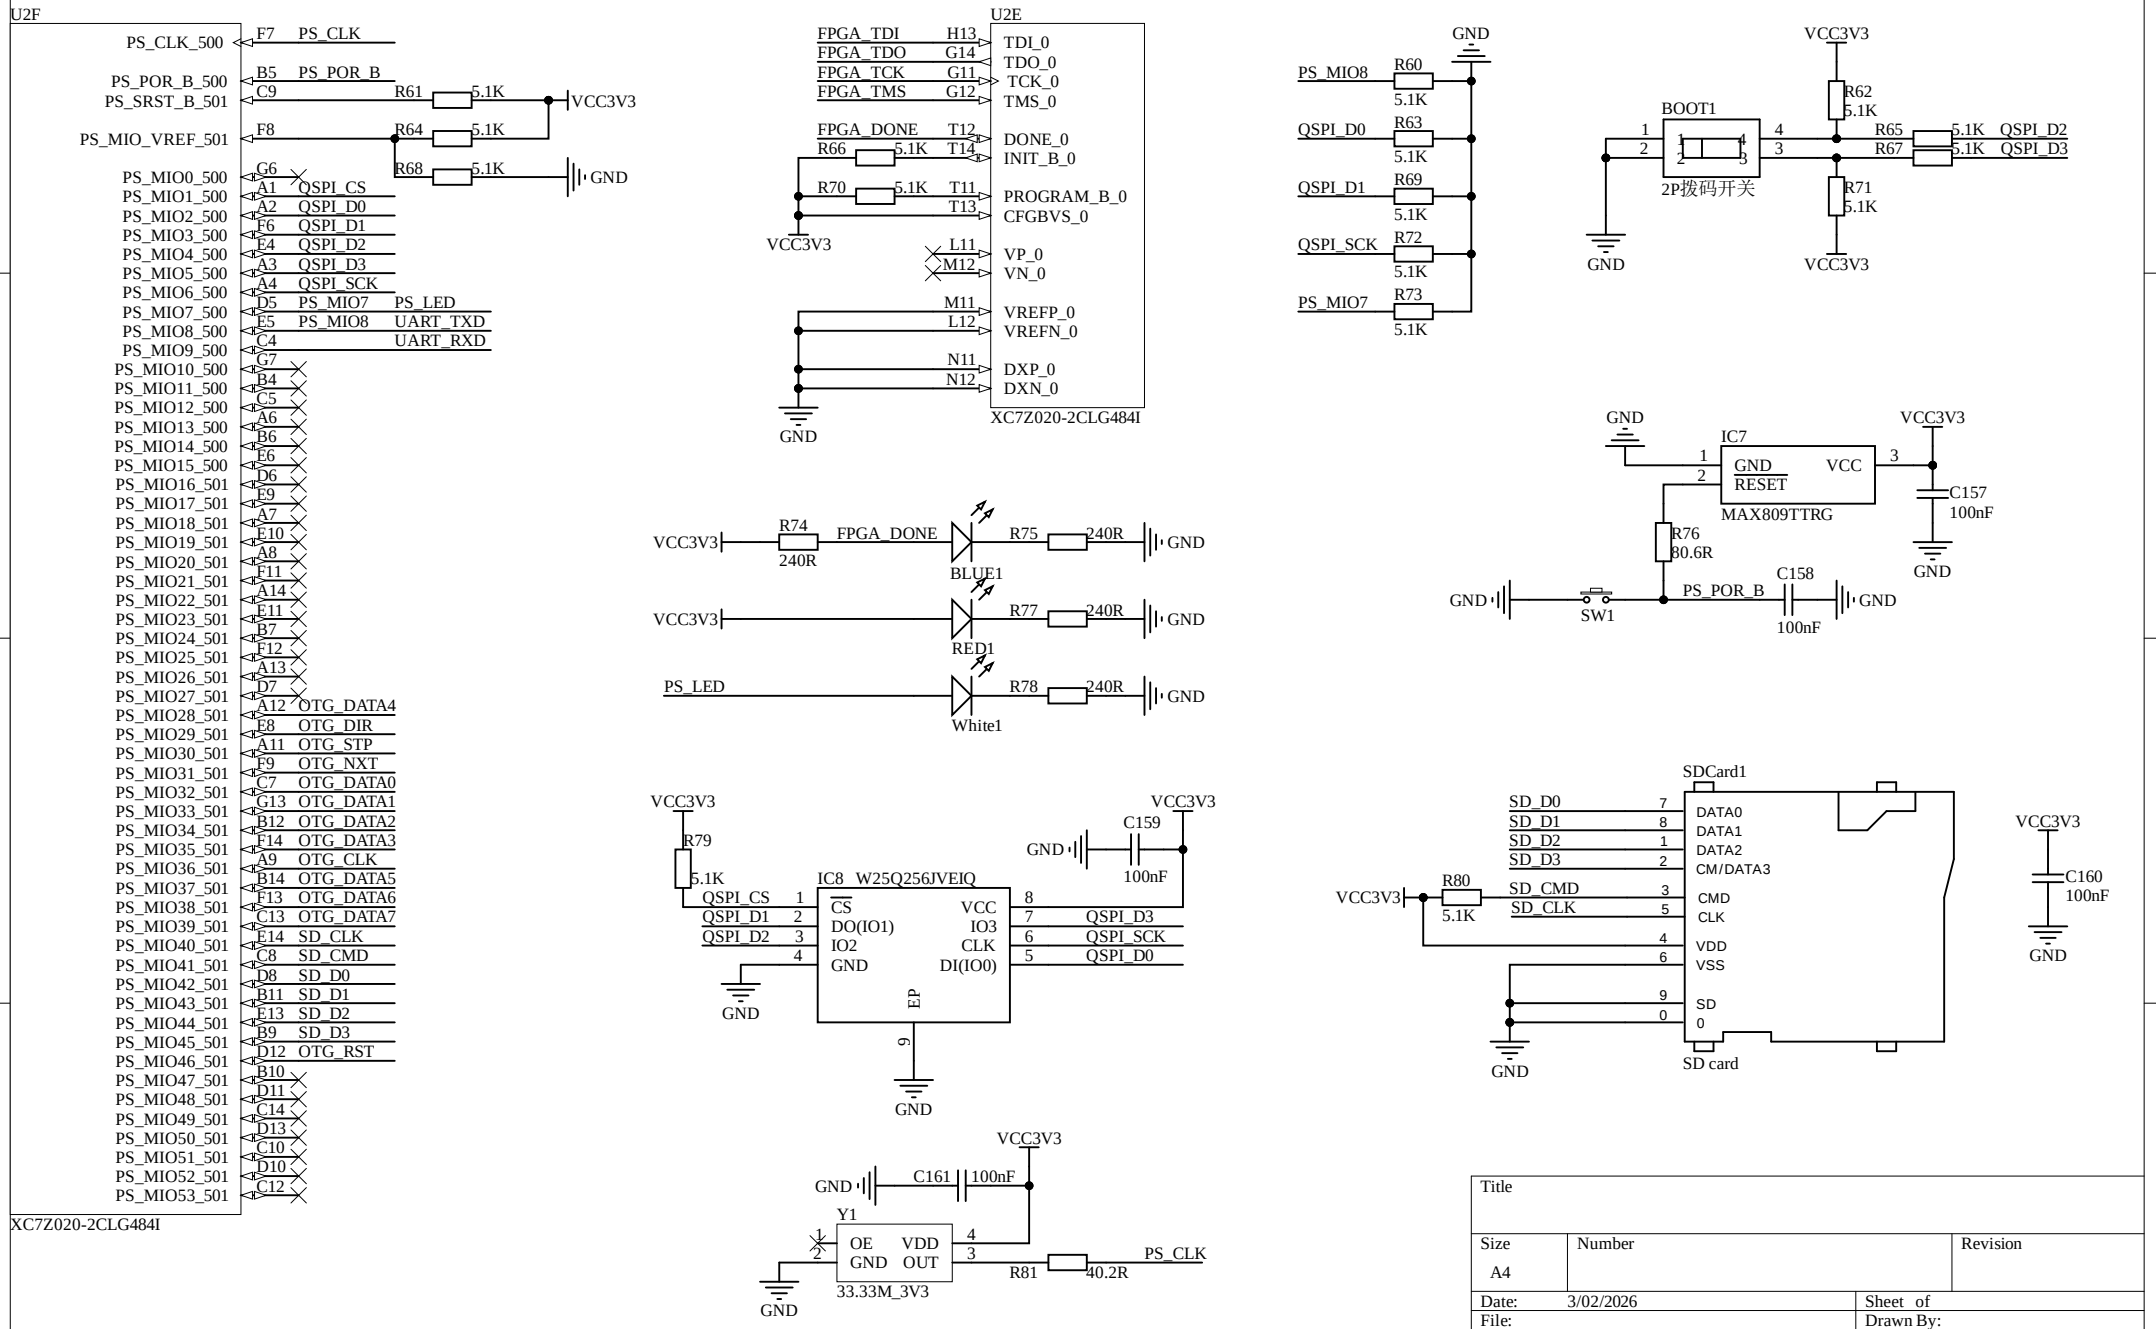

U2F
PS_CLK_500
F7 PS_CLK
PS_POR_B_500
B5 PS_POR_B
PS_SRST_B_501
C9
R61 5.1K
VCC3V3
PS_MIO_VREF_501
F8
R64 5.1K
R68 5.1K
GND
PS_MIO0_500 G6
PS_MIO1_500 A1 QSPI_CS
PS_MIO2_500 A2 QSPI_D0
PS_MIO3_500 F6 QSPI_D1
PS_MIO4_500 E4 QSPI_D2
PS_MIO5_500 A3 QSPI_D3
PS_MIO6_500 A4 QSPI_SCK
PS_MIO7_500 D5 PS_MIO7 PS_LED
PS_MIO8_500 E5 PS_MIO8 UART_TXD
PS_MIO9_500 C4 UART_RXD
PS_MIO10_500 G7
PS_MIO11_500 B4
PS_MIO12_500 C5
PS_MIO13_500 A6
PS_MIO14_500 B6
PS_MIO15_500 E6
PS_MIO16_501 D6
PS_MIO17_501 E9
PS_MIO18_501 A7
PS_MIO19_501 E10
PS_MIO20_501 A8
PS_MIO21_501 F11
PS_MIO22_501 A14
PS_MIO23_501 E11
PS_MIO24_501 B7
PS_MIO25_501 F12
PS_MIO26_501 A13
PS_MIO27_501 D7
PS_MIO28_501 A12 OTG_DATA4
PS_MIO29_501 E8 OTG_DIR
PS_MIO30_501 A11 OTG_STP
PS_MIO31_501 F9 OTG_NXT
PS_MIO32_501 C7 OTG_DATA0
PS_MIO33_501 G13 OTG_DATA1
PS_MIO34_501 B12 OTG_DATA2
PS_MIO35_501 F14 OTG_DATA3
PS_MIO36_501 A9 OTG_CLK
PS_MIO37_501 B14 OTG_DATA5
PS_MIO38_501 F13 OTG_DATA6
PS_MIO39_501 C13 OTG_DATA7
PS_MIO40_501 E14 SD_CLK
PS_MIO41_501 C8 SD_CMD
PS_MIO42_501 D8 SD_D0
PS_MIO43_501 B11 SD_D1
PS_MIO44_501 E13 SD_D2
PS_MIO45_501 B9 SD_D3
PS_MIO46_501 D12 OTG_RST
PS_MIO47_501 B10
PS_MIO48_501 D11
PS_MIO49_501 C14
PS_MIO50_501 D13
PS_MIO51_501 C10
PS_MIO52_501 D10
PS_MIO53_501 C12
XC7Z020-2CLG484I
U2E
FPGA_TDI H13 TDI_0
FPGA_TDO G14 TDO_0
FPGA_TCK G11 TCK_0
FPGA_TMS G12 TMS_0
FPGA_DONE T12 DONE_0
R66 5.1K T14 INIT_B_0
R70 5.1K T11 PROGRAM_B_0
T13 CFGBVS_0
VCC3V3
L11 VP_0
M12 VN_0
M11 VREFP_0
L12 VREFN_0
N11 DXP_0
N12 DXN_0
GND
XC7Z020-2CLG484I
PS_MIO8 R60 5.1K
QSPI_D0 R63 5.1K
QSPI_D1 R69 5.1K
QSPI_SCK R72 5.1K
PS_MIO7 R73 5.1K
GND
BOOT1
2P拨码开关
R62 5.1K
R65 5.1K QSPI_D2
R67 5.1K QSPI_D3
R71 5.1K
VCC3V3
GND
VCC3V3
R74 240R
FPGA_DONE
R75 240R
BLUE1
R77 240R
RED1
PS_LED
R78 240R
White1
GND
IC7
GND
RESET
VCC
MAX809TTRG
C157 100nF
R76 80.6R
SW1
PS_POR_B
C158 100nF
VCC3V3
GND
R79 5.1K
IC8 W25Q256JVEIQ
QSPI_CS 1
QSPI_D1 2
QSPI_D2 3
GND 4
CS
DO(IO1)
IO2
GND
EP
9
VCC
IO3
CLK
DI(IO0)
8
7 QSPI_D3
6 QSPI_SCK
5 QSPI_D0
C159 100nF
GND
VCC3V3
GND
C161 100nF
Y1
OE
GND
VDD
OUT
33.33M_3V3
R81 40.2R
PS_CLK
SDCard1
SD_D0 7
SD_D1 8
SD_D2 1
SD_D3 2
SD_CMD 3
SD_CLK 5
4
6
9
0
DATA0
DATA1
DATA2
CM/DATA3
CMD
CLK
VDD
VSS
SD
0
R80 5.1K
SD card
C160 100nF
Title
Size A4
Number
Revision
Date: 3/02/2026
Sheet of
File:
Drawn By:

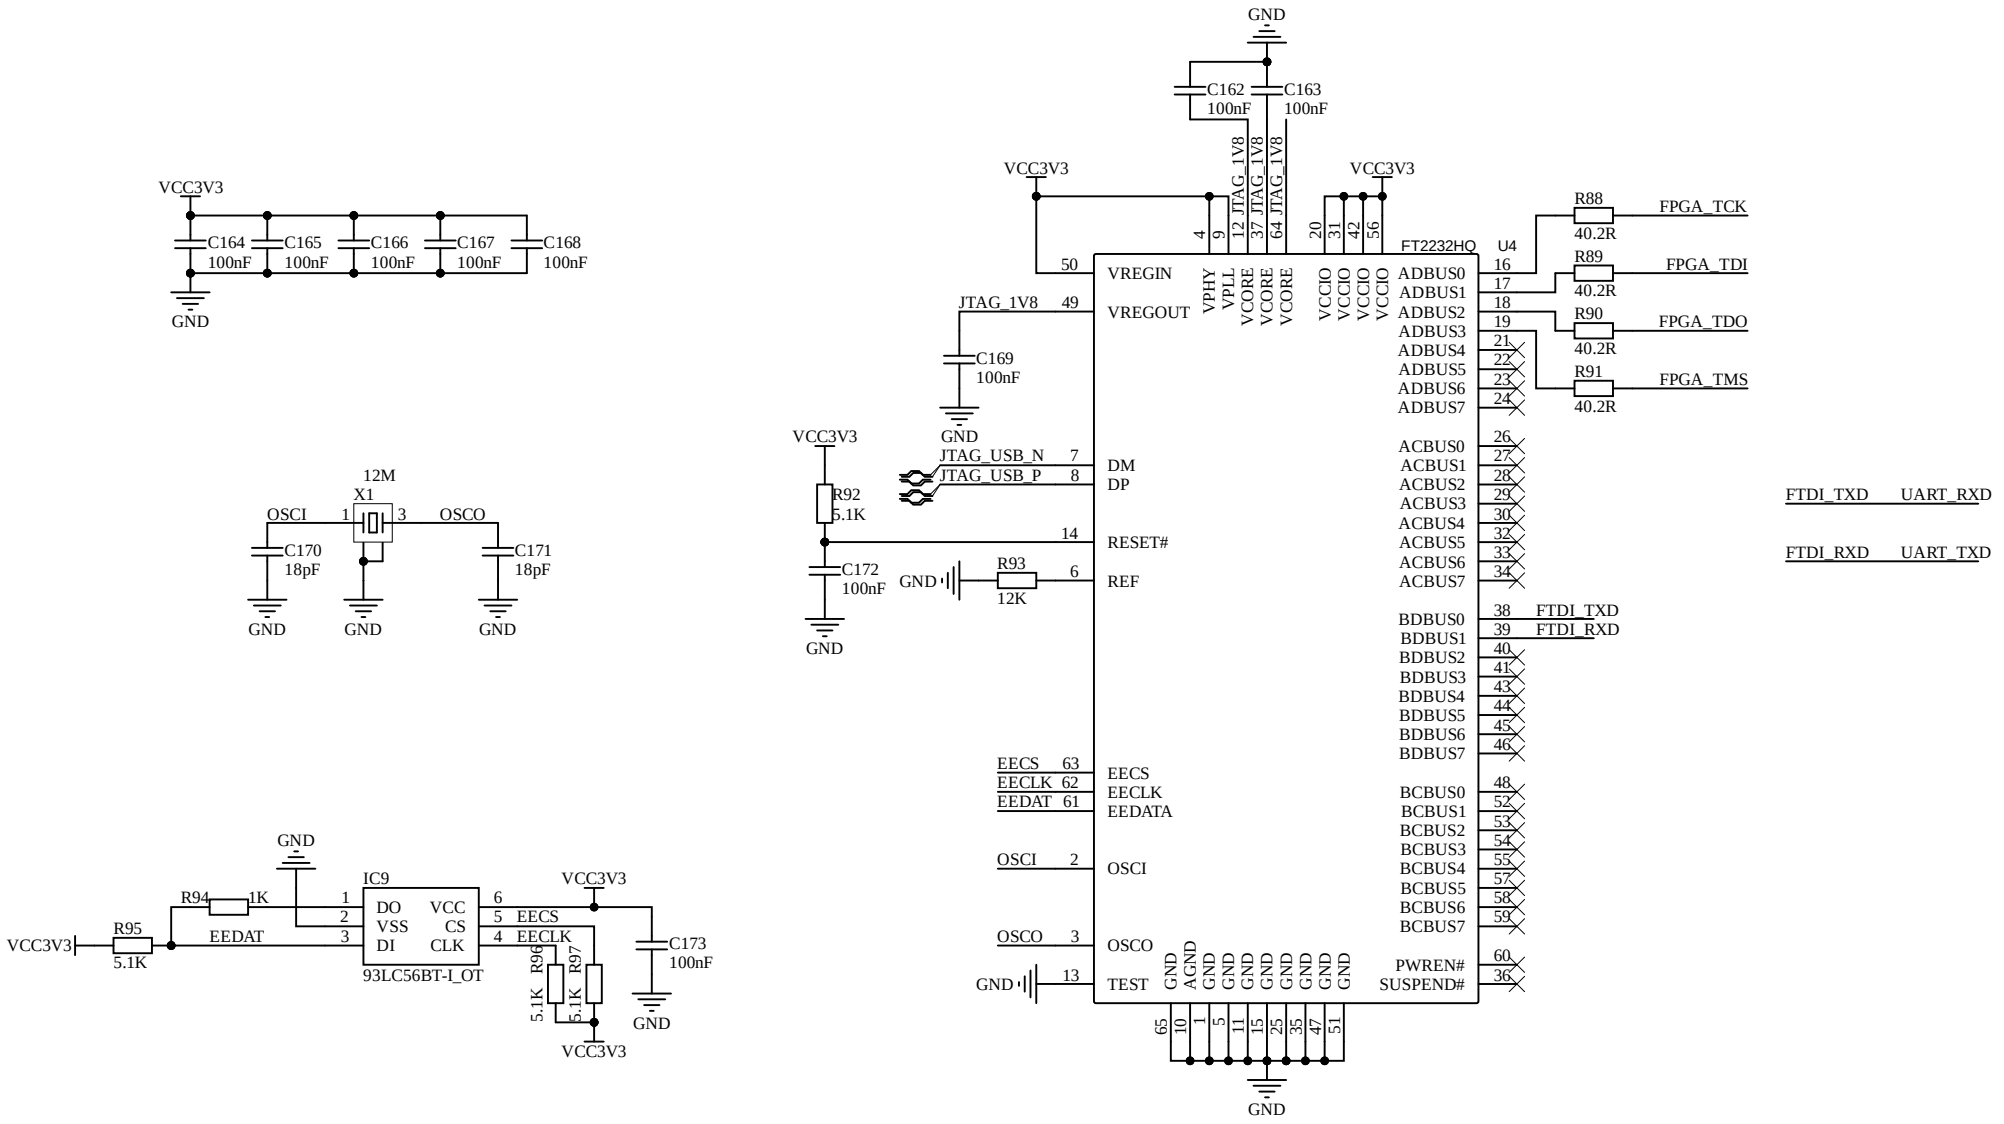


Title		
Size A4	Number	Revision
Date: 3/02/2026		Sheet of
File:		Drawn By:

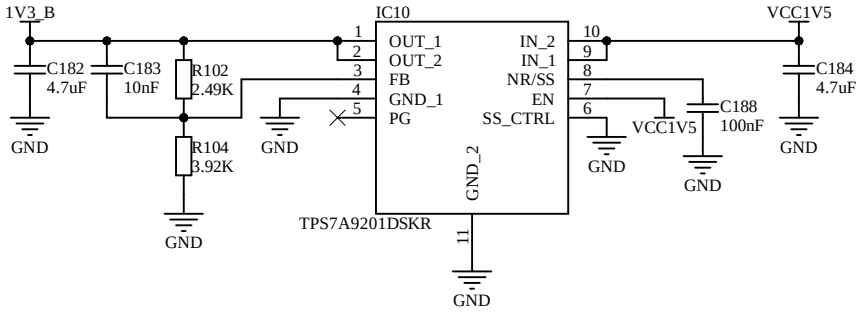

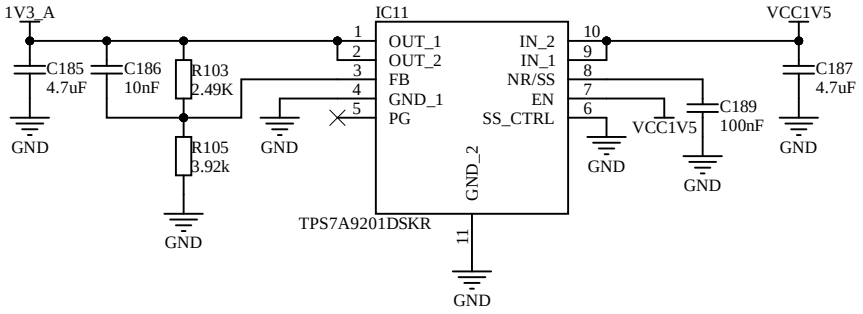


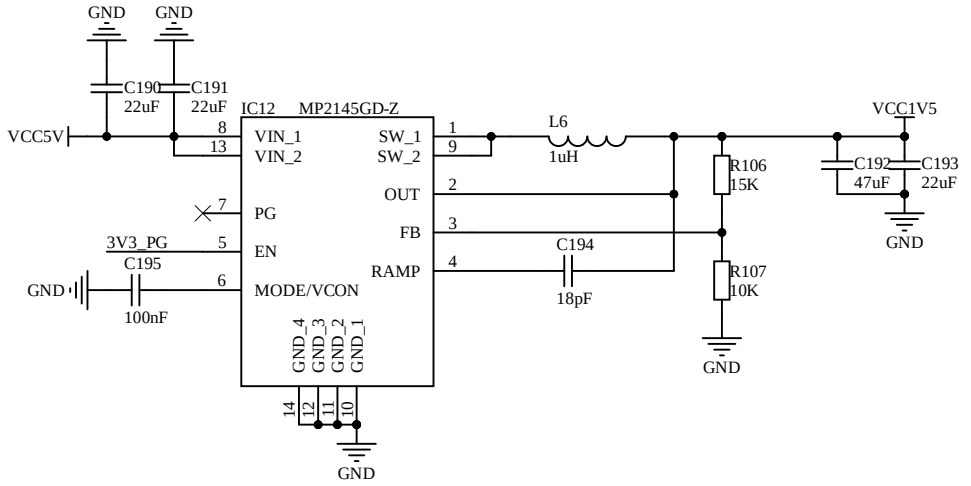



Title		
Size A4	Number	Revision
Date: 3/02/2026		Sheet of
File:		Drawn By:

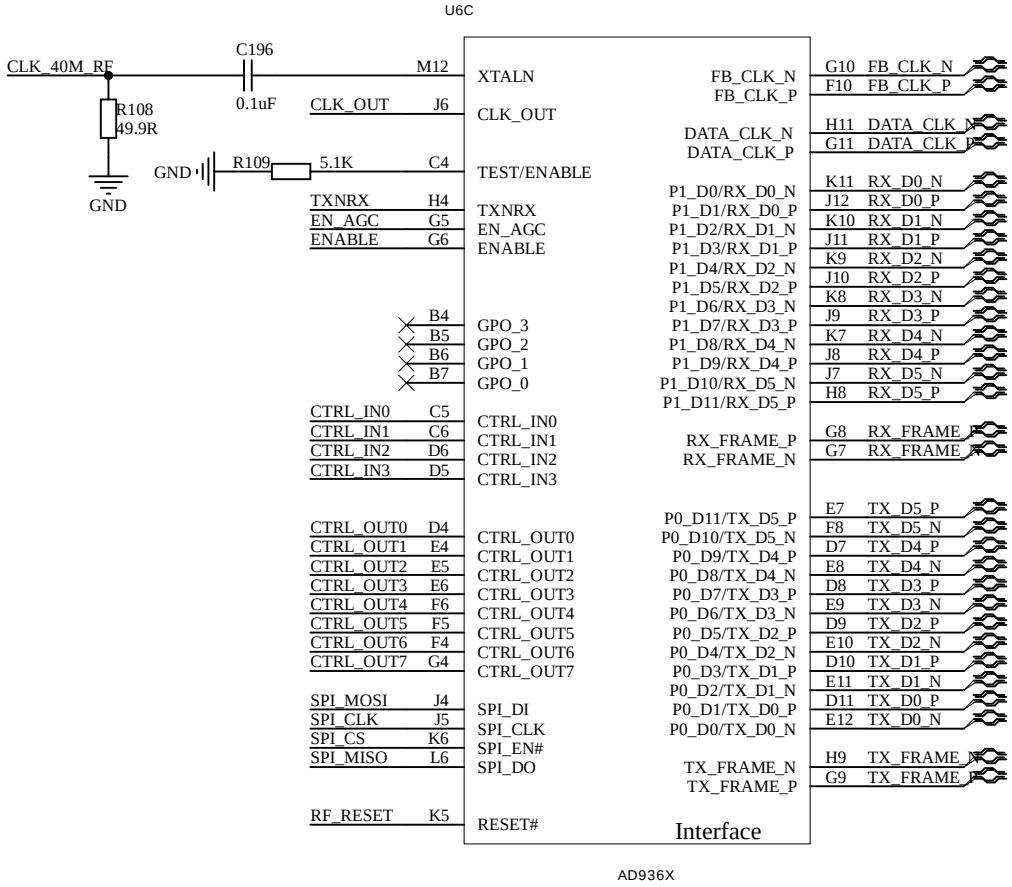


Title		
Size: A4	Number	Revision
Date: 3/02/2026		Sheet of
File:		Drawn By:

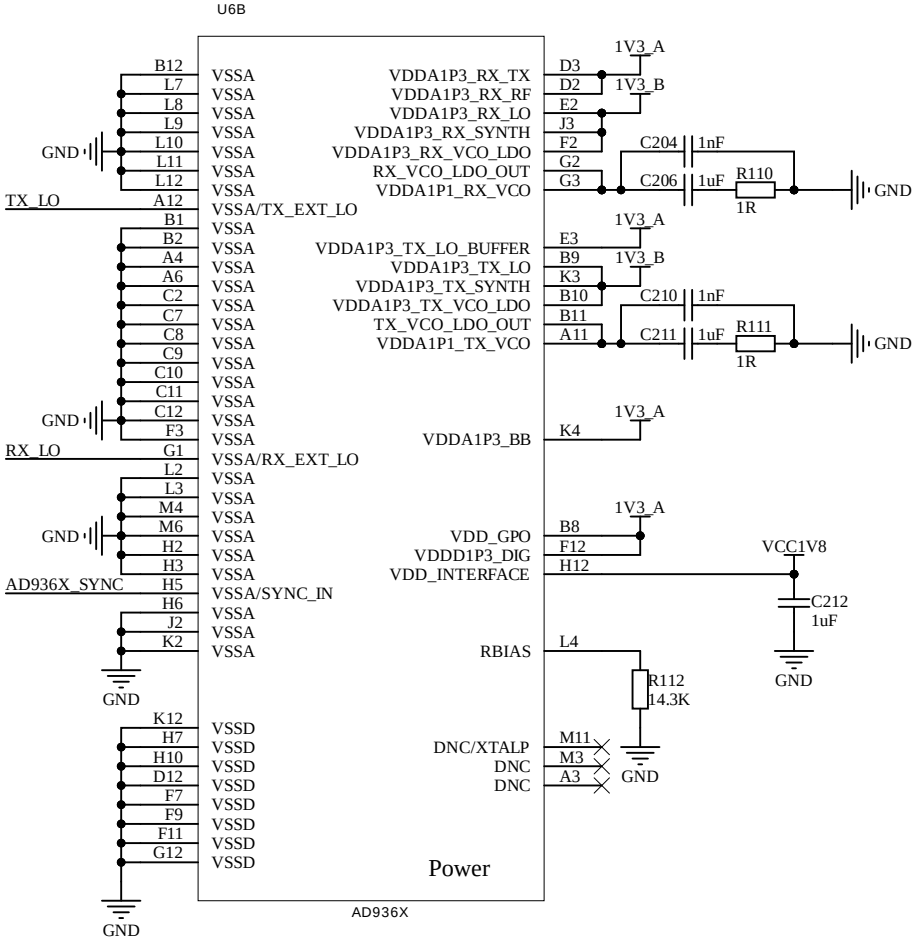


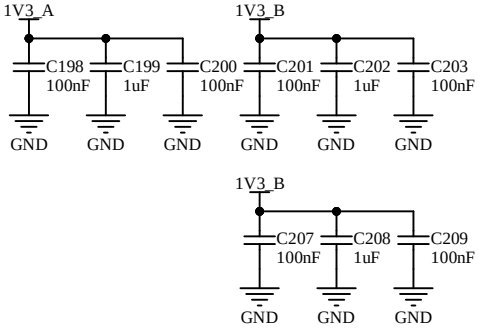

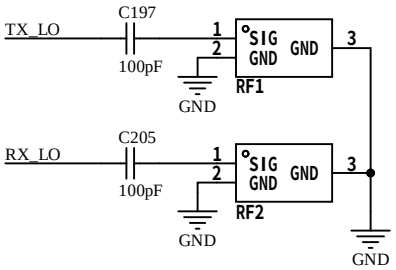


Title		
Size A4	Number	Revision
Date: 3/02/2026		Sheet of
File:		Drawn By:

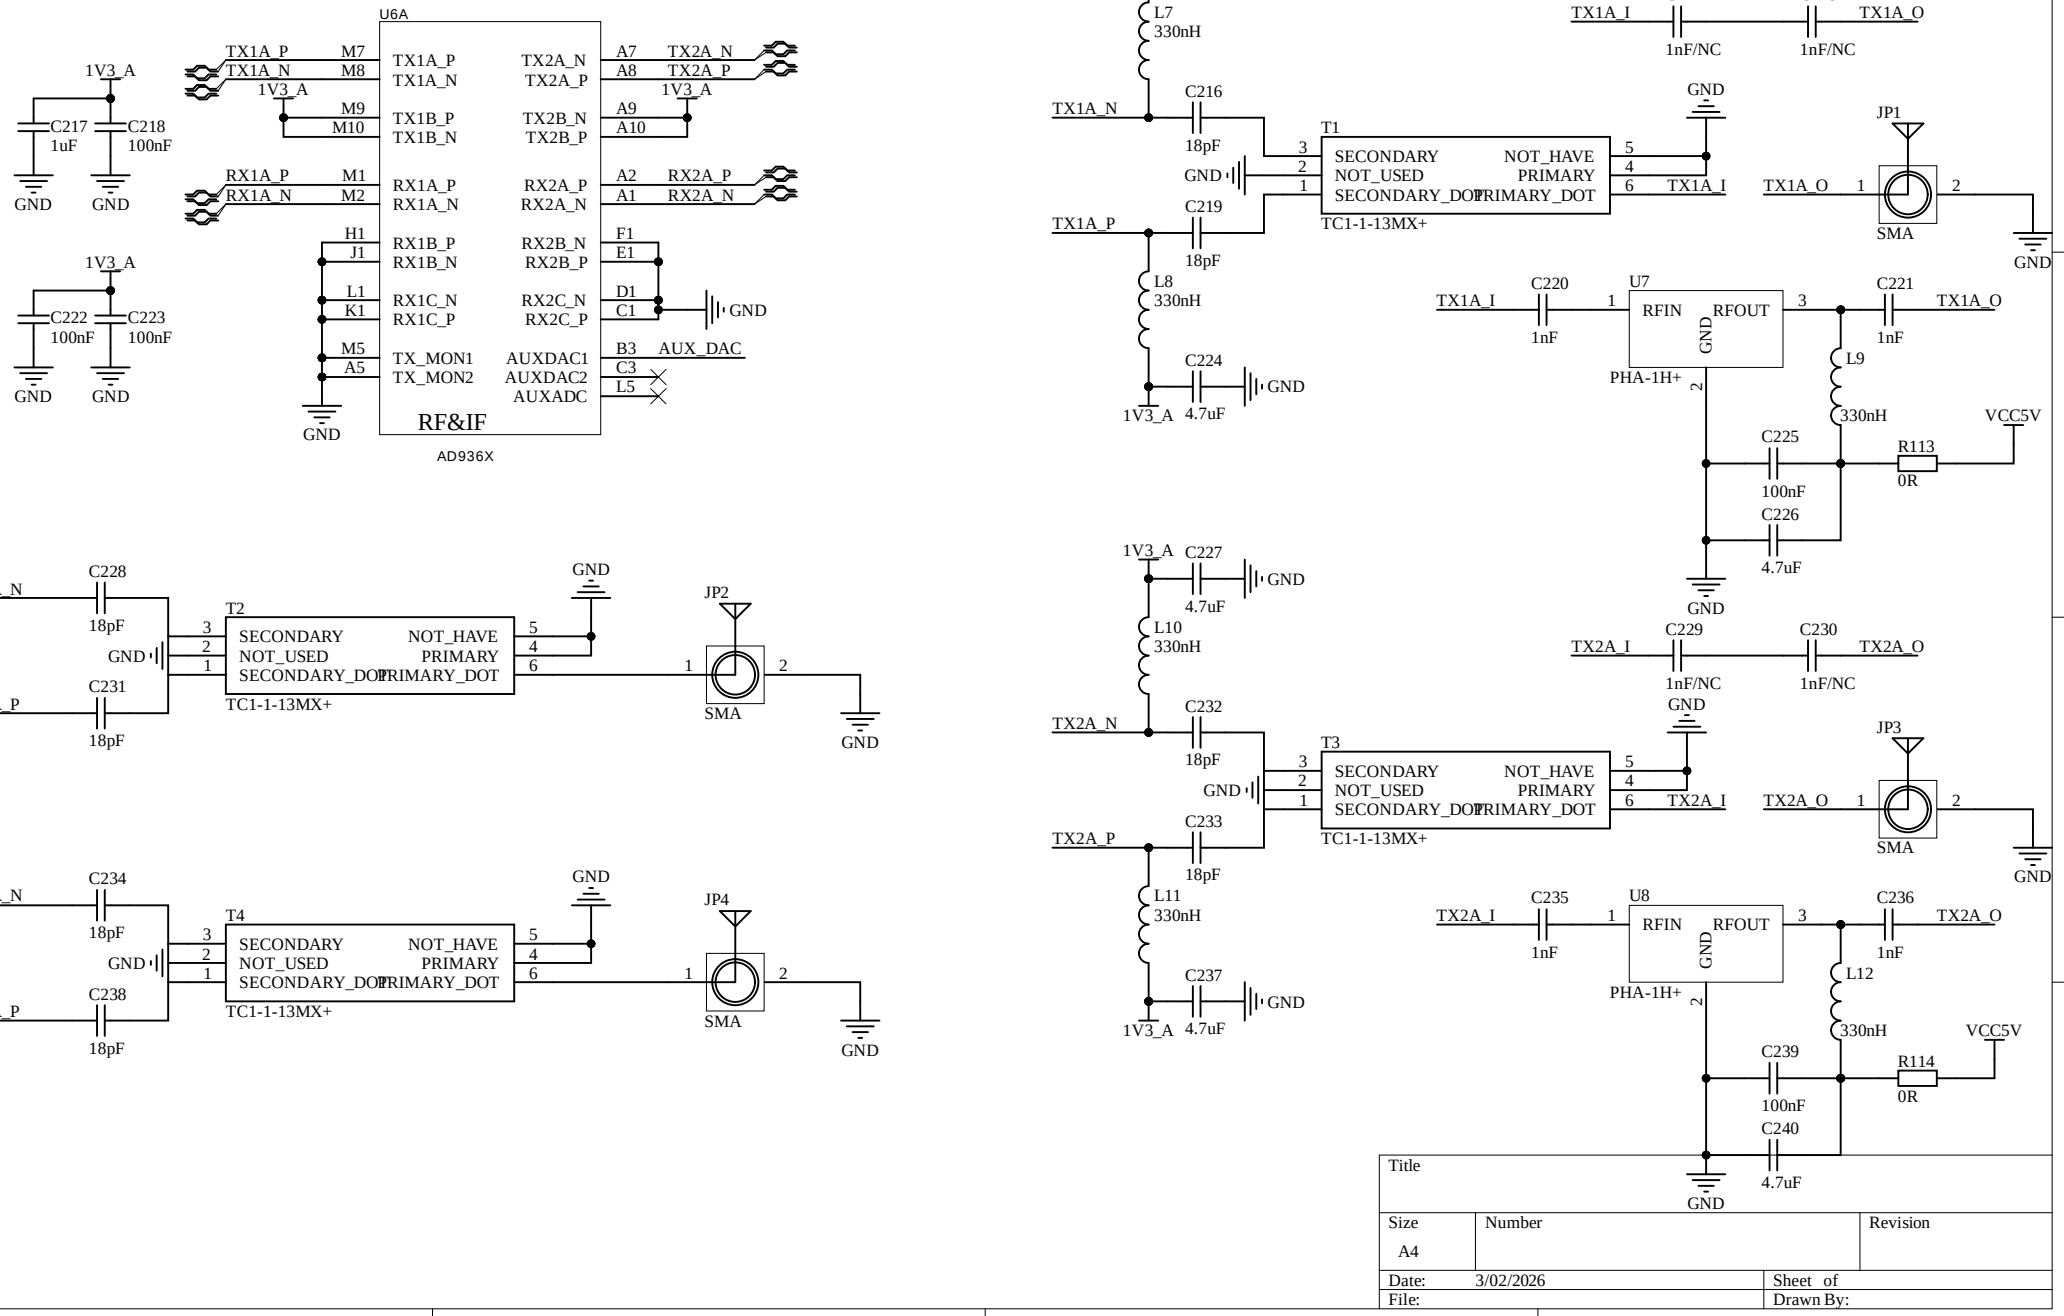
U6A
RF&IF
AD936X
TX1A_P
TX1A_N
TX2A_N
TX2A_P
RX1A_P
RX1A_N
RX2A_P
RX2A_N
TX_MON1
TX_MON2
AUXDAC1
AUXDAC2
AUXADC
AUX_DAC
1V3_A
GND
C217 1uF
C218 100nF
C222 100nF
C223 100nF
C213 4.7uF
C214 1nF/NC
C215 1nF/NC
C216 18pF
C219 18pF
C224 4.7uF
L7 330nH
L8 330nH
T1
TC1-1-13MX+
SECONDARY
NOT_USED
SECONDARY_DOT
NOT_HAVE
PRIMARY
PRIMARY_DOT
JP1
SMA
C220 1nF
C221 1nF
U7
RFIN
RFOUT
PHA-1H+
L9 330nH
C225 100nF
C226 4.7uF
R113 0R
VCC5V
C227 4.7uF
C229 1nF/NC
C230 1nF/NC
C232 18pF
C233 18pF
C237 4.7uF
L10 330nH
L11 330nH
T3
JP3
C235 1nF
C236 1nF
U8
L12 330nH
C239 100nF
C240 4.7uF
R114 0R
C228 18pF
C231 18pF
T2
JP2
C234 18pF
C238 18pF
T4
JP4
Title
Size
A4
Number
Revision
Date: 3/02/2026
Sheet of
File:
Drawn By:

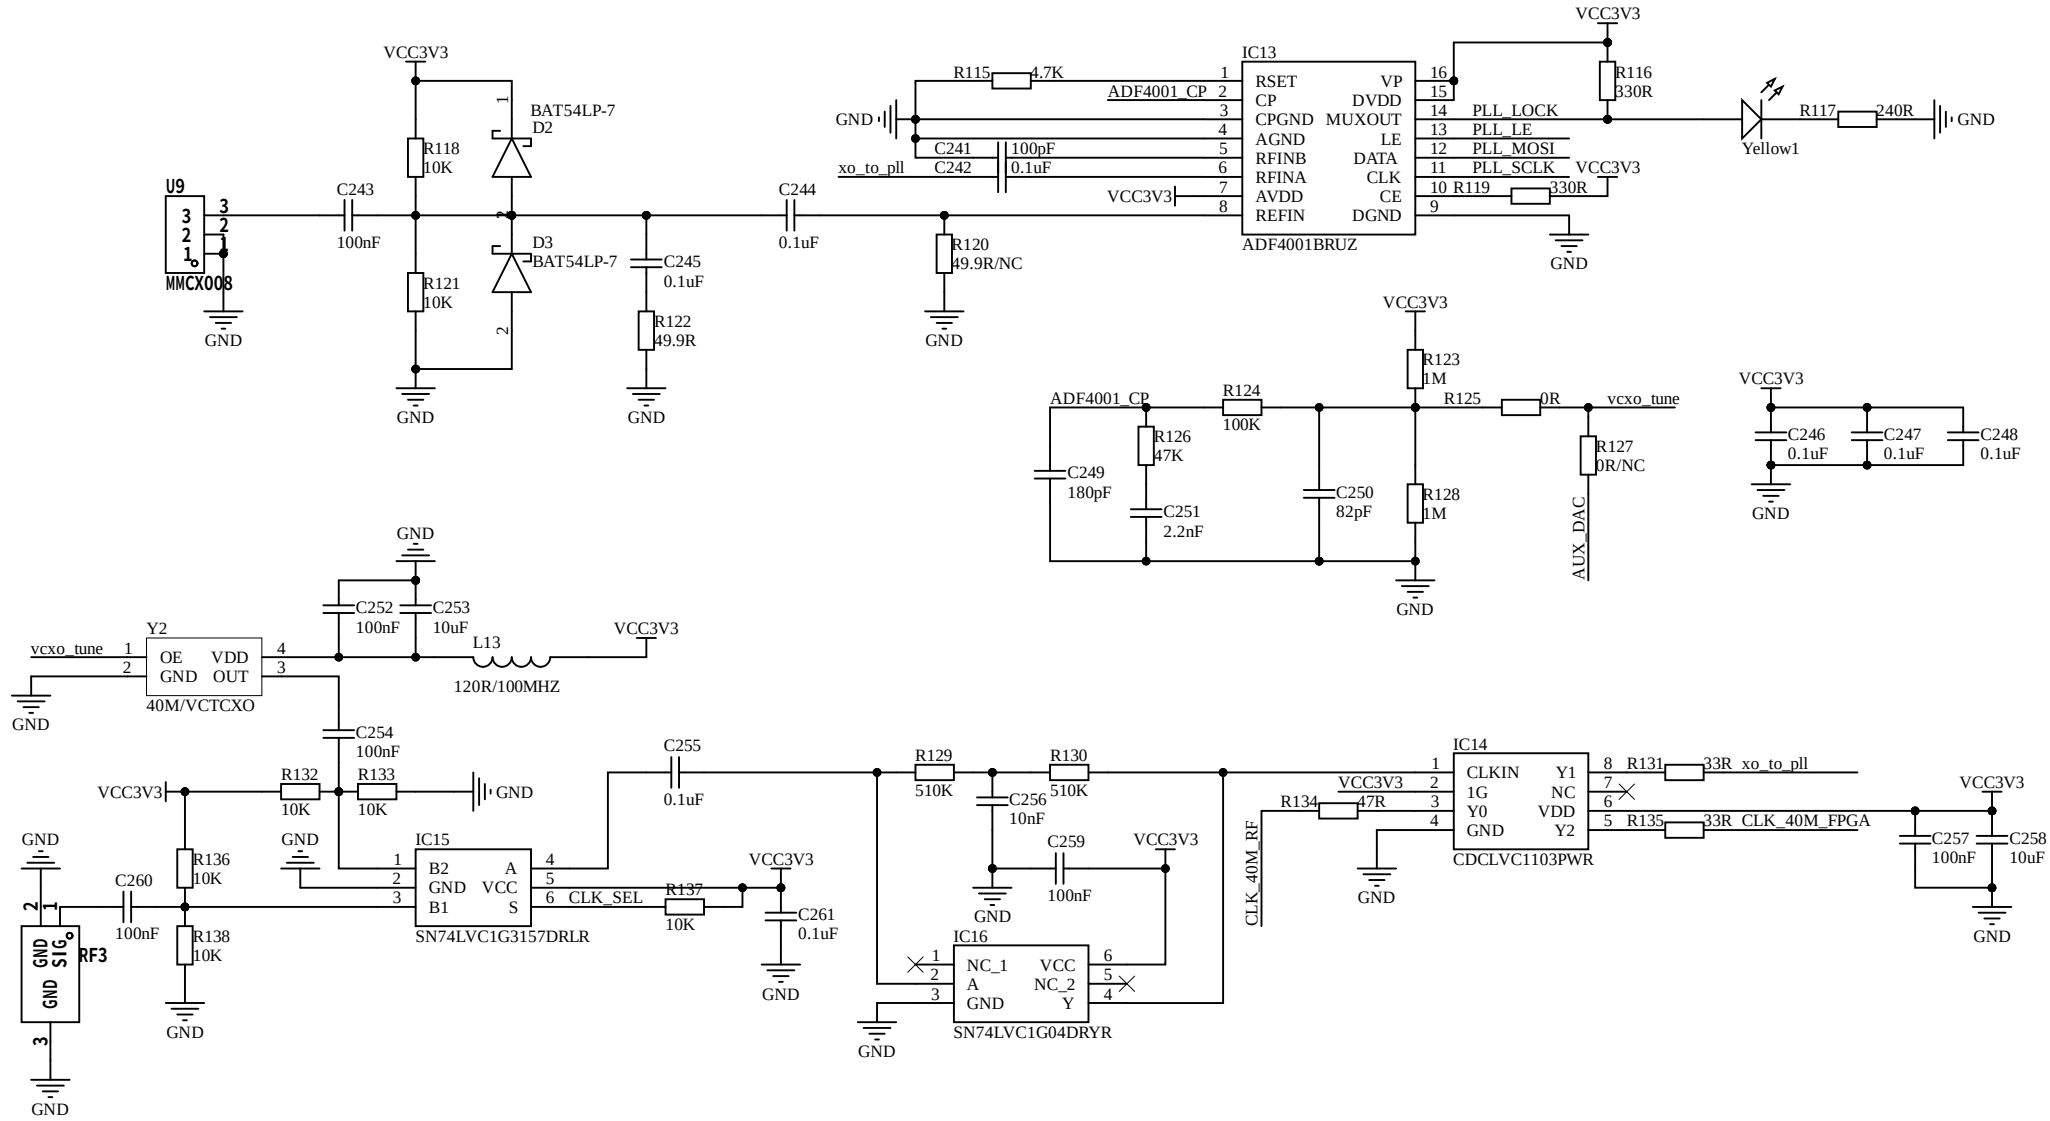

Title		
Size: A4	Number	Revision
Date: 3/02/2026		Sheet of
File:		Drawn By:

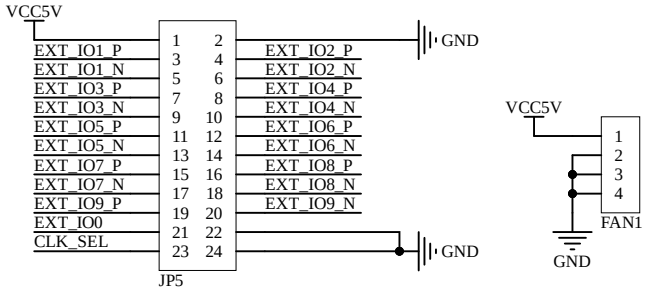

Title		
Size: A4	Number	Revision
Date: 3/02/2026		Sheet of
File:		Drawn By: