OPENSOURCESDRLAB DOCUMENTATION

RFSoC-27DR Schematic

Product	RFSoC-27DR
Document	OSSDRLAB-RFSoC-27DR-SCH
Version	1.0
Date	2026-11-12

This document contains the main schematic sheets of the OpenSourceSDRLab RFSoC-27DR board (XCZU27DR RFSoC, 8T8R), exported from Altium Designer. It is a partial schematic: the power-supply (PMU) sheet is not included, and sheets 10 and 18 are blank in this edition. Some sheets carry short Chinese labels for function blocks; their meaning is given in the table. The schematic sheets follow this cover page.


© 2026 OpenSourceSDRLab. All rights reserved. · www.opensourcesdrlab.com


Sheet	Content
1	RFSoC PS configuration: system monitor, JTAG, boot mode, PS reference clock (33.3 MHz), PS MIO assignment (QSPI, SD, USB, Ethernet, UART, I2C, LMK04828 control)
2	RFSoC PL I/O banks 88 and 89: LMK04828 SYNC, LEDs, PL clocks and SYSREF, expansion-connector I/O
3	RFSoC I/O bank supply connections (VCCO)
4	PS DDR4: four MT40A256M16GE devices, 64-bit
5	PL DDR4: two MT40A256M16GE devices, 32-bit, banks 65/66
6	PS-GTR transceivers (bank 505) and reference clocks
7	GTY transceivers (quads 128 and 129) and reference clocks
8	RF-ADC tiles 224–227 and RF-DAC tiles 228–229 with TC1-1-13MX+ baluns, converter reference clocks and SYSREF
9	12 V DC input and reverse-polarity protection (label: "DC power input")
10	blank (power supply sheet not included)
11	USB JTAG and UART: FT2232H, Type-C connector, EEPROM
12	Gigabit Ethernet: RTL8211F PHY and RJ45
13	USB 3.0: USB3320C ULPI PHY, Type-C connector and switch, VBUS power switch
14	QSFP28 cage on GTY quad 128
15	Clocking: LMK04828 clock generator, 19.2 MHz VCTCXO, 100 MHz and 156.25 MHz oscillators
16	Other peripherals: reset supervisor ("reset control"), boot-mode switch ("boot mode": JTAG/QSPI/eMMC/SD), dual QSPI flash, I2C EEPROM, microSD slot ("TF card"), status and user LEDs ("indicator LEDs"), fan header ("fan")
17	Expansion interface: FX10A-120S-SV 120-pin connector and MMCX clock / SYSREF / trigger connectors
18	blank

Product page: https://opensourcesdrlab.com/products/opensourcesdrlab-rfsoc-development-board-equipped-with-usb-30-socket


Questions about the hardware: support@opensourcesdrlab.com

© 2026 OpenSourceSDRLab. All rights reserved. · www.opensourcesdrlab.com

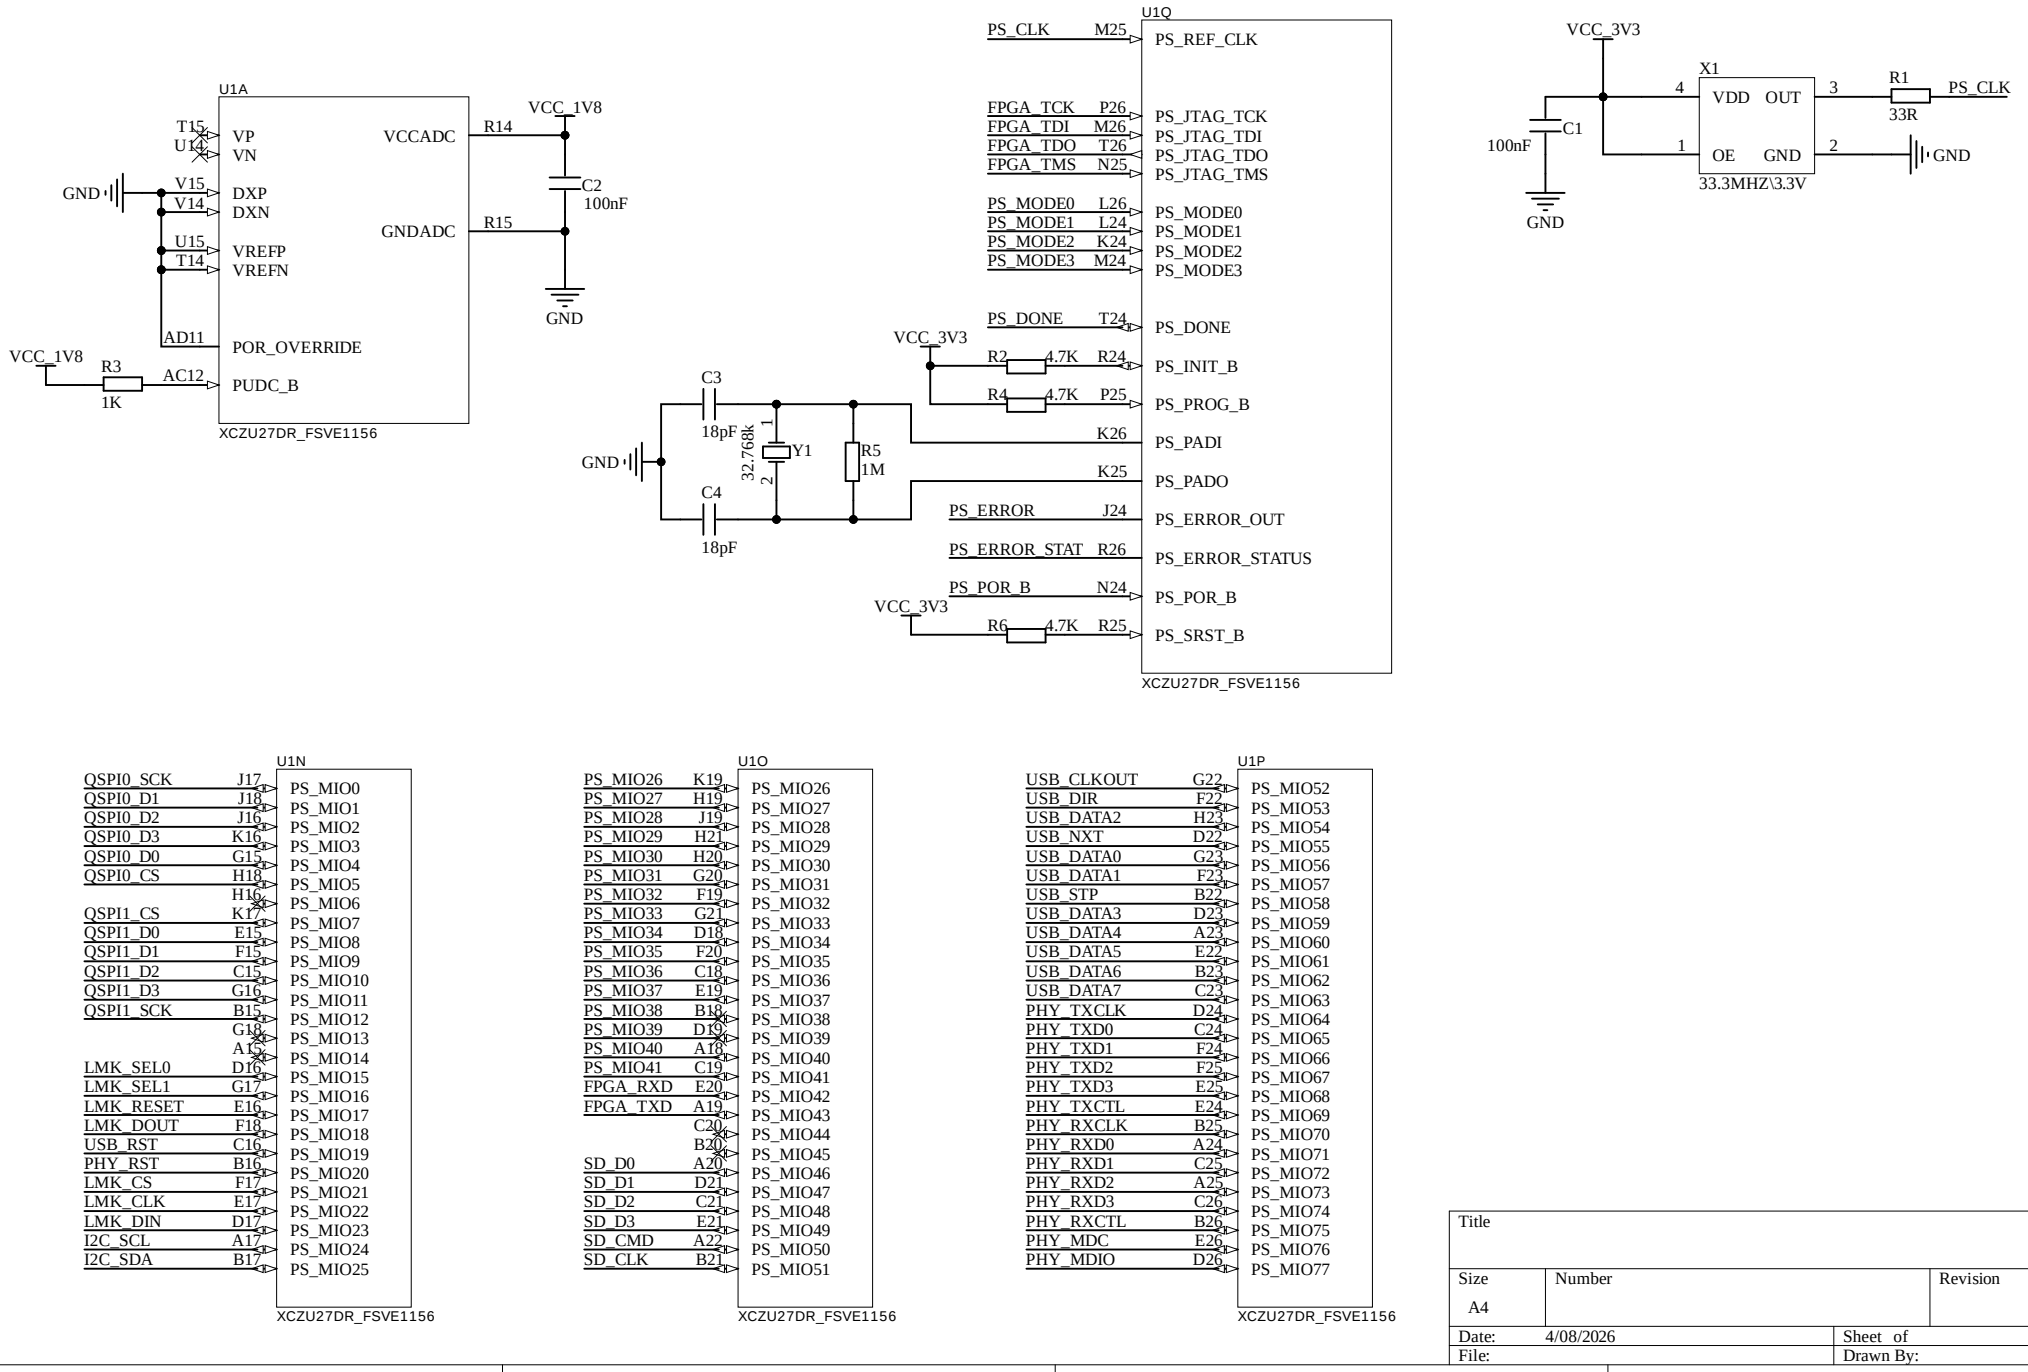

U1A
T15
U14
VP
VN
V15
V14
DXP
DXN
U15
T14
VREFP
VREFN
AD11
POR_OVERRIDE
AC12
PUDC_B
VCCADC
GNDADC
XCZU27DR_FSVE1156
GND
VCC_1V8
R3
1K
R14
R15
C2
100nF
U1Q
PS_CLK M25
PS_REF_CLK
FPGA_TCK P26
FPGA_TDI M26
FPGA_TDO T26
FPGA_TMS N25
PS_JTAG_TCK
PS_JTAG_TDI
PS_JTAG_TDO
PS_JTAG_TMS
PS_MODE0 L26
PS_MODE1 L24
PS_MODE2 K24
PS_MODE3 M24
PS_MODE0
PS_MODE1
PS_MODE2
PS_MODE3
PS_DONE T24
PS_DONE
VCC_3V3
R2 4.7K R24
PS_INIT_B
R4 4.7K P25
PS_PROG_B
K26
PS_PADI
K25
PS_PADO
PS_ERROR J24
PS_ERROR_OUT
PS_ERROR_STAT R26
PS_ERROR_STATUS
PS_POR_B N24
PS_POR_B
R6 4.7K R25
PS_SRST_B
C3
18pF
C4
18pF
32.768k
Y1
R5
1M
VCC_3V3
X1
VDD OUT
OE GND
33.3MHZ\3.3V
R1
33R
PS_CLK
C1
100nF
GND
U1N
QSPI0_SCK J17
QSPI0_D1 J18
QSPI0_D2 J16
QSPI0_D3 K16
QSPI0_D0 G15
QSPI0_CS H18
H16
QSPI1_CS K17
QSPI1_D0 E15
QSPI1_D1 F15
QSPI1_D2 C15
QSPI1_D3 G16
QSPI1_SCK B15
G18
A15
LMK_SEL0 D16
LMK_SEL1 G17
LMK_RESET E16
LMK_DOUT F18
USB_RST C16
PHY_RST B16
LMK_CS F17
LMK_CLK E17
LMK_DIN D17
I2C_SCL A17
I2C_SDA B17
PS_MIO0
PS_MIO1
PS_MIO2
PS_MIO3
PS_MIO4
PS_MIO5
PS_MIO6
PS_MIO7
PS_MIO8
PS_MIO9
PS_MIO10
PS_MIO11
PS_MIO12
PS_MIO13
PS_MIO14
PS_MIO15
PS_MIO16
PS_MIO17
PS_MIO18
PS_MIO19
PS_MIO20
PS_MIO21
PS_MIO22
PS_MIO23
PS_MIO24
PS_MIO25
XCZU27DR_FSVE1156
U1O
PS_MIO26 K19
PS_MIO27 H19
PS_MIO28 J19
PS_MIO29 H21
PS_MIO30 H20
PS_MIO31 G20
PS_MIO32 F19
PS_MIO33 G21
PS_MIO34 D18
PS_MIO35 F20
PS_MIO36 C18
PS_MIO37 E19
PS_MIO38 B18
PS_MIO39 D19
PS_MIO40 A18
PS_MIO41 C19
FPGA_RXD E20
FPGA_TXD A19
C20
B20
SD_D0 A20
SD_D1 D21
SD_D2 C21
SD_D3 E21
SD_CMD A22
SD_CLK B21
PS_MIO26
PS_MIO27
PS_MIO28
PS_MIO29
PS_MIO30
PS_MIO31
PS_MIO32
PS_MIO33
PS_MIO34
PS_MIO35
PS_MIO36
PS_MIO37
PS_MIO38
PS_MIO39
PS_MIO40
PS_MIO41
PS_MIO42
PS_MIO43
PS_MIO44
PS_MIO45
PS_MIO46
PS_MIO47
PS_MIO48
PS_MIO49
PS_MIO50
PS_MIO51
XCZU27DR_FSVE1156
U1P
USB_CLKOUT G22
USB_DIR F22
USB_DATA2 H23
USB_NXT D22
USB_DATA0 G23
USB_DATA1 F23
USB_STP B22
USB_DATA3 D23
USB_DATA4 A23
USB_DATA5 E22
USB_DATA6 B23
USB_DATA7 C23
PHY_TXCLK D24
PHY_TXD0 C24
PHY_TXD1 F24
PHY_TXD2 F25
PHY_TXD3 E25
PHY_TXCTL E24
PHY_RXCLK B25
PHY_RXD0 A24
PHY_RXD1 C25
PHY_RXD2 A25
PHY_RXD3 C26
PHY_RXCTL B26
PHY_MDC E26
PHY_MDIO D26
PS_MIO52
PS_MIO53
PS_MIO54
PS_MIO55
PS_MIO56
PS_MIO57
PS_MIO58
PS_MIO59
PS_MIO60
PS_MIO61
PS_MIO62
PS_MIO63
PS_MIO64
PS_MIO65
PS_MIO66
PS_MIO67
PS_MIO68
PS_MIO69
PS_MIO70
PS_MIO71
PS_MIO72
PS_MIO73
PS_MIO74
PS_MIO75
PS_MIO76
PS_MIO77
XCZU27DR_FSVE1156
Title
Size
A4
Number
Revision
Date: 4/08/2026
Sheet of
File:
Drawn By:

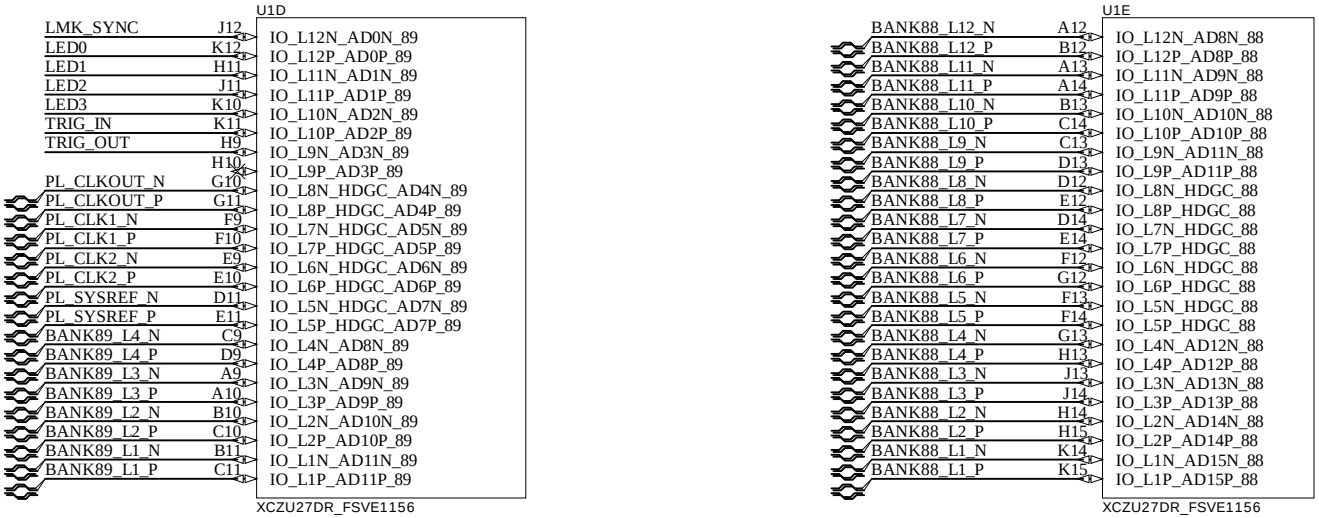



Title		
Size: A4	Number	Revision
Date: 4/08/2026		Sheet of
File:		Drawn By:

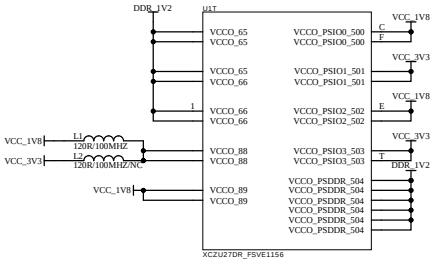



Title		
Size: A2	Number	Revision
Date: 4/08/2026		Sheet of
File:		Drawn By:

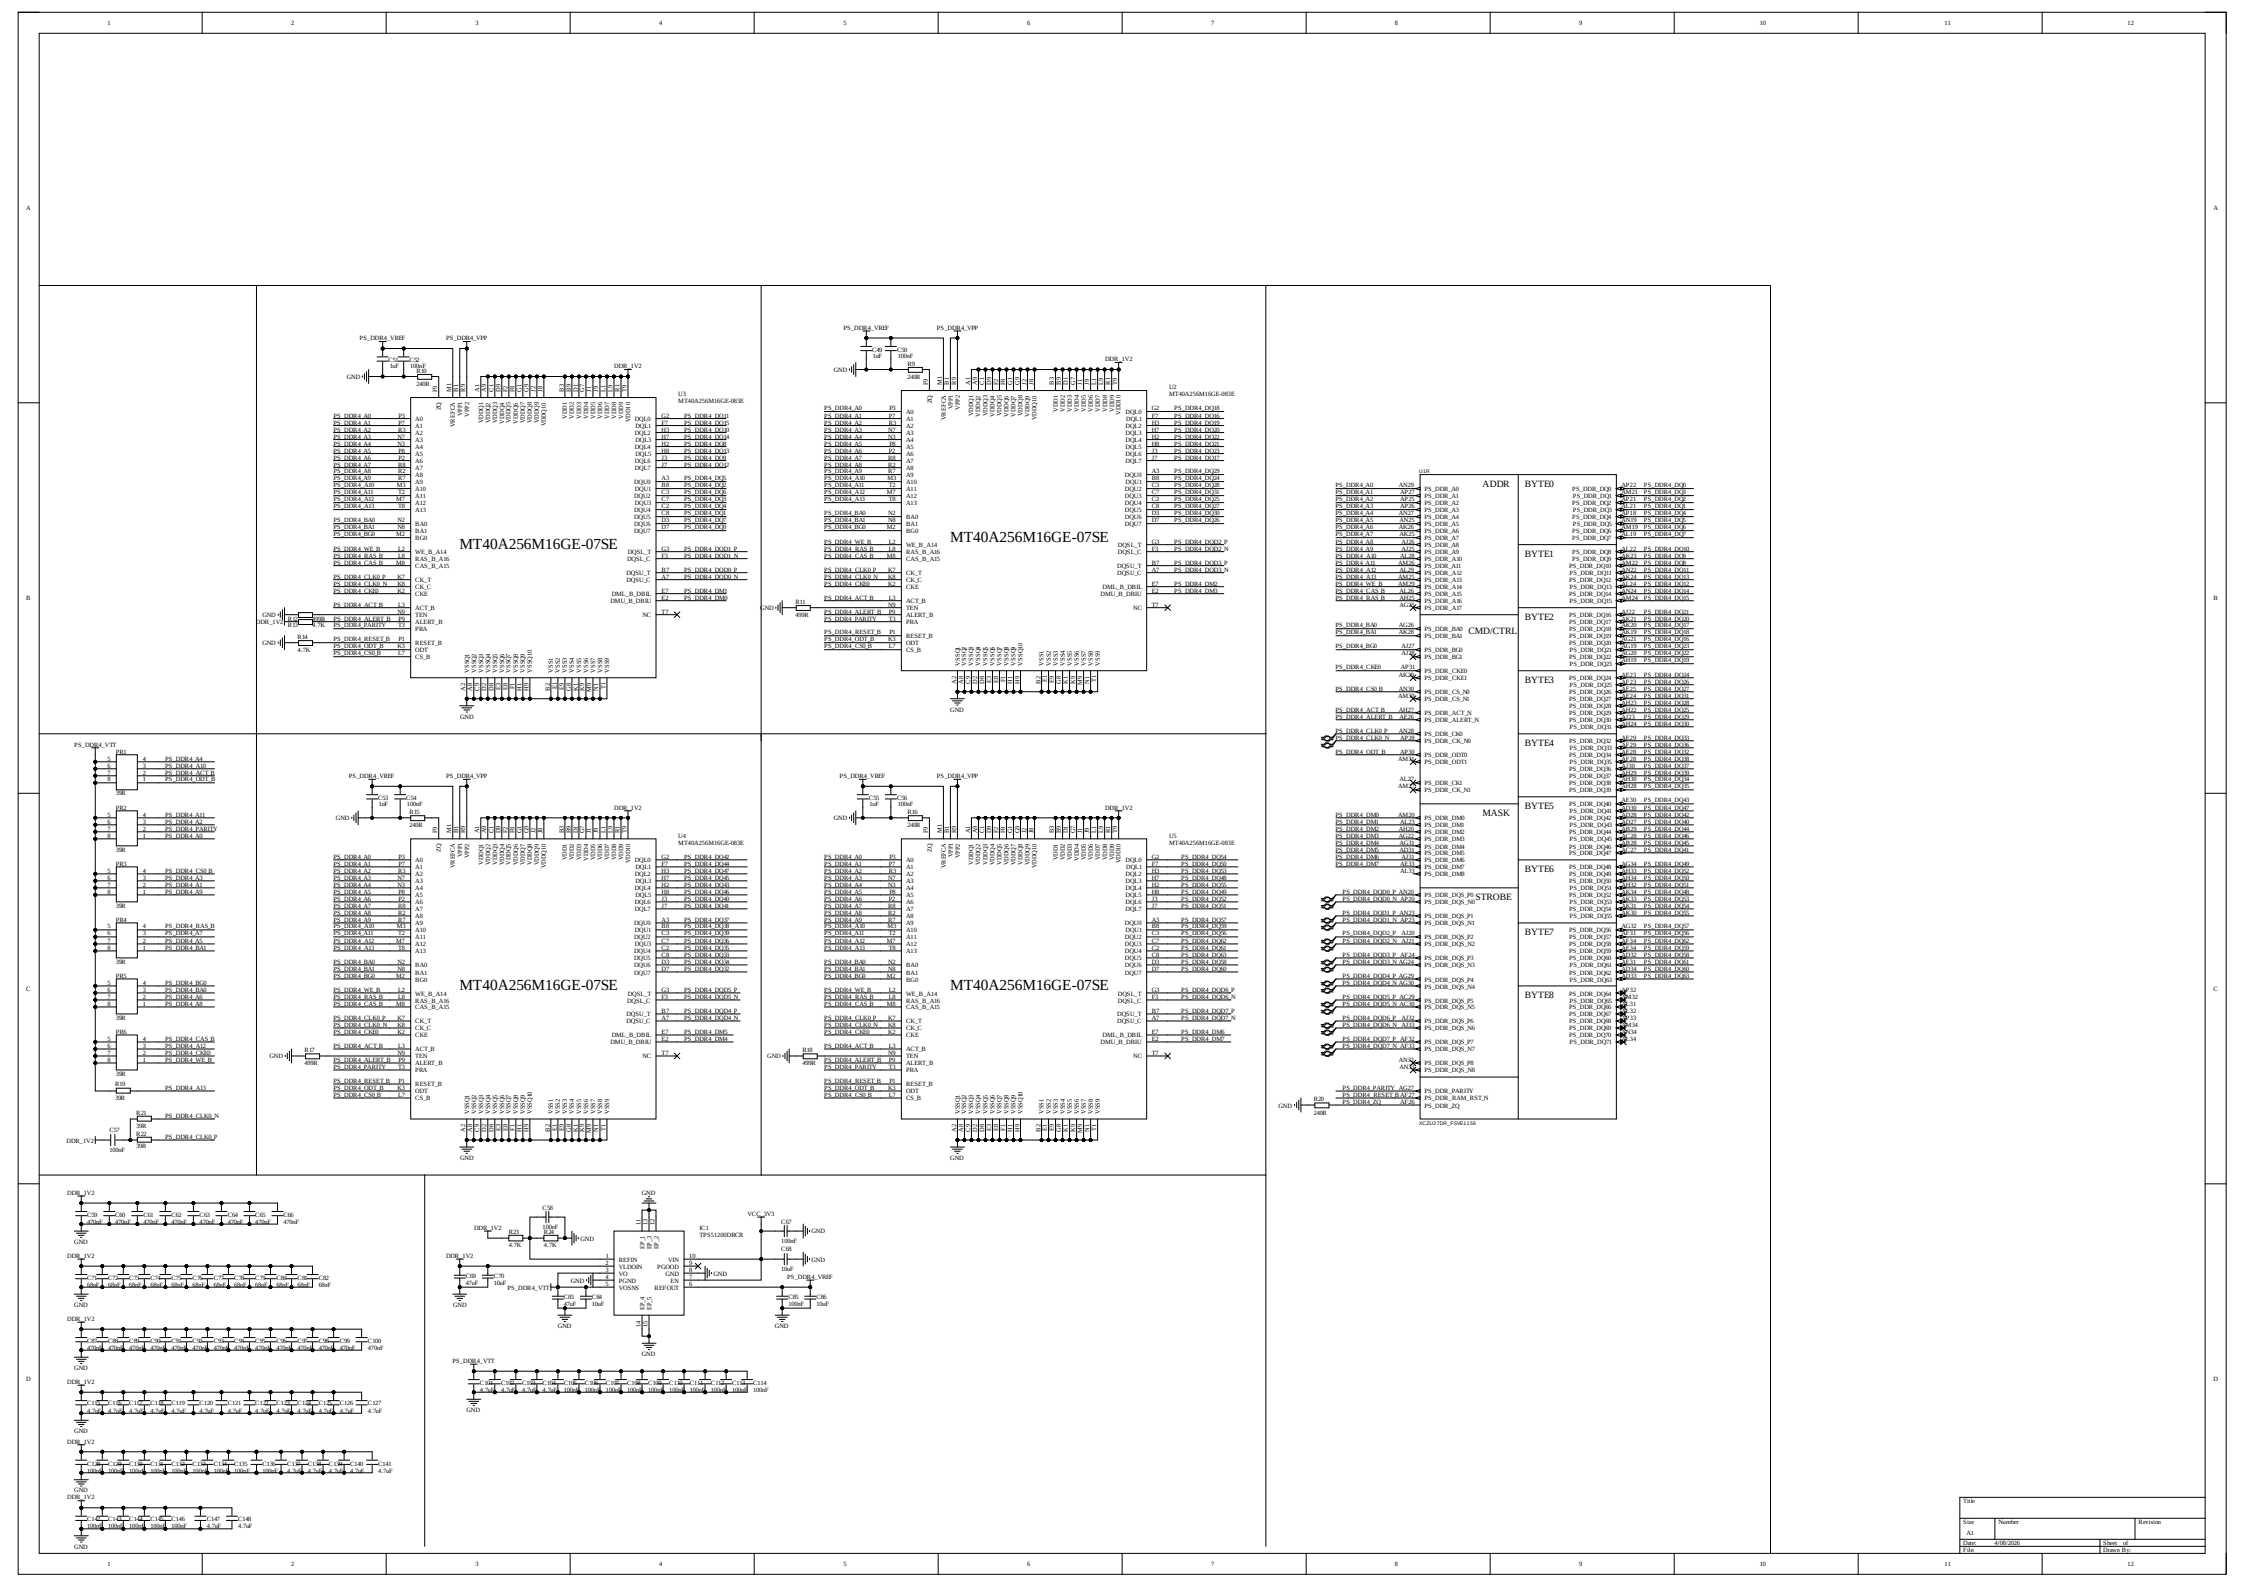

MT40A256M16GE-07SE
MT40A256M16GE-083E
ADDR
CMD/CTRL
MASK
STROBE
BYTE0
BYTE1
BYTE2
BYTE3
BYTE4
BYTE5
BYTE6
BYTE7
BYTE8
XC2U270DR_FSVE1156
IC1
TPS51200DRCR

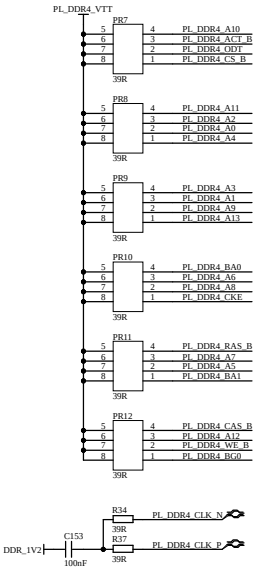

PL_DDR4_VTT
PR7
PR8
PR9
PR10
PR11
PR12
39R
PL_DDR4_A10
PL_DDR4_ACT_B
PL_DDR4_ODT
PL_DDR4_CS_B
PL_DDR4_A11
PL_DDR4_A2
PL_DDR4_A0
PL_DDR4_A4
PL_DDR4_A3
PL_DDR4_A1
PL_DDR4_A9
PL_DDR4_A13
PL_DDR4_BA0
PL_DDR4_A6
PL_DDR4_A8
PL_DDR4_CKE
PL_DDR4_RAS_B
PL_DDR4_A7
PL_DDR4_A5
PL_DDR4_BA1
PL_DDR4_CAS_B
PL_DDR4_A12
PL_DDR4_WE_B
PL_DDR4_BG0
R34
R37
PL_DDR4_CLK_N
PL_DDR4_CLK_P
DDR_1V2
C153
100nF

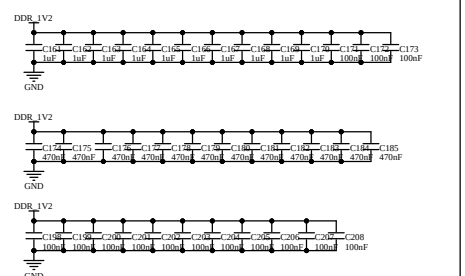

DDR_1V2
C161
C162
C163
C164
C165
C166
C167
C168
C169
C170
C171
C172
C173
1uF
100nF
GND
C174
C175
C176
C177
C178
C179
C180
C181
C182
C183
C184
C185
470nF
C186
C187
C188
C189
C190
C191
C192
C193
C194
C195
C196
C197
C198
C199
C200
C201
C202
C203
C204
C205
C206
C207
C208

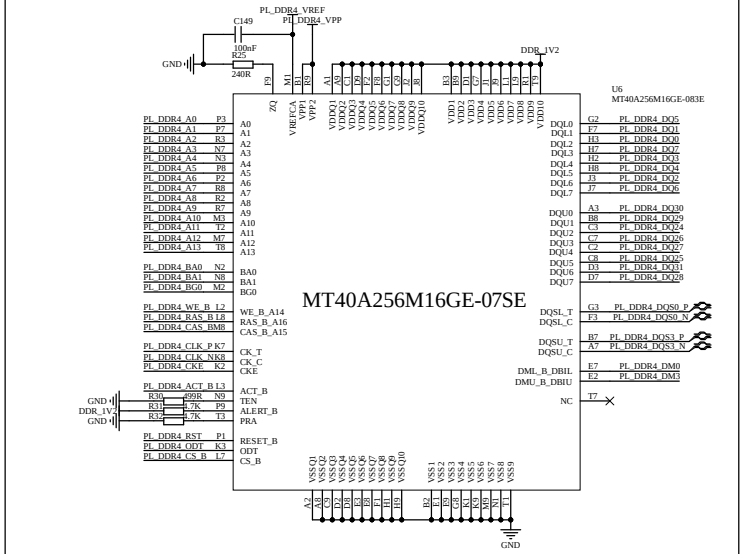
PL_DDR4_VREF
PL_DDR4_VPP
C149
100nF
R25
240R
DDR_1V2
U6
MT40A256M16GE-083E
MT40A256M16GE-07SE
PL_DDR4_A0
PL_DDR4_A1
PL_DDR4_A2
PL_DDR4_A3
PL_DDR4_A4
PL_DDR4_A5
PL_DDR4_A6
PL_DDR4_A7
PL_DDR4_A8
PL_DDR4_A9
PL_DDR4_A10
PL_DDR4_A11
PL_DDR4_A12
PL_DDR4_A13
PL_DDR4_BA0
PL_DDR4_BA1
PL_DDR4_BG0
PL_DDR4_WE_B
PL_DDR4_RAS_B
PL_DDR4_CAS_B
PL_DDR4_CLK_P
PL_DDR4_CLK_N
PL_DDR4_CKE
PL_DDR4_ACT_B
PL_DDR4_RST
PL_DDR4_ODT
PL_DDR4_CS_B
R36
R35
R34
499R
4.7K
GND
DDR_1V2
PL_DDR4_DQ5
PL_DDR4_DQ1
PL_DDR4_DQ0
PL_DDR4_DQ7
PL_DDR4_DQ2
PL_DDR4_DQ3
PL_DDR4_DQ4
PL_DDR4_DQ6
PL_DDR4_DQ30
PL_DDR4_DQ29
PL_DDR4_DQ26
PL_DDR4_DQ27
PL_DDR4_DQ25
PL_DDR4_DQ31
PL_DDR4_DQS0_P
PL_DDR4_DQS0_N
PL_DDR4_DQS3_P
PL_DDR4_DQS3_N
PL_DDR4_DM0
PL_DDR4_DM3

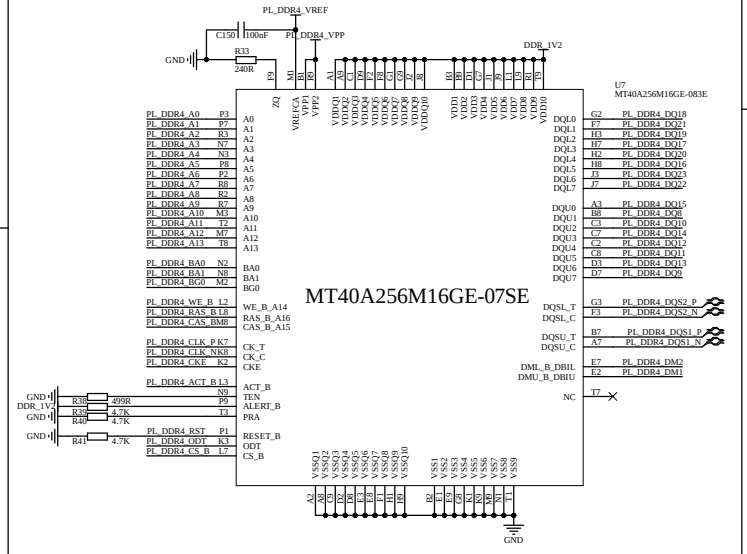

PL_DDR4_VREF
PL_DDR4_VPP
C150
100nF
R33
240R
DDR_1V2
U7
MT40A256M16GE-083E
MT40A256M16GE-07SE
PL_DDR4_A0
PL_DDR4_A1
PL_DDR4_A2
PL_DDR4_A3
PL_DDR4_A4
PL_DDR4_A5
PL_DDR4_A6
PL_DDR4_A7
PL_DDR4_A8
PL_DDR4_A9
PL_DDR4_A10
PL_DDR4_A11
PL_DDR4_A12
PL_DDR4_A13
PL_DDR4_BA0
PL_DDR4_BA1
PL_DDR4_BG0
PL_DDR4_WE_B
PL_DDR4_RAS_B
PL_DDR4_CAS_B
PL_DDR4_CLK_P
PL_DDR4_CLK_N
PL_DDR4_CKE
PL_DDR4_ACT_B
PL_DDR4_RST
PL_DDR4_ODT
PL_DDR4_CS_B
R38
R39
R40
R41
499R
4.7K
GND
DDR_1V2
PL_DDR4_DQ18
PL_DDR4_DQ21
PL_DDR4_DQ19
PL_DDR4_DQ17
PL_DDR4_DQ20
PL_DDR4_DQ16
PL_DDR4_DQ23
PL_DDR4_DQ22
PL_DDR4_DQS2_P
PL_DDR4_DQS2_N
PL_DDR4_DQS1_P
PL_DDR4_DQS1_N
PL_DDR4_DM2
PL_DDR4_DM1

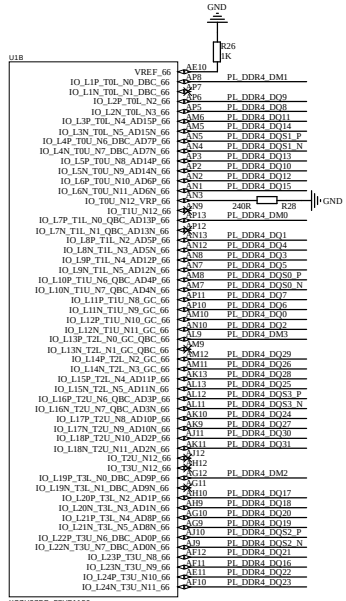
U1B
XCZU27DR_FSVE1156
GND
R26
1K
R28
240R
PL_DDR4_DM1
PL_DDR4_DQ9
PL_DDR4_DQ8
PL_DDR4_DQ11
PL_DDR4_DQ14
PL_DDR4_DQS1_P
PL_DDR4_DQS1_N
PL_DDR4_DQ13
PL_DDR4_DQ10
PL_DDR4_DQ12
PL_DDR4_DQ15
PL_DDR4_DM0
PL_DDR4_DQ1
PL_DDR4_DQ4
PL_DDR4_DQ3
PL_DDR4_DQ5
PL_DDR4_DQS0_P
PL_DDR4_DQS0_N
PL_DDR4_DQ7
PL_DDR4_DQ6
PL_DDR4_DQ0
PL_DDR4_DQ2
PL_DDR4_DM3
PL_DDR4_DQ29
PL_DDR4_DQ26
PL_DDR4_DQ28
PL_DDR4_DQ25
PL_DDR4_DQS3_P
PL_DDR4_DQS3_N
PL_DDR4_DQ24
PL_DDR4_DQ27
PL_DDR4_DQ30
PL_DDR4_DQ31
PL_DDR4_DM2
PL_DDR4_DQ17
PL_DDR4_DQ18
PL_DDR4_DQ20
PL_DDR4_DQ19
PL_DDR4_DQS2_P
PL_DDR4_DQS2_N
PL_DDR4_DQ21
PL_DDR4_DQ16
PL_DDR4_DQ22
PL_DDR4_DQ23

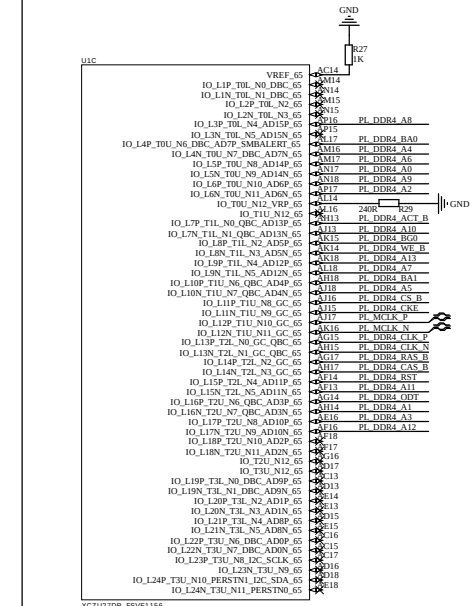
U1C
XCZU27DR_FSVE1156
GND
R27
1K
R29
240R
PL_DDR4_A8
PL_DDR4_BA0
PL_DDR4_A4
PL_DDR4_A6
PL_DDR4_A9
PL_DDR4_A2
PL_DDR4_ACT_B
PL_DDR4_A10
PL_DDR4_BG0
PL_DDR4_WE_B
PL_DDR4_A13
PL_DDR4_A7
PL_DDR4_BA1
PL_DDR4_A5
PL_DDR4_CS_B
PL_DDR4_CKE
PL_MCLK_P
PL_MCLK_N
PL_DDR4_CLK_P
PL_DDR4_CLK_N
PL_DDR4_RAS_B
PL_DDR4_RST
PL_DDR4_CAS_B
PL_DDR4_A11
PL_DDR4_ODT
PL_DDR4_A1
PL_DDR4_A3
PL_DDR4_A12

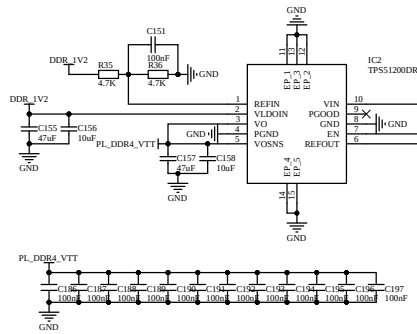
DDR_1V2
R35
4.7K
C151
100nF
R36
4.7K
GND
C155
47uF
C156
10uF
PL_DDR4_VTT
C157
47uF
C158
10uF
IC2
TPS51200DRCR
REFIN
VLDOIN
VO
PGND
VOSNS
VIN
PGOOD
GND
EN
REFOUT
VCC_3V3
C152
100nF
C154
10uF
C159
100nF
C160
10uF
PL_DDR4_VREF


PL_DDR4_VTT
C198
C199
C200
C201
C202
C203
C204
C205
C206
C207
C208
C209
C210
C211
C212
C213
C214
C215
C216
C217
C218
C219
C220
C221
C222
C223
C224
C225
C226
C227
C228
C229
C230
C231
C232
C233
C234
C235
C236
C237

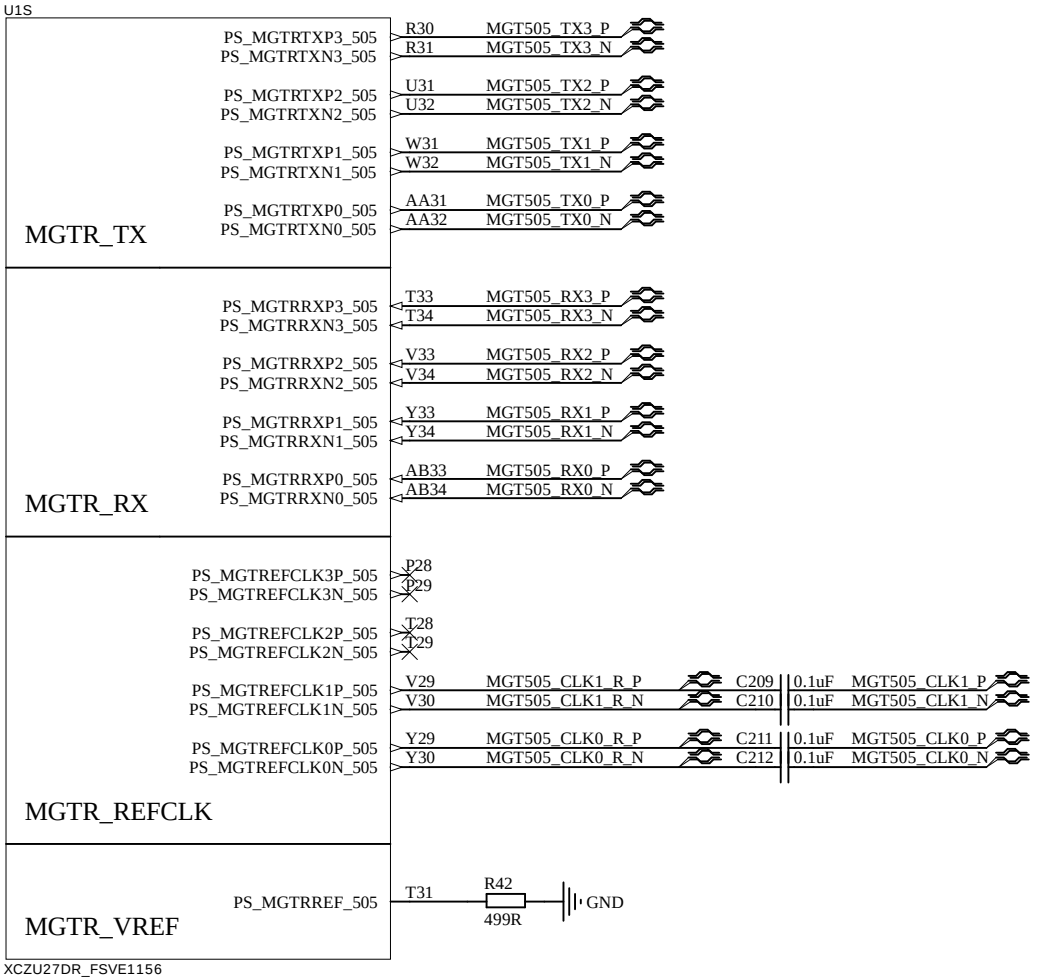


Title		
Size A4	Number	Revision
Date: 4/08/2026		Sheet of
File:		Drawn By:




Title		
Size A4	Number	Revision
Date: 4/08/2026		Sheet of
File:		Drawn By:

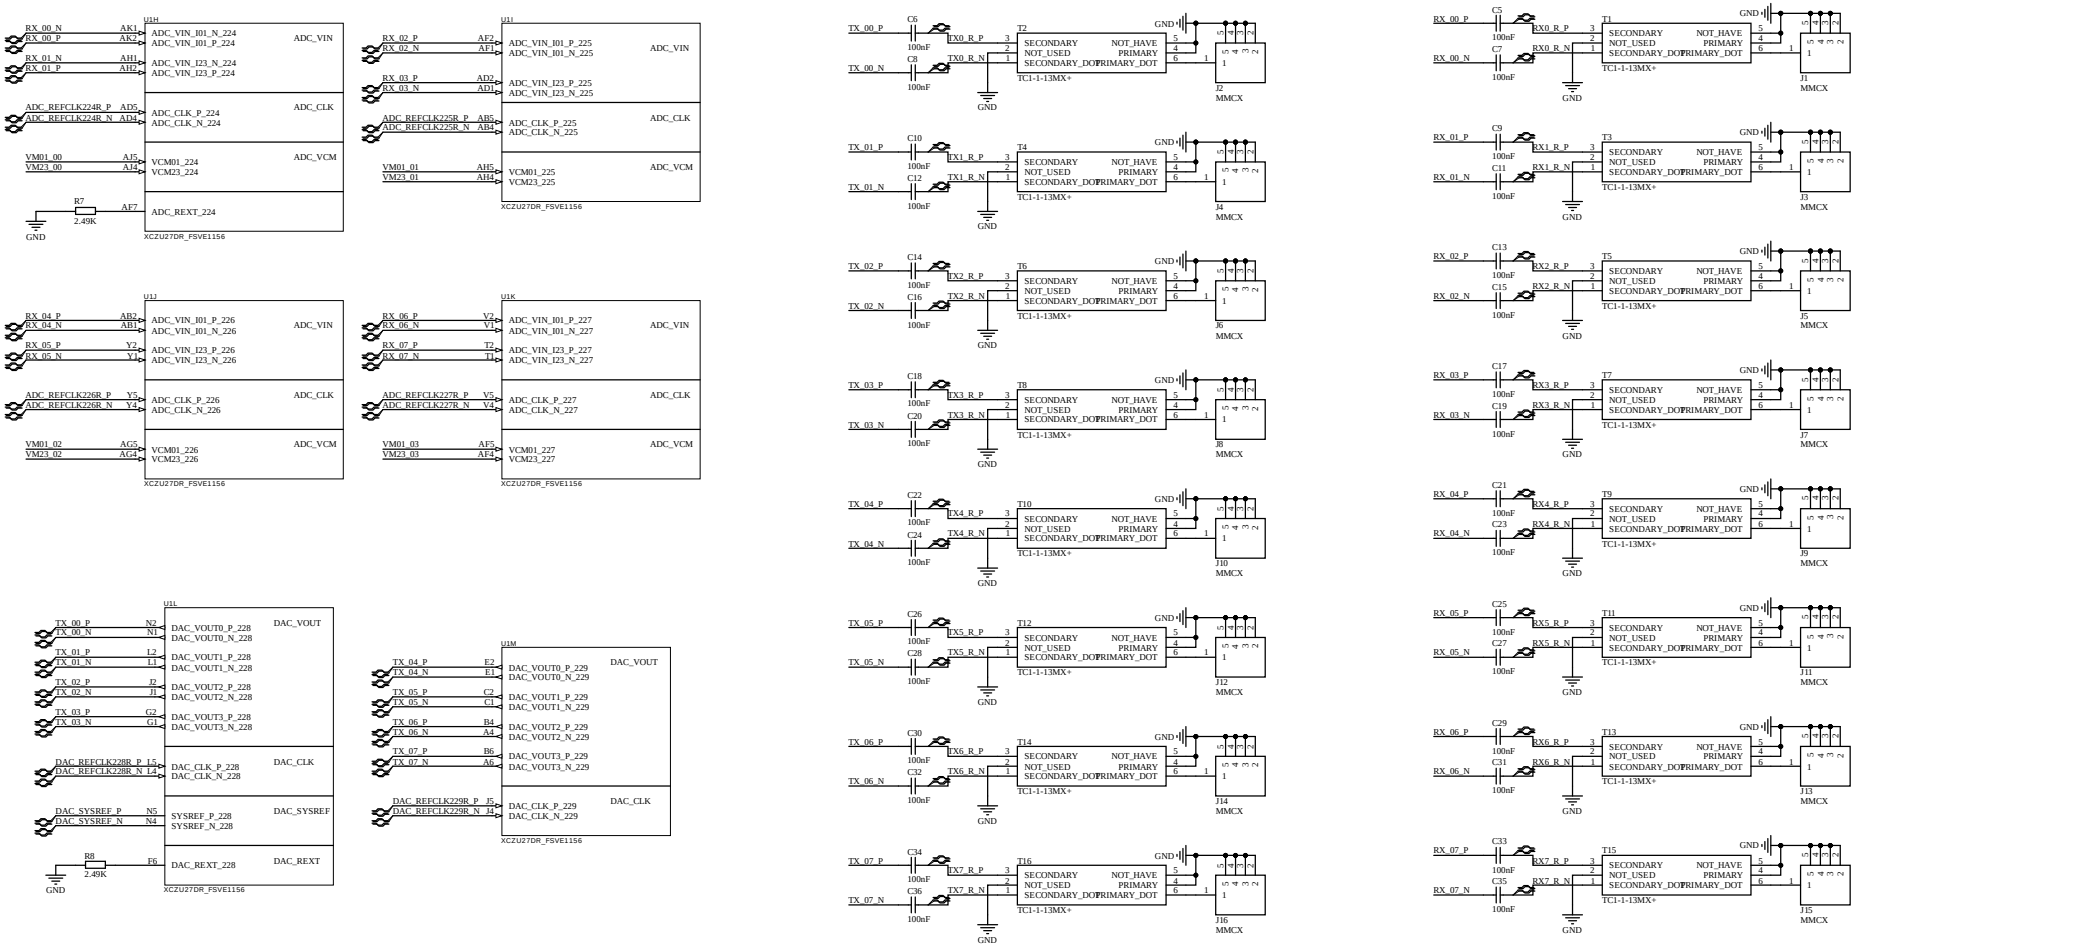

U1H
RX_00_N AK1
RX_00_P AK2
RX_01_N AH1
RX_01_P AH2
ADC_REFCLK224R_P AD5
ADC_REFCLK224R_N AD4
VM01_00 AJ5
VM23_00 AJ4
R7
2.49K
AF7
GND
ADC_VIN_I01_N_224
ADC_VIN_I01_P_224
ADC_VIN_I23_N_224
ADC_VIN_I23_P_224
ADC_VIN
ADC_CLK_P_224
ADC_CLK_N_224
ADC_CLK
VCM01_224
VCM23_224
ADC_VCM
ADC_REXT_224
XCZU27DR_FSVE1156
U1I
RX_02_P AF2
RX_02_N AF1
RX_03_P AD2
RX_03_N AD1
ADC_REFCLK225R_P AB5
ADC_REFCLK225R_N AB4
VM01_01 AH5
VM23_01 AH4
ADC_VIN_I01_P_225
ADC_VIN_I01_N_225
ADC_VIN_I23_P_225
ADC_VIN_I23_N_225
ADC_VIN
ADC_CLK_P_225
ADC_CLK_N_225
ADC_CLK
VCM01_225
VCM23_225
ADC_VCM
XCZU27DR_FSVE1156
U1J
RX_04_P AB2
RX_04_N AB1
RX_05_P Y2
RX_05_N Y1
ADC_REFCLK226R_P Y5
ADC_REFCLK226R_N Y4
VM01_02 AG5
VM23_02 AG4
ADC_VIN_I01_P_226
ADC_VIN_I01_N_226
ADC_VIN_I23_P_226
ADC_VIN_I23_N_226
ADC_VIN
ADC_CLK_P_226
ADC_CLK_N_226
ADC_CLK
VCM01_226
VCM23_226
ADC_VCM
XCZU27DR_FSVE1156
U1K
RX_06_P V2
RX_06_N V1
RX_07_P T2
RX_07_N T1
ADC_REFCLK227R_P V5
ADC_REFCLK227R_N V4
VM01_03 AF5
VM23_03 AF4
ADC_VIN_I01_P_227
ADC_VIN_I01_N_227
ADC_VIN_I23_P_227
ADC_VIN_I23_N_227
ADC_VIN
ADC_CLK_P_227
ADC_CLK_N_227
ADC_CLK
VCM01_227
VCM23_227
ADC_VCM
XCZU27DR_FSVE1156
U1L
TX_00_P N2
TX_00_N N1
TX_01_P L2
TX_01_N L1
TX_02_P J2
TX_02_N J1
TX_03_P G2
TX_03_N G1
DAC_REFCLK228R_P L5
DAC_REFCLK228R_N L4
DAC_SYSREF_P N5
DAC_SYSREF_N N4
R8
2.49K
F6
GND
DAC_VOUT0_P_228
DAC_VOUT0_N_228
DAC_VOUT1_P_228
DAC_VOUT1_N_228
DAC_VOUT2_P_228
DAC_VOUT2_N_228
DAC_VOUT3_P_228
DAC_VOUT3_N_228
DAC_VOUT
DAC_CLK_P_228
DAC_CLK_N_228
DAC_CLK
SYSREF_P_228
SYSREF_N_228
DAC_SYSREF
DAC_REXT_228
DAC_REXT
XCZU27DR_FSVE1156
U1M
TX_04_P E2
TX_04_N E1
TX_05_P C2
TX_05_N C1
TX_06_P B4
TX_06_N A4
TX_07_P B6
TX_07_N A6
DAC_REFCLK229R_P J5
DAC_REFCLK229R_N J4
DAC_VOUT0_P_229
DAC_VOUT0_N_229
DAC_VOUT1_P_229
DAC_VOUT1_N_229
DAC_VOUT2_P_229
DAC_VOUT2_N_229
DAC_VOUT3_P_229
DAC_VOUT3_N_229
DAC_VOUT
DAC_CLK_P_229
DAC_CLK_N_229
DAC_CLK
XCZU27DR_FSVE1156
ADC225_CLK_P C37
ADC225_CLK_N C39
0.1uF ADC_REFCLK225R_P
0.1uF ADC_REFCLK225R_N
ADC226_CLK_P C41
ADC226_CLK_N C43
0.1uF ADC_REFCLK226R_P
0.1uF ADC_REFCLK226R_N
ADC224_CLK_P C45
ADC224_CLK_N C46
0.1uF ADC_REFCLK224R_P
0.1uF ADC_REFCLK224R_N
ADC227_CLK_P C47
ADC227_CLK_N C48
0.1uF ADC_REFCLK227R_P
0.1uF ADC_REFCLK227R_N
DAC229_CLK_P C38
DAC229_CLK_N C40
0.1uF DAC_REFCLK229R_P
0.1uF DAC_REFCLK229R_N
DAC228_CLK_P C42
DAC228_CLK_N C44
0.1uF DAC_REFCLK228R_P
0.1uF DAC_REFCLK228R_N
TX_00_P
TX_00_N
C6
C8
100nF
TX0_R_P
TX0_R_N
T2
SECONDARY NOT_HAVE
NOT_USED PRIMARY
SECONDARY_DOT PRIMARY_DOT
TC1-1-13MX+
GND
J2
MMCX
TX_01_P
TX_01_N
C10
C12
TX1_R_P
TX1_R_N
T4
J4
TX_02_P
TX_02_N
C14
C16
TX2_R_P
TX2_R_N
T6
J6
TX_03_P
TX_03_N
C18
C20
TX3_R_P
TX3_R_N
T8
J8
TX_04_P
TX_04_N
C22
C24
TX4_R_P
TX4_R_N
T10
J10
TX_05_P
TX_05_N
C26
C28
TX5_R_P
TX5_R_N
T12
J12
TX_06_P
TX_06_N
C30
C32
TX6_R_P
TX6_R_N
T14
J14
TX_07_P
TX_07_N
C34
C36
TX7_R_P
TX7_R_N
T16
J16
RX_00_P
RX_00_N
C5
C7
RX0_R_P
RX0_R_N
T1
J1
MMCX
RX_01_P
RX_01_N
C9
C11
RX1_R_P
RX1_R_N
T3
J3
RX_02_P
RX_02_N
C13
C15
RX2_R_P
RX2_R_N
T5
J5
RX_03_P
RX_03_N
C17
C19
RX3_R_P
RX3_R_N
T7
J7
RX_04_P
RX_04_N
C21
C23
RX4_R_P
RX4_R_N
T9
J9
RX_05_P
RX_05_N
C25
C27
RX5_R_P
RX5_R_N
T11
J11
RX_06_P
RX_06_N
C29
C31
RX6_R_P
RX6_R_N
T13
J13
RX_07_P
RX_07_N
C33
C35
RX7_R_P
RX7_R_N
T15
J15
Title
Size
A2
Number
Revision
Date: 4/08/2026
Sheet of
File:
Drawn By:

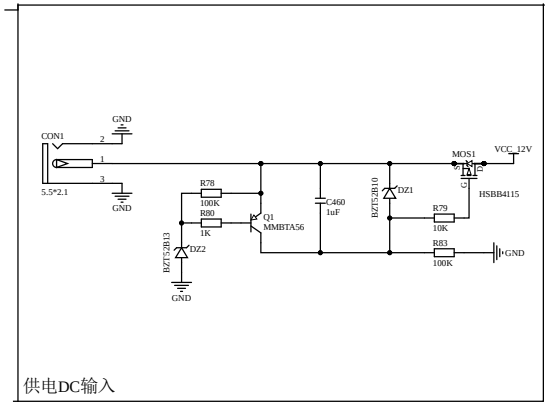

GND
CON1
2
1
3
5.5*2.1
GND
R78
100K
R80
1K
Q1
MMBTA56
C460
1uF
BZT52B10
DZ1
MOS1
VCC_12V
HSBB4115
R79
10K
R83
100K
GND
BZT52B13
DZ2
GND


供电DC输入


Title		
Size A3	Number	Revision
Date: 4/08/2026		Sheet of
File:		Drawn By:

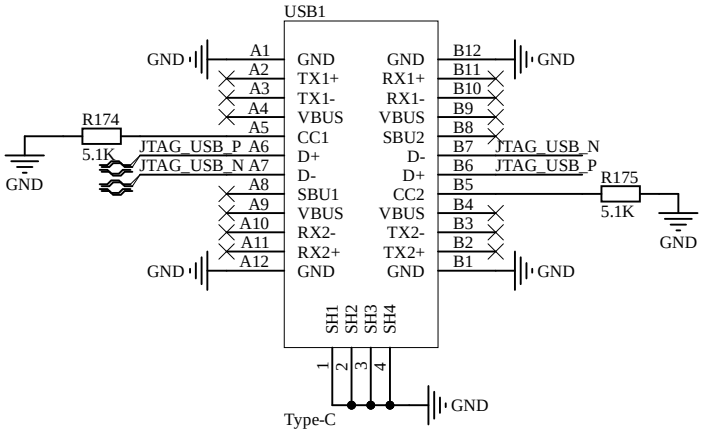


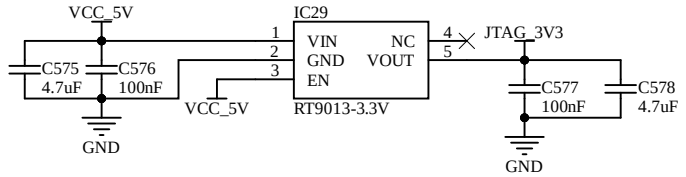


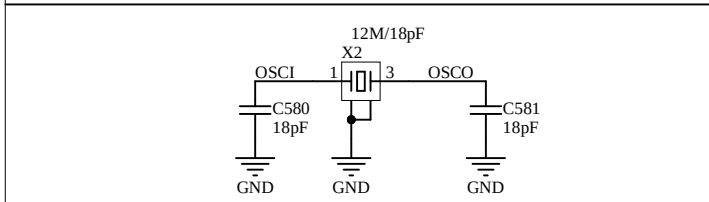


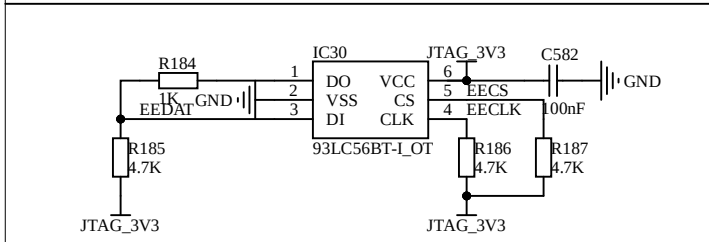

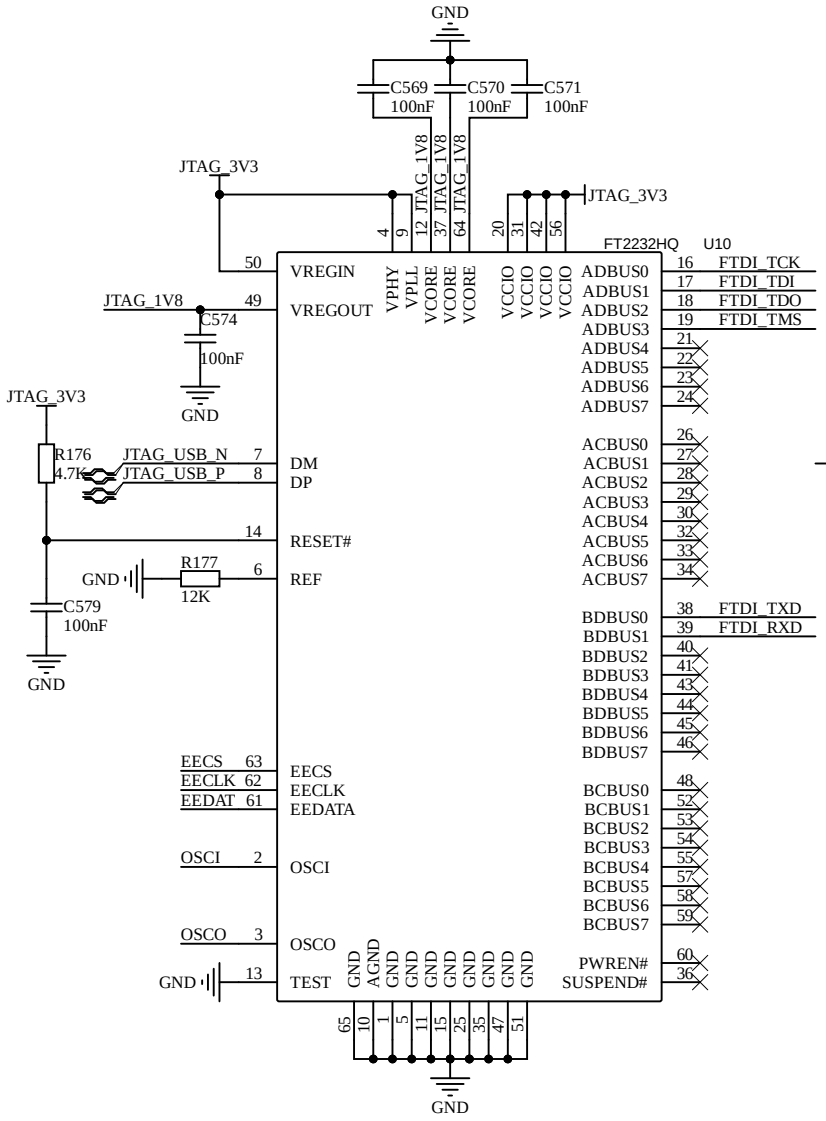


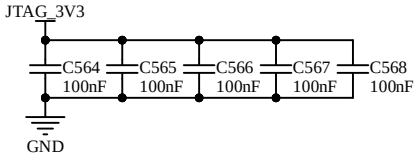




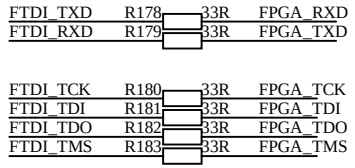



Title		
Size: A4	Number	Revision
Date: 4/08/2026		Sheet of
File:		Drawn By:

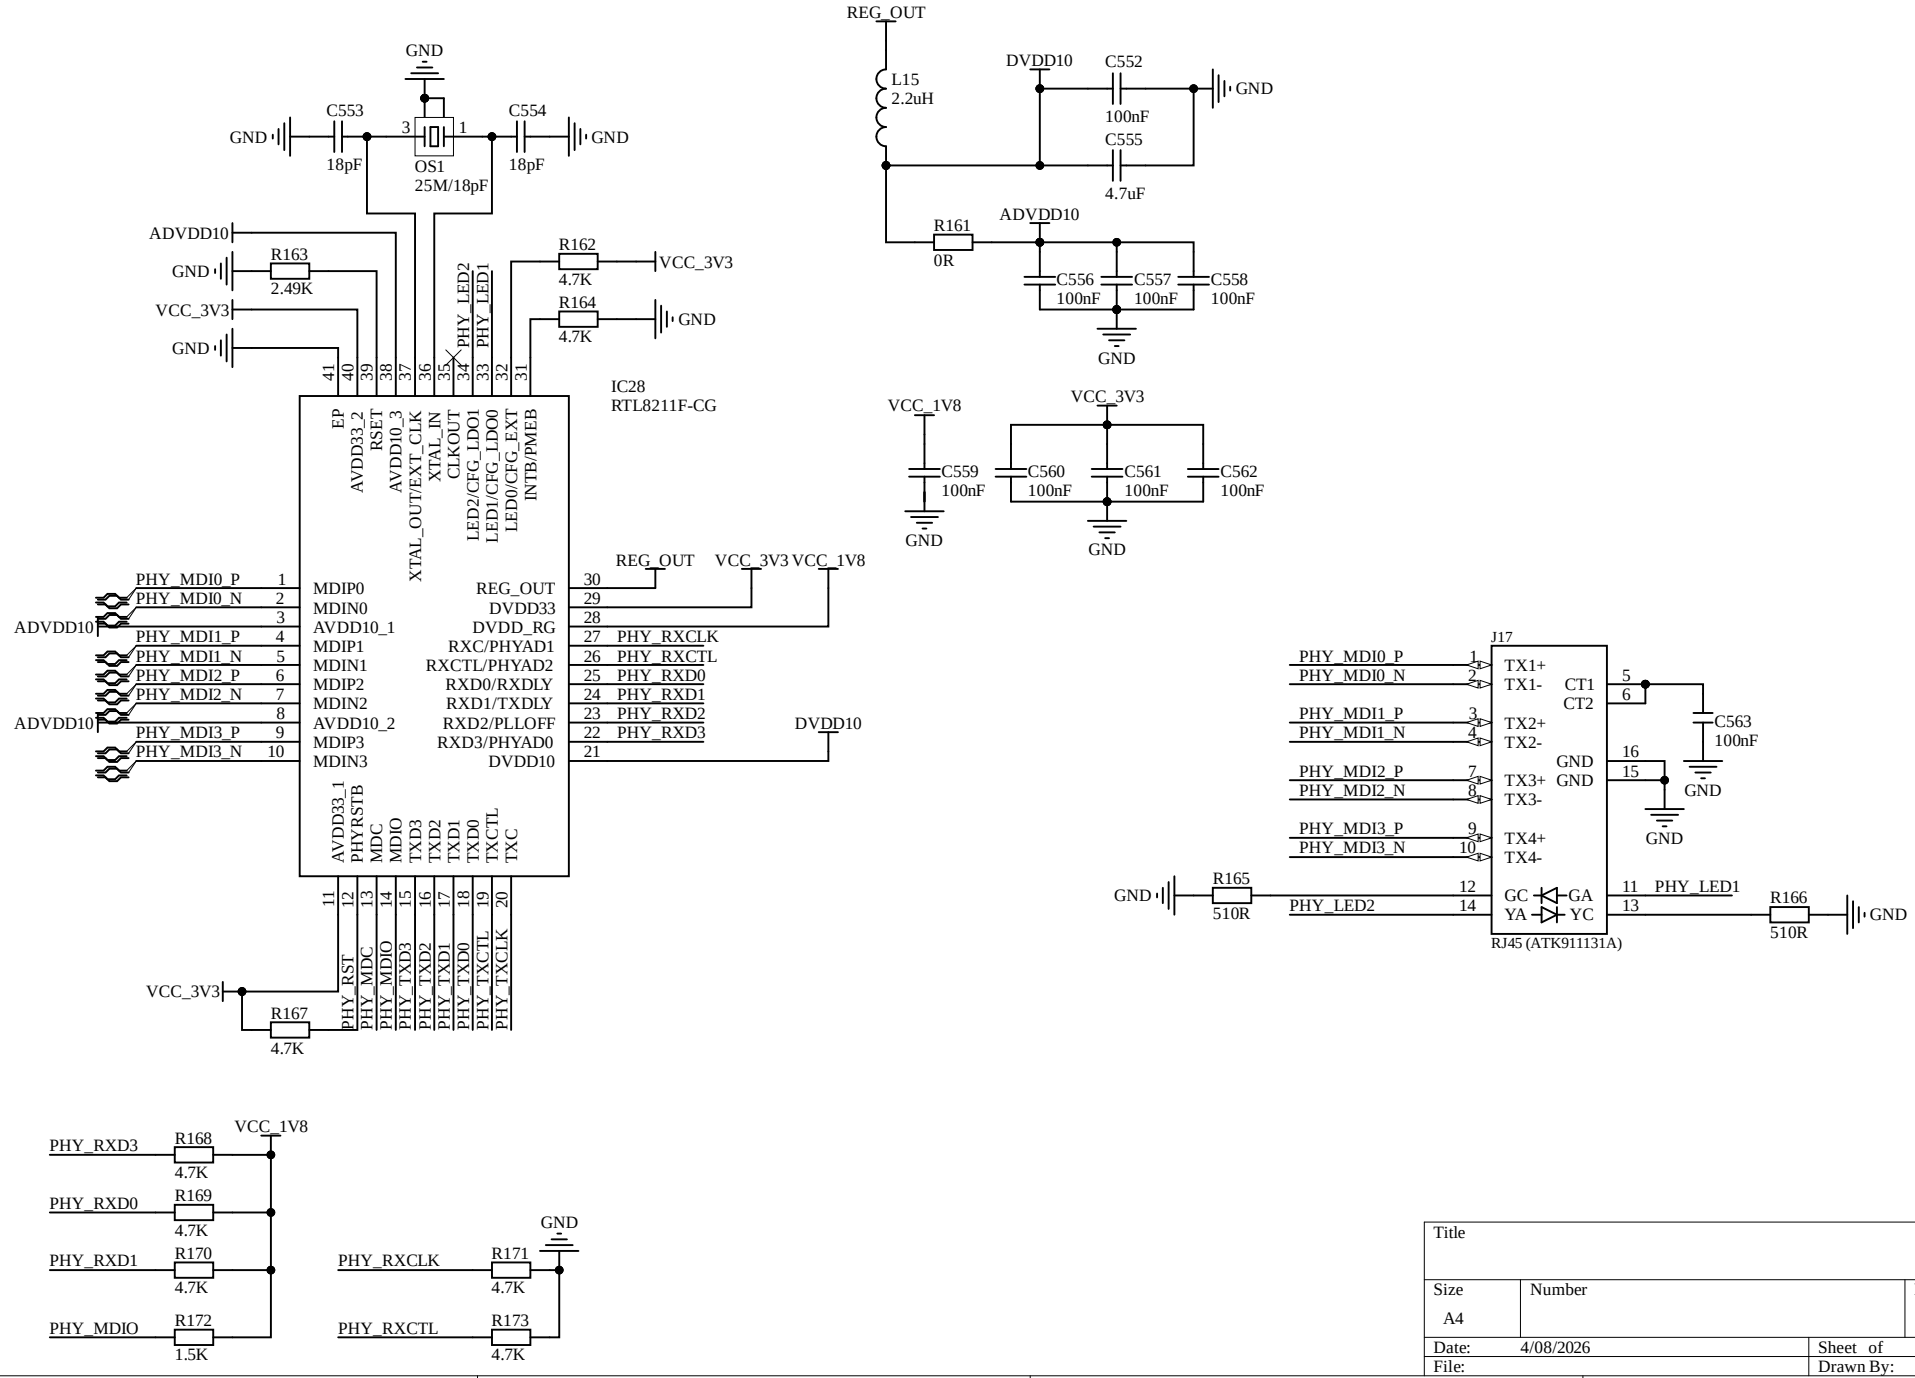
GND
C553
18pF
OS1
25M/18pF
C554
18pF
GND
ADVDD10
R163
2.49K
VCC_3V3
R162
4.7K
R164
4.7K
PHY_LED2
PHY_LED1
IC28
RTL8211F-CG
EP
AVDD33_2
RSET
AVDD10_3
XTAL_OUT/EXT_CLK
XTAL_IN
CLKOUT
LED2/CFG_LDO1
LED1/CFG_LDO0
LED0/CFG_EXT
INTB/PMEB
MDIP0
MDIN0
AVDD10_1
MDIP1
MDIN1
MDIP2
MDIN2
AVDD10_2
MDIP3
MDIN3
REG_OUT
DVDD33
DVDD_RG
RXC/PHYAD1
RXCTL/PHYAD2
RXD0/RXDLY
RXD1/TXDLY
RXD2/PLLOFF
RXD3/PHYAD0
DVDD10
AVDD33_1
PHYRSTB
MDC
MDIO
TXD3
TXD2
TXD1
TXD0
TXCTL
TXC
PHY_MDI0_P
PHY_MDI0_N
PHY_MDI1_P
PHY_MDI1_N
PHY_MDI2_P
PHY_MDI2_N
PHY_MDI3_P
PHY_MDI3_N
PHY_RXCLK
PHY_RXCTL
PHY_RXD0
PHY_RXD1
PHY_RXD2
PHY_RXD3
VCC_1V8
R167
4.7K
PHY_RST
PHY_MDC
PHY_MDIO
PHY_TXD3
PHY_TXD2
PHY_TXD1
PHY_TXD0
PHY_TXCTL
PHY_TXCLK
REG_OUT
L15
2.2uH
DVDD10
C552
100nF
C555
4.7uF
R161
0R
ADVDD10
C556
100nF
C557
100nF
C558
100nF
VCC_1V8
C559
100nF
VCC_3V3
C560
100nF
C561
100nF
C562
100nF
J17
TX1+
TX1-
CT1
CT2
TX2+
TX2-
GND
TX3+
TX3-
TX4+
TX4-
GC
YA
GA
YC
C563
100nF
R165
510R
R166
510R
RJ45 (ATK911131A)
R168
4.7K
R169
4.7K
R170
4.7K
R172
1.5K
R171
4.7K
R173
4.7K
Title
Size
A4
Number
Revision
Date:
4/08/2026
Sheet of
File:
Drawn By:

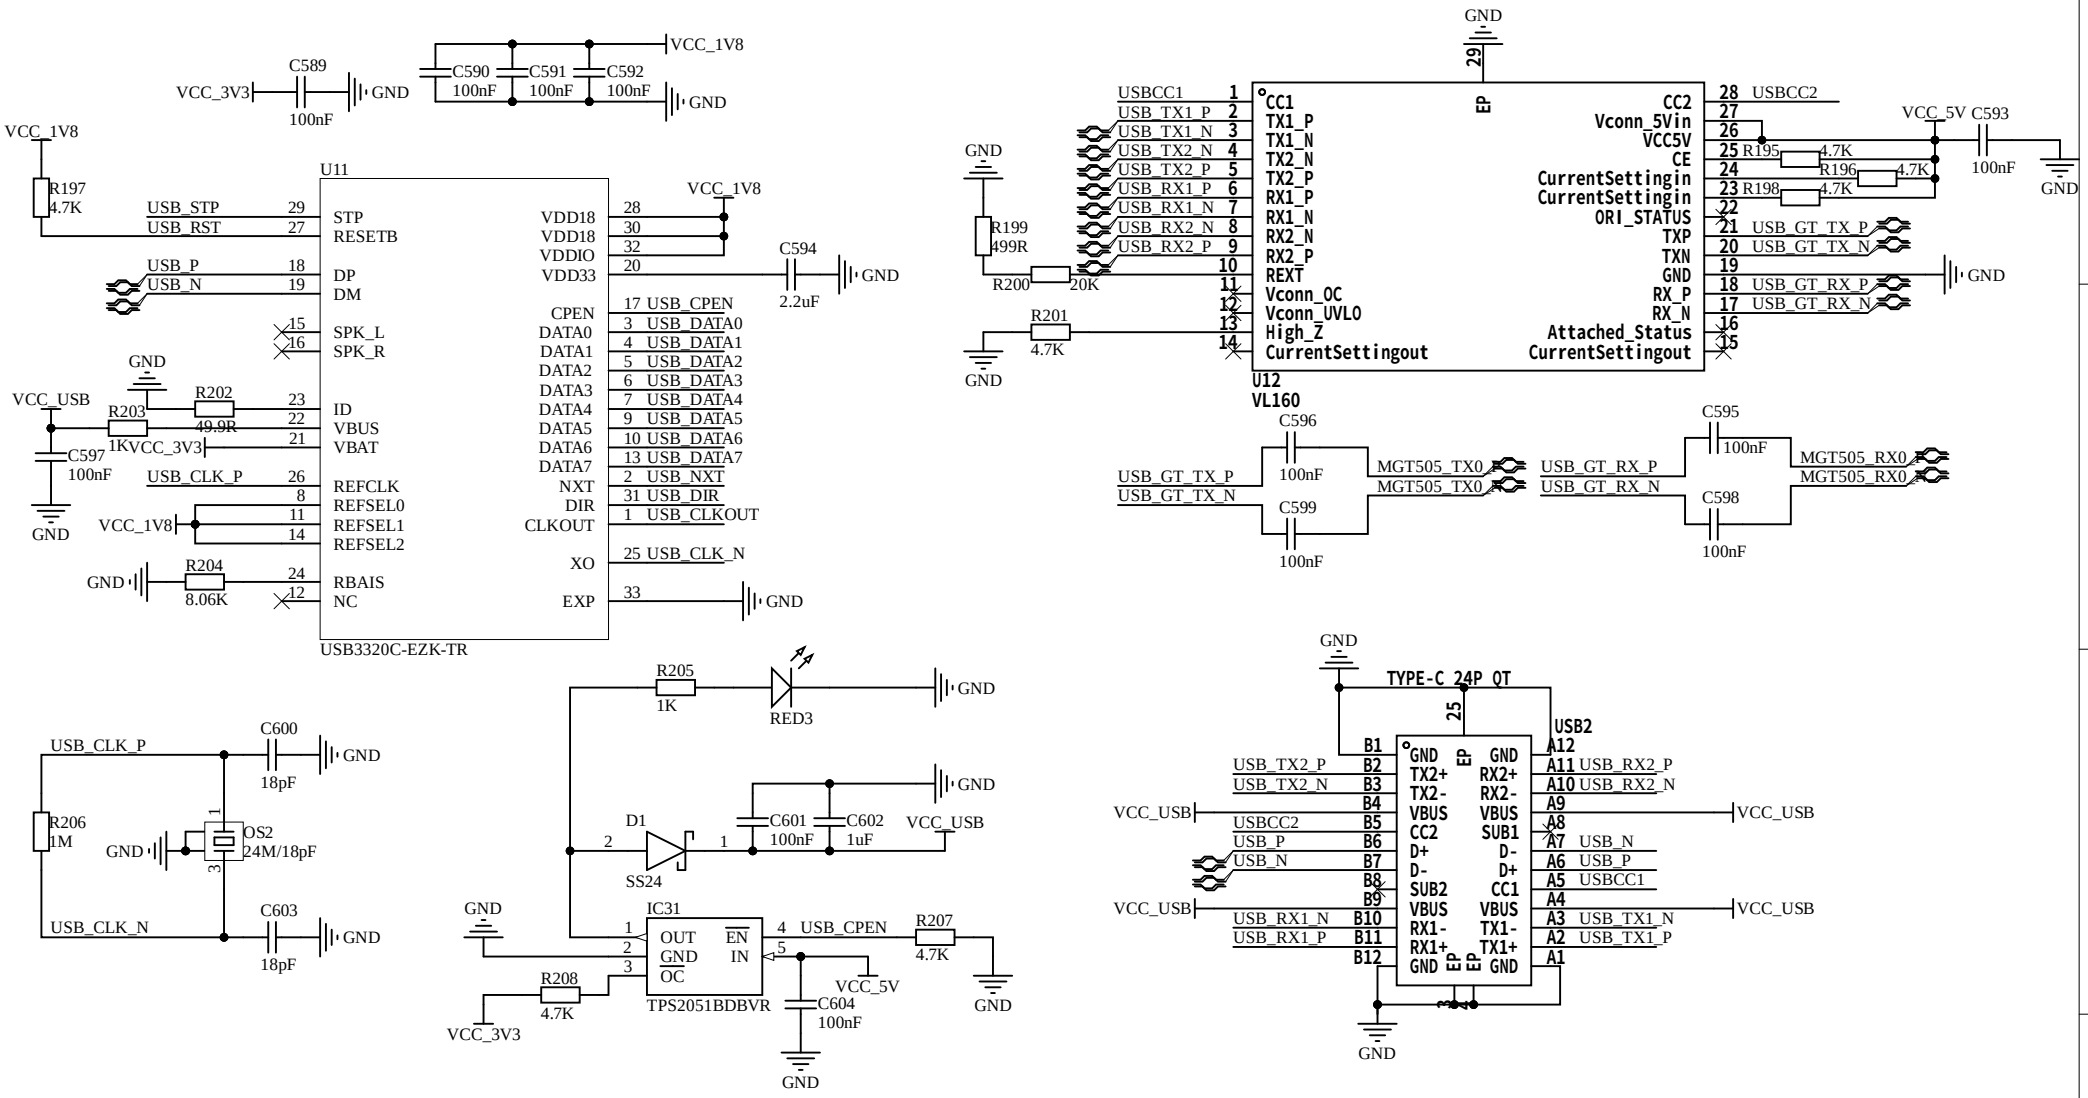



Title		
Size A4	Number	Revision
Date: 4/08/2026		Sheet of
File:		Drawn By:

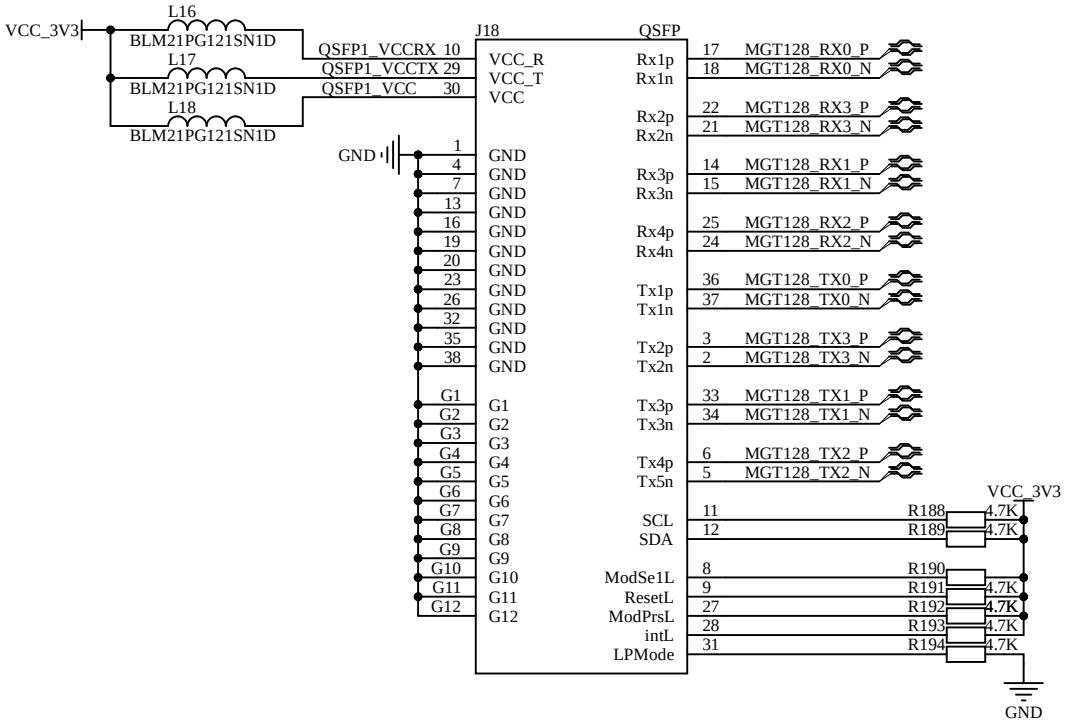

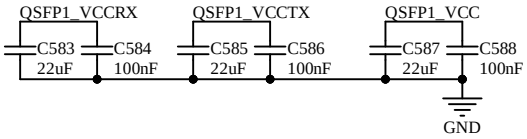


Title		
Size: A4	Number	Revision
Date: 4/08/2026		Sheet of
File:		Drawn By:

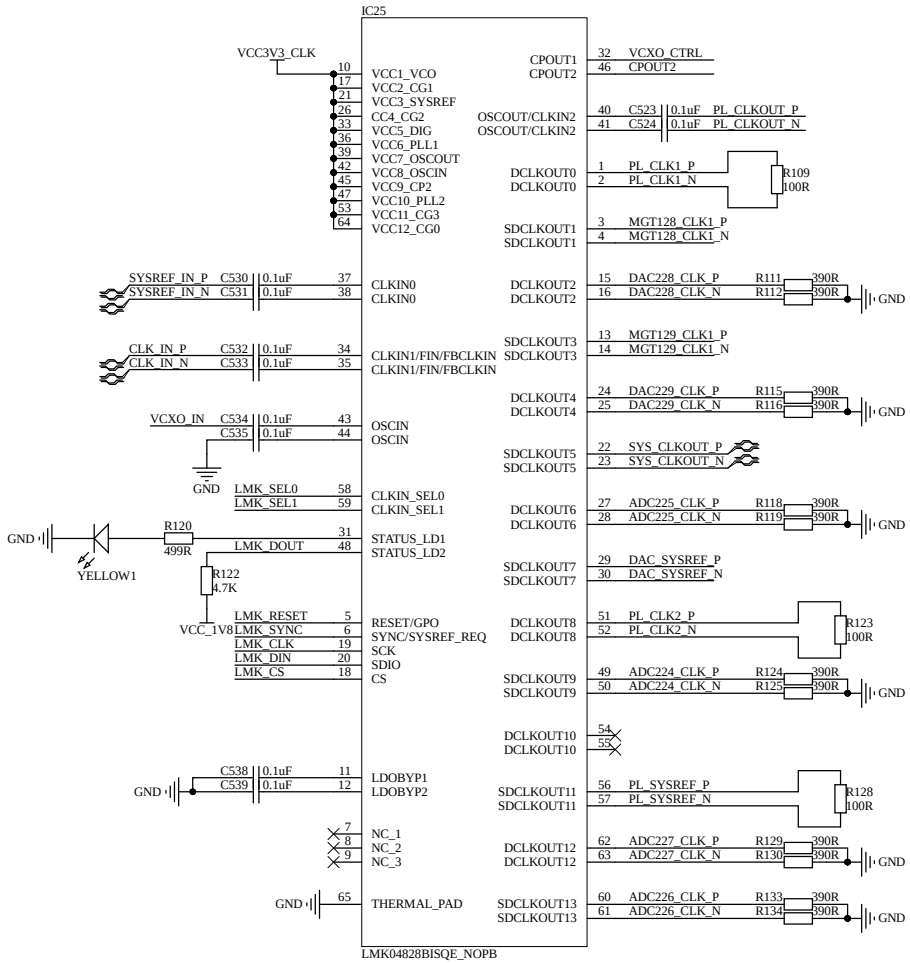

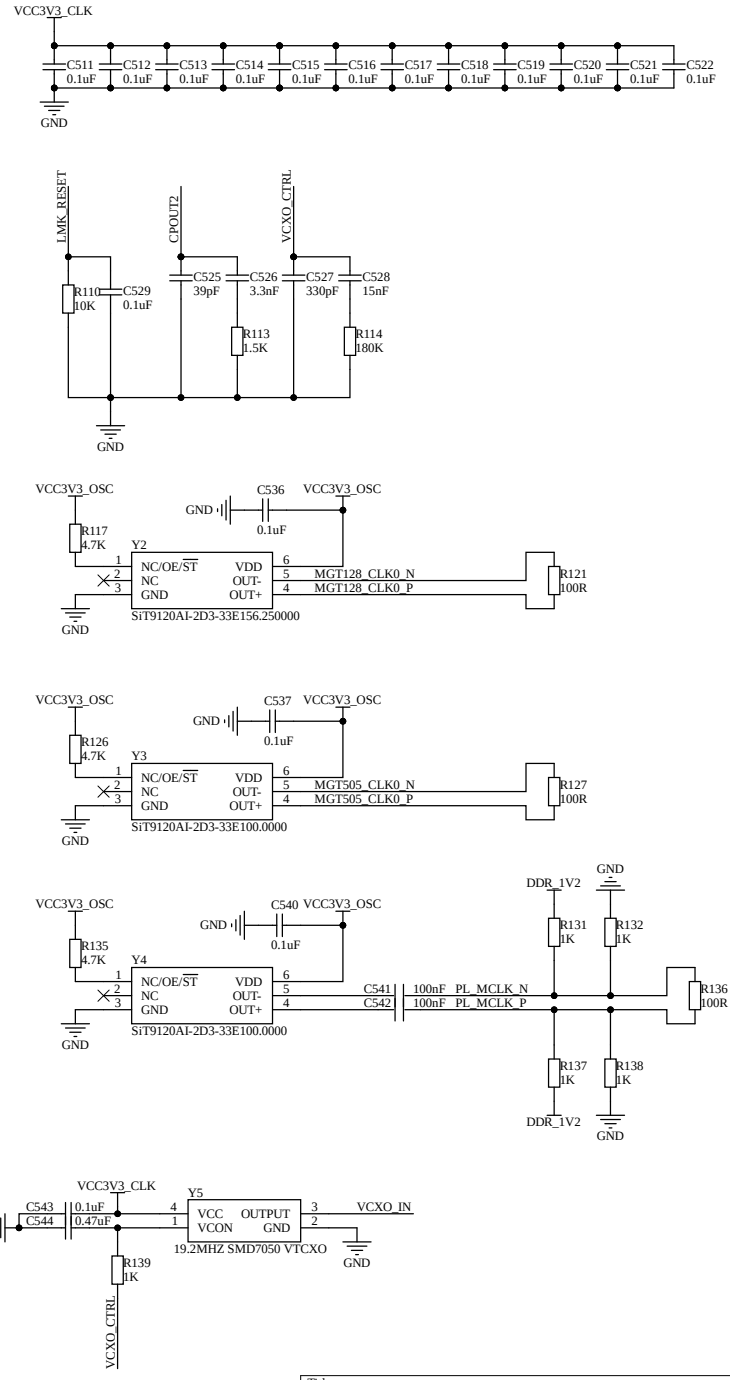


Title		
Size: A3	Number	Revision
Date: 4/08/2026		Sheet of
File:		Drawn By:

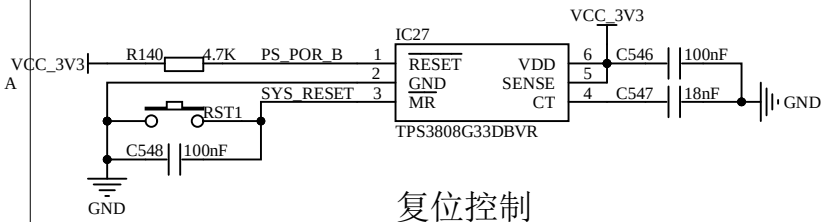


复位控制


PSMODE[3:0]
JTAG 0000
QSPI 0010
EMMC 0110
SD30 1110

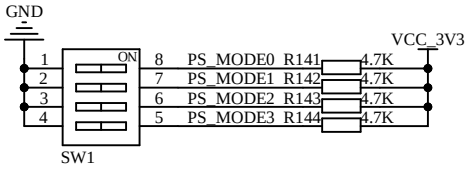


启动模式

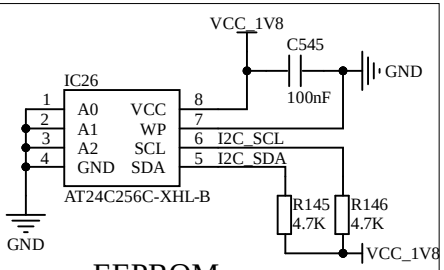


EEPROM

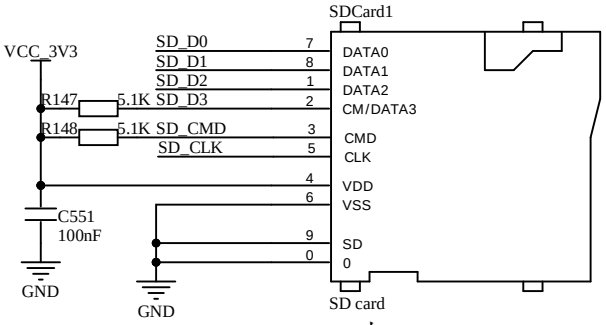


TF卡




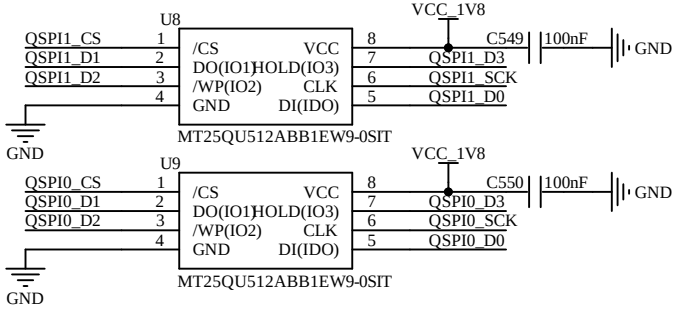

FLASH

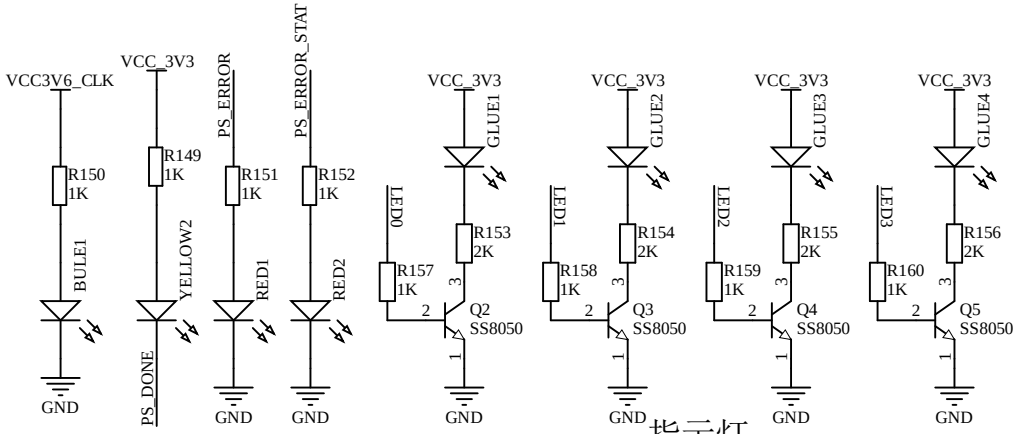



指示灯




风扇

Title		
Size A4	Number	Revision
Date: 4/08/2026		Sheet of
File:		Drawn By:

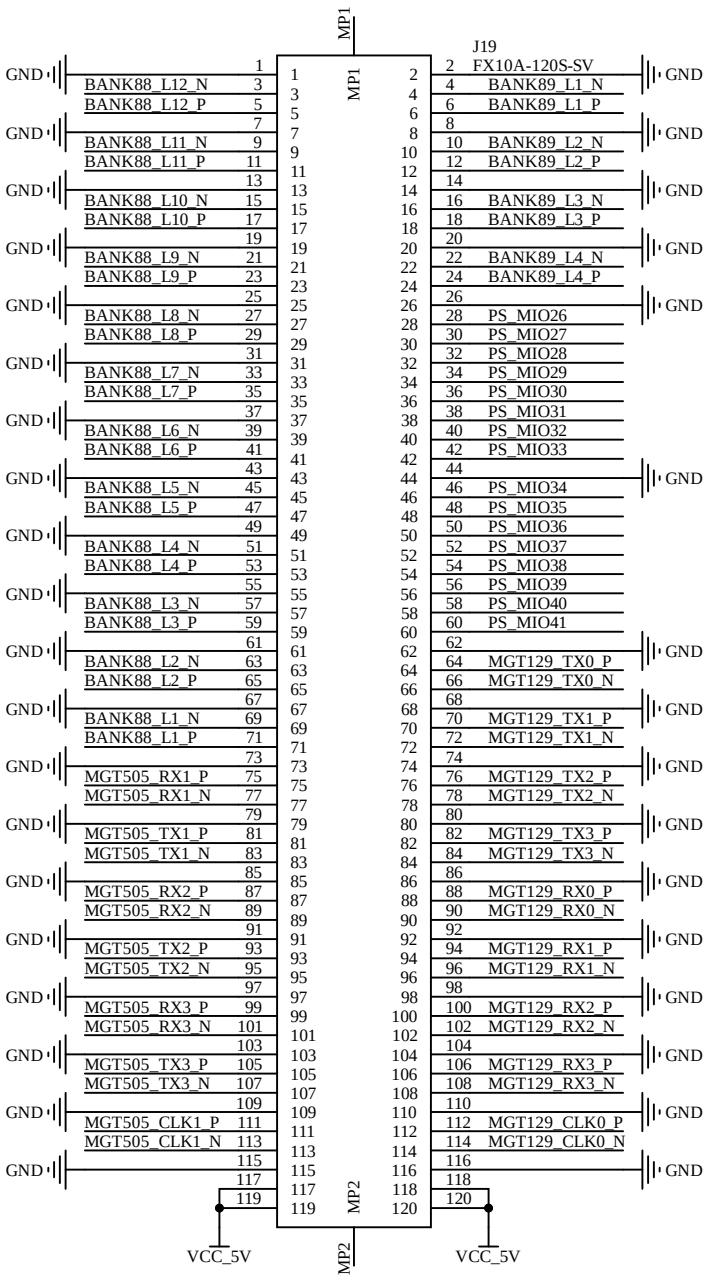

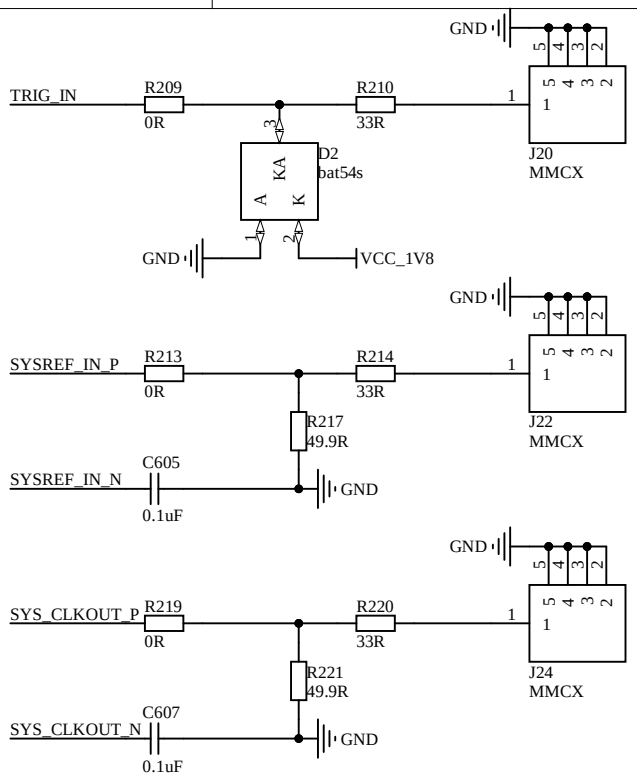

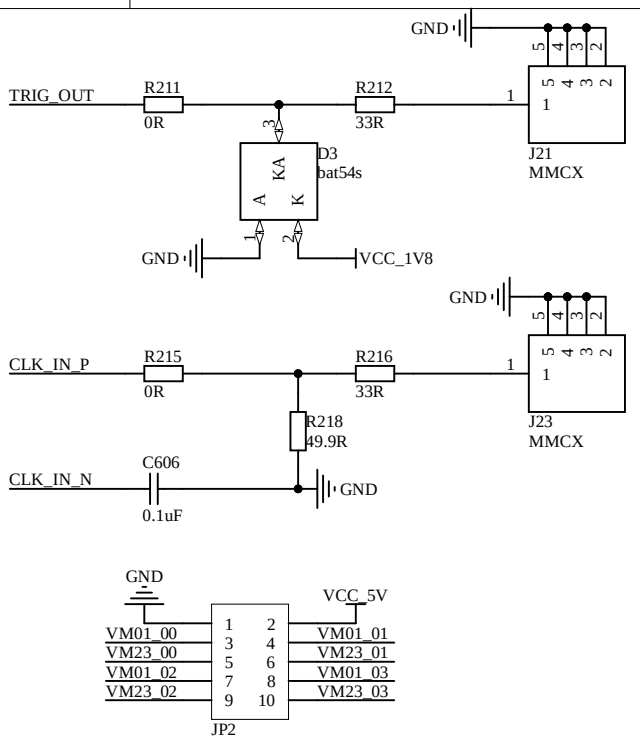

Title		
Size: A4	Number	Revision
Date: 4/08/2026		Sheet of
File:		Drawn By: