

onero Actuator User Guide

Safety and Precautions





- Operate the actuator strictly within the specified environmental conditions and the maximum allowable winding temperature range. Exceeding these limits will cause permanent and irreversible damage to the product.
- Prevent foreign objects from entering the rotor assembly, as this will cause abnormal operation of the actuator.
- Before use, inspect all components for integrity. Discontinue use immediately if any parts are missing, aged, or damaged.
- Ensure all electrical connections are correct and that the actuator is properly and securely mounted.
- Do not touch the rotating parts or electronic components of the actuator during operation to prevent accidents.
- The actuator may become hot during high-torque output. Take care to avoid burns.
- Do not disassemble the actuator. Unauthorized disassembly will adversely affect its control precision and may lead to operational failure.

Product Features

- All-in-one joint module with a compact structure
- Compact size, superior torque output
- High-precision 21-bit encoder
- Dual encoder system: provides absolute single-turn positioning of the output shaft; position is maintained during power loss
- Comprehensive protection: over-temperature, over-voltage, over-current, under-voltage, and timeout
- High-speed CAN 2.0 communication interfaces
- Multiple control modes: position, velocity, torque, and MIT hybrid control mode
- Wide power supply range: supports 20V to 55V input
- Flexible wiring: side-exit and rear-exit options for easy mechanical integration

XD5746-1/2

Dimensions

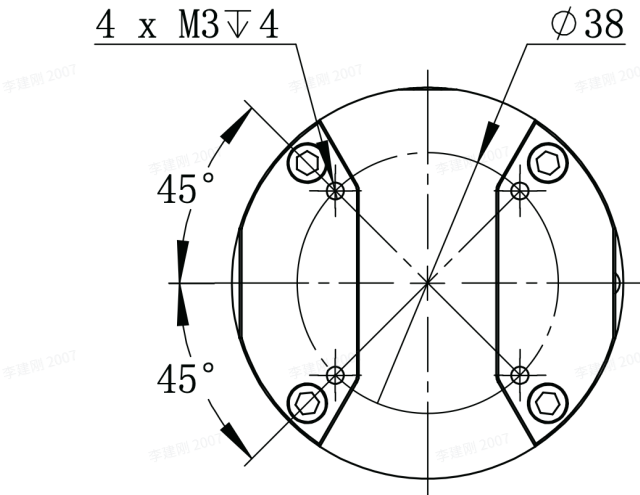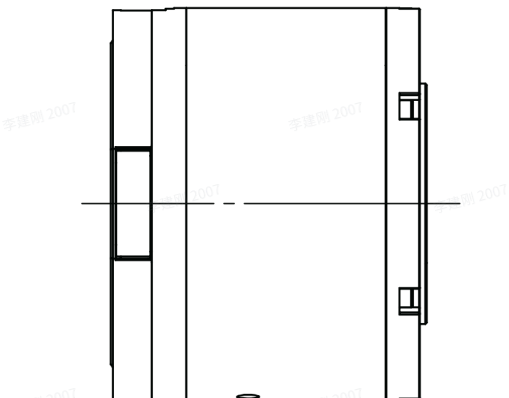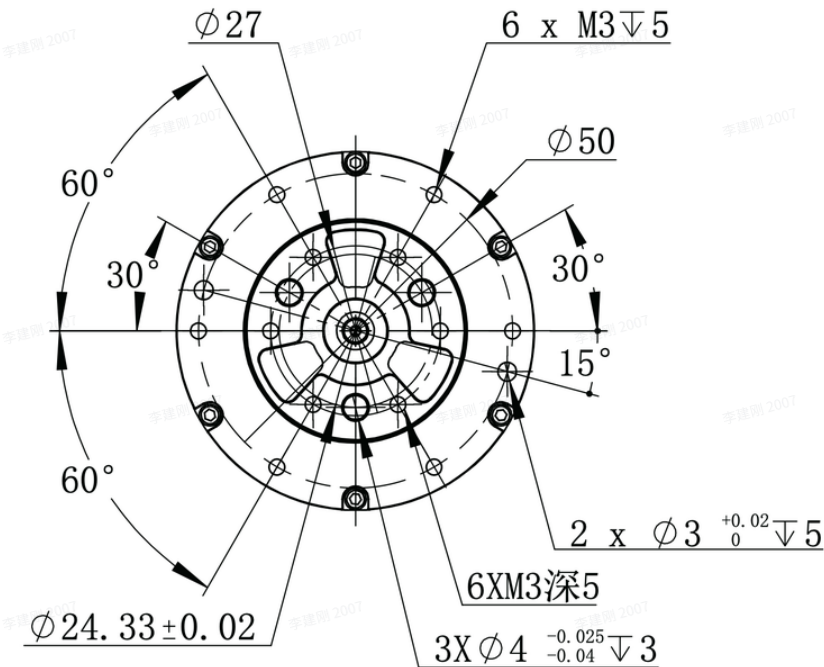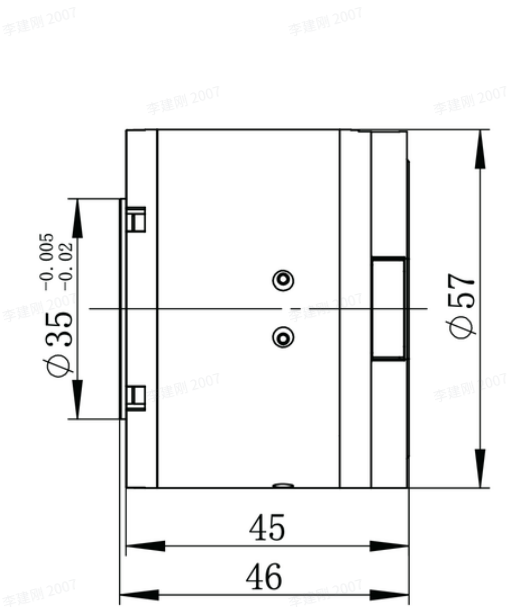

李達剛 2007

李達剛 2007

李達剛 2007

李達剛 2007

3

李達剛 2007

李達剛 2007

李達剛 2007

李達剛 2007

3


李達剛 2007

李達剛 2007

李達剛 2007

李達剛 2007

3

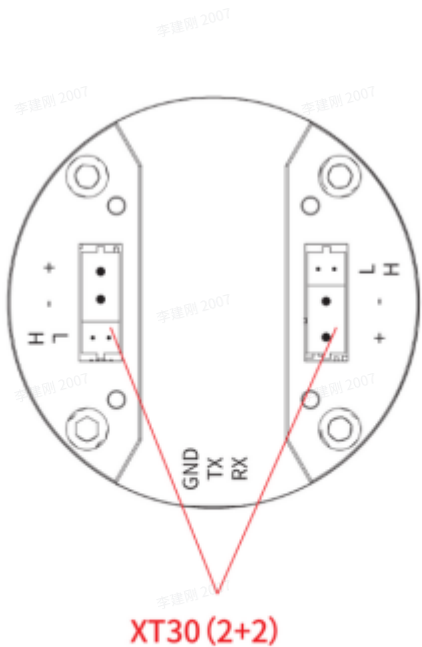


XT30 (2+2)

Axial cable exit

XD5746-2

Debugging port

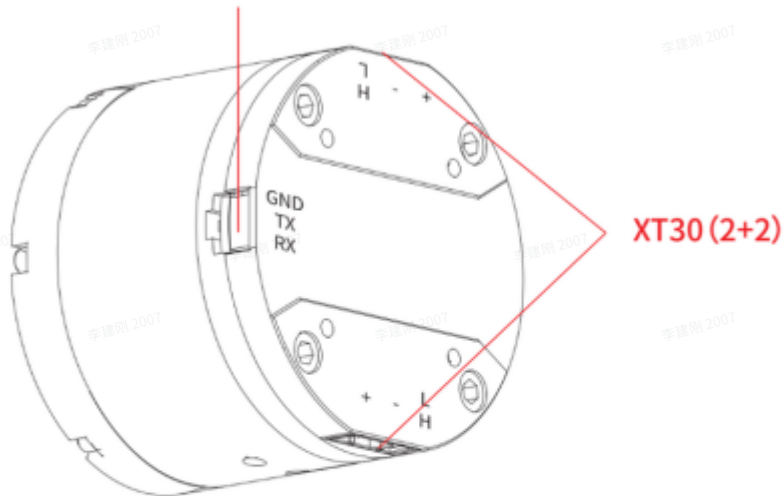

XT30 (2+2)

Radial cable exit

XD5746-1

Technical Specifications

李達剛 2007

李達剛 2007

李達剛 2007

李達剛 2007

3

李達剛 2007

李達剛 2007

李達剛 2007

李達剛 2007


李達剛 2007



Category	Item	Value
Performance Parameters	Rated Voltage	48V
	Rated Torque	3N.m
	Rated Rotational Speed	120rpm
	Rated Current	3.7A
	Operating Voltage Range	20V~55V
	Peak Torque	7N.m
	Maximum No-Load Rotational Speed	200rpm
	Peak Current	7.4A
	Number of Pole Pairs	14
	Gear Ratio	10:1
	Rotational Backlash	10 arcminutes
Mechanical Parameters	Diameter	57mm
	Height	46mm

	Total Weight	320g
	Operating Temperature	5-50°C
	Operating Humidity	RH 35% to 80%, non-condensing
Interface Parameters	Electrical Connector	CAN@1Mbps
	Communication Terminal	XT30(2+2)

XD5757-1/2

Dimensions

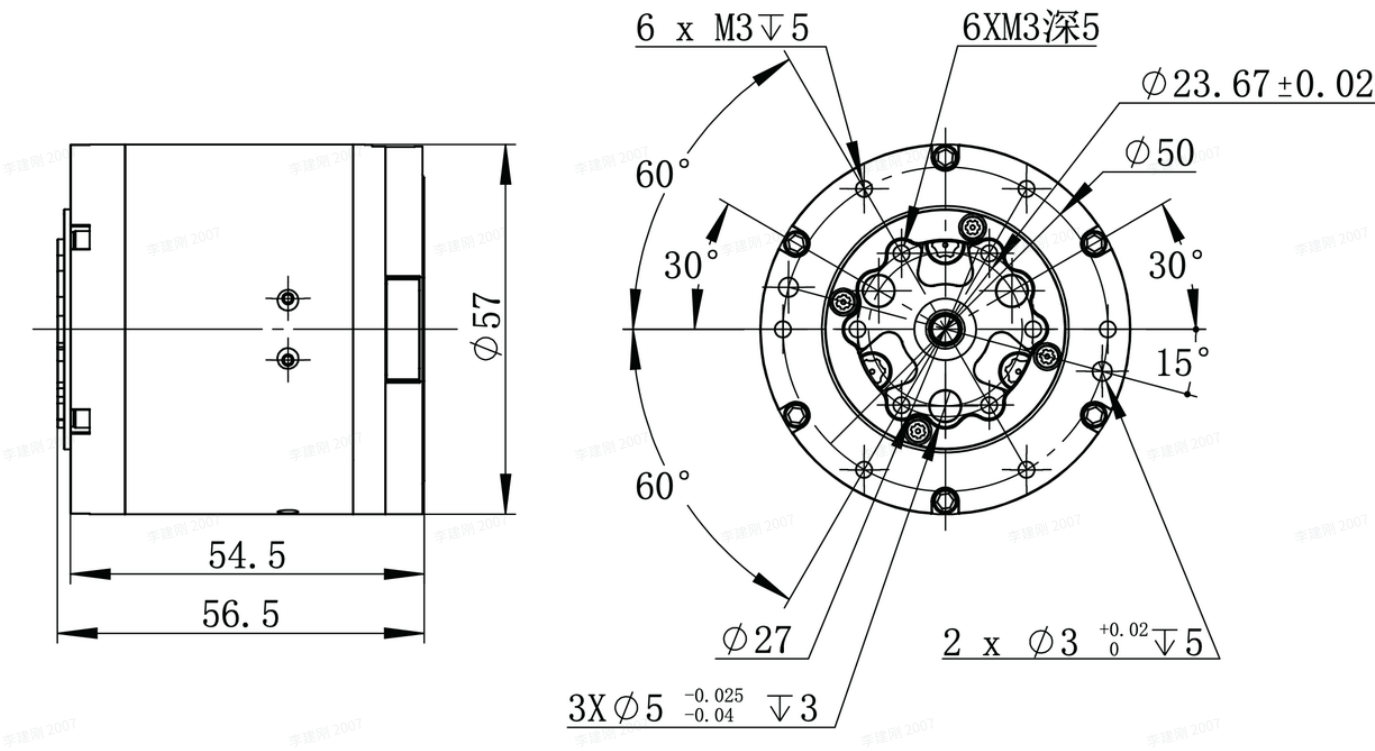

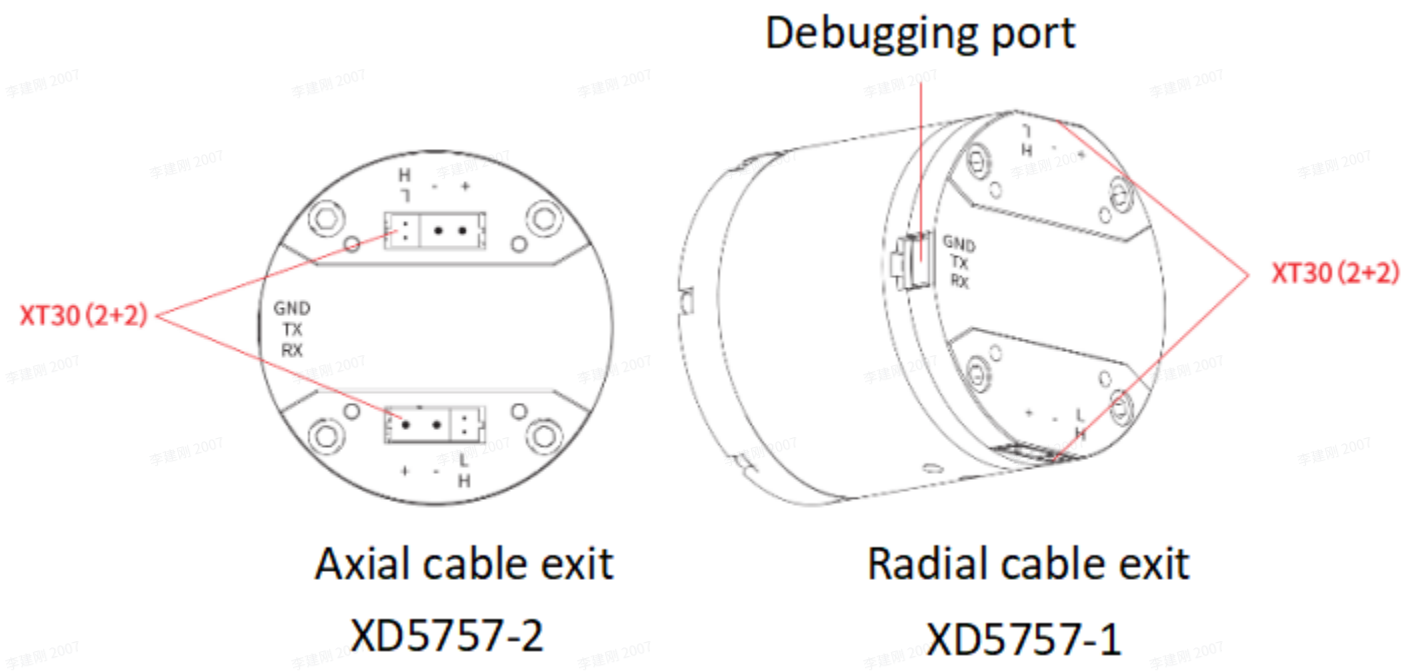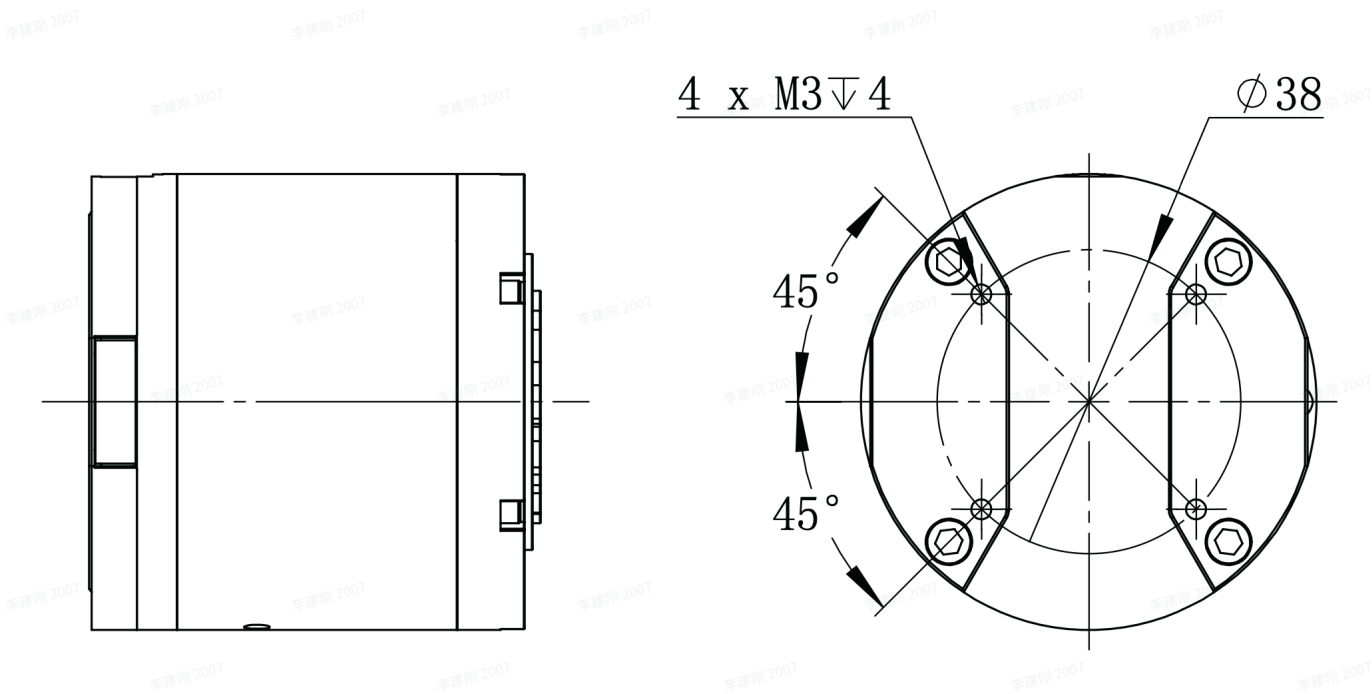

Technical Specifications

Category	Item	Value
Performance Parameters	Rated Voltage	48V
	Rated Torque	15N.m
	Rated Rotational Speed	25rpm
	Rated Current	3.7A

	Operating Voltage Range	20V~55V
	Peak Torque	30N.m
	Maximum No-Load Rotational Speed	200rpm
	Peak Current	7.4A
	Number of Pole Pairs	14
	Gear Ratio	48.19:1
	Rotational Backlash	20 arcminutes
Mechanical Parameters	Diameter	57mm
	Height	56.5mm
	Total Weight	390g
	Operating Temperature	5-50°C
	Operating Humidity	RH 35% to 80%, non-condensing
Interface Parameters	Electrical Connector	CAN@1Mbps
	Communication Terminal	XT30(2+2)

Communication Protocol

Click the link below to view the "Actuator Communication Protocol":https://github.com/OpenWonderLabs/RobotDoc/blob/main/en/actuator/Actuator_Communication_Protocol.pdf

Debugging Tool

Click the link below to view the "Debug Tool Quick Guide":https://github.com/OpenWonderLabs/RobotDoc/blob/main/en/tools/Debug_Tool_Quick_Guide.pdf Debug software download:https://github.com/OpenWonderLabs/RobotDoc/blob/main/tools/motor_debug_tool_v1.0.2.zip

Mechanical Drawings

- XD5746-1

- 2D Drawing:
https://github.com/OpenWonderLabs/RobotDoc/blob/main/cad/actuator/XD5746-1_2d.pdf
- 3D Drawing:
https://github.com/OpenWonderLabs/RobotDoc/blob/main/cad/actuator/XD5746-1_3d.stp
- XD5746-2
 - 2D Drawing:
https://github.com/OpenWonderLabs/RobotDoc/blob/main/cad/actuator/XD5746-2_2d.pdf
 - 3D Drawing:
https://github.com/OpenWonderLabs/RobotDoc/blob/main/cad/actuator/XD5746-2_3d.stp
- XD5757-1
 - 2D Drawing:
https://github.com/OpenWonderLabs/RobotDoc/blob/main/cad/actuator/XD5757-1_2d.pdf
 - 3D Drawing:
https://github.com/OpenWonderLabs/RobotDoc/blob/main/cad/actuator/XD5757-1_3d.stp
- XD5757-2
 - 2D Drawing:
https://github.com/OpenWonderLabs/RobotDoc/blob/main/cad/actuator/XD5757-2_2d.pdf
 - 3D Drawing:
https://github.com/OpenWonderLabs/RobotDoc/blob/main/cad/actuator/XD5757-2_3d.stp