Digital Audio

The mystery behind sampling and reconstruction

Spring 2019 - Audio Tech Talk Series

January 22, 2019

What is audio?

Analog Audio

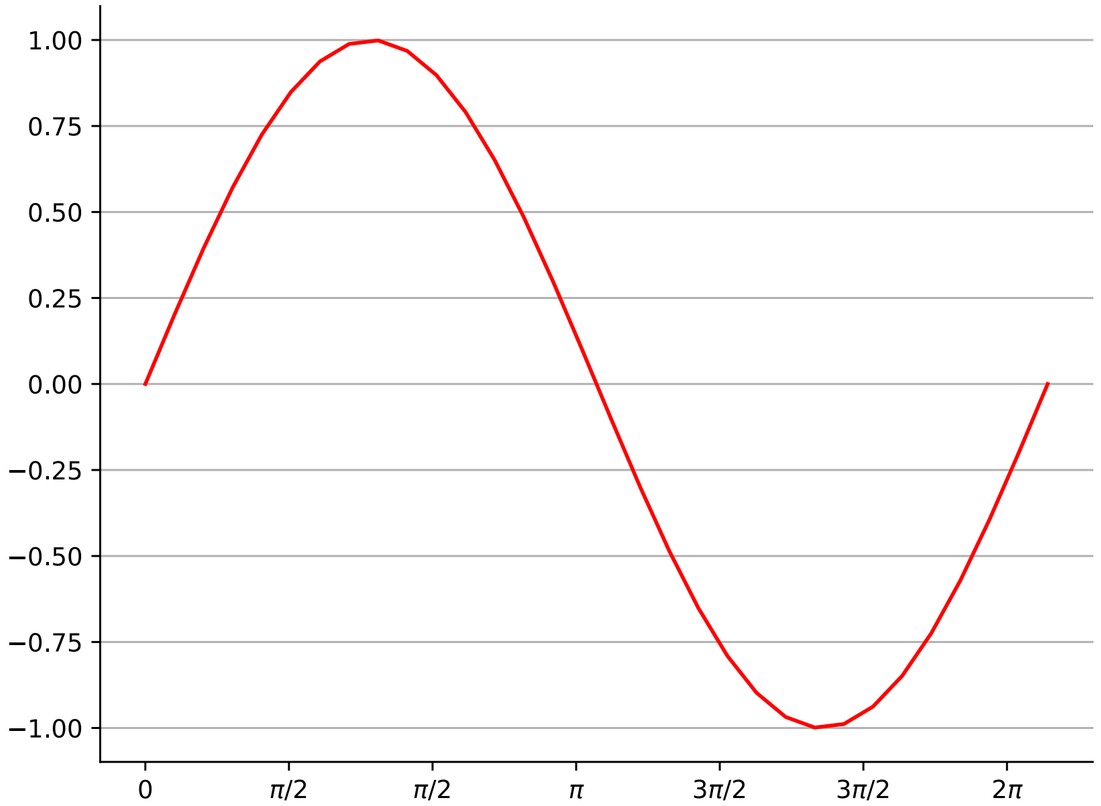

Digital Audio

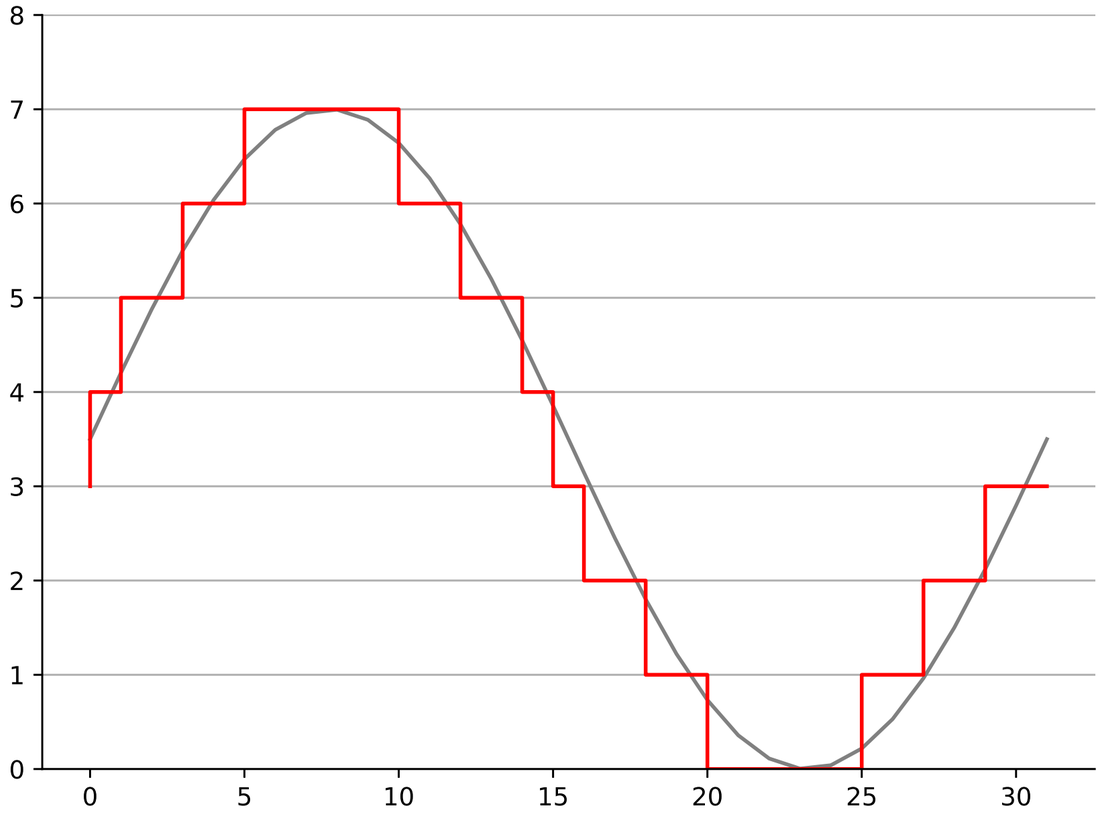

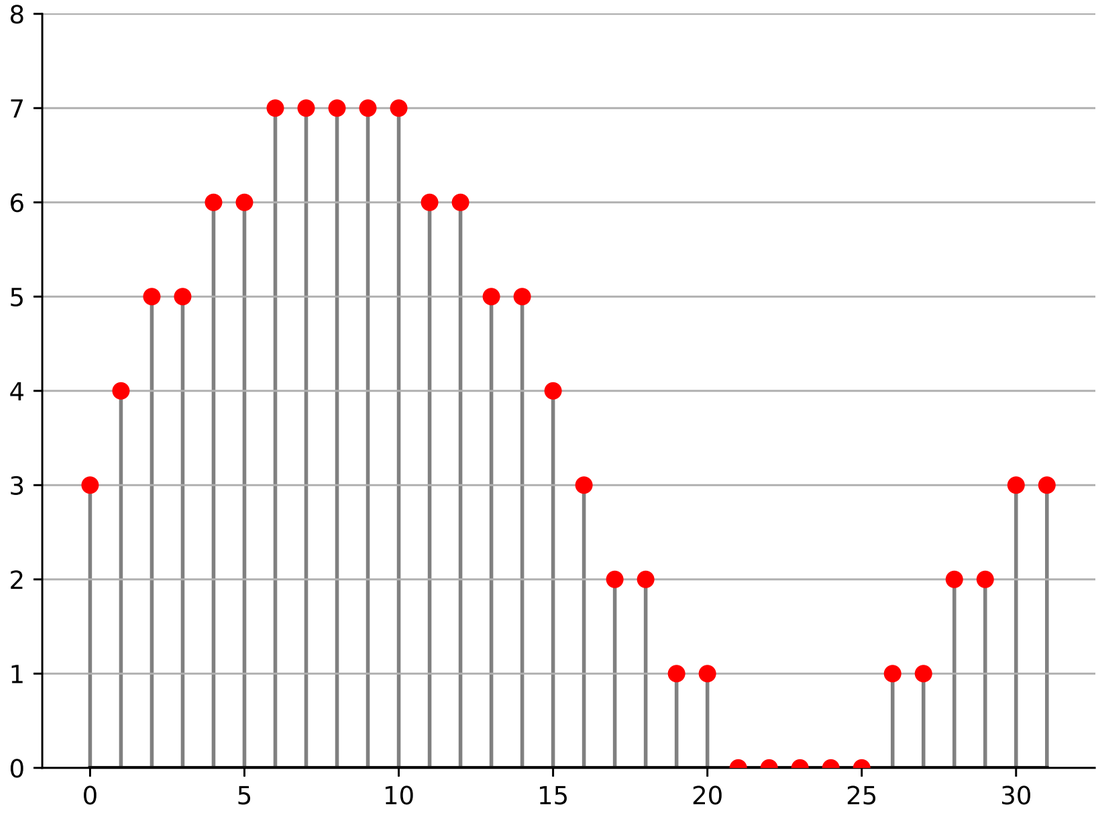
8
7
6
5
4
3
2
1
0
0
5
10
15
20
25
30

Sampling Theorem

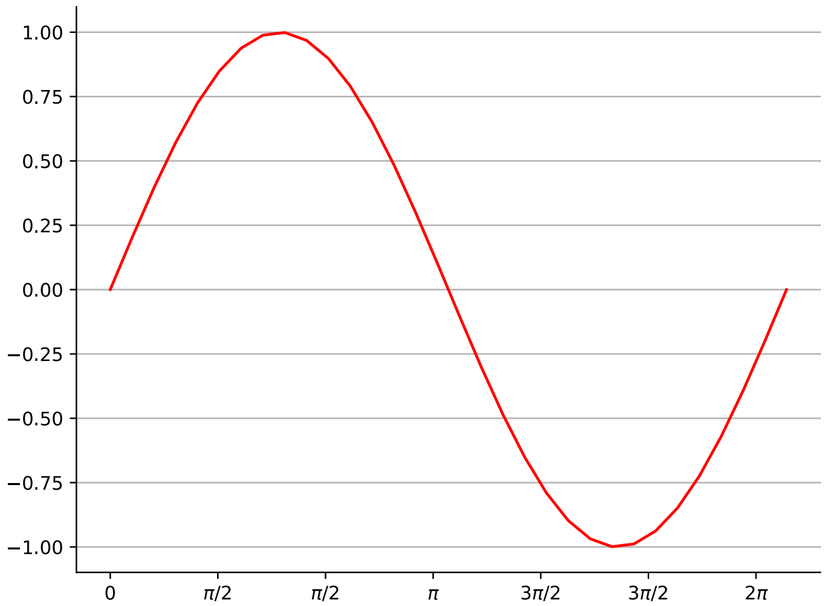

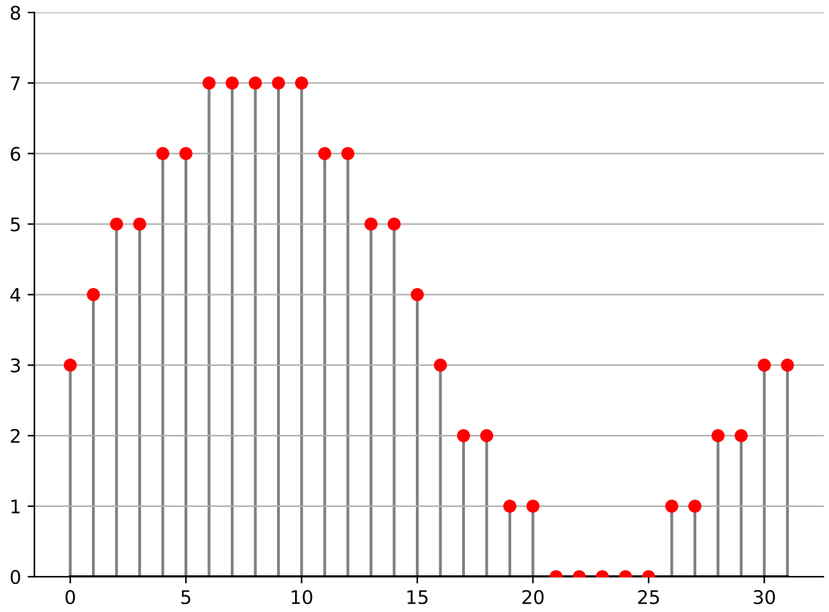

Sampling Theorem

A continuous time signal (analog) can be completed represented by its samples and can be recovered back when sampling frequency $\mathbf{f_s}$ is greater than or equal to the twice the highest frequency component $\mathbf{f_m}$ of the signal. i.e.

$$\mathbf{f_s \geq 2 * f_m}$$

Examples

- Human speech (100 Hz - 4,000 Hz)
- Music (20 Hz - 20,000 Hz)
- Temperatue sensor (0 Hz - 0.25 Hz)

Reconstruction

There is only ONE bandlimited signal that fits the sampled points.

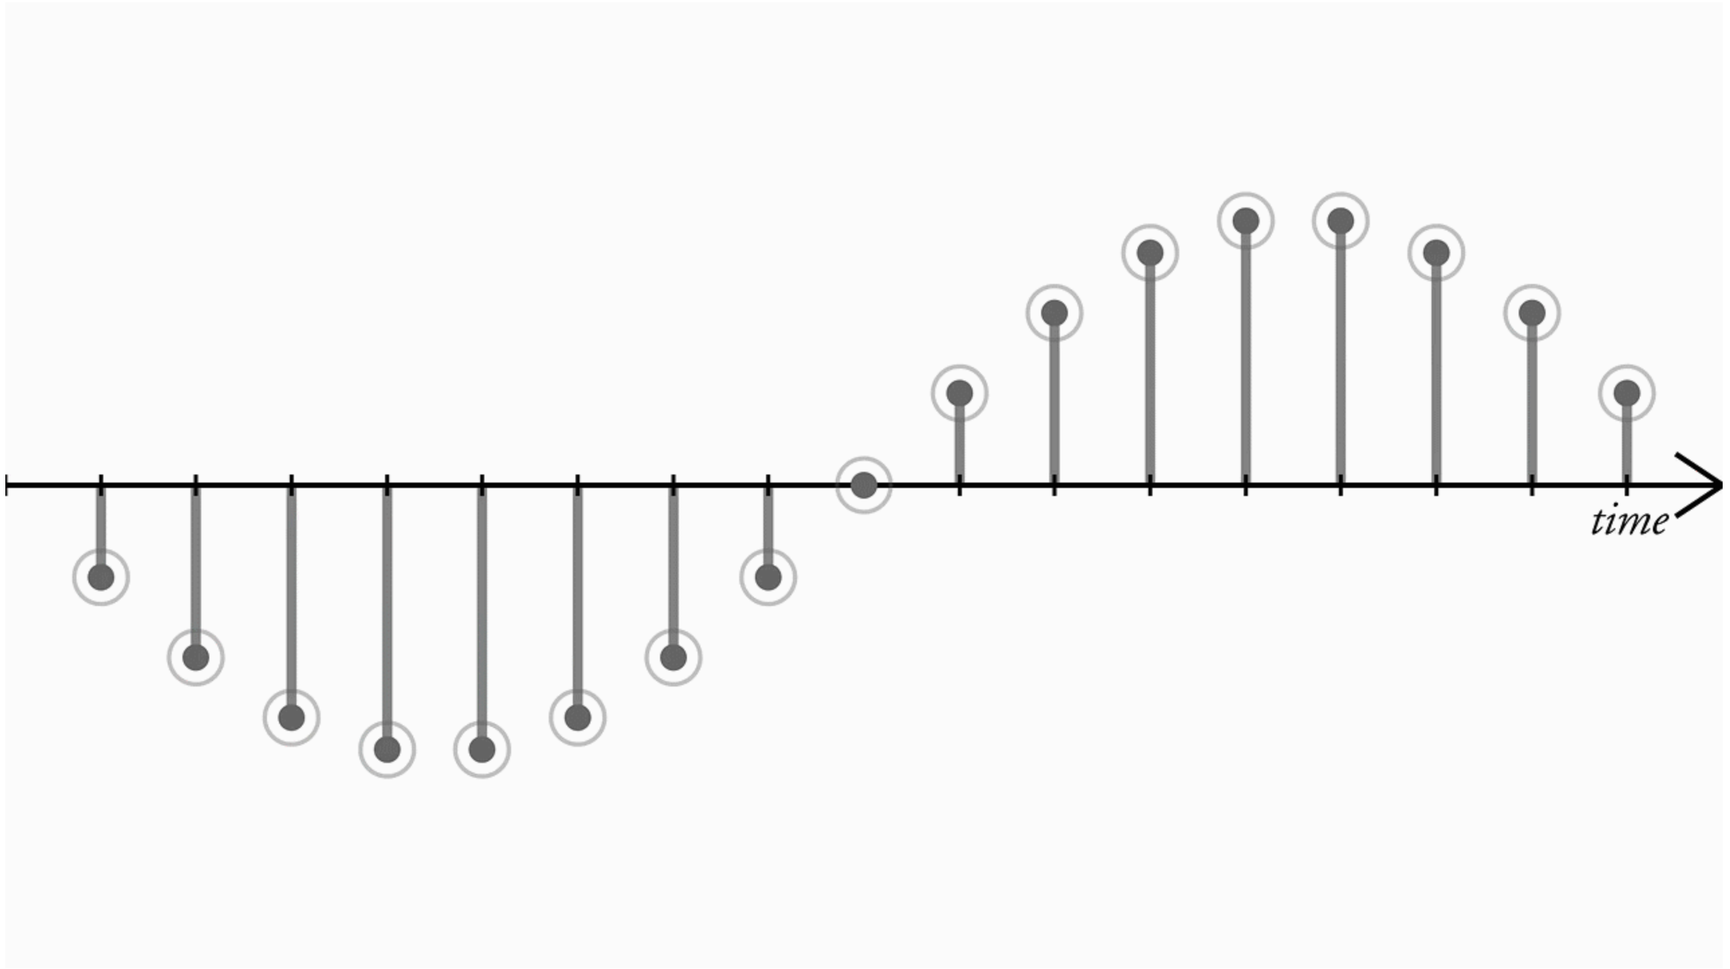

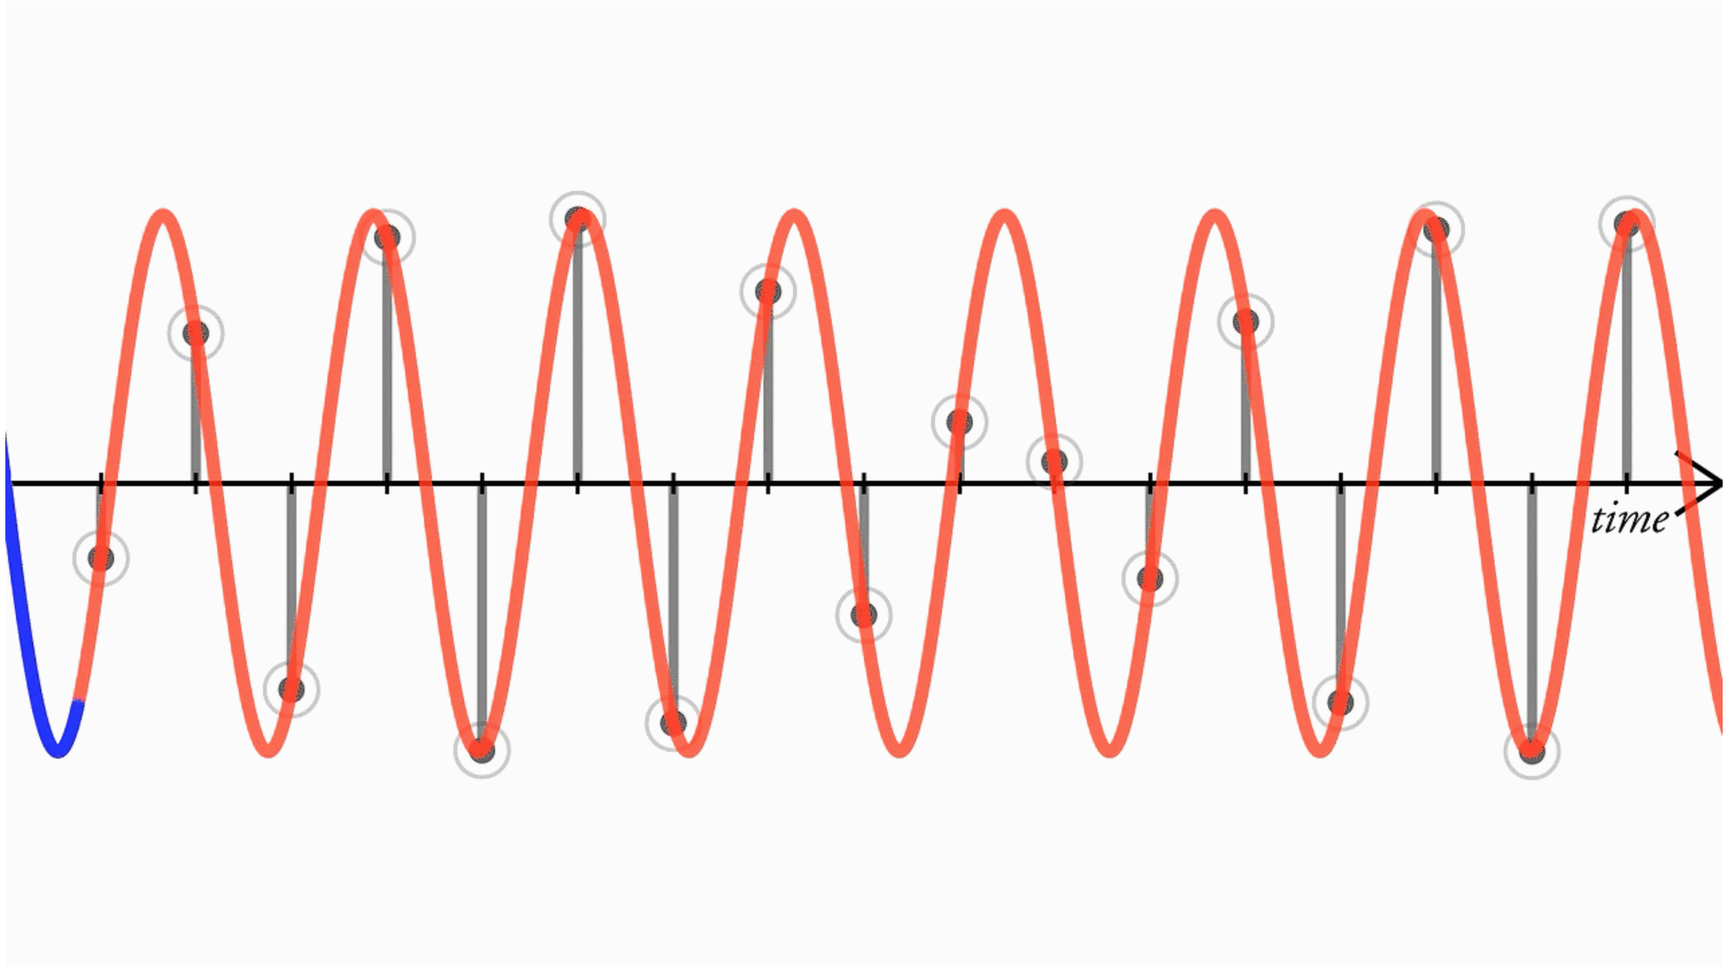
time

Caveats

- Sampled signal MUST be bandlimited -> **Aliasing**
- Finite bit depth (e.g. 16 bits) -> **Quantization noise**

Pulse Code Modulation (PCM)

Sampling Rate and Bit Depth

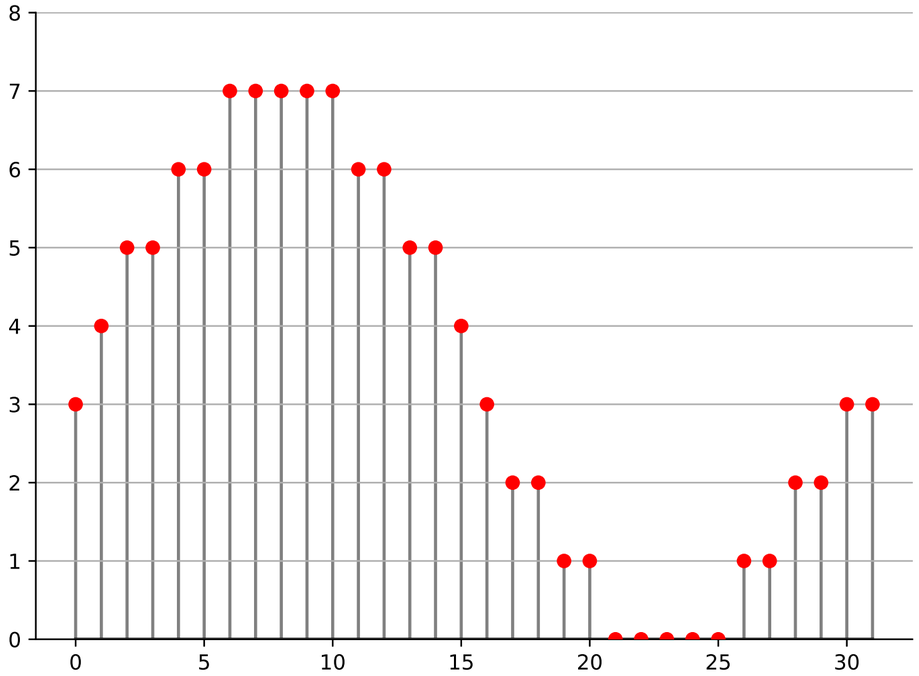

Bit depth = number of discrete levels -> **Dynamic range**

Sampling rate = number samples per second -> **Bandwidth**

Sampling Rate

f_s=44.1 kHz -> f_m=22.05 kHz

f_s=22.05 kHz -> f_m=11.025 kHz

f_s=11.025 kHz -> f_m=5.5125 kHz

f_s=44.1 kHz -> LPF f_c=5.5125 kHz kHz

Aliasing

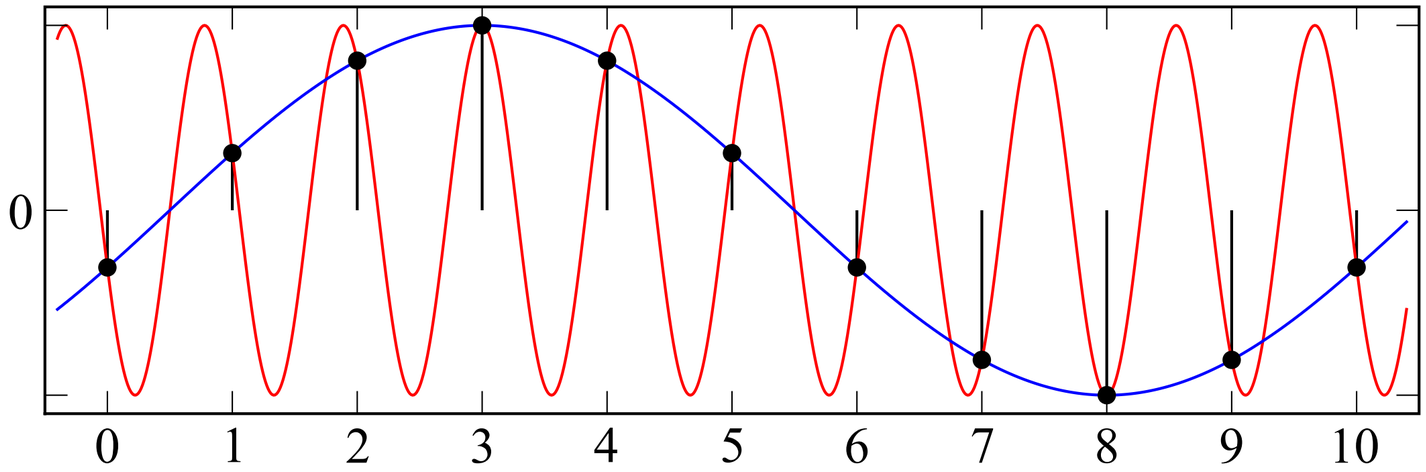

Anti-Aliasing Filters

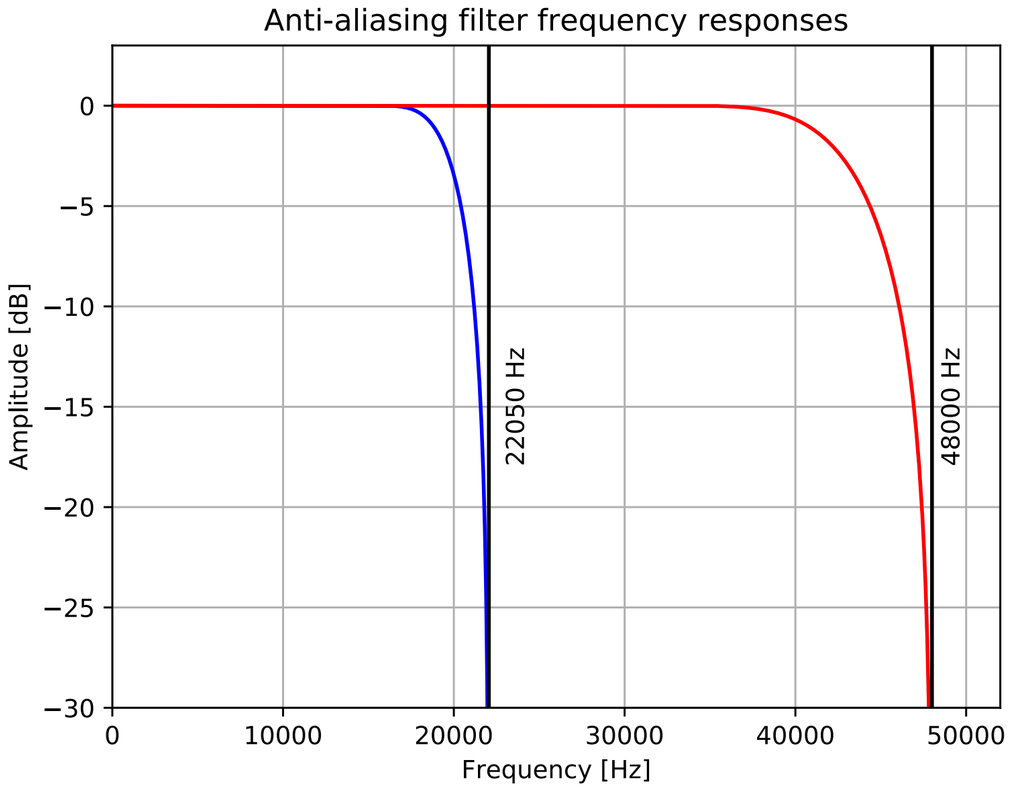

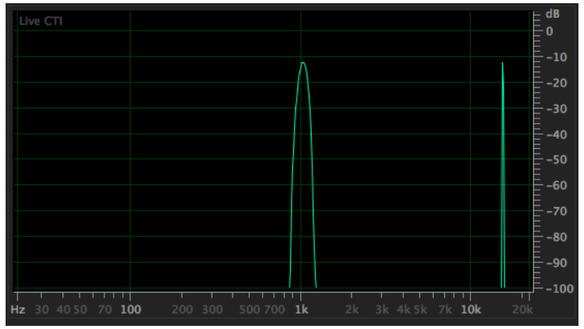

0:00 / 0:03

1 kHz + 15 kHz @ 16bit 44.1 kHz

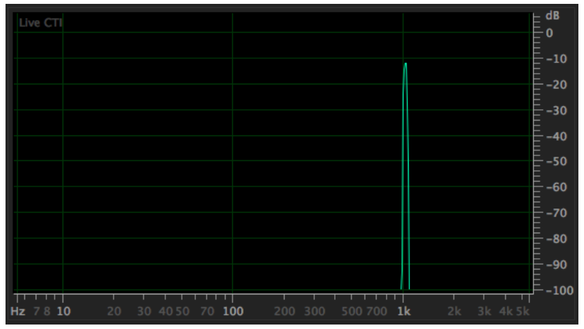

0:00 / 0:03

1 kHz + 15 kHz @ 16bit 11.025 kHz

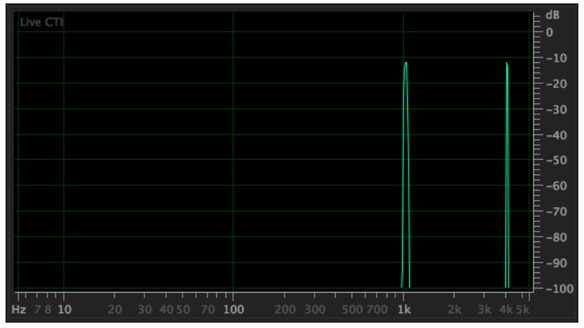

0:00 / 0:03

1 kHz + 15 kHz @ 16bit 11.025 kHz (No Anti-Aliasing filter)

Bit Depth

16 bit -> 96 dB

8 bit -> 48 dB



16 bit -> 96 dB



8 bit -> 48 dB

Quantization Noise

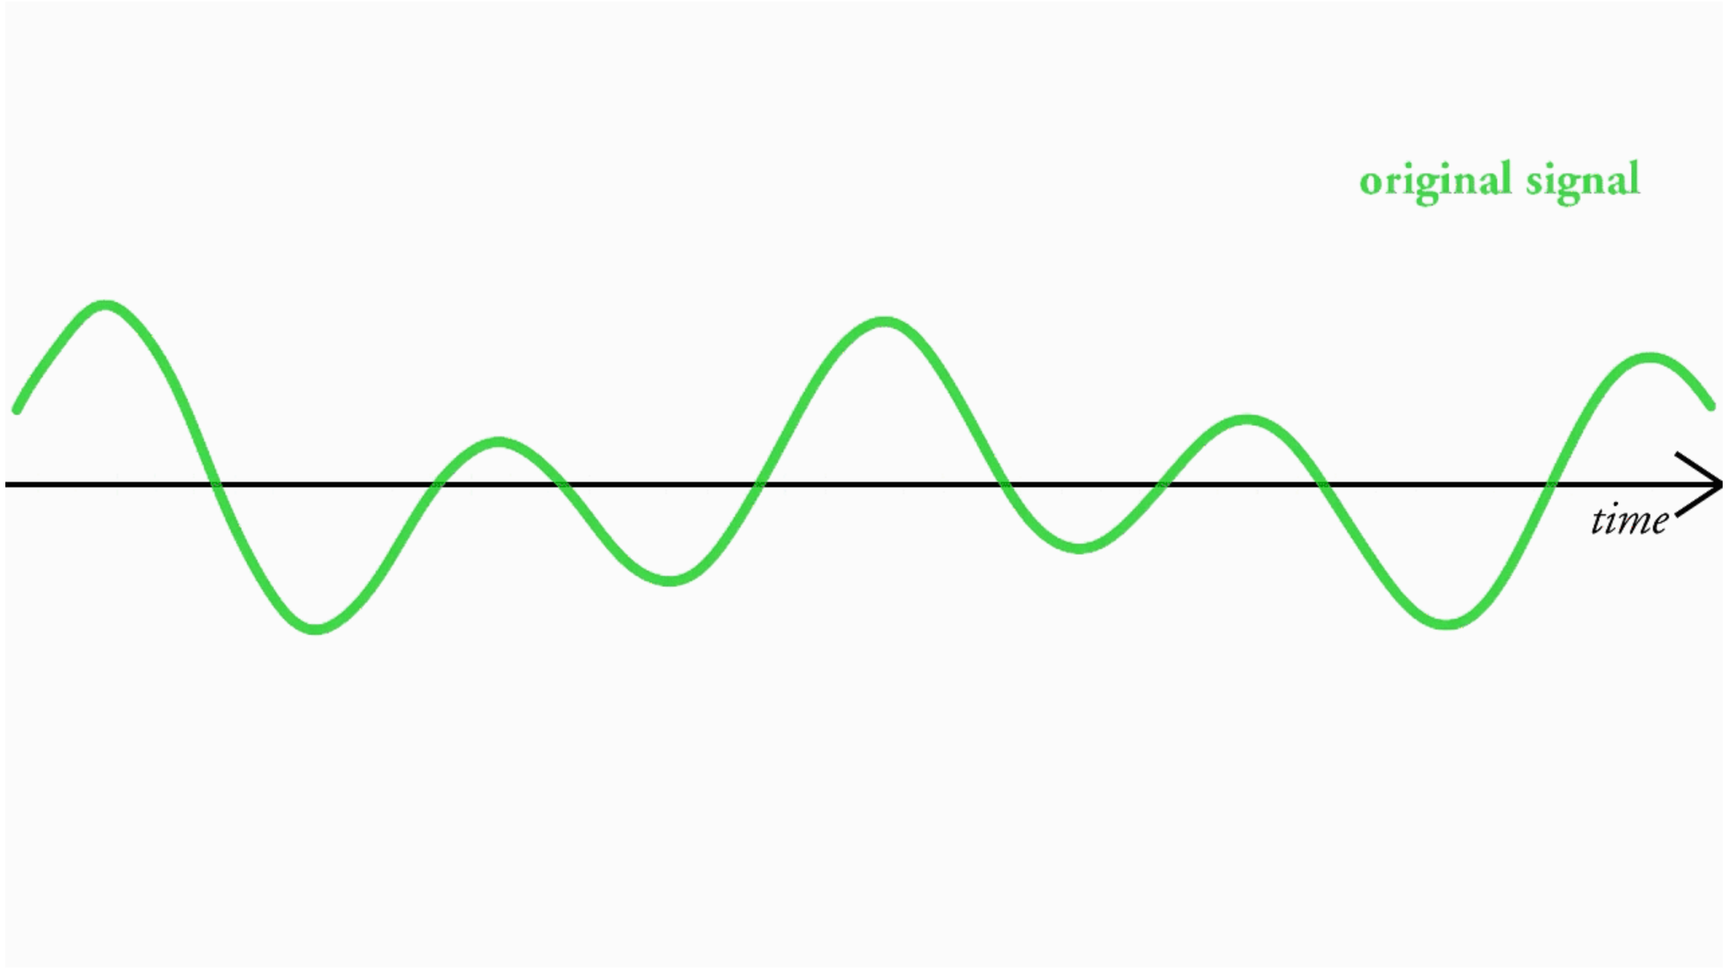

Dither

1 kHz sine wave @ 16 bit 44.1 kHz

1 kHz sine wave @ 8 bit 44.1 kHz (with dither)



1 kHz sine wave @ 8 bit 44.1 kHz (no dither)

Analog comparison

Format	Dynamic range	Effective Bit Depth
Cassette	40 dB	6 bits
Vinyl	60 dB	10 bits
Reel-to-Reel	80 dB	13 bits
CD	96 dB	16 bits
HD Audio	144 dB	24 bits

* These are estimates -> analog hardware performance varies

Further Reading

- Sigma-Delta converter (PDM)
- Error-correction codes (EFM, Reed-Solomon, etc.)
- Perceptual Audio Coding (MP3, AAC, etc.)
- Relevant ECE Courses
  - ECE 3300: Signals & Systems
  - ECE 4270: Communcation Systems
  - ECE 3170: Random Signal Analysis
  - ECE 4670: Digital Signal Processing