



1. Description

1.1. Project

Project Name	estacion_ambiental
Board Name	NUCLEO-L476RG
Generated with:	STM32CubeMX 6.12.0
Date	09/26/2024


1.2. MCU

MCU Series	STM32L4
MCU Line	STM32L4x6
MCU name	STM32L476RGTx
MCU Package	LQFP64
MCU Pin number	64

1.3. Core(s) information

Core(s)	Arm Cortex-M4
---------	---------------

2. Pinout Configuration

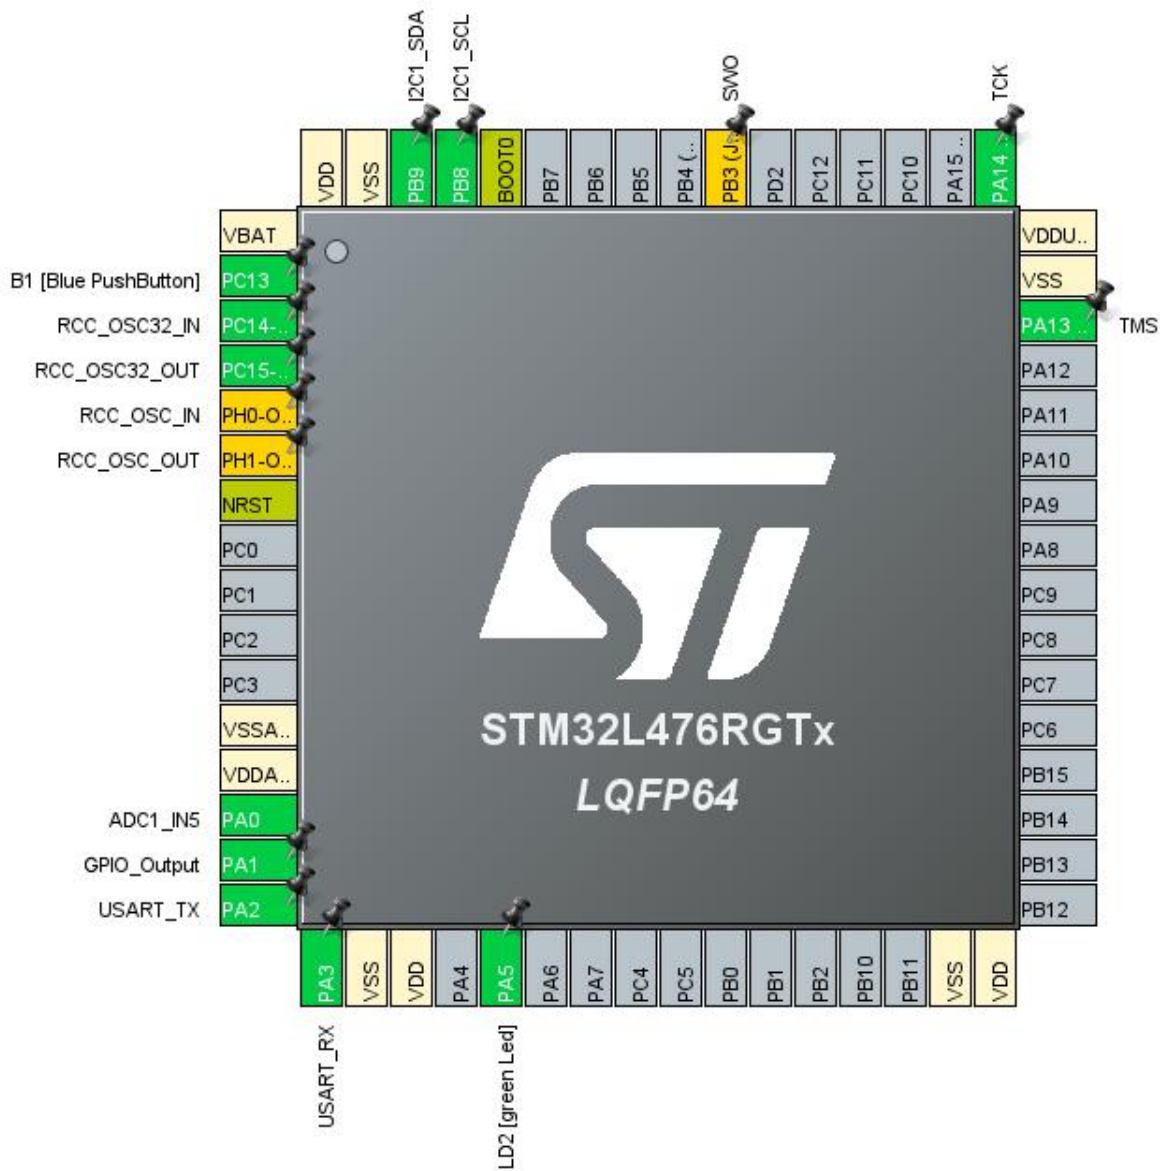


3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13	I/O	GPIO_EXTI13	B1 [Blue PushButton]
3	PC14-OSC32_IN (PC14)	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT (PC15)	I/O	RCC_OSC32_OUT	
5	PH0-OSC_IN (PH0) *	I/O	RCC_OSC_IN	
6	PH1-OSC_OUT (PH1) *	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA/VREF-	Power		
13	VDDA/VREF+	Power		
14	PA0	I/O	ADC1_IN5	
15	PA1 **	I/O	GPIO_Output	
16	PA2	I/O	USART2_TX	USART_TX
17	PA3	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
21	PA5 **	I/O	GPIO_Output	LD2 [green Led]
31	VSS	Power		
32	VDD	Power		
46	PA13 (JTMS-SWDIO)	I/O	SYS_JTMS-SWDIO	TMS
47	VSS	Power		
48	VDDUSB	Power		
49	PA14 (JTCK-SWCLK)	I/O	SYS_JTCK-SWCLK	TCK
55	PB3 (JTDO-TRACESWO) *	I/O	SYS_JTDO-SWO	SWO
60	BOOT0	Boot		
61	PB8	I/O	I2C1_SCL	
62	PB9	I/O	I2C1_SDA	
63	VSS	Power		
64	VDD	Power		

** The pin is affected with an I/O function

* The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

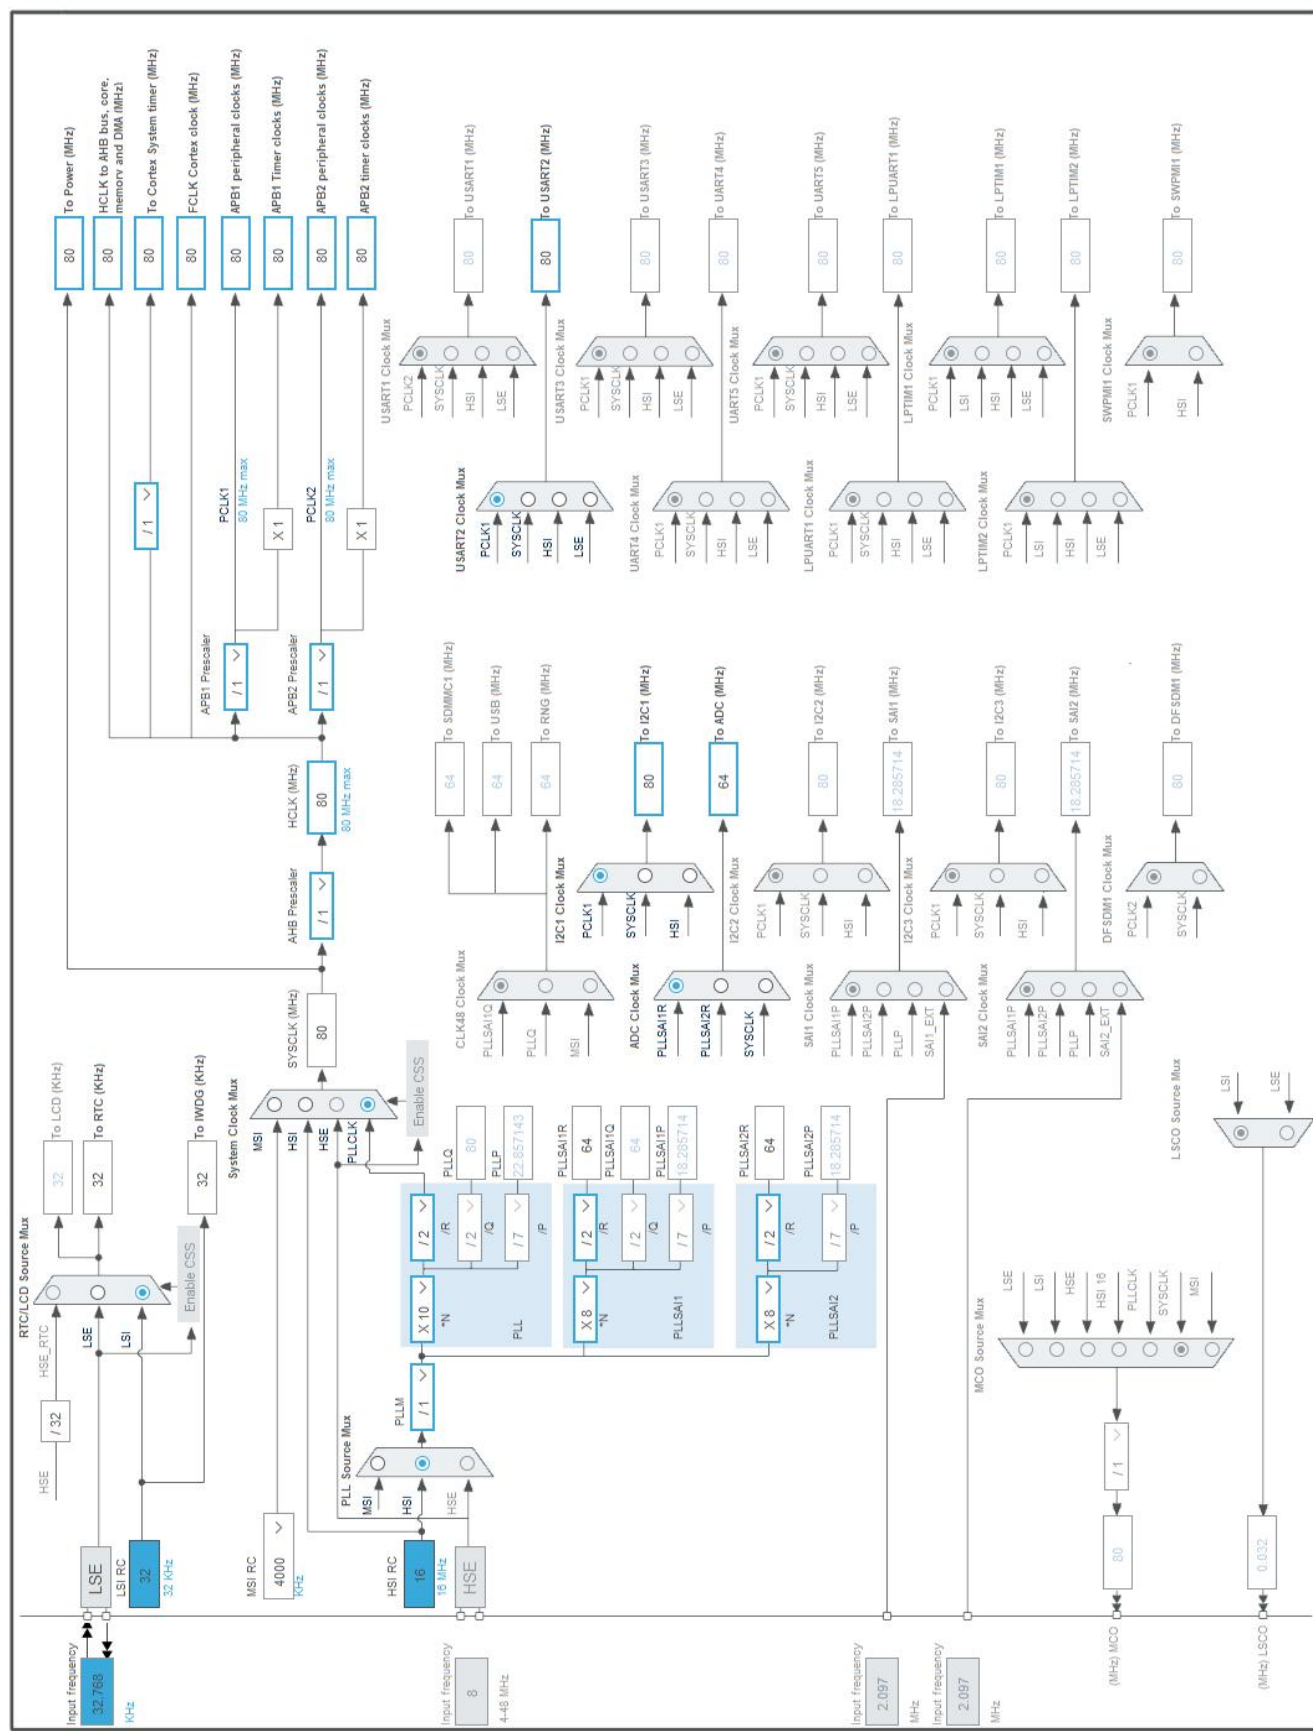

1. Power Consumption Calculator report

1.1. Microcontroller Selection

Series	STM32L4
Line	STM32L4x6
MCU	STM32L476RGTx
Datasheet	DS10198_Rev4

1.2. Parameter Selection

Temperature	25
Vdd	3.0

1.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


1.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP2
Vdd	3.0	3.0
Voltage Source	Battery	Battery
Range	Range1-High	NoRange
Fetch Type	SRAM2	n/a
CPU Frequency	80 MHz	0 Hz
Clock Configuration	HSE PLL	ALL CLOCKS OFF
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	10.7 mA	1.18 μ A
Duration	0.1 ms	0.9 ms
DMIPS	100.0	0.0
Ta Max	103.56	105
Category	In DS Table	In DS Table

1.5. Results

Sequence Time	1 ms	Average Current	1.07 mA
Battery Life	4 months, 10 days, 3 hours	Average DMIPS	100.0 DMIPS

1.6. Chart

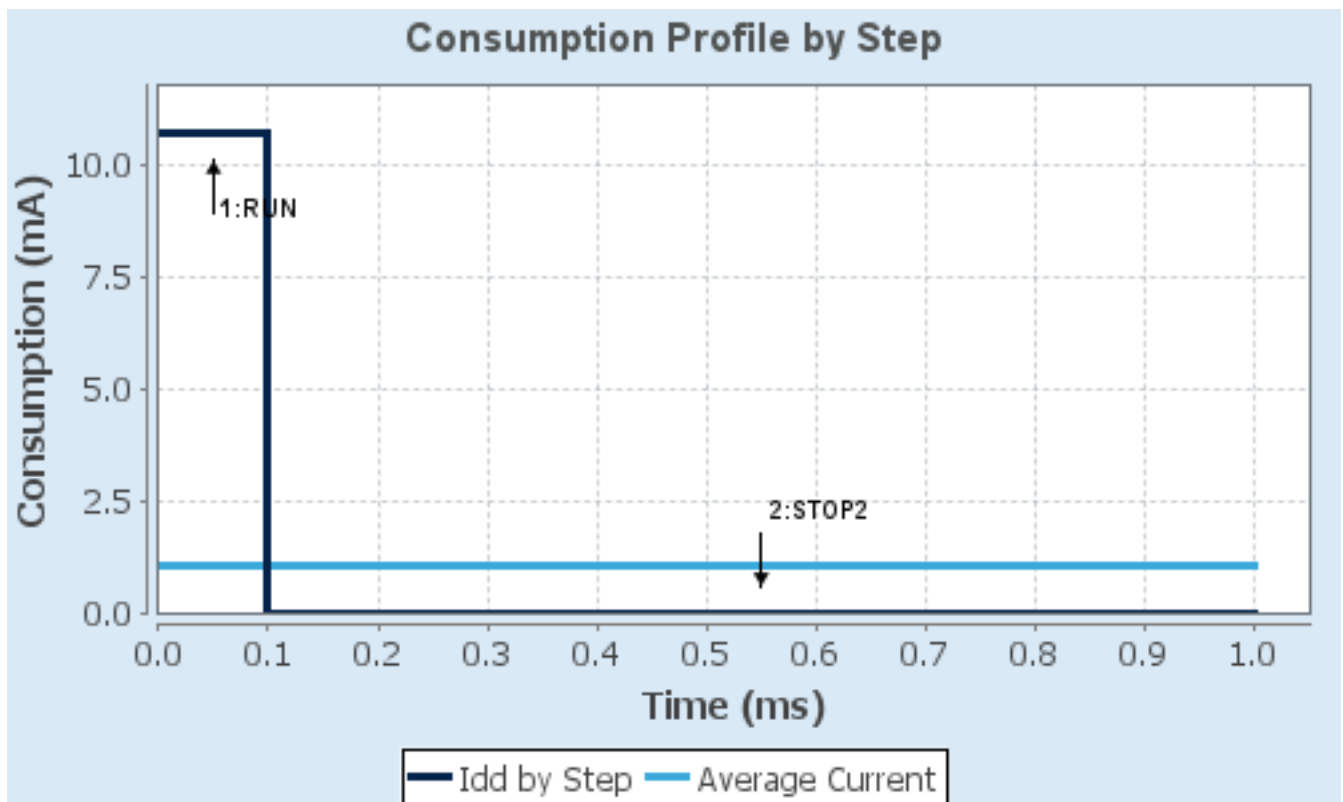

2. Software Project

2.1. Project Settings

Name	Value
Project Name	estacion_ambiental
Project Folder	C:\Datos\Pablo\Teleco\4\TFG\pruebas\estacion_ambiental
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_L4 V1.18.1
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

2.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

2.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_USART2_UART_Init	USART2
4	MX_ADC1_Init	ADC1
5	MX_I2C1_Init	I2C1
6	MX_TIM6_Init	TIM6
7	MX_RTC_Init	RTC
8	MX_IWDG_Init	IWDG

3. Peripherals and Middlewares Configuration

3.1. ADC1

IN5: IN5 Single-ended

3.1.1. Parameter Settings:

ADCs_Common_Settings:

Mode Independent mode

ADC_Settings:

Clock Prescaler Asynchronous clock mode divided by 1

Resolution ADC 12-bit resolution

Data Alignment Right alignment

Scan Conversion Mode Disabled

Continuous Conversion Mode Disabled

Discontinuous Conversion Mode Disabled

DMA Continuous Requests Disabled

End Of Conversion Selection End of single conversion

Overrun behaviour Overrun data preserved

Low Power Auto Wait Disabled

ADC_Regular_ConversionMode:

Enable Regular Conversions Enable

Enable Regular Oversampling Disable

Number Of Conversion 1

External Trigger Conversion Source Regular Conversion launched by software

External Trigger Conversion Edge None

Rank 1

Channel Channel 5

Sampling Time 2.5 Cycles

Offset Number No offset

ADC_Injected_ConversionMode:

Enable Injected Conversions Disable

Analog Watchdog 1:

Enable Analog WatchDog1 Mode false

Analog Watchdog 2:

Enable Analog WatchDog2 Mode false

Analog Watchdog 3:

Enable Analog WatchDog3 Mode false

3.2. I2C1

I2C: I2C

3.2.1. Parameter Settings:

Timing configuration:

Custom Timing	Disabled
I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	100
Fall Time (ns)	100
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	0x10D19CE4 *

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

3.3. IWDG

mode: Activated

3.3.1. Parameter Settings:

Watchdog Clocking:

IWDG counter clock prescaler	4
IWDG window value	4095
IWDG down-counter reload value	4095

3.4. RCC

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

3.4.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled *

Data Cache	Enabled
Flash Latency(WS)	4 WS (5 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
MSI Calibration Value	0
MSI Auto Calibration	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
-------------------------------	---------------------------------

3.5. RTC

mode: Activate Clock Source

3.5.1. Parameter Settings:

General:

Hour Format	Hourformat 24
Asynchronous Predivider value	127
Synchronous Predivider value	255

3.6. SYS

Debug: Serial Wire

Timebase Source: TIM5

3.7. TIM6

mode: Activated

3.7.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	65535
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Trigger Event Selection	Reset (UG bit from TIMx_EGR)
-------------------------	------------------------------

3.8. USART2

Mode: Asynchronous

3.8.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

3.9. FREERTOS

Interface: CMSIS_V2

3.9.1. Config parameters:

API:

FreeRTOS API	CMSIS v2
--------------	----------

Versions:

FreeRTOS version	10.3.1
CMSIS-RTOS version	2.00

MPU/FPU:

ENABLE_MPU	Disabled
ENABLE_FPU	Disabled

Kernel settings:

USE_PREEMPTION	Enabled
CPU_CLOCK_HZ	SystemCoreClock
TICK_RATE_HZ	1000
MAX_PRIORITIES	56
MINIMAL_STACK_SIZE	128
MAX_TASK_NAME_LEN	16
USE_16_BIT_TICKS	Disabled
IDLE_SHOULD_YIELD	Enabled
USE_MUTEXES	Enabled
USE_RECURSIVE_MUTEXES	Enabled
USE_COUNTING_SEMAPHORES	Enabled
QUEUE_REGISTRY_SIZE	8
USE_APPLICATION_TASK_TAG	Disabled
ENABLE_BACKWARD_COMPATIBILITY	Enabled
USE_PORT_OPTIMISED_TASK_SELECTION	Disabled
USE_TICKLESS_IDLE	Disabled
USE_TASK_NOTIFICATIONS	Enabled
RECORD_STACK_HIGH_ADDRESS	Disabled

Memory management settings:

Memory Allocation	Dynamic / Static
TOTAL_HEAP_SIZE	3000
Memory Management scheme	heap_4

Hook function related definitions:

USE_IDLE_HOOK	Disabled
USE_TICK_HOOK	Disabled
USE_MALLOC_FAILED_HOOK	Disabled
USE_DAEMON_TASK_STARTUP_HOOK	Disabled
CHECK_FOR_STACK_OVERFLOW	Disabled

Run time and task stats gathering related definitions:

GENERATE_RUN_TIME_STATS	Disabled
USE_TRACE_FACILITY	Enabled
USE_STATS_FORMATTING_FUNCTIONS	Disabled

Co-routine related definitions:

USE_CO_ROUTINES	Disabled
MAX_CO_ROUTINE_PRIORITIES	2

Software timer definitions:

USE_TIMERS	Enabled
TIMER_TASK_PRIORITY	2
TIMER_QUEUE_LENGTH	10
TIMER_TASK_STACK_DEPTH	256

Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY	15
-----------------------------------	----

LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY 5

Added with 10.2.1 support:

MESSAGE_BUFFER_LENGTH_TYPE	size_t
USE_POSIX_ERRNO	Disabled

CMSIS-RTOS V2 flags:

USE_OS2_THREAD_SUSPEND_RESUME	Enabled
USE_OS2_THREAD_ENUMERATE	Enabled
USE_OS2_EVENTFLAGS_FROM_ISR	Enabled
USE_OS2_THREAD_FLAGS	Enabled
USE_OS2_TIMER	Enabled
USE_OS2_MUTEX	Enabled

3.9.2. Include parameters:

Include definitions:

vTaskPrioritySet	Enabled
uxTaskPriorityGet	Enabled
vTaskDelete	Enabled
vTaskCleanUpResources	Disabled
vTaskSuspend	Enabled
vTaskDelayUntil	Enabled
vTaskDelay	Enabled
xTaskGetSchedulerState	Enabled
xTaskResumeFromISR	Enabled
xQueueGetMutexHolder	Enabled
xSemaphoreGetMutexHolder	Disabled
pcTaskGetTaskName	Disabled
uxTaskGetStackHighWaterMark	Enabled
xTaskGetCurrentTaskHandle	Enabled
eTaskGetState	Enabled
xEventGroupSetBitFromISR	Disabled
xTimerPendFunctionCall	Enabled
xTaskAbortDelay	Disabled
xTaskGetHandle	Disabled
uxTaskGetStackHighWaterMark2	Disabled

3.9.3. Advanced settings:

Newlib settings (see parameter description first):

USE_NEWLIB_REENTRANT	Enabled *
----------------------	-----------

Project settings (see parameter description first):

Use FW pack heap file

Enabled

*** User modified value**

4. System Configuration

4.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PA0	ADC1_IN5	Analog mode for ADC conversion	No pull-up and no pull-down	n/a	
I2C1	PB8	I2C1_SCL	Alternate Function Open Drain	Pull-up *	Very High *	
	PB9	I2C1_SDA	Alternate Function Open Drain	Pull-up *	Very High *	
RCC	PC14-OSC32_IN (PC14)	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT (PC15)	RCC_OSC32_OUT	n/a	n/a	n/a	
SYS	PA13 (JTMS-SWDIO)	SYS_JTMS-SWDIO	n/a	n/a	n/a	TMS
	PA14 (JTCK-SWCLK)	SYS_JTCK-SWCLK	n/a	n/a	n/a	TCK
USART2	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USART_TX
	PA3	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USART_RX
Single Mapped Signals	PH0-OSC_IN (PH0)	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT (PH1)	RCC_OSC_OUT	n/a	n/a	n/a	
	PB3 (JTDO-TRACESWO)	SYS_JTDO-SWO	n/a	n/a	n/a	SWO
GPIO	PC13	GPIO_EXTI13	External Interrupt Mode with Falling edge trigger detection	No pull-up and no pull-down	n/a	B1 [Blue PushButton]
	PA1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD2 [green Led]

4.2. DMA configuration

nothing configured in DMA service

4.3. NVIC configuration

4.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	15	0
System tick timer	true	15	0
TIM5 global interrupt	true	15	0
PVD/PVM1/PVM2/PVM3/PVM4 interrupts through EXTI lines 16/35/36/37/38	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
ADC1 and ADC2 interrupts	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
USART2 global interrupt	unused		
EXTI line[15:10] interrupts	unused		
TIM6 global interrupt, DAC channel1 and channel2 underrun error interrupts	unused		
FPU global interrupt	unused		

4.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Prefetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	false	false
Debug monitor	false	true	false
Pendable request for system service	false	false	false
System tick timer	false	false	true
TIM5 global interrupt	false	true	true

*** User modified value**

5. System Views

5.1. Category view

5.1.1. Current

Middleware						
FREERTOS						
System Core	Analog	Timers	Connectivity	Multimedia	Security	Computing
DMA	ADC1	RTC	I2C1			
GPIO		TIM6	USART2			
IWDG						
IVIC						
RCC						
SYS						

6. Docs & Resources

Type	Link
------	------