

ASH

User Guide

Contents

| | |
|--|-----------|
| 1. Introduction | 2 |
| 2. Equalizer APO Configuration | 3 |
| 2.1. Overview | 3 |
| 2.2. Complete steps | 3 |
| 2.3. Troubleshooting | 3 |
| 3. BRIRs | 4 |
| 3.1. Overview | 4 |
| 3.2. Frequency Response Compensation | 4 |
| 3.3. Room Information | 5 |
| 3.4. Measurement Setups | 6 |
| 3.5. File information | 7 |
| 3.6. Room Photos | 8 |
| 3.7. Data Sources | 10 |
| 4. Headphone Compensation Filters | 11 |
| 5. License | 12 |
| 6. Access | 12 |
| 7. Contact Information | 12 |

1. Introduction

ASH is short for Audio Spatialisation for Headphones. It is an impulse response dataset that can be used for binaural synthesis of spatial audio systems on headphones. It includes binaural room impulse responses (BRIRs), headphone compensation filters (HPCFs) and configuration files for Equalizer APO. A brief description of each content is provided in the table below. The dataset is described in detail in the sections that follow.

| Dataset contents | Description |
|-----------------------------------|---|
| BRIRs | A comprehensive set of colouration-free BRIRs that have been compensated for headphones |
| HPCFs | Individual compensation filters for over 35 headphones that can be used to equalise the listener's headphones to the diffuse field target |
| Equalizer APO configuration files | Configuration files that can be used to convolve BRIRs and HPCFs in Equalizer APO |

ASH is freely provided under a [Creative Commons Attribution-NonCommercial-ShareAlike 4.0 License](https://creativecommons.org/licenses/by-nc-sa/4.0/).

© 2017 Shanon Pearce

spearceash@gmail.com




2. Equalizer APO Configuration

2.1. Overview

The dataset can be used with Equalizer APO, an Audio Processing Object (APO) for windows featuring convolution capabilities.

BRIR convolution configuration files have been provided for each room, speaker configuration and headphone type in the dataset. Configurations for the HPCFs have also been provided. Simply include these in your 'config.txt' configuration file.

Example config.txt in the configuration editor:

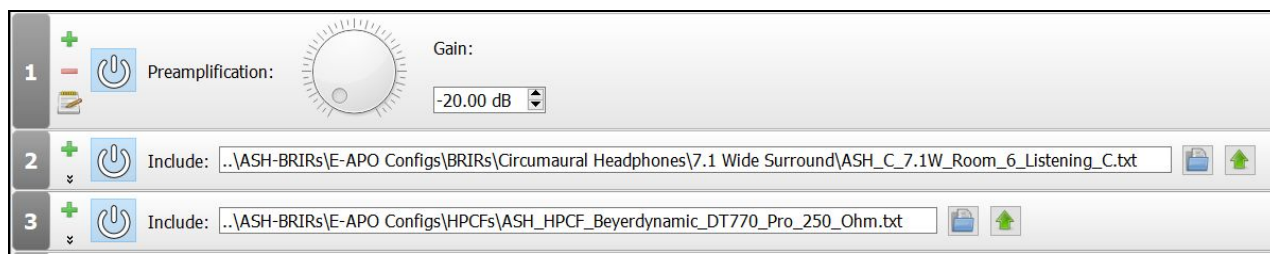

2.2. Complete steps

1. Download [Equalizer APO](#).
2. Follow the [installation tutorial](#).
3. Download the ASH impulse response dataset.
4. Extract the dataset to the location of your choosing. It is recommended to place the 'ASH-BRIRs' folder in the following location: C:\Program Files\EqualizerAPO.
5. In the configuration editor add a new 'include' control to your 'config.txt'.
6. Navigate to the 'E-APO configs' folder and select the desired configuration file.

2.3. Troubleshooting

The BRIRs and HPCFs have been sampled at 44100Hz so the sample rate of the playback device must be set to 44100Hz. The sample rate of the file must match the sample rate of the device.

If your audio device does not support a 7.1 surround channel configuration, a virtual audio device such as [VB-Audio Virtual Cable](#) or [Voicemeeter](#) can be used for audio processing in place of your regular audio playback device.

3. BRIRs

3.1. Overview

BRIRs are measurements that capture the spectral filtering properties of the head and ears of the listener as well as any room reverberation present in the measurement. Measurements are typically made in reverberant rooms using dummy heads that are rotated above their torso to capture multiple head orientations for a number of source locations.

BRIRs can be used to synthesise spatial audio over headphones. Convolution of an audio signal with a BRIR converts the audio to that which would be heard by the listener if it had been played at the source location.

This dataset contains BRIRs derived from a range of freely available datasets. The BRIRs were measured in a wide variety of rooms each containing unique acoustical properties. So far 13 rooms have been included in the dataset. The frequency response of each BRIR has been compensated to remove sources of colouration and allow for accurate binaural synthesis of acoustic environments. Further details of the BRIRs can be found in the sections below.

3.2. Frequency Response Compensation

Sources of colouration present in the uncompensated BRIRs such as loudspeakers, microphones, room modes and ear canal resonances have been removed from the compensated BRIRs. This was achieved by equalising the BRIRs with compensation filters.

Colouration that would be introduced from the listener's headphone to their ear canal has also been removed from the BRIRs while taking into consideration the type of headphone used. Separate BRIRs are available for circumaural headphones and in ear headphones making the dataset compatible with both headphone types.

The frequency response compensation technique described above was used to minimise colouration, improve externalisation and improve localisation of sounds within the acoustic environments reconstructed by the BRIRs.

Note that it is assumed the listener's headphones are diffuse field calibrated and the effectiveness of the BRIRs depends on how closely the headphones match the diffuse field target frequency response. Individual headphone compensation filters have been included for some commonly used headphones. The filters can be used to equalise the listener's headphones to the diffuse field target.

3.3. Room Information

The BRIRs were measured in 13 rooms each containing unique acoustical properties such as reverberation time. A summary of the acoustical properties of each of the rooms is provided in the table below. The rooms have been sorted by reverb time in ascending order.

| ID | Room Name | Dimensions (l x w x h) (m) | Floor Area (m ²) | Volume (m ³) | RT60 (s) |
|----|---|-------------------------------|---------------------------------|-----------------------------|----------|
| 1 | Listening Room A | 5.00 x 5.50 x 3.00 | 27.50 | 83.00 | 0.170 |
| 2 | Control Room A | 6.85 x 5.48 X 2.47 | 37.57 | 92.79 | 0.232 |
| 3 | Listening Room B | 5.80 x 6.60 X 2.70 | 38.28 | 103.36 | 0.261 |
| 4 | Control Room B | 7.26 x 8.26 X 2.90 | 59.97 | 167.91 | 0.266 |
| 5 | Listening Room C (with absorbers) | 4.50 x 5.50 | 24.75 | N/A | 0.369 |
| 6 | Seminar Room A | 5.00 x 5.00 | 25.00 | N/A | 0.474 |
| 7 | Conference Room A | 10.31 x 5.76 x 3.10 | 59.39 | 184.10 | 0.575 |
| 8 | Conference Room B | 5.50 x 4.50 | 24.75 | N/A | 0.808 |
| 9 | Apartment | 4.00 x 8.00 | 32.00 | N/A | 0.704 |
| 10 | Seminar Room B | 10.00 x 9.00 | 90.00 | N/A | 0.784 |
| 11 | Studio | 17.33 x 11.07 x 6.2 | 191.84 | 815.33 | 0.969 |
| 12 | Listening Room C (without absorbers) | 4.50 x 5.50 | 24.75 | N/A | 1.107 |
| 13 | Stairway | N/A | N/A | N/A | 1.119 |

3.4. Measurement Setups

The BRIRs were measured using a variety of dummy heads and head and torso simulators (HATS). A summary of the measurement setups for each of the rooms is provided in the table below.

| ID | Room Name | Listener | Azimuth Resolution | Source Distance (m) | Source Azimuth Range | Source Elevation |
|----|--------------------------------------|--------------------|--------------------|---------------------|----------------------|------------------|
| 1 | Listening Room A | KEMAR 45BA | Nearest 5° | 2.00 | ±180° | 0° |
| 2 | Control Room A | Neumann KU100 | Nearest 5° | 2.80 | ±180° | 0° |
| 3 | Listening Room B | B&K HATS Type 4100 | Nearest 5° | 2.10 | ±180° | 0° |
| 4 | Control Room B | Neumann KU100 | Nearest 5° | 3.00 | ±180° | 0° |
| 5 | Listening Room C (with absorbers) | KEMAR 45BA | Nearest 5° | 2.14 | ±180° | 0° |
| 6 | Seminar Room A | KEMAR | Nearest 5° | 3.35 | ±180° | 0° |
| 7 | Conference Room A | KEMAR 45BA | Nearest 5° | 2.50 | ±180° | 0° |
| 8 | Conference Room B | KEMAR 45BA | Nearest 30° | 2.00 | ±120° | 0° |
| 9 | Apartment | KEMAR 45BB-4 | Nearest 30° | 2.50 | ±180° | -20° |
| 10 | Seminar Room B | KEMAR | Nearest 15° | 4.00 | ±180° | 0° |
| 11 | Studio | Neumann KU100 | Nearest 5° | 6.94 | ±180° | 0° |
| 12 | Listening Room C (without absorbers) | KEMAR 45BA | Nearest 5° | 2.52 | ±180° | 0° |
| 13 | Stairway | Neumann KU100 | Nearest 15° | 3.00 | ±90° | 0° |


3.5. File information

The BRIRs are provided as 24 bit stereo wav files at a sampling rate of 44100Hz. The following information can be used to locate the desired wav files within the dataset. The file names follow the coding below. Possible options for each field are listed in the table.

ASH_BRIR_<headphone type>_<room>_<elevation>_<azimuth>.WAV




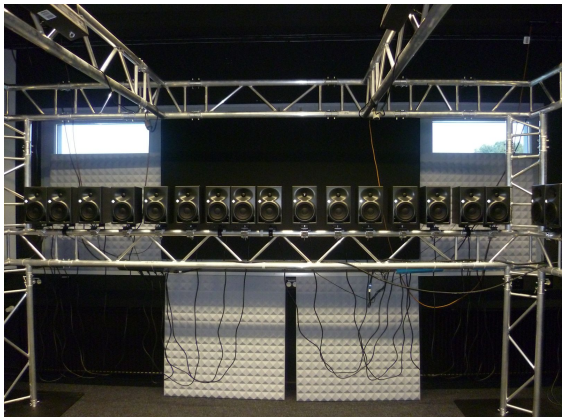

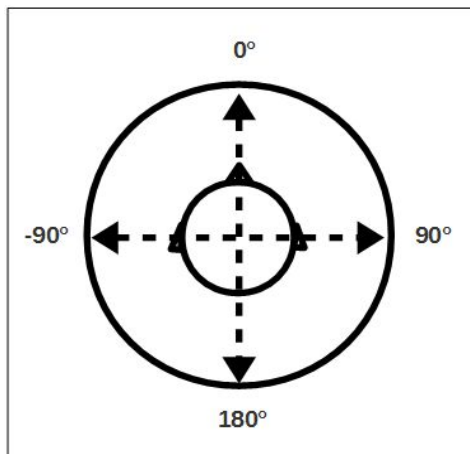
| Field | Options |
|----------------|--|
| Headphone type | C: Circumaural Headphone IE: In Ear Headphone |
| Room | R1: Listening Room A R2: Control Room A R3: Listening Room B R4: Control Room B R5: Listening Room C (with absorbers) R6: Seminar Room A R7: Conference Room A R8: Conference Room B R9: Apartment R10: Seminar Room B R11: Studio R12: Listening Room C (without absorbers) R13: Stairway |
| Elevation | E0: Elevation angle between source and listener |
| Azimuth | A-180 to A180: Azimuth angle between the source and listener |

Azimuth angles between the source and the listener's head can be found using the diagram below.



3.6. Room Photos

A collection of photos for some of the rooms included in the dataset is provided below.

| | |
|---|--|
| Listening Room A | Control Room A |
|  |  |
| Control Room B | Listening Room C |
|  |  |
| Conference Room A | Conference room B |
|  |  |

Apartment




Seminar Room B



Studio



Stairway

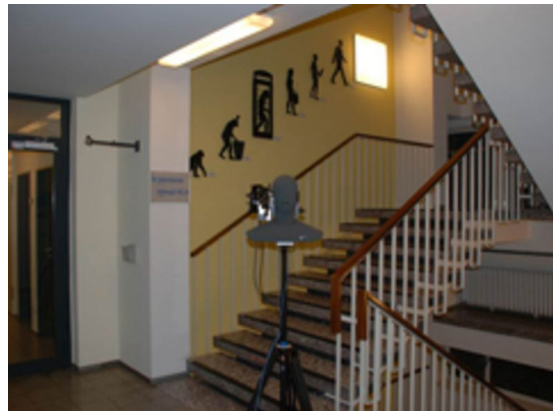

3.7. Data Sources


The original BRIR measurements were sourced from the datasets referenced in the table below. The license of each dataset has been listed. Additional information about each license or each set of measurements can be found by clicking the links in the table.

| Room | Reference | License |
|-------------------|--|--|
| Control Room A | "A Spatial Audio Impulse Response Compilation Captured at the WDR Broadcast Studios". Audio Group Downloads, 11-Jan-2013. | Creative Commons (CC BY-SA 3.0) |
| Control Room B | "A Spatial Audio Impulse Response Compilation Captured at the WDR Broadcast Studios". Audio Group Downloads, 11-Jan-2013. | Creative Commons (CC BY-SA 3.0) |
| Listening Room A | Wierstorf, Hagen, "Binaural room impulse responses of a 5.0 surround setup for different listening positions". Zenodo, 14-Oct-2016. | Creative Commons (CC BY 4.0) |
| Listening Room B | F. Melchior, D. Marston, C. Pike, D. Satongar and Y. Lam, "The Salford BBC Spatially-sampled Binaural Room Impulse Response dataset". University of Salford, 26 Feb 2014. | Creative Commons (CC BY-NC-SA 4.0) |
| Listening Room C | Erbes, Vera, "Single-channel and binaural room impulse responses of a 64-channel loudspeaker array for different room configurations". depositonce, 21-Apr-2015. | Creative Commons (CC BY 4.0) |
| Conference Room A | Neidhardt, Annika, "Binaural room impulse responses: Same listener-source-setup at different positions in the room". Zenodo, 28-Oct-2016. | Creative Commons (CC BY 4.0) |
| Conference Room B | Wierstorf, Hagen and Geier, Matthias, "Binaural room impulse responses recorded with KEMAR in a small meeting room". Zenodo, 14-Oct-2016. | Creative Commons (CC BY 4.0) |
| Apartment | F. Winter, W. Hagen, A. Podlubne, T. Forgue, J. Manhès, M. Herrb, S. Spors, A. Raake, and P. Danès, "Binaural room impulse responses of an apartment-like environment". Zenodo, 08-Apr-2016. | Creative Commons (CC BY 4.0) |
| Seminar Room A | Mittag, Christina, Böhme, Martina, and Werner, Stephan, "Dataset of KEMAR-BRIRs measured at several positions and head orientations in a real room". Zenodo, 16-Dec-2016. | Creative Commons (CC BY-NC 4.0) |
| Seminar Room B | Wierstorf, Hagen and Geier, Matthias, "Binaural room impulse responses recorded with KEMAR in a mid-size lecture hall". Zenodo, 14-Oct-2016. | Creative Commons (CC BY 4.0) |
| Stairway | "Aachen Impulse Response (AIR) Database". RWTH Aachen University | © 2009 RWTH Aachen University |
| Studio | "A Spatial Audio Impulse Response Compilation Captured at the WDR Broadcast Studios". Audio Group Downloads, 11-Jan-2013. | Creative Commons (CC BY-SA 3.0) |

4. Headphone Compensation Filters

A set of headphone compensation filters have been included for some commonly used headphones. The filters can be used to equalise the listener's headphones to the diffuse field target response. The filters are minimum phase FIRs that are provided as mono wav files sampled at 44100Hz. Equalizer APO configuration files have also been provided.

Example usage in Equalizer APO:



The following headphones have been included in the set:

- AKG K141 MKII
- AKG K171 MKII 55 Ohm
- AKG K240 MKII
- AKG K240 Studio
- AKG K271 MKII
- AKG K401
- AKG K420
- AKG K601
- AKG K701
- AKG K702
- AKG K1000
- AKG N60nc
- AKG Q701
- Audio-technica ATH M50
- Audio-technica ATH M50x
- Beats Solo
- Beyerdynamic DT250
- Beyerdynamic DT770 Pro
- Beyerdynamic DT880 Pro
- Beyerdynamic DT990 Pro
- Beyerdynamic MMX 300
- Bose QC25
- Philips SHP2500
- Presonus HD7
- Razer Piranha
- Sennheiser HD25-I 70 Ohm
- Sennheiser HD25-II 70 Ohm
- Sennheiser HD202
- Sennheiser HD569
- Sennheiser HD599
- Sennheiser HD600
- Sennheiser HD650
- Shure SRH940
- Sony MDR7505
- Sony MDR7506
- SpeedLink Medusa NX
- STAX SRS2050 II
- Superlux HD681 EVO

The HPCFs listed above were created using headphone impulse responses sourced from the [FABIAN head-related transfer function database](#) and are licensed under a [Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International License](#).

5. License

Unless otherwise stated, the contents of this dataset are licensed under a [Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International License](https://creativecommons.org/licenses/by-nc-sa/4.0/). Refer to the Data Sources section above for the licences of the BRIRs sourced for this dataset.



© 2017 Shanon Pearce

6. Access

Visit github.com/ShanonPearce/ASH-BRIRs to download the latest dataset.

7. Contact Information

If you have questions or suggestions, please send an email to:

Name: Shanon Pearce

Email: spearceash@gmail.com