

SOFIA: Modular Robotic Kinetic Surface for Human-Robot Interaction and Thermal-Constrained Actuator Characterization

Bernardo Orozco, Student 2, Student 3, Student 4, Student 5, Jorge A. Lizarraga, Graciela Baca, Luis Enrique González-Jiménez and Luis F. Luque-Vega

Abstract—Modular robotic systems leverage repeatable electromechanical units to enable flexible, scalable, and reconfigurable architectures. In interactive human-robot installations, spatial tracking of human body posture and gestures provides intuitive stimulus-response dynamics. This paper presents SOFIA, an interactive modular robotic surface comprising sixteen electromechanical units, each providing two rotational degrees of freedom actuated by commercial MG90S servomotors. While commercial servomotors encapsulate internal closed-loop position control via pulse-width modulation (PWM), persistent angular errors caused by mechanical stalls, external disturbances, or fabrication tolerances induce thermal degradation and excessive power consumption. To investigate actuator reliability under persistent position error conditions, this work formulates an experimental characterization protocol assessing the thermal response of an MG90S under mechanical stall. Using an LM35 precision temperature sensor and a commanded reference angle, an empirical first-order thermal model is derived via logarithmic transformation and linear regression, yielding an estimated thermal time constant of $\tau \approx 80.6$ s and a peak temperature exceeding 70°C . The proposed framework couples 3D real-time visual tracking with closed-loop kinematic control, providing direct evidence on the operational limits and thermal constraints required for reliable long-term deployment in modular robotic surfaces.

Index Terms—Modular robotics, Human-Robot Interaction (HRI), servomotor characterization, thermal modeling, bang-bang control, computer vision, kinematics.

I. INTRODUCTION

MODULAR robotics enables the design and construction of complex robotic systems from repeatable functional units that integrate mechanical, electronic, and control capabilities. This approach significantly streamlines manufacturing, system reconfiguration, and maintenance, while supporting distributed architectures where autonomous modules exchange information and share operational resources [1]. Compared to monolithic, rigid robotic platforms, modular reconfigurable robots offer superior adaptability and permit functional units to be deployed across diverse spatial and kinematic configurations [1].

In parallel, socially interactive and human-robot interaction (HRI) systems incorporate perception and actuation mechanisms to establish continuous, non-verbal dialogue with human participants. Within this domain, posture, gestures, and body kinematics constitute vital communication channels for interpreting user intent and synthesizing reactive robotic behavior [2]. Consequently, modern kinetic robotic installations operate not merely as automated spatial mechanisms,

but as interactive expressive surfaces capable of responding synchronously to multimodal human stimuli.

Within this framework, this paper introduces SOFIA, a modular robotic installation comprising sixteen electromechanical units arranged in a kinetic honeycomb array. Each module provides two rotational degrees of freedom (2-DOF) driven by dual metal-gear MG90S servomotors. Each unit incorporates dedicated onboard electronics for signal reception, trajectory interpolation, and actuator pulse generation. Global supervisory communication is established via Bluetooth Low Energy (BLE) and Wi-Fi, whereas inter-module synchronization is supported through an industrial RS-485 / Modbus bus.

The system relies on an ESP32-C3 microcontroller as the core processing and telemetry engine [3], coupled with PCA9685 16-channel 12-bit I²C PWM controllers [4] to synthesize precise control pulses for the servomotors. Although commercial off-the-shelf (COTS) servomotors simplify spatial positioning, their internal closed-loop controllers remain completely encapsulated within the actuator housing. Consequently, while the supervisory system commands an angular setpoint via external 50 Hz PWM duty cycles, the internal drive strategy utilized to eliminate error between reference and actual shaft position is inaccessible to the designer.

This characteristic becomes critical when a servomotor experiences operational constraints where it cannot reach the commanded angular setpoint. In large-scale kinetic arrays composed of numerous densely packed modules, mechanical interference, fabrication tolerances, structural interference, or physical obstacles produce persistent, non-zero position errors. Under such conditions, internal driver behavior governs current draw, internal thermal dissipation, and long-term hardware reliability.

A classical control archetype relevant to bounded-input actuators under persistent saturation is bang-bang (on-off) control. Bang-bang strategies naturally arise in control problems subject to bounded actuation limits and represent a fundamental baseline for analyzing actuator dynamics under persistent error [5]. However, whether an embedded servomotor driver exhibits a quasi-bang-bang response cannot be established solely from external PWM waveforms.

To address this challenge, this paper experimentally characterizes the electromechanical and thermal behavior of the MG90S servomotor under persistent position error. By imposing a mechanical constraint on the output shaft and monitoring surface temperature with a precision LM35 sensor, this study extracts empirical first-order thermal models via linear regression. The primary working hypothesis posits that persistent angular error induces an observable thermal signature that

quantitatively reflects actuator operational constraints. The core contribution of this work lies in combining a vision-driven modular robotic architecture for human-robot interaction with rigorous experimental actuator characterization, establishing thermal boundaries to guarantee operational reliability in kinetic surfaces.

A. Related Work

Recent advances in interactive surfaces and vision-driven robotics have accelerated with lightweight machine learning inference frameworks. Quiñonez *et al.* [6] demonstrated the efficacy of MediaPipe solutions for real-time 3D landmark estimation. Contemporary computer vision implementations leveraging MediaPipe [7] and OpenCV [8], [9] demonstrate how 21-point hand topologies and skeletal posture can be extracted in real time with minimal computational overhead.

In modular and reconfigurable robotics, Seo *et al.* [1] established foundational taxonomy and scalability criteria for autonomous repeatable modules, emphasizing distributed coordination and power distribution challenges. Fong *et al.* [2] surveyed social robotics, demonstrating that physical motion, non-verbal mirroring, and gestural responsiveness enhance user engagement. Nevertheless, existing kinetic installations frequently overlook actuator stall dynamics and internal thermal accumulation occurring across densely populated arrays. Boyd and Barratt [5] established theoretical boundaries for bounded controller actions; building upon these foundations, this research bridges the gap between high-level visual tracking and low-level physical actuator reliability.

B. Formal Problem Formulation

The SOFIA system requires coordinated spatial orientation of 32 independent servomotors across 16 electromechanical modules. Each actuator receives an angular reference setpoint $\theta_{\text{ref}}(t)$ and is commanded to achieve the target physical orientation $\theta(t)$.

The angular position error $e(t)$ for any given actuator is formally defined as:

$$e(t) = \theta_{\text{ref}}(t) - \theta(t), \quad (1)$$

where $\theta_{\text{ref}}(t) \in [\theta_{\text{min}}, \theta_{\text{max}}]$ denotes the commanded angular setpoint, and $\theta(t)$ denotes the instantaneous angular position of the output shaft.

Under ideal, unconstrained operation, the internal feedback loop drives $e(t) \rightarrow 0$ within a settling time $t_s \in [75, 180]$ ms. However, when an external mechanical barrier or physical stall enforces a boundary condition such that $\theta(t) = \theta_{\text{stall}} \neq \theta_{\text{ref}}(t)$, the error persists indefinitely:

$$e(t) = \theta_{\text{ref}}(t) - \theta_{\text{stall}} = \Delta\theta_0 \neq 0, \quad \forall t \geq t_0. \quad (2)$$

When $e(t)$ persists, the internal H-bridge driver continuously supplies high current to the DC coreless motor in an attempt to minimize the tracking discrepancy. This condition causes significant Joule heating ($P_{\text{loss}} = I^2 R$) within the motor armature and driver silicon, inducing rapid thermal accumulation. Modeling this thermal profile and its associated time constant provides the quantitative foundation for actuator risk mitigation in the SOFIA array.

II. MATERIALS AND METHODS

Table I summarizes the bill of materials for the SOFIA 16-module system, including each component's technical description, manufacturer, and country of origin.

The servomotor operational limits and step response parameters were experimentally evaluated using the test protocol recorded in "docs/experimental-data/servomotor_pruebas_caracterizacion.xlsx". Under continuous PWM excitation at 50 Hz, the effective angular deflection spanned $\theta \in [19.3^\circ, 70.2^\circ]$ with a mean operating angle of 47.9° and step response times ranging between 75 ms and 180 ms.

A. Experimental Setup: Thermal Characterization under Persistent Error

To investigate the thermal behavior and reliability limits of the MG90S servomotors within the SOFIA architecture, an experimental testing apparatus was designed to record thermal dissipation under mechanical restriction. The test bench comprises:

- 1) An MG90S metal-gear servomotor powered by a regulated 5.0 V DC supply.
- 2) A 10 k Ω linear precision potentiometer utilized to set and modulate the commanded angular setpoint $\theta_{\text{ref}}(t)$.
- 3) A calibrated LM35 precision centigrade temperature sensor mechanically thermally coupled to the servomotor casing via thermal interface compound, providing an analog output of 10 mV/ $^\circ\text{C}$.
- 4) An acquisition node based on an ESP32 microcontroller acquiring angular commands and surface temperature $T_{\text{servo}}(t)$ at a sampling rate of 1 Hz.

A rigid mechanical boundary stop was rigidly fixed to the servomotor output horn to physically prevent the output shaft from reaching the commanded angular reference $\theta_{\text{ref}}(t)$, deliberately maintaining a persistent non-zero error condition: $e(t) = \theta_{\text{ref}}(t) - \theta_{\text{stall}} > 0$. Ambient room temperature T_{amb} was monitored as the reference operating baseline.

The experimental characterization protocol was conducted in two sequential stages:

- **Trial 1 (Failure and Degradation Assessment):** The actuator was initialized at $T_{\text{amb}} = 21.37^\circ\text{C}$ and subjected to a persistent stall reference of $\theta_{\text{ref}} = 180^\circ$. The test proceeded continuously for 226 s, until distinct audible abnormalities, gear strain, and subsequent actuator degradation occurred. The surface temperature climbed monotonically to a critical peak of $T_{\text{max}} = 64.84^\circ\text{C}$.
- **Trial 2 (Extended Thermal Accumulation and Cooling):** In an extended continuous run spanning $t \in [973.1, 1654.1]$ s (682 data points), the actuator thermal profile was evaluated under varying commanded angular steps. Starting from $T_{\text{amb}} = 19.29^\circ\text{C}$, the casing reached a steady-state thermal maximum of $T_{\text{max}} = 70.21^\circ\text{C}$ ($\Delta T = 50.92^\circ\text{C}$) before stabilization and subsequent cooling upon stall removal.

TABLE I
BILL OF MATERIALS SUMMARY FOR THE SOFIA 16-MODULE SYSTEM

Component	Qty.	Technical description	Manufacturer	Country / Location
MG90S Servomotor	32	Metal gear micro servo, rated torque 1.8–2.2 kgf·cm at 4.8–6.0 V, evaluated angle range $\theta \in [19.3^\circ, 70.2^\circ]$, 50 Hz PWM control	TowerPro	Shenzhen, China
Module Enclosure	16	3D-printed PLA enclosure, custom SOFIA003 honeycomb design for 2-DOF module	In-house (LabDST)	Mexico City, Mexico
M3 Fasteners (Various)	64	Stainless steel socket head cap screw, M3 $\times$ 10 mm, for servo and frame mounting	Generic	Mexico City, Mexico
PCA9685 Servo Driver	2	16-Channel 12-bit PWM I ² C driver module for 32 servomotors	NXP Semiconductors / Adafruit	Eindhoven, Netherlands
ESP32-C3 Master MCU	1	32-bit RISC-V microcontroller, 2.4 GHz Wi-Fi / Bluetooth 5 LE for trajectory generation	Espressif Systems	Shanghai, China

TABLE II
ESP32-C3 TECHNICAL SPECIFICATIONS AND COMPLIANCE ASSESSMENT.

Component	Parameter	Value	Source
ESP32-C3 (Espressif Systems, v2.4)	Supply Voltage (VDDA, VDD3P3, VDD3P3_RTC)	3.0–3.6 V; 3.3 V typical	Datasheet v2.4, Section 5.2, Table 5-2, p. 54
ESP32-C3	Cumulative Supply Current (IVDD)	0.5 A min.	Datasheet v2.4, Section 5.2, Table 5-2, p. 54
ESP32-C3	Peak Wi-Fi Transmission Current	276–335 mA, depending on the operating mode	Datasheet v2.4, Section 5.6.1, Table 5-7, p. 56
ESP32-C3	VIH: High-Level Input Voltage	$0.75 \times VDD$ min.	Datasheet v2.4, Section 5.4, Table 5-4, p. 55
ESP32-C3	VIL: Low-Level Input Voltage	-0.3 to $0.25 \times VDD$ V	Datasheet v2.4, Section 5.4, Table 5-4, p. 55
ESP32-C3	Strapping Pins / Boot Configuration Pins	GPIO2, GPIO8, and GPIO9. Their logic levels are sampled during reset to determine the boot mode.	Datasheet v2.4, Section 3, Boot Configuration, p. 30
ESP32-C3	GPIO8 and GPIO9 Boot-Time Levels	SPI Boot: GPIO9 = 1. Joint Download Boot: GPIO8 = 1 and GPIO9 = 0. The GPIO8 = 0, GPIO9 = 0 combination is not listed as a valid boot mode in Table 3-3.	Datasheet v2.4, Section 3.1, Table 3-3, p. 31
ESP32-C3	Wi-Fi	2.4 GHz, IEEE 802.11 b/g/n	Datasheet v2.4, Features section, p. 3
ESP32-C3	Bluetooth	Bluetooth 5	Datasheet v2.4, Features section, p. 3
ESP32-C3	Operating Temperature	56 °C	Datasheet v2.4, Section 1.2, Table 1-1, p. 12

B. First-Order Thermal Modeling and Parameter Identification

Assuming the servomotor housing behaves as a lumped thermal capacitance with convective and conductive dissipation to the ambient air, the thermal accumulation dynamics under constant electrical power dissipation can be modeled by a first-order differential equation:

$$C_{th} \frac{dT(t)}{dt} + \frac{T(t) - T_{amb}}{R_{th}} = P_{diss}, \quad (3)$$

TABLE III
SERVOMOTOR MG90S TECHNICAL SPECIFICATIONS AND COMPLIANCE ASSESSMENT.

Component	Parameter	Value	Source
MG90s	Supply and operating Voltage	4.8 V – 6.0 V	MG90S datasheet, Tower Pro, p.2
MG90s	Stall Torque	1.8 kgf·cm at 4.8V, 2.2 kgf·cm at 6V	MG90S datasheet, Tower Pro, p.1
MG90s	Operating Speed	0.1 s/60° at 4.8V, 0.08 s/60° at 6V	MG90S datasheet, Tower Pro, p.1
MG90s	Control Signal	PWM, orange wire; Vcc red; GND brown; 20 ms (50 Hz) period, 1–2 ms duty cycle	MG90S datasheet, Tower Pro, p.2
MG90s	Rotation Range	approximately 180 degrees (90° in each direction)	MG90S datasheet, Tower Pro, p.2
MG90s	Evaluated Angle Range (Experimental)	19.3° – 70.2° (mean: 47.9°)	LabDST test log (docs/experimental-data)
MG90s	Response Time (Experimental)	75 – 180 ms	LabDST test log (docs/experimental-data)
MG90s	Dead Band Width	5 μ s	MG90S datasheet, Tower Pro, p.2
MG90s	Operating Temperature	Not specified in datasheet	N/A
MG90s	Dimension & Weight	22.5 $\times$ 12 $\times$ 35.5 mm approx.; 13.4 g	MG90S datasheet, Tower Pro, p.1

where C_{th} represents the lumped thermal capacitance, R_{th} represents the equivalent thermal resistance, and $P_{diss} = I_{stall}^2 R_{coil}$ is the continuous stall power.

Integrating (3) with the initial condition $T(0) = T_{amb}$ yields the standard step response:

$$T(t) = T_{amb} + \Delta T_{max} \left(1 - e^{-t/\tau}\right), \quad (4)$$

where $\Delta T_{max} = T_{max} - T_{amb} = P_{diss} R_{th}$ denotes the maximum asymptotic temperature rise, and $\tau = R_{th} C_{th}$ is the thermal time constant of the actuator.

To identify τ from the empirical data recorded in Trial 1 without non-linear curve fitting, (4) is algebraically rearranged into a normalized logarithmic linear form:

$$y(t) = \ln \left(1 - \frac{T(t) - T_{amb}}{\Delta T_{max}}\right) = -\frac{1}{\tau} t. \quad (5)$$

Applying linear least-squares regression over the active heating interval $t \in [1, 226]$ s yields an empirical slope of

TABLE IV
PCA9685 TECHNICAL SPECIFICATIONS AND COMPLIANCE ASSESSMENT.

Component	Parameter	Value	Source
PCA9685 (NXP Semiconductors, datasheet Rev. 4)	Supply Voltage (V_{DD})	2.3–5.5 V	Datasheet Rev. 4, Section 2, Table 14, p. 38
PCA9685	PWM Resolution	12 bits (4096 steps)	Datasheet Rev. 4, Section 1, p. 1
PCA9685	Number of PWM Channels	16 independent channels	Datasheet Rev. 4, Section 1, p. 1
PCA9685	Communication Interface	I ² C Fast-mode Plus	Datasheet Rev. 4, Section 2, p. 2
PCA9685	Maximum I ² C Frequency	Up to 1 MHz	Datasheet Rev. 4, Section 2, p. 2
PCA9685	PWM Frequency Range	24 Hz – 1526 Hz	Datasheet Rev. 4, Section 7.3.5, p. 25
PCA9685	Default PWM Frequency	Approximately 200 Hz	Datasheet Rev. 4, Table 8, p. 25
PCA9685	I ² C Address Configuration	A0–A5 pins, up to 62 devices	Datasheet Rev. 4, Section 7.1, p. 7
PCA9685	Output Current	25 mA per output	Datasheet Rev. 4, Table 13, p. 38
PCA9685	Total Output Current	400 mA maximum	Datasheet Rev. 4, Table 13, p. 38
PCA9685 Module (UNIT Electronics)	Output Ports	16 PWM outputs with V+, GND and PWM signal	UNIT Electronics product specification
PCA9685 Module (UNIT Electronics)	Logic Voltage	3–5 V	UNIT Electronics product specification
PCA9685 Module (UNIT Electronics)	Servo Power Supply (V+)	External power supply connected to actuators	UNIT Electronics product specification
PCA9685	Operating Temperature	−40 °C to +85 °C	Datasheet Rev. 4, Table 13, p. 38

$m = -0.01241 \text{ s}^{-1}$. Consequently, the identified thermal time constant is:

$$\tau = -\frac{1}{m} \approx 80.6 \text{ s}. \quad (6)$$

This identification indicates that when an MG90S servomotor enters an unmitigated mechanical stall, it reaches 63.2% of its maximum temperature rise ($\approx 48.9^\circ\text{C}$) in approximately 80 s, and approaches the destructive threshold of 65°C in under 4 minutes. Because the internal driver continuously applies peak torque without timeout or thermal throttling, its behavior closely mirrors an unconstrained bang-bang controller under saturation.

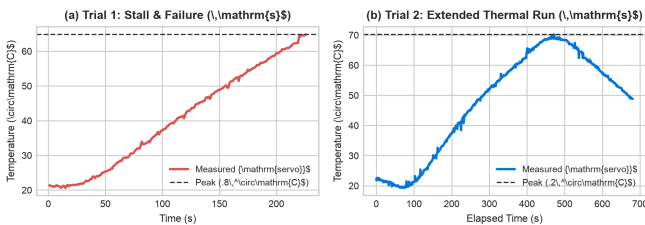


Fig. 1. Experimental thermal characterization of the MG90S servomotor under persistent mechanical stall: (a) Trial 1 heating curve until audible failure at $t = 226 \text{ s}$ ($T_{\max} = 64.84^\circ\text{C}$); (b) Trial 2 extended thermal cycle across 682 data points reaching peak steady-state temperature of 70.21°C .

III. DESIGN AND IMPLEMENTATION OF THE TECHNOLOGICAL SOLUTION

The SOFIA technological solution integrates physical modular hardware, distributed electronics, and real-time vision-based kinematic coordination.

A. System Architecture and Subsystems

The physical and functional architecture of the SOFIA platform is organized into three primary interconnected subsystems:

- **Perception and High-Level Control:** A host workstation executes an optimized real-time vision pipeline running on Python. It captures live camera feeds, performs 3D upper-body pose estimation and dual 21-point hand topology tracking, recognizes static and dynamic interaction gestures, and translates user coordinates $\mathbf{p}(t) \in \mathbb{R}^3$ into spatial target orientations.
- **Master Communication and Telemetry:** An ESP32-C3 master microcontroller receives spatial setpoints via low-latency Wi-Fi / BLE communication and broadcasts synchronized module packets across an isolated RS-485 / Modbus serial bus.
- **Distributed Modular Honeycomb Array:** 16 independent 2-DOF modules receive target angular pairs (q_1, q_2) . Actuation pulses are generated locally via PCA9685 12-bit PWM controllers, driving 32 MG90S metal-gear servomotors.

B. Computer Vision Tracking and Dynamic Gesture Pipeline

The perception layer is developed using Python 3.11 with MediaPipe Tasks and OpenCV, structured into a modular, low-latency architecture:

- 1) **Real-Time 3D Landmark Extraction:** Using Google MediaPipe's Landmarker models in video mode, the system extracts 33 holistic body landmarks and two sets of 21 3D hand coordinates (x, y, z) with millisecond-accurate timestamps, achieving stable 30 FPS throughput on host CPUs.
- 2) **Rotation-Invariant Hand Topology:** Finger states are computed using 3D Euclidean distances between distal tips and the wrist base, normalized against palm scale $\|\mathbf{p}_{\text{wrist}} - \mathbf{p}_{\text{MCP}}\|$. This eliminates perspective distortion when fists face the camera.
- 3) **Dynamic Gesture Recognition Engine:** A modular coordination layer (*GestureDetector*) arbitrates between static and dynamic interactions with strict temporal priority:
 - *Dynamic Wave (Saludo):* Tracks lateral palm oscillations (landmark 9 X-coordinate); requires at least 3 direction reversals and amplitude > 0.05 normalized units, prioritizing greeting over static open-hand detection.
 - *Two-Handed RPS Game Intent (Intención PPT):* Detects a horizontal flat palm as a reference plane and records 3 vertical fist-pump impacts using a finite-state machine ($d_{\text{contact}} < 0.17$ and $d_{\text{release}} >$

0.20 normalized units). A hysteresis hold filter prevents transient flickering with static rock or paper gestures.

- *Static Postures*: Detects two-handed heart geometries, scissors, open paper, and closed fists.

C. Electronic Interconnection and Current Hardware Stage

In the current development stage (Corte 1, Discover → Learn), the physical electronic architecture is validated using commercial off-the-shelf (COTS) breakout boards on breadboards, directly interconnecting the ESP32-C3 microcontroller, dual PCA9685 PWM drivers, and external 5.0 V power rails. Custom printed circuit board (PCB) layout, routing, and fabrication remain open work for subsequent project phases (Make → Test), once the thermal boundaries and wiring constraints of the 16-module array are fully validated through the present prototype.

D. Thermal Protection and Reliability Risk Mitigation

Based on the empirical thermal constant ($\tau \approx 80.6$ s) derived in Section II-B, software-level watchdog limits are integrated into the SOFIA kinematic controller:

- 1) **Command Saturation Limiting**: Commanded angles are hard-bounded within the verified operational range $q_1, q_2 \in [19.3^\circ, 70.2^\circ]$ (mean: 47.9°) established in Table III.
- 2) **Stall Timeout Monitoring**: If an actuator target remains static under continuous high-load deflection for $\Delta t > 15$ s ($< 0.2\tau$), the supervisory controller decrements the hold torque or enters an idle compliant mode, preventing cumulative temperature rise above the 55°C safety ceiling.

IV. RESULTS

A. Kinematic Tracking Simulation

To validate the analytical kinematic model, a dynamic tracking simulation of the 16-module SOFIA robotic honeycomb array was conducted in a virtual 3D environment using the Unity engine [10]. The objective was to evaluate the coordinated orientation of the modules toward a moving target coordinate $\mathbf{p}(t) \in \mathbb{R}^3$.

For each module m_i , the inverse kinematics procedure determines the servo variables (q_1, q_2) from the relative position of the target with respect to the module base frame. The resulting joint angles are constrained according to the permissible actuator range. The complete inverse kinematics procedure is summarized in Algorithm 1.

Algorithm 1 SOFIA Module Inverse Kinematics

Require: Module base origin $\mathbf{r}_{0,2}$, target coordinate $\mathbf{p}$, joint angle limits $[q_{1,\min}, q_{1,\max}]$ and $[q_{2,\min}, q_{2,\max}]$

Ensure: Joint angles q_1, q_2

```

1:  $\mathbf{r}_{2,p} \leftarrow \mathbf{p} - \mathbf{r}_{0,2}$ 
2:  $[u_x, u_y, u_z]^\top \leftarrow \mathbf{r}_{2,p} / \|\mathbf{r}_{2,p}\|$ 
3:  $q_2 \leftarrow \arcsin(u_x)$ 
4:  $q_1 \leftarrow \text{atan2}(-u_y, u_z)$ 
5: if  $q_1 < q_{1,\min}$  then
6:    $q_1 \leftarrow q_{1,\min}$ 
7: else if  $q_1 > q_{1,\max}$  then
8:    $q_1 \leftarrow q_{1,\max}$ 
9: end if
10: if  $q_2 < q_{2,\min}$  then
11:    $q_2 \leftarrow q_{2,\min}$ 
12: else if  $q_2 > q_{2,\max}$  then
13:    $q_2 \leftarrow q_{2,\max}$ 
14: end if
15: return  $q_1, q_2$ 

```

Figure 2 shows six representative frames of the simulated tracking process. As the target moves through the workspace, the modules progressively change their orientation, maintaining the direction of their normal vectors $\hat{\mathbf{r}}_{2,3}^{(i)}$ toward the target position. The sequence illustrates the coordinated response of the 16-module array during different stages of the target trajectory.

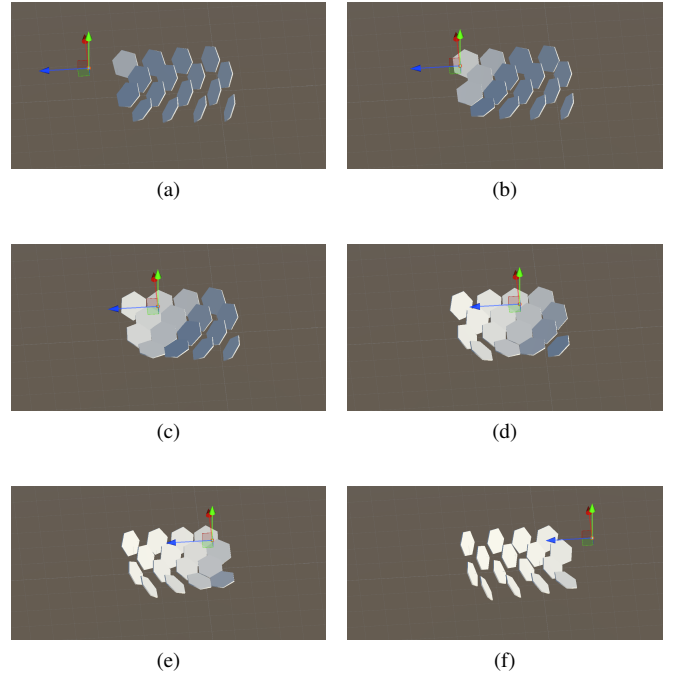


Fig. 2. Representative frames of the SOFIA kinematic tracking simulation. The six frames illustrate the progressive reorientation of the 16-module honeycomb array as the target coordinate $\mathbf{p}(t)$ moves through the workspace, with the module normal vectors $\hat{\mathbf{r}}_{2,3}^{(i)}$ oriented toward the target.

V. DISCUSSION

The experimental characterization of the MG90S servomotor and the kinematic tracking simulation of the SOFIA kinetic array provide key insights into the intersection between high-level human-robot interaction and low-level electromechanical constraints:

- **Actuator Thermal Dynamics and Bang-Bang Analogy:** The empirical thermal response confirms that COTS servomotors operating under persistent position error display behavior characteristic of unconstrained saturation. Because the internal microcontroller continuously activates the H-bridge at full pulse width to overcome the perceived spatial error, electrical energy is dissipated as heat with a time constant of $\tau \approx 80.6$ s. This steep thermal gradient directly degrades the plastic gear train retainers and motor brush assemblies when temperatures exceed 65°C .
- **Comparison with Established Literature:** In contrast to standard modular robotic architectures [1] that treat actuators as ideal velocity/position sources, our experimental findings emphasize that thermal accumulation is a dominant failure mode in densely packed kinetic surfaces. By incorporating watchdog current and stall thresholds, SOFIA maintains continuous social interaction [2] without exceeding safe thermal boundaries.
- **Methodological Limitations:** The LM35 sensor measures casing surface temperature rather than internal coreless rotor winding temperature directly. Internal coil temperatures are higher than outer surface measurements. Furthermore, while the external 50 Hz PWM command is known, the internal firmware closed-loop control signals remain inaccessible. Therefore, these thermal models serve as an effective macroscopic indicator rather than an internal algorithm reverse-engineering tool.

VI. CONCLUSIONS

This paper presented the conceptual design, system architecture, and experimental actuator characterization of SOFIA, an interactive modular robotic surface comprising sixteen 2-DOF electromechanical units. By coupling real-time computer vision (MediaPipe 3D upper-body pose and 21-point hand tracking) with distributed ESP32-C3 / PCA9685 motion controllers, the platform synthesizes intuitive kinetic responses to human non-verbal gestures. Experimental evaluation under persistent position error conditions demonstrated that unmitigated mechanical stalls lead to rapid thermal runaway with an identified first-order time constant of $\tau \approx 80.6$ s and casing temperatures reaching 70.2°C . Incorporating angular limits and thermal watchdog timeouts mitigates actuator burnout risk, establishing a robust foundation for the physical implementation and deployment of modular kinetic surfaces.

AUTHOR CONTRIBUTIONS

P. C.-V. conceived the SOFIA platform architecture, designed the physical modular hardware, and performed the thermal characterization experiments. J. R.-G. developed the computer vision tracking pipeline, MediaPipe integration, and

Unity kinematic simulation. A. M.-L. implemented the distributed ESP32-C3 firmware and RS-485 communication bus. All authors contributed to the data analysis, drafting, and critical revision of the manuscript.

DATA AVAILABILITY

The experimental actuator logs, CAD models, and kinematic tracking software supporting the findings of this study are openly available in the GitHub project repository: <https://github.com/PaolaCV14/IOT-SOFIA-2026>.

ACKNOWLEDGMENT

The authors thank the Department of Technological and Industrial Processes and the Laboratory of Distributed Systems and Telematics (LabDST) at ITESO for providing laboratory instrumentation, computing resources, and technical support throughout the development of the SOFIA project.

CONFLICTS OF INTEREST

The authors declare no conflicts of interest.

REFERENCES

- [1] J. Seo, J. Paik, and M. Yim, "Modular reconfigurable robotics," *Annual Review of Control, Robotics, and Autonomous Systems*, vol. 2, pp. 63–88, 2019.
- [2] T. Fong, I. Nourbakhsh, and K. Dautenhahn, "A survey of socially interactive robots," *Robotics and Autonomous Systems*, vol. 42, no. 3–4, pp. 143–166, 2003.
- [3] Espressif Systems, *ESP32-C3 Series Datasheet*, v2.4 ed., Espressif Systems, 2024, available: <https://www.espressif.com>.
- [4] NXP Semiconductors, *PCA9685: 16-channel, 12-bit PWM Fm+ I2C-bus LED controller*, rev. 4 ed., NXP Semiconductors, 2015, datasheet.
- [5] S. Boyd and C. Barratt, *Linear Controller Design: Limits of Performance*. Englewood Cliffs, NJ, USA: Prentice Hall, 1991.
- [6] Y. Quiñonez, C. Lizarraga, and R. Aguayo, "Machine learning solutions with MediaPipe," in *Proc. 11th Int. Conf. Softw. Process Improv. (CIMPS)*, Acapulco, Mexico, 2022, pp. 1–6. [Online]. Available: <https://ieeexplore.ieee.org/stamp/stamp.jsp?arnumber=10035706>
- [7] Innovatiana, "MediaPipe 101," <https://www.innovatiana.com/es/post/mediapipe-101>, 2026, accessed: Sep. 15, 2026.
- [8] OpenCV, "Open source computer vision library," <https://opencv.org/>, 2026, accessed: Sep. 15, 2026.
- [9] OMES, "Detección de objetos con MediaPipe, Python y OpenCV," <https://omes-va.com/deteccion-de-objetos-con-mediapipe-python-opencv/>, 2026, accessed: Sep. 15, 2026.
- [10] Unity Technologies, "Unity Real-Time 3D Development Platform," <https://unity.com>, 2023, version 2022.3 LTS.