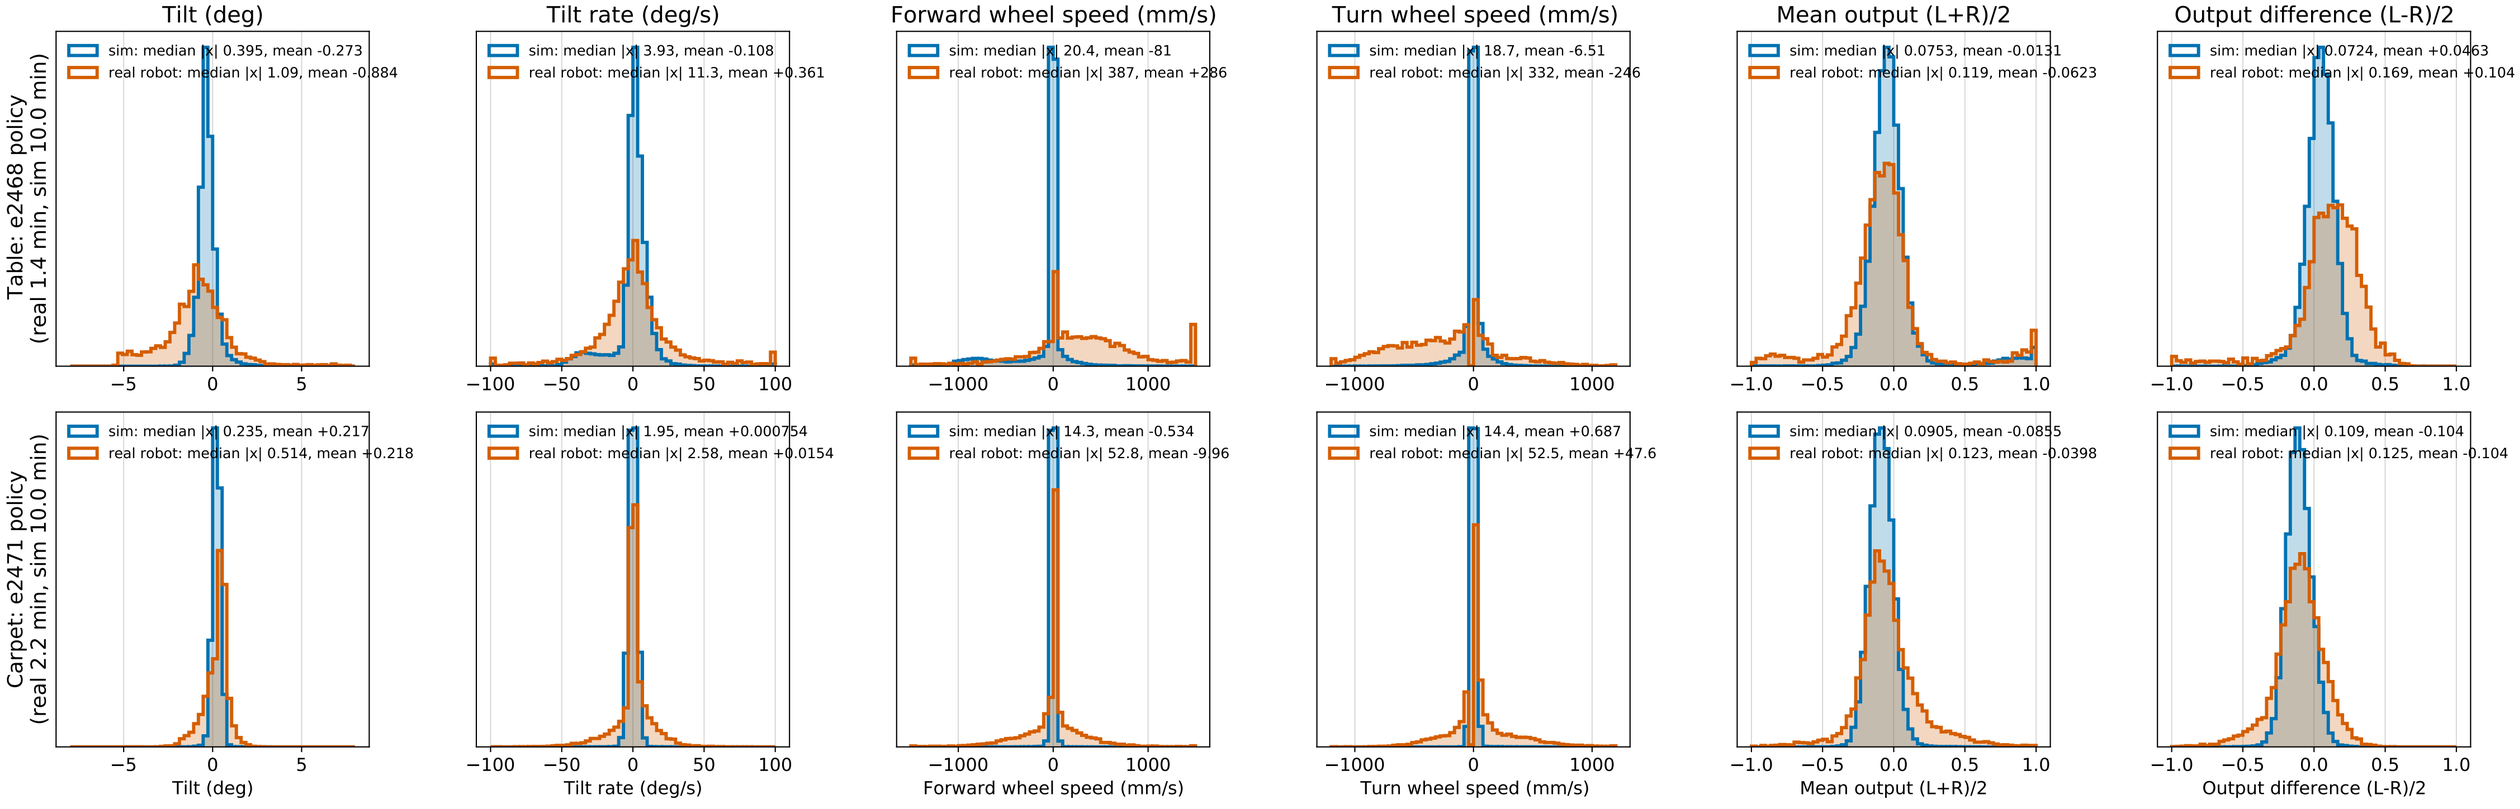
Same policy on the real robot vs in the sim, off the bumpers (training paused on the robot; sim: last 10 min before the checkpoint)
Tilt (deg)
Tilt rate (deg/s)
Forward wheel speed (mm/s)
Turn wheel speed (mm/s)
Mean output (L+R)/2
Output difference (L-R)/2
Table: e2468 policy
(real 1.4 min, sim 10.0 min)
sim: median |x| 0.395, mean -0.273
real robot: median |x| 1.09, mean -0.884
sim: median |x| 3.93, mean -0.108
real robot: median |x| 11.3, mean +0.361
sim: median |x| 20.4, mean -81
real robot: median |x| 387, mean +286
sim: median |x| 18.7, mean -6.51
real robot: median |x| 332, mean -246
sim: median |x| 0.0753, mean -0.0131
real robot: median |x| 0.119, mean -0.0623
sim: median |x| 0.0724, mean +0.0463
real robot: median |x| 0.169, mean +0.104
Carpet: e2471 policy
(real 2.2 min, sim 10.0 min)
sim: median |x| 0.235, mean +0.217
real robot: median |x| 0.514, mean +0.218
sim: median |x| 1.95, mean +0.000754
real robot: median |x| 2.58, mean +0.0154
sim: median |x| 14.3, mean -0.534
real robot: median |x| 52.8, mean -9.96
sim: median |x| 14.4, mean +0.687
real robot: median |x| 52.5, mean +47.6
sim: median |x| 0.0905, mean -0.0855
real robot: median |x| 0.123, mean -0.0398
sim: median |x| 0.109, mean -0.104
real robot: median |x| 0.125, mean -0.104
Tilt (deg)
Tilt rate (deg/s)
Forward wheel speed (mm/s)
Turn wheel speed (mm/s)
Mean output (L+R)/2
Output difference (L-R)/2