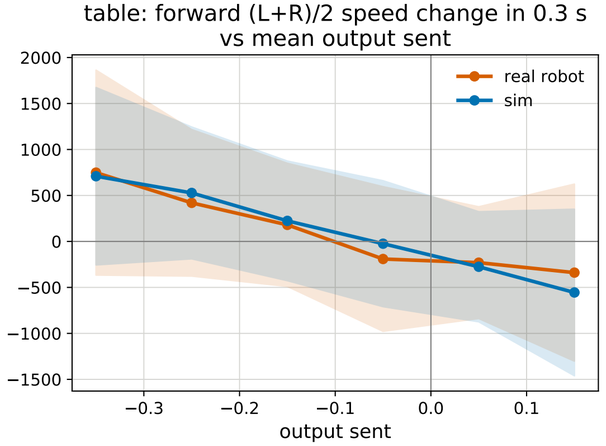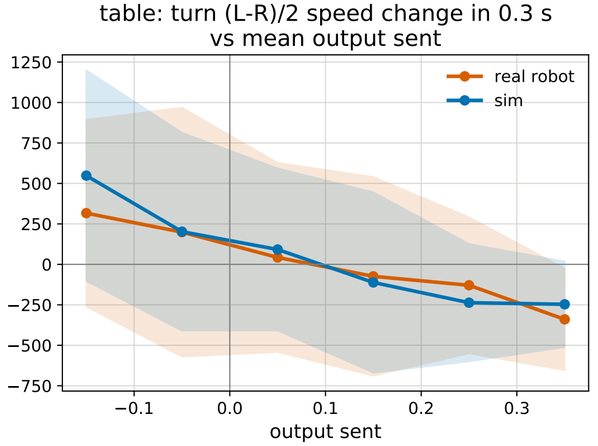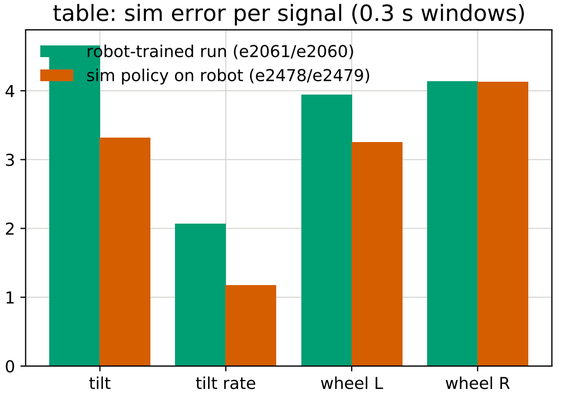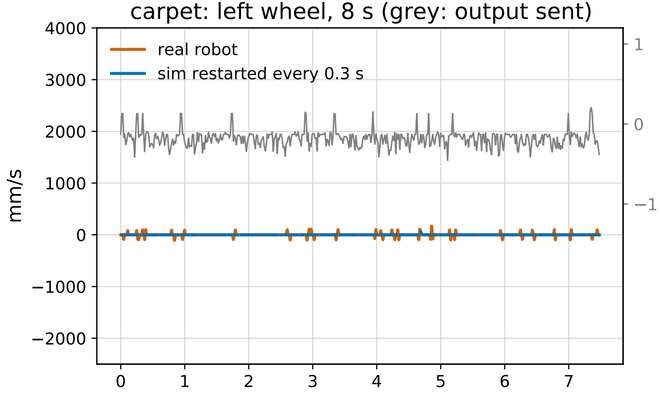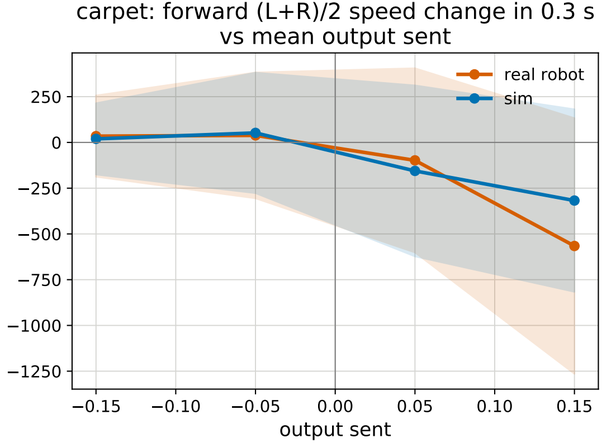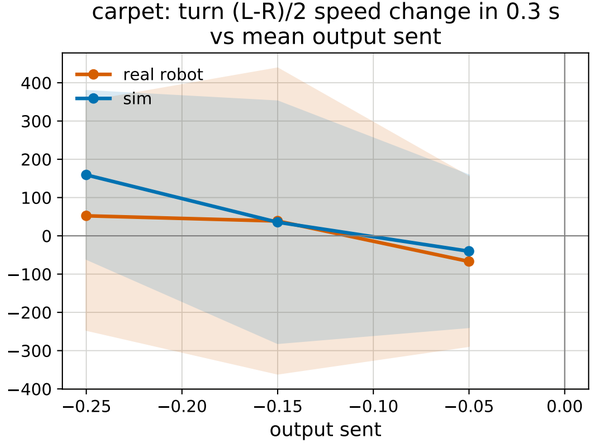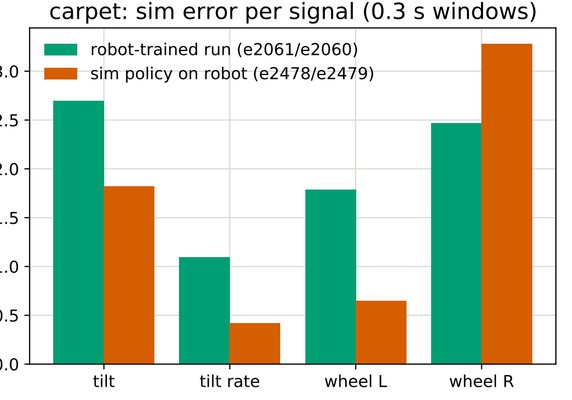Fitted sim fed the outputs the real robot was sent, restarted from its measured state