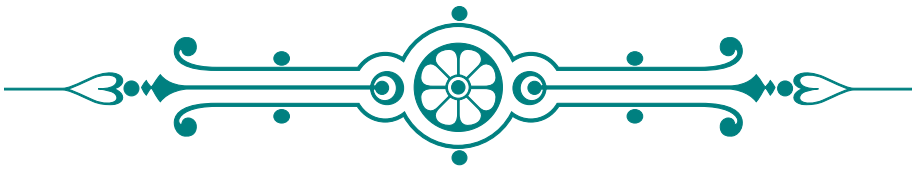

정보통신 수학 및 실습
Lab assignment

학번 :	2016110056	2012112130
이름 :	박승원	노희승
편성 :	20조	2017년 5월 21일

Chapter 10 Lab Assignment

1. The Fourier Series of the following function is as follows: .

$$f(t) = \frac{4}{\pi}\sin t + \frac{4}{\pi}\frac{\sin(3t)}{3} + \frac{4}{\pi}\frac{\sin(5t)}{5} + \frac{4}{\pi}\frac{\sin(7t)}{7}$$

a) Define a variable t having 201 points between $-\pi$ and π using MATLAB.

b) Define a variable $a_1 = \frac{4}{\pi}\sin t$ having 201 points between $-\pi$ and π using a variable t defined in (a) and plot it.

c) Define a variable $a_3 = \frac{4}{\pi}\frac{\sin(3t)}{3}$ having 201 points between $-\pi$ and π using a variable t defined in (a) and plot it over the figure in (b).

d) Define a variable $f_2(t) = a_1(t) + a_3(t)$ having 201 points between $-\pi$ and π and plot it over the figure in (b).

e) Define a variable $a_5 = \frac{4}{\pi}\frac{\sin(5t)}{5}$ having 201 points between $-\pi$ and π using a variable t defined in (a) and plot it over the figure in (b).

f) Define a variable $f_3(t) = f_2(t) + a_5(t)$ having 201 points between $-\pi$ and π and plot it over the figure in (b).

g) Define a variable $f_N(t)$ that add the first N items of the Fourier Series having 201 points between $-\pi$ and π and plot it over the figure in (b) by programming a loop of N=100.