Accepted Manuscript

Title: Impact of formulation parameters on physical characteristics of spray dried nanoemulsions and their reconstitutions

Author: Htoo Htet Myat, Garnpimol C. Ritthidej

PII: S1818-0876(15)00201-9

DOI: http://dx.doi.org/doi: 10.1016/j.ajps.2015.11.038

Reference: AJPS 263

To appear in: Asian Journal of Pharmaceutical Sciences



Please cite this article as: Htoo Htet Myat, Garnpimol C. Ritthidej, Impact of formulation parameters on physical characteristics of spray dried nanoemulsions and their reconstitutions, *Asian Journal of Pharmaceutical Sciences* (2015), http://dx.doi.org/doi: 10.1016/j.ajps.2015.11.038.

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

ACCEPTED MANUSCRIPT

Impact of formulation parameters on physical characteristics of spray dried nanoemulsions and their reconstitutions

Htoo Htet Myat*, Garnpimol C. Ritthidej

International program (Pharmaceutical Technology), Department of Pharmaceutics and Industrial Pharmacy, Faculty of Pharmaceutical Sciences, Chulalongkorn University, Bangkok 10330, Thailand.

*Email: htoohtetmyat1992@gmail.com

Nanoemulsion as small droplet dispersion allows them to uniformly deposit on substrates, increases the rate of bioavailability, absorption and has a better uptake. Although it is generally accepted that nanoemulsions are stable for years, Oswald ripening which can damage nanoemulsion has been reported [1]. In this study, converting nanoemulsion as liquid formulation into solid powders was attempted by using spray drying method. The obtained powders were then characterized, reconstituted and compared to initial nanoemulsion.

Oil in water nanoemulsionscontaining various oil compositions of vegetable oil1% to 5% with constant surfactant concentration of a hydrophobic surfactant, Span® 85, 0.5% w/vand hydrophilic surfactant, Tween® 80, 0.5% w/v were prepared by high pressure homogenization technique. The primary emulsion was prepared by Ultraturrax high-speed homogenizer of 12,000 rpm for 3 min, 5 min and 7 min. It was then subjected to high-pressure homogenizer of 1000 bar for 6 cycles at different temperatures (40°C, 50°C and 60°C) [1]. Optimized nanoemulsion had the lowest oil composition of 1% w/v with an average diameter of 110nm. Nanoemulsion droplets were spherical in shape when characterized by transmission electron microscope (Fig.1A). Stability evaluation was carried out at 4°C and at ambient temperature for 3 months. During the storage period, nanoemulsion was stable with no phase separation or creaming. Maltodextrin was used as carrier during spray drying as it is low cost, neutral aroma and low viscosity at high solid concentrations [2]. Nanoemulsion was loaded with two different concentrations of maltodextrin, 3% and 5% under magnetic stirring for 15 minutes. Two different inlet temperatures of 110°C and 130°C and pump rate of 20% and 30% were varied to analyze the effect of parameters on particle size [3]. Spray dried powders were then reconstituted with purified water to analyze the particle size compared with nanoemulsion before spray drying. The morphological appearances and thermal behavior of spray dried powders were analyzed by scanning electron microscope and differential scanning calorimetry, respectively [2]. The highest spray dried powder yield of 57% was obtained with the formulation containing 3% of maltodextrin at the inlet temperature of 110°C and pump rate of 20% with the spherical powder size of 1-2 µm (Fig.1B). However, increasing the concentration of maltodextrin had not much effect on spray dried yield. Among all formulations, nanoemulsion spray dried at 110°C and pump rate of 30% containing 3% of maltodextrin had achieved the smallest particle size after reconstitution with an average diameter of 158 nm with narrower size distribution (Fig.1C) and zeta potential of -16.43 mV. Increasing the inlet temperature to 130°C or decreasing the pump rate to 20% had

ACCEPTED MANUSCRIPT

increased the particle size to 180nm after reconstitution. It could be concluded that at optimum spray drying condition, spherical powder of nanoemulsion could be obtained and rendered slightly larger size but narrower size distribution than initial formulation.

Keywords: Nanoemulsion; Maltodextrin; Spray drying; Particle size

Acknowledgements

Research grant from the Office of Higher Education Commission via Chulalongkorn University, fiscal year 2014-2015, is acknowledged.

References

- [1] Yuan Y, Gao Y, Zhao J, et al. Characterization and stability evaluation of β-carotene nanoemulsions prepared by high pressure homogenization under various emulsifying conditions. Food Res Int 2008; 41:61-68.
- [2] Carneiro H C, Tonon R V, Grosso C R, et al. Encapsulation efficiency and oxidative stability of flaxseed oil microencapsulated by spray drying using different combinations of wall materials. J Food Eng 2013; 115:443-451.
- [3] Maher P G, Roos Y H, Fenelon M A. Physicochemical properties of spray dried nanoemulsions with varying final water and sugar contents. J Food Eng2014; 126:113-119.

ACCEPTED MANUSCRIPT

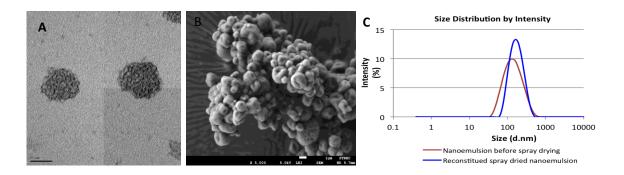


Fig.1. TEM of nanoemulsion with lowest oil composition (A), SEM of spray dried powders (B), size distribution data of nanoemulsion before spray drying and reconstituted spray dried nanoemulsion (C).