

# Iridium 9603N Mini Beacon

Page 2:

With grateful thanks to:  
Adafruit for the Feather M0 Adalogger  
<https://www.adafruit.com/products/2796>  
<https://github.com/adafruit/Adafruit-Feather-M0-Adalogger-PCB>  
Adafruit invests time and resources providing this open source design,  
please support Adafruit and open-source hardware by purchasing products from Adafruit  
Designed by Adafruit Industries.


Page 3:

With grateful thanks to:  
Adafruit for the Ultimate GPS FeatherWing  
<https://www.adafruit.com/products/3133>  
<https://github.com/adafruit/Adafruit-Ultimate-GPS-FeatherWing-PCB>  
Adafruit invests time and resources providing this open source design,  
please support Adafruit and open-source hardware by purchasing products from Adafruit  
Designed by Adafruit Industries.


Page 4:

MPM3610 5V regulator based on the Arduino Zero

Fiducials

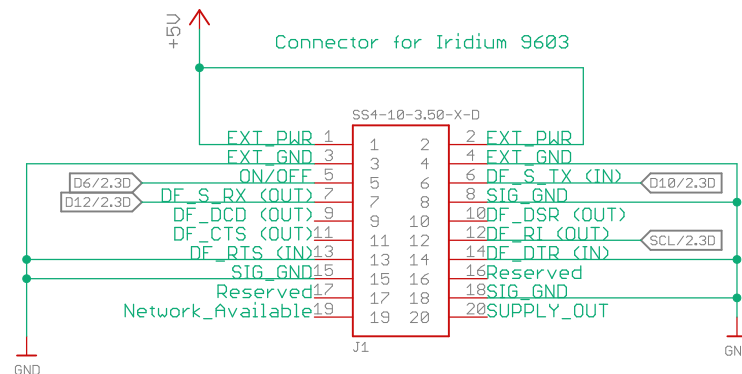

Mounting holes for Iridium 9603  
2 x McMaster 95117A411 Press-In Nuts





Iridium\_9603N\_Mini\_Beacon

22/08/2019 09:38


Sheet: 1/4







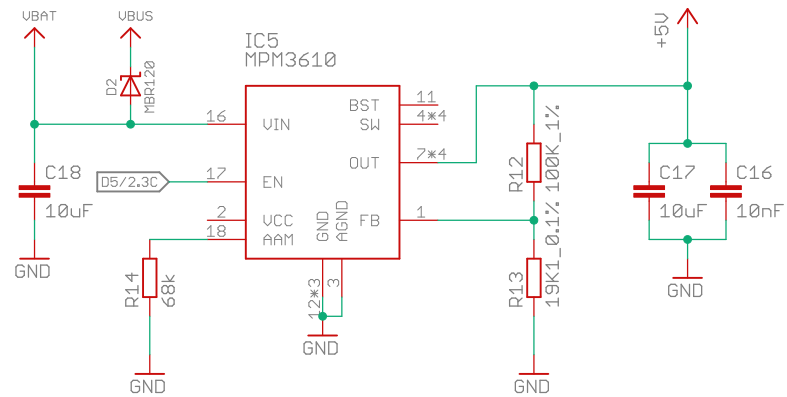

Iridium_9603N_Mini_Beacon	
22/08/2019 09:38	
Sheet: 4/4	

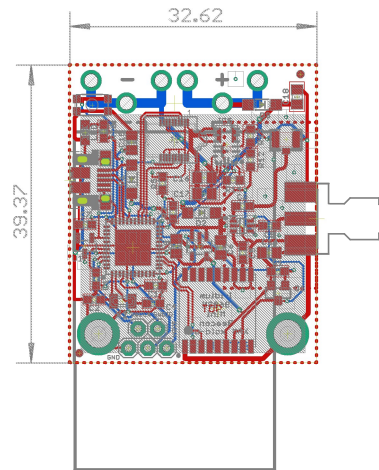

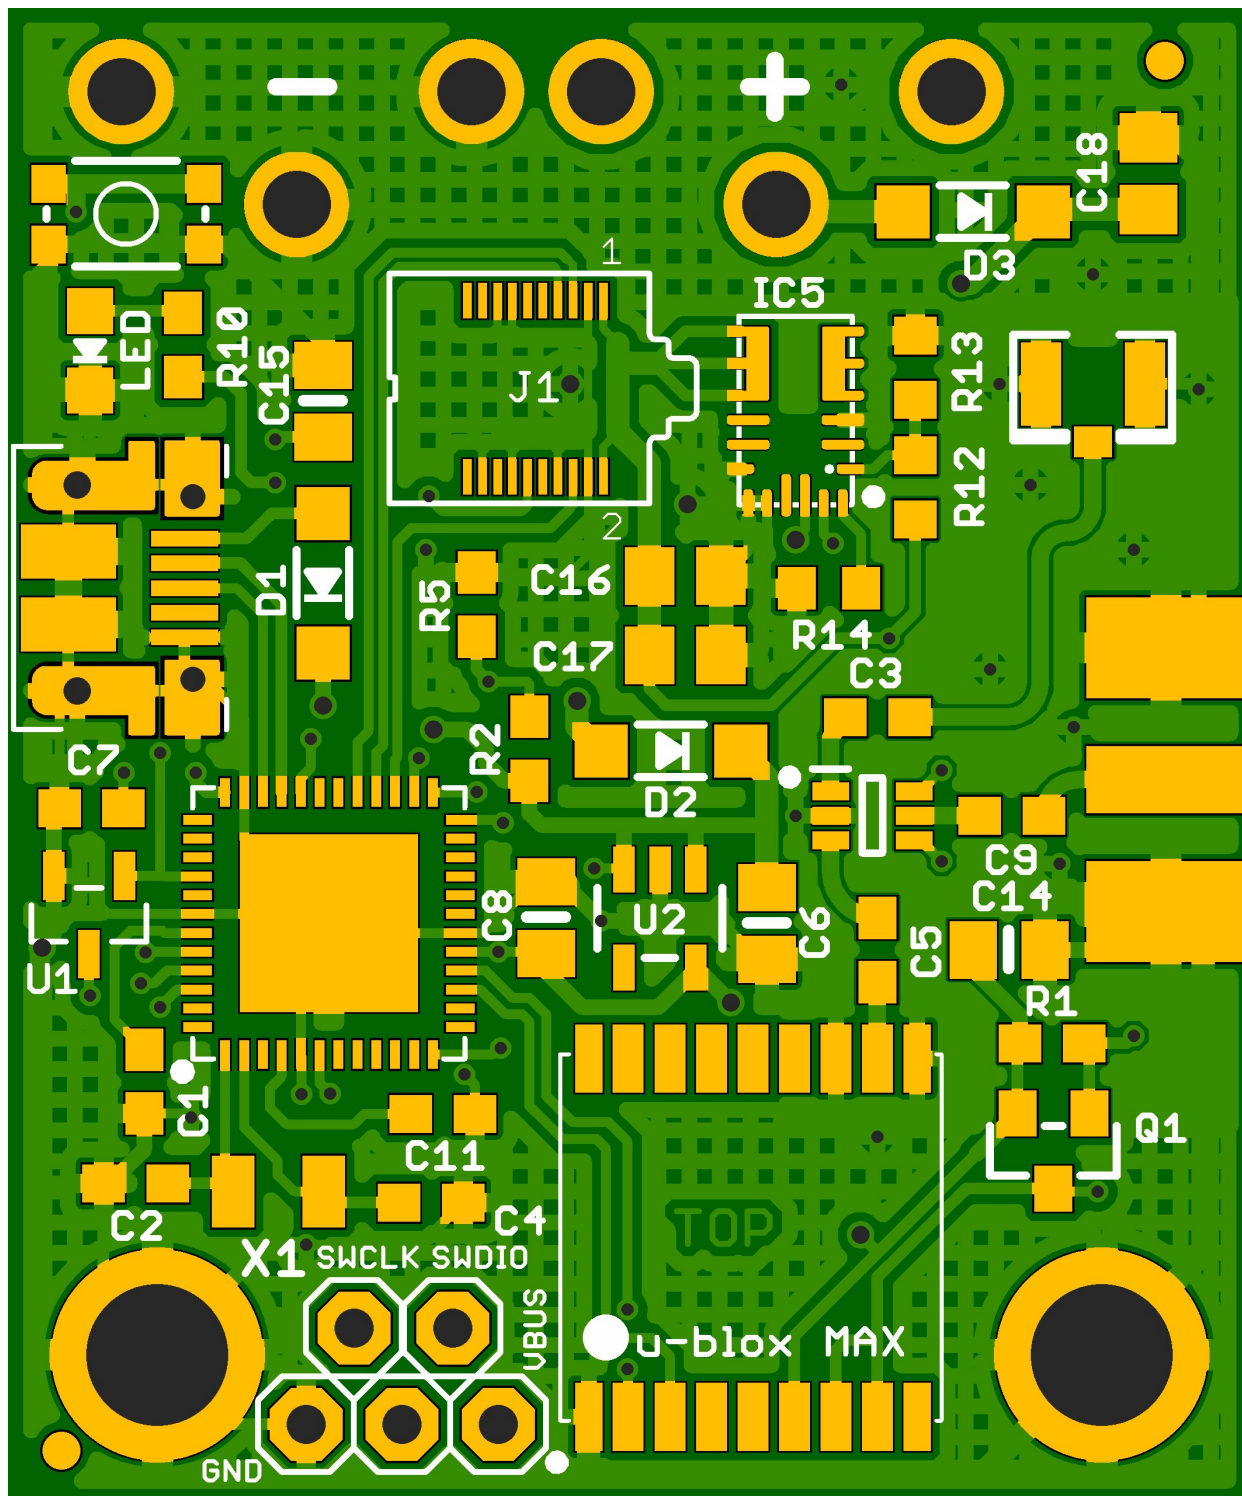

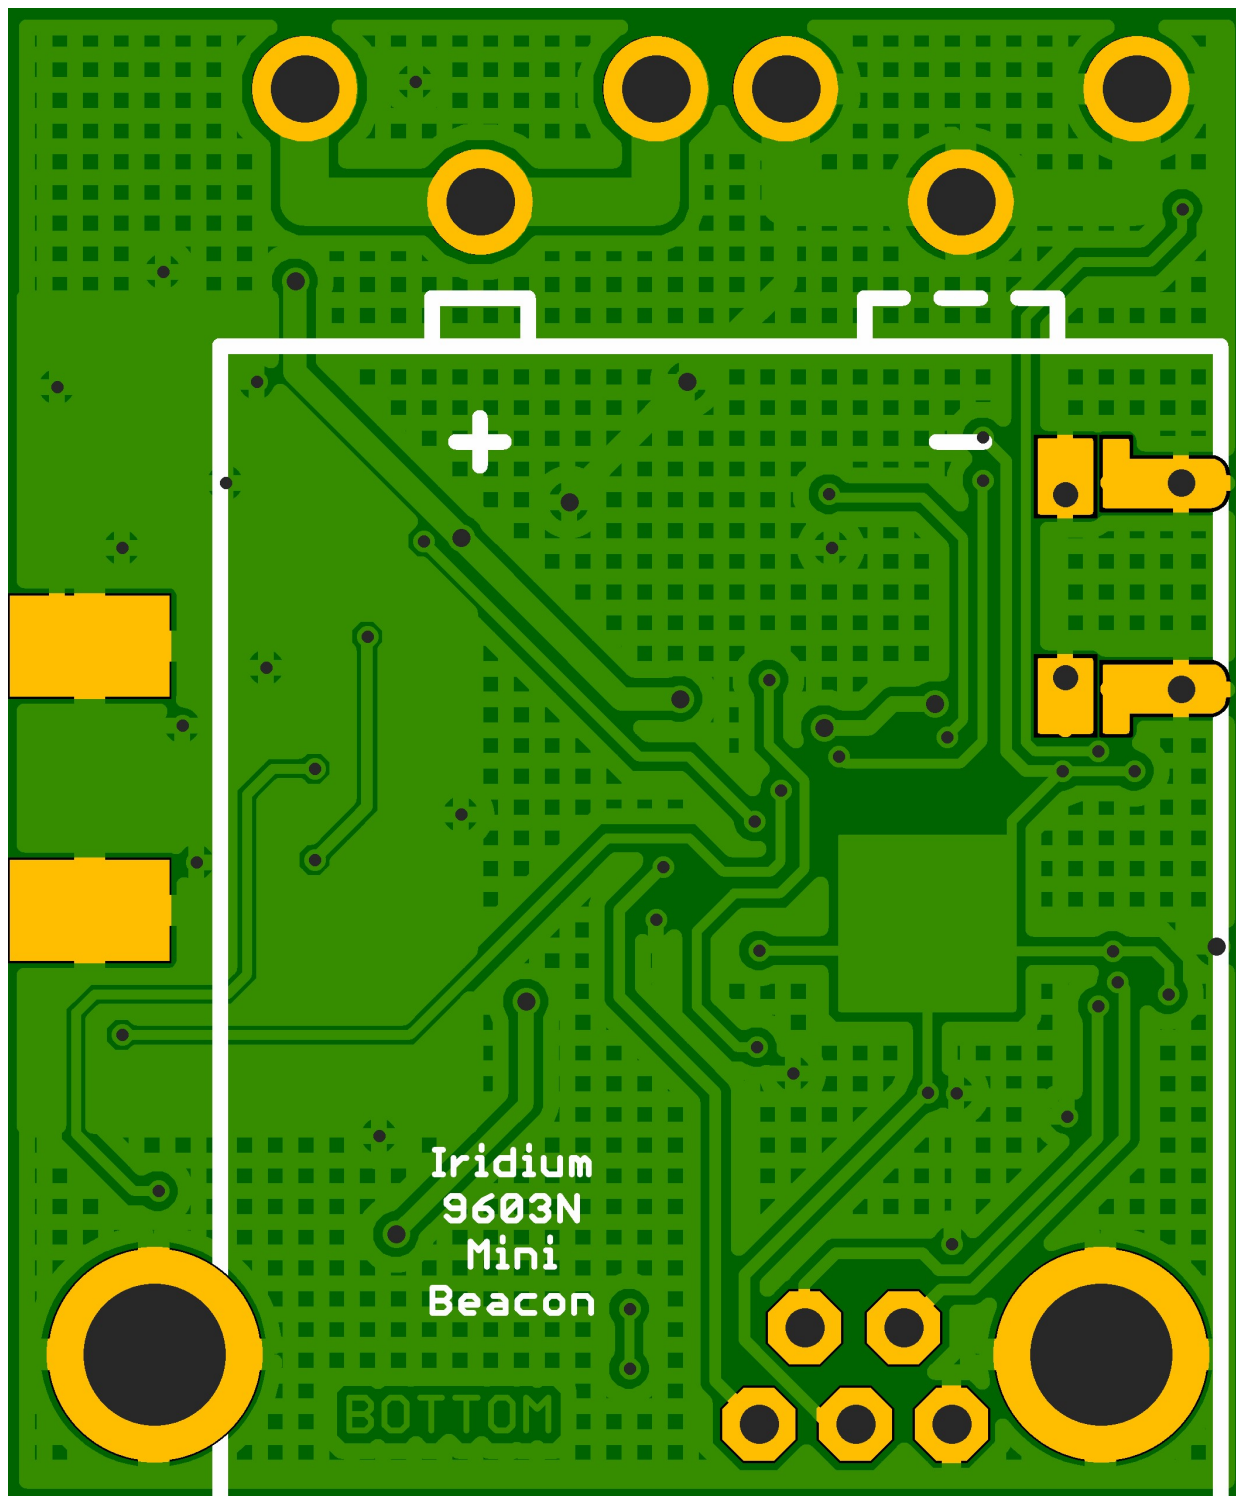

Part	X	Y	Angle	Package	Value	Manufacturer	Manufacturer Part No	Farnell Part No	Mouser Part No	McMaster Part No	Description
Dimensions 32.62 39.37											
Fiducials - for solder paste mask alignment:											
FD1	1.27	1.27	0								Fiducial 1mm
FD2	30.48	38.10	0								Fiducial 1mm
Surface Mount Components:											
C1	3.46	11.05	270	0603	1uF	Walsin	0603X105K100CT	2496916			MultiLayer Ceramic Capacitor; 1uF; 10V; 0603; XSR
C2	3.24	8.35	180	0603	12pF	Walsin	0603N120J500CT	2496884			MultiLayer Ceramic Capacitor; 12pF; 50V; 0603
C3	22.86	20.7	0	0603	120pF	Walsin	0603B121K500CT	2524820			MultiLayer Ceramic Capacitor; 120pF; 50V; 0603
C4	11.05	7.84	0	0603	12pF	Walsin	0603N120J500CT	2496884			MultiLayer Ceramic Capacitor; 12pF; 50V; 0603
C5	22.86	14.54	270	0603	120pF	Walsin	0603B121K500CT	2524820			MultiLayer Ceramic Capacitor; 120pF; 50V; 0603
C6	19.94	15.24	270	0805	10uF	Walsin	0805F106Z100CT	2496998			MultiLayer Ceramic Capacitor; 10uF; 10V; 0805
C7	2.06	18.29	180	0603	100nF	Murata	GRM188R71H104JA93D	2688523			MultiLayer Ceramic Capacitor; 0.1uF; 50V; 0603; X7R
C8	14.1	15.4	90	0805	10uF	Walsin	0805F106Z100CT	2496998			MultiLayer Ceramic Capacitor; 10uF; 10V; 0805
C9	26.42	18.1	180	0603	120pF	Walsin	0603B121K500CT	2524820			MultiLayer Ceramic Capacitor; 120pF; 50V; 0603
C11	11.37	10.19	0	0603	1uF	Walsin	0603X105K100CT	2496916			MultiLayer Ceramic Capacitor; 1uF; 10V; 0603; XSR
C14	26.35	14.54	0	0805	10uF	Walsin	0805F106Z100CT	2496998			MultiLayer Ceramic Capacitor; 10uF; 10V; 0805
C15	8.19	29.08	90	0805	10uF	Walsin	0805F106Z100CT	2496998			MultiLayer Ceramic Capacitor; 10uF; 10V; 0805
C16	17.78	24.45	0	0805	10nF	Walsin	0805B103K500CT	2496939			MultiLayer Ceramic Capacitor; 10nF; 50V; 0805; X7R
C17	17.78	22.35	0	0805	10uF	Walsin	0805F106Z100CT	2496998			MultiLayer Ceramic Capacitor; 10uF; 10V; 0805
C18	30.04	35.12	90	0805	10uF	Walsin	0805F106Z100CT	2496998			MultiLayer Ceramic Capacitor; 10uF; 10V; 0805
CON1	2.99	24.13	270		Micro_USB	Amphenol_FCI	10103594	2293752			Amphenol FCI 10103594 Micro USB Type B
CON2	28.58	28.77	270	uFL	uFL	Hirose	U.FL-R-SMT(01)	3908021			HIROSE U.FL-R-SMT(01); U.FL Coaxial; Straight Jack; 50 ohm
D1	8.19	24.26	90	SOD-123	MBR120	ON SEMICONDUCTOR	MBR120VLSFT1G	1431044			Schottky Rectifier; 20V; 1A; SOD-123
D2	17.4	19.81	180	SOD-123	MBR120	ON SEMICONDUCTOR	MBR120VLSFT1G	1431044			Schottky Rectifier; 20V; 1A; SOD-123
D3	25.4	34.1	180	SOD-123	MBR120	ON SEMICONDUCTOR	MBR120VLSFT1G	1431044			Schottky Rectifier; 20V; 1A; SOD-123
IC5	20.7	28.65	180	QFN-20	MPM3610	MPS	MPM3610AGQV-P		946-MPM3610AGQV-P		Switching Voltage Regulator; 21V; 1.2A; DC/DC
J1	13.81	29.41	0		SS4-10-3.50	Samtec	SS4-10-3.50-L-D-K-TR	2085336			Samtec SS4-10-3.50-L-D-K-TR
LED	2.03	30.42	180	2.0x1.25	RED	Wurth Elektronik	150080RS75000	2322077			LED; Red; 20mA; 2V; 2.0x1.25mm
Q1	27.53	9.21	180	SOT23	DMG3415U-7	Diodes Inc.	DMG3415U-7	1843688			MOSFET; P Channel; SOT23-WIDE
R1	27.5	12.07	180	0603	100K	Multicomp	MCWR06X1003FTL	2447226			Chip Resistor; Thick Film; 100k; 50V; 0603; 100mW
R2	13.65	19.88	90	0603	330K	Multicomp	MCWR06X3303FTL	2447338			Resistor, Thick Film, 330K, 1%, 50V, 100mW, 0603
R5	12.26	23.69	90	0603	100K	Multicomp	MCWR06X1003FTL	2447226			Chip Resistor; Thick Film; 100k; 50V; 0603; 100mW
R10	4.48	30.58	90	0603	2.2K	Multicomp	MCWR06X2201FTL	2447320			Chip Resistor; Thick Film; 2.2k; 50V; 0603; 100mW
R12	23.88	26.8	270	0603	100K 1%	Panasonic	ERJ6ENF1003V	2303757			Resistor, Thick Film, 100K, 1% 0.125W, 0805
R13	23.88	29.97	270	0603	19K1 0.1%	Panasonic	ERA6ARB1912V	2094729			Resistor, Thin Film, 19K1, 0.1%, 0.125W, 0805
R14	21.59	24.13	0	0603	68K	Multicomp	MCWR08X6802FTL	2447706			Resistor, Thick Film, 68K, 1%, 0.125W
SW1	2.98	34.04	180	4.6x2.8	Tactile Switch	Multicomp	MCIPTG23K-V	1605470			Tactile Switch; 4.6x2.8mm; 50mA; 12V
U1	2	15.46	180	SOT23-3	MCP111T-240E/TT	Microchip	MCP111T-240E/TT	1627192			Reset Supervisor; SOT23-3; 2.40V; Open Drain; Active Low
U2	17.11	15.37	180	SOT23-5	SPX3819-3.3	Exar	SPX3819M5-L-3-3/TR	2889625			LDO Voltage Regulator; 500mA; 50V; SOT-23-5
U4	22.73	18.1	0	SOT65P220X100-6N	AS179-92LF	Skyworks Solutions	AS179-92LF	1753762			Skyworks AS179-92LF RF Switch
U5	8.35	15.24	0	TQFN48	ATSAMD21G18A	Atmel	ATSAMD21G18A-MF	2460544			ATSAMD21G18A-MF; QFN48
U6	19.57	6.91	270		MAX-M8Q	u-blox					<a href="https://www.u-blox.com/en/product/max-m8-series">https://www.u-blox.com/en/product/max-m8-series</a>
X1	7.02	8.13	180	3.2x1.5	32.768	Epson	Q13FC13500004	1278036			Crystal; 32.768KHz; 12.5pF; 3.2 x 1.5mm

Press-In Nuts for Iridium 9603N (press into the TOP of the PCB):

S1	3.81	3.81			Press-In Nut	McMaster-Carr	95117A411			95117A411	Press-In Nut; 2-56
S2	28.81	3.81			Press-In Nut	McMaster-Carr	95117A411			95117A411	Press-In Nut; 2-56

Non-surface mount components:

BAT						Keystone	593 + 594	723988			Battery Contact, PP3 (9V), Snap Contact, Steel, Nickel Plated
ANTENNA					SMA Jack	Johnson	142-0711-821	1019328			SMA End Launch Jack

Iridium 9603N:

9603N						Iridium	9603N				<a href="https://www.rock7.com/shop-product-detail?productId=50">https://www.rock7.com/shop-product-detail?productId=50</a>
-------	--	--	--	--	--	---------	-------	--	--	--	---

Mounting hardware for Iridium 9603N:

SPACERS_x2										92511A127	1/8" OD x 3/16" Spacers for Iridium Module
SCREWS_x2										92185A079	2-56 x 3/8" Screws for Iridium Module

Cable for Iridium 9603N:

CABLE						Amphenol	A-1PA-132-025B2	2664624			Amphenol AMC Cable (u.FL compatible) 50ohm 25mm
-------	--	--	--	--	--	----------	-----------------	---------	--	--	---

SMA Antenna:

Iridium						Maxtena	M1600HCT-P-SMA				Iridium + GNSS Passive Antenna with SMA connector
---------	--	--	--	--	--	---------	----------------	--	--	--	---