BALDOR • RELIANCE II

Customer information packet CESSWDM3546-5

1HP, 1775RPM, 3PH, 60HZ, 56C, 3522M, TENV, F1, N Class - None Division - Not Applicable

Specifications

Enclosure	TENV
Frame	56C
Frame Material	Stainless Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	1.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	CSA
	UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	1.300 A @ 575.0 V
Design Code	В
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	85.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.3 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	N

Part detail

Revision	D
Туре	AC
Mech. spec.	35W899
Base	
Status	PRD/A
Elec. spec.	35WGG198
Layout	35LYW899
Eff. date	02-19-2024
CD Diagram	CD0006
Poles	04
Leads	3#18 Y
Proprietary	False
Created date	03-11-2022

Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	3 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3522M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	11.09 IN
Power Factor	67
Product Family	Wash Down All Stainless Steel
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1770 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1951A05											
CAT.NO.	CESSW	CESSWDM3546-5									
SPEC.	35W89	35W899G198G1									
НР	1										
VOLTS	575	575									
AMP	1.3	1.3									
RPM	1775	1775									
FRAME	56C				ΗZ	60			РΗ		3
SER.F.	1.15	(COD	Ε	М	DES	В	CLASS		F	
NEMA-NOM-EFF	85.5			PF		70					
RATING	40C AM	40C AMB-CONT									
СС	010A										
DE	6205			C	DE	6203					
ENCL	TENV	SN									
	SFA 1.4										

AC Induction Motor Performance Data


Record # 82151


Typical performance - not guaranteed values

Winding: 35WGG198-R001 Type: 35		3522M Enclosure: TEFC			
Nameplate Data			575 V, 60 Hz: Single Voltage Motor		
Rated Output (HP)		1	Full Load Torque	2.99 LB-FT	
Volts		575	Start Configuration	direct on line	
Full Load Amps		1.3	Breakdown Torque	16.37 LB-FT	
R.P.M.		1770	Pull-up Torque	7.31 LB-FT	
Hz	60 Phase	3	Locked-rotor Torque	10.16 LB-FT	
NEMA Design Code	B KVA Code	N	Starting Current	12.72 A	
Service Factor (S.F.)		1.15	No-load Current	0.972 A	
NEMA Nom. Eff.	85.5 Power Factor	67	Line-line Res. @ 25°C	22.9 Ω	
Rating - Duty	40	C AMB-CONT	Temp. Rise @ Rated Load	63°C	
S.F. Amps		1.4	Temp. Rise @ S.F. Load	71°C	
			Locked-rotor Power Factor	59.6	
			Rotor inertia	0.159 lb-ft²	


Load Characteristics 575 V, 60 Hz, 1 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	28	44	56	67	73	78	71
Efficiency	71.2	81.2	84.4	86	85.7	85.1	85.8
Speed	1793	1786	1781	1773	1766	1757	1769
Line amperes	0.988	1.06	1.18	1.32	1.49	1.69	1.42

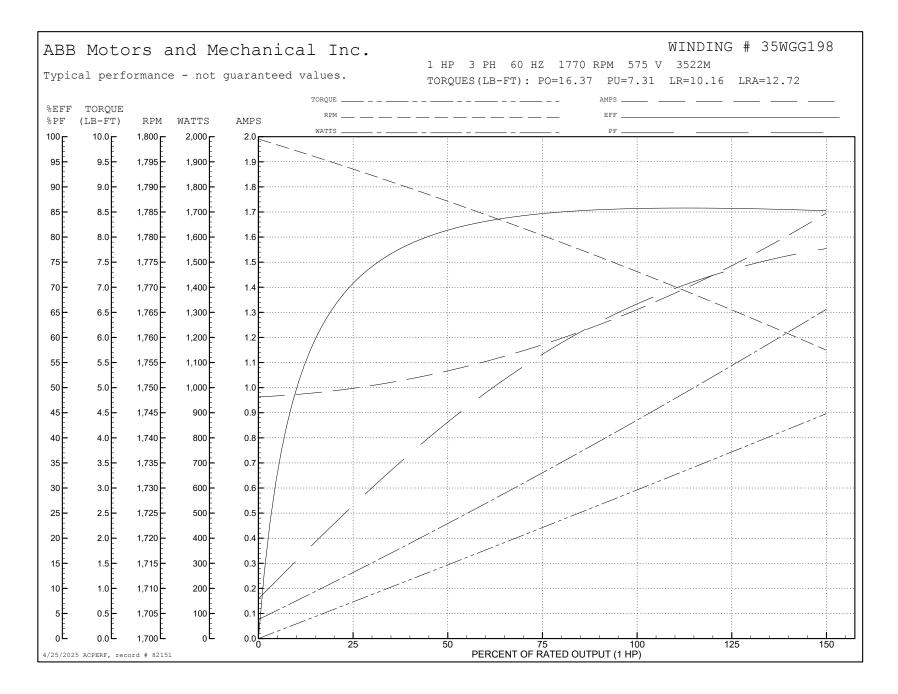

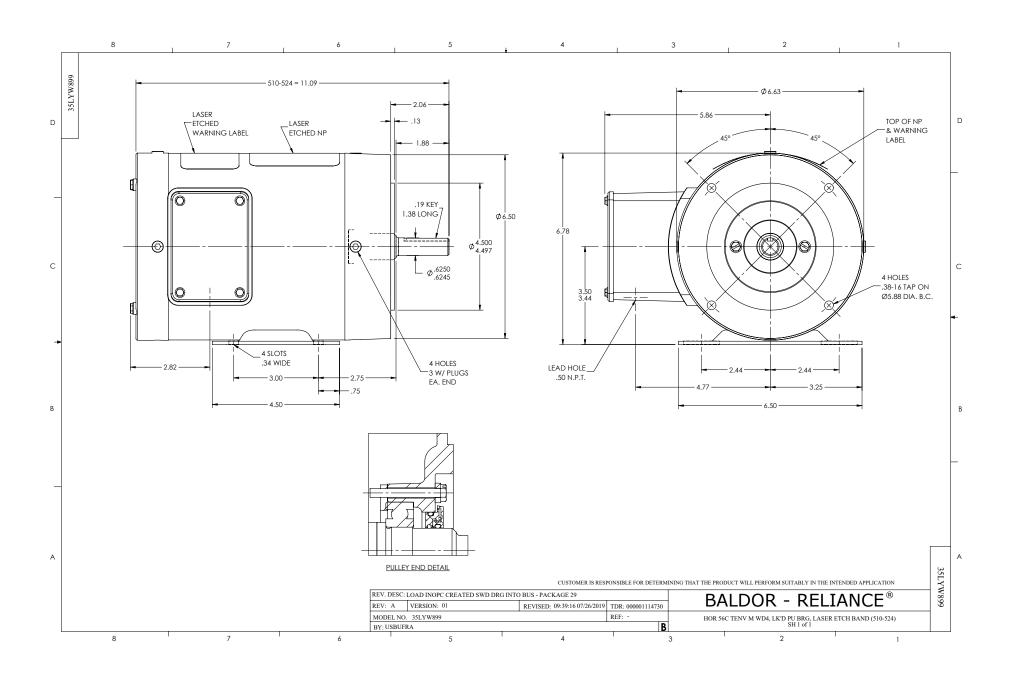

35W899: TENV RG 56C WD4 M N F1 Page 7 of 8

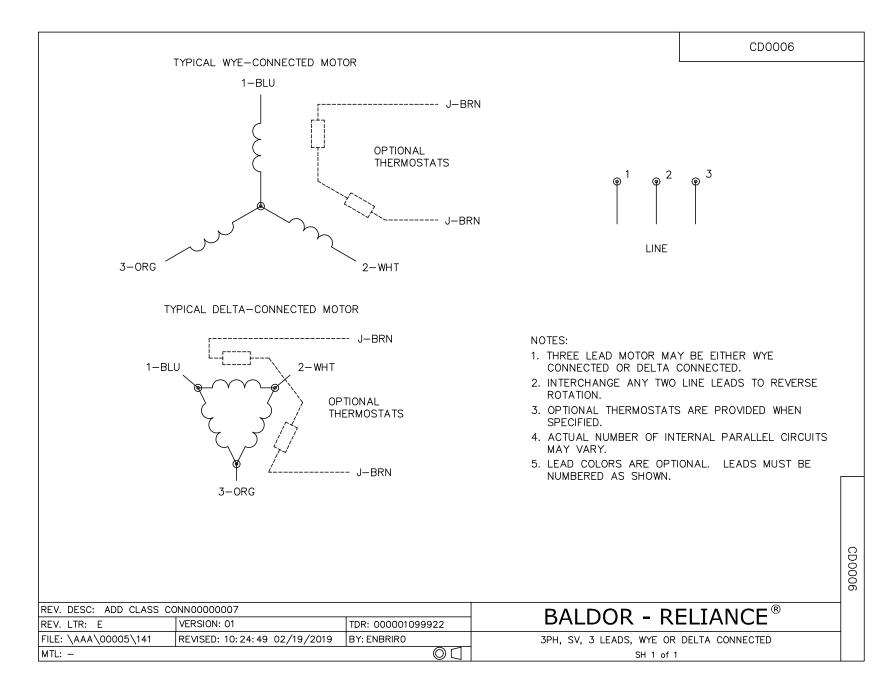

35WGG184: Electrical Design Page 8 of 8